PSS Gain Fix
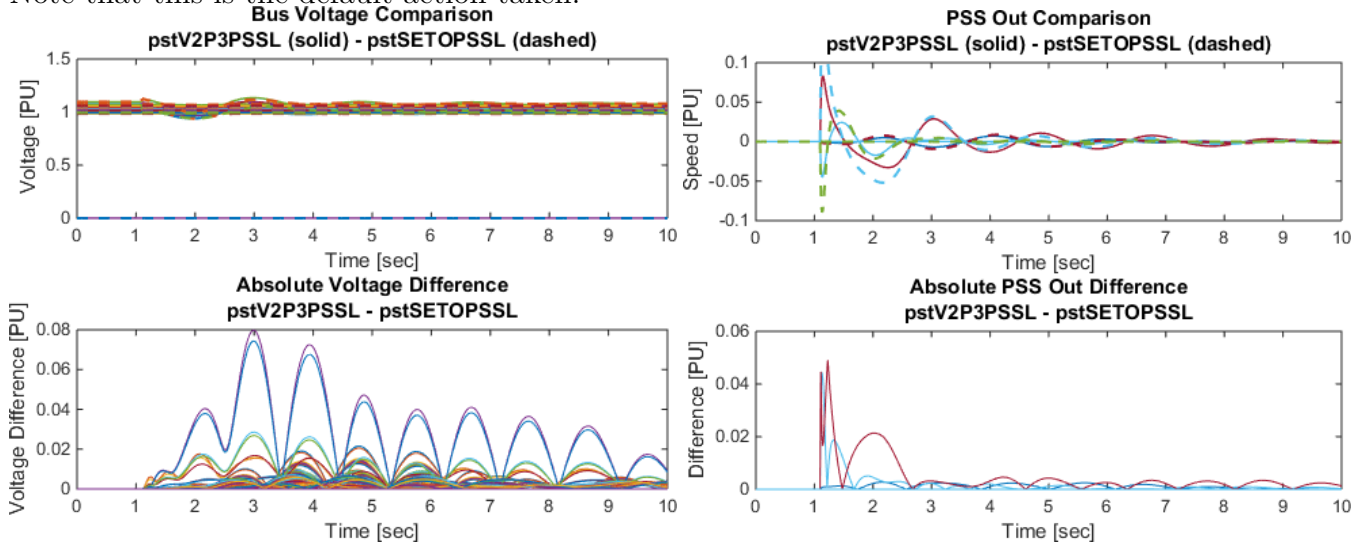
The washout time constant adjustment that occured between version 2 and 3 of PST requires a minor adjustment to the `d_` file `pss_con` for results to match.

The adjustment carried out by setting a `pssGainFix` flag to one is:

`pss_con(:,3) = pss_con(:,3)./pss_con(:,4);`

Unfixed Comparisons

Note that this is the default action taken.

Fixed Comparisons

As the PSS model parameters were from version 2, the PSS gain fix allows for the same results to occur between versions.