

The Art of Iterating: Update-Strategies in Agent-Based Simulation

Jonathan THALER

February 22, 2017

Abstract

When developing a model for an Agent-Based Simulation (ABS) it is very important to select the update-strategy which reflects the semantics of the model because simulation results can vary vastly across different update-strategies. This awareness, we claim, is still lacking in the field of ABS. In this paper our contribution is to derive general properties of ABS and use them to classify all update-strategies possible in ABS. This will allow implementers and researchers in this field to use a general terminology, removing ambiguities when discussing ABS and their models. We will give results of simulating a discrete and a continuous game using our update-strategies and show that in the case of the discrete game only one specific strategy seems to be able to produce its emergent patterns whereas the pattern of the continuous game seems to be robust under varying update-strategies.

Keywords

Agent-Based Simulation, Parallelism, Concurrency, Actors, Emergence, Prisoners Dilemma, Heroes and Cowards

1 Introduction

In this paper we are looking at two different kind of games to show the differences update-strategies can make in ABS and support our main message that *when developing a model for an ABS it is of most importance to select the right update-strategy which reflects and supports the corresponding semantics of the model*. As we will show due to conflicting ideas about update-strategies this awareness is yet still under-represented in the field of ABS and is lacking a systematic treatment. As a remedy we undertake such a systematic treatment in proposing a new terminology by identifying properties of ABS and deriving all possible update-strategies. The by-product is a framework to talk in a unified way about this very important matter, so to enable researchers and implementers to talk about it in a common way, enabling better discussions, same

understanding and better reproducibility and continuity in research. The two games we use are discrete and continuous games where in the former one the agents act synchronized at discrete time-steps whereas in the later one they act continuously in continuous time. We show that in the case of simulating the discrete game the update-strategies have a huge impact on the final result whereas our continuous game seems to be stable under different update-strategies. The contribution of this paper is: Identifying general properties of ABS, deriving update-strategies from these properties and establishing a general terminology for talking about these update-strategies.

2 Background

In this section we define our term and understanding of *agent* and ABS and how we understand and use it in this paper. Then we will give a description of the two kind of games which were the motivators for our research and case-studies. Finally we will present related work.

2.1 Agent-Based Simulation

We understand ABS as a method of modelling and simulating a system where the global behaviour may be unknown but the behaviour and interactions of the parts making up the system is of knowledge. Those parts, called agents, are modelled and simulated out of which then the aggregate global behaviour of the whole system emerges. So the central aspect of ABS is the concept of an agent which can be understood as a metaphor for a pro-active unit, situated in an environment, able to spawn new agents and interacting with other agents in a network of neighbours by exchange of messages [10]. It is important to note that we focus our understanding of ABS on a very specific kind of agents where the focus is on communicating entities with individual, localized behaviour from out of which the global behaviour of the system emerges. We informally assume the following about our agents:

- They are uniquely addressable entities with some internal state.
- They can initiate actions on their own e.g. change their internal state, send messages, create new agents, kill themselves.
- They can react to messages they receive with actions as above.
- They can interact with an environment they are situated in.

An implementation of an ABS must solve two fundamental problems:

1. **Source of pro-activity** How can an agent initiate actions without the external stimuli of messages?
2. **Semantics of Messaging** When is a message m , sent by agent A to agent B , visible and processed by B ?

In computer systems, pro-activity, the ability to initiate actions on its own without external stimuli, is only possible when there is some internal stimulus, most naturally represented by some generic notion of monotonic increasing time-flow. Due to the discrete nature of computer-system, this time-flow must be discretized in steps as well and each step must be made available to the agent, acting as the internal stimulus. This allows the agent then to perceive time and become pro-active depending on time. So we can understand an ABS as a discrete time-simulation where time is broken down into continuous, real-valued or discrete natural-valued time-steps. Independent of the representation of the time-flow we have the two fundamental choices whether the time-flow is local to the agent or whether it is a system-global time-flow. Time-flows in computer-systems can only be created through threads of execution where there are two ways of feeding time-flow into an agent. Either it has its own thread-of-execution or the system creates the illusions of its own thread-of-execution by sharing the global one sequentially among the agents where an agent has to yield the execution back after it has executed its step. Note the similarity to an operating system with cooperative multitasking in the latter case and real multi-processing in the former.

The semantics of messaging define when sent messages are visible to the receivers and when the receivers process them. Message-processing could happen either immediately or delayed, depending on how message-delivery works. There are two ways of message-delivery: queued or immediate. In the case of immediate message-deliver the message is sent directly to the agent without any queuing in between e.g. a direct method-call. This would allow an agent to immediately react to this message as this call of the method transfers the thread-of-execution to the agent. This is not the case in the queued message-delivery where messages are posted to the message-box of an agent and the agent pro-actively processes the message-box at regular points in time.

2.2 A discrete game: Prisoners Dilemma

As an example of a discrete game we use the *Prisoners Dilemma* as presented in [8]. In the prisoners dilemma two players play a game where in each step a player can either choose to cooperate or defect receiving a payoff. There are four possible payoffs: if both players cooperate both receive R; if one player defects and the other cooperates the defector receives T and the cooperator S; if both defect both receive P where $T > R > P > S$. In the version of [8] NxN agents are arranged on a 2D-grid where every agent has 8 neighbours except at the edges. Agents don't have a memory of the past and have one of two roles: either cooperator or defector. In every step an agent plays the game with all its neighbours, including itself (something which was not explicitly mentioned in the paper but if omitted, will not lead to their results) and sums up the payoff. After the payoff sum is calculated the agent changes its role to the role of the agent with the highest payoff within its neighbourhood (including itself). The authors attribute the following payoffs: $S=P=0$, $R=1$, $T>b$, where $b>1$. They showed that when having a grid of only cooperators with a single defector at

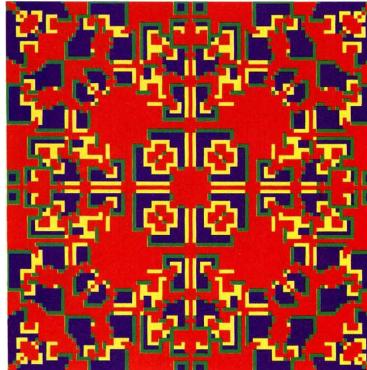


Figure 1: Patterns formed by playing the *Prisoners Dilemma* game on a 99×99 grid with $1.8 < b < 2$ after 217 steps with all agents being cooperators except one defector at the center. Blue are cooperators, red are defectors, yellow are cooperators which were defectors in the previous step, green are defectors which were cooperators in the previous step. Picture taken from [8].

the center, the simulation will form beautiful structural patterns as shown in figure 1.

In [6] the authors showed that the results of simulating the *Prisoners Dilemma* as above depends on a very specific strategy of iterating the simulation and show that the beautiful patterns seen in figure 1 will not form when selecting a different update-strategy. They introduced the terms of synchronous and asynchronous updates and define synchronous to be as agents being updated in unison and asynchronous where one agent is updated and the others are held constant. Only the synchronous updates are able to reproduce the results. Although the authors differentiated between the two strategies, their description still lacks precision and detail, something we will provide in this paper. Although they didn't publish their work in the field of ABS, it has general implications for ABS as well which can be generalized in the main message of our paper as emphasised in the introduction. We will show that there are more than two update-strategies and will give results of simulating this discrete game using all of them. As will be shown later, the patterns emerge indeed only when selecting a specific update-strategy.

2.3 A continuous game: Heroes & Cowards

As an example for a continuous game we use the *Heroes & Cowards* game introduced by [9]. In this game one starts with a crowd of agents where each agent is positioned randomly in a continuous 2D-space which is bounded by borders on all sides. Each of the agents then selects randomly one friend and one enemy (except itself) and decides with a given probability whether the agent acts in the role of a hero or a coward - friend, enemy and role don't change after the initial set-up. In each step the agent will move a small distance towards a

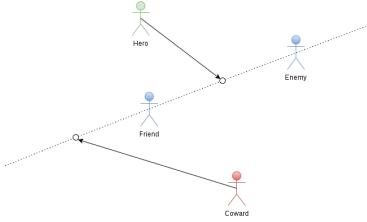


Figure 2: A conceptual diagram of the *Heroes & Cowards* game. Hero (green) and coward (red) have the same agents as friend and enemy but act different: the hero tries to move in between the friend and enemy whereas the coward tries to hide behind its friend.

target point. If the agent is in the role of a hero this target point will be the half-way distance between the agents friend and enemy - the agent tries to protect the friend from the enemy. If the agent is acting like a coward it will try to hide behind the friend also the half-way distance between the agents friend and enemy, just in the opposite direction. Note that this simulation is determined by the random starting positions, random friend and enemy selection, random role selection and number of agents. Note also that during the simulation-stepping no randomness is incurred and given the initial random set-up, the simulation-model is completely deterministic. As will be shown later the results of simulating this model are invariant under different update-strategies.

2.4 Related Research

[7] give an approach for ABS on GPUs which is a very different approach to updating and iterating agents in ABS. They discuss execution order at length, highlight the problem of inducing a specific execution-order in a model which is problematic for parallel execution and give solutions how to circumvent these shortcomings. Although we haven't mapped our ideas to GPUs we explicitly include an approach for data-parallelism which, we hypothesize, can be utilized to roughly map their approach onto our terminology.

[1] sketch a minimal ABS implementation in Haskell. Their focus is primarily on economic simulations and instead of iterating a simulation with a global time, their focus is on how to synchronize agents which have internal, local transition times.

[3] describe basic inner workings of ABS environments and compare their implementation in C++ to the existing ABS environment AnyLogic which is programmed in Java. They explicitly mention synchronous and asynchronous time-models and compare them in theory but unfortunately couldn't report the results of asynchronous updates due to limited space. They interpret asynchronous time-models to be the ones in which an agent acts at random time intervals and synchronous time-models where agents are updated all in same time intervals.

[11] presents a comprehensive discussion on how to implement an ABS for state-charts in Java and also mentions synchronous and asynchronous time-models. He identifies the asynchronous time-model to be one in which updates are triggered by the exchange of messages and the synchronous ones which trigger changes immediately without the indirection of messages.

3 A new terminology

When looking at related work, we observe that there seems to be a variety of meanings attributed to the terminology of asynchronous and synchronous updates but the very semantic and technical details are unclear and not described very precisely. To develop a new terminology, we propose to abandon the notion of synchronous and asynchronous updates and, based on the discussion above we propose six properties characterizing the dimensions and details of the internals of an ABS. Having these properties identified we then derive all meaningful and reasonable update-strategies which are possible in a general form in ABS. These update-strategies together with the properties will form the new terminology we propose to speak about update-strategies in ABS in general. For each strategy we give a short description, the list of all properties and discuss their semantics and variations. We will discuss all details programming-language agnostic, give semantic meanings and interpretations of them and the implications selecting update-strategies for a model. A summary of all update-strategies and their properties are given in table 1.

3.1 ABS Properties

Iteration-Order Is the collection of agents updated *sequential* with one agent updated after the other or are all agents updated in *parallel*, at virtually the same time?

Global Synchronization Is a full iteration over the collection of agents happening in lock-step at global points in time or not (*yes/no*)?

Thread of Execution Does each agent has a *separate* thread of execution or does it *share* it with all the others? Note that it seems to have a constraint on the Iteration-Order, namely that *parallel* execution forces separate threads of execution for all agents. We will show that this is not the case, when looking at the *parallel strategy* in the next section.

Message-Handling Are messages handled *immediately* by an agent when sent to them or are they *queued* and processed later? Here we have the constraint, that an immediate reaction to messages is only possible when the agents share a common thread of execution. Note that we must enforce this constraint as otherwise agents could end up having more than one thread of execution

which could result in them acting concurrently by making simultaneous actions. This is something we explicitly forbid as it runs against our definition of agents which allows them only one thread of execution at a time.

Visibility of Changes Are the changes made (messages sent, environment modified) by an agent which is updated during an Iteration-Order visible (during) *In-Iteration* or only *Post-Iteration* at the next Iteration-Order? More formally: do agents $a_{n>i}$ which are updated after agent a_i see the changes by agent a_i or not? If yes, we refer to *In-Iteration* visibility and *Post-Iteration* otherwise.

Repeatability Does the ABS has an external source of non-determinism which it cannot influence? If this is the case then we regard an update-strategy as *non-deterministic* and *deterministic* otherwise. It is important to distinguish between *external* and *internal* sources of non-determinism. The latter, coming from random-number generators, can be controlled using the same starting-seed leading to repeatability and deemed deterministic in this context. The former one are race-conditions due to concurrency, creating non-deterministic orderings of events which has the consequence that repeated runs may lead to different results with the same configuration, rendering an ABS non-deterministic.

3.2 ABS Update-Strategies

3.2.1 Sequential Strategy

This strategy has a globally synchronized time-flow and in each time-step iterates through all the agents and updates one agent after another. Messages sent and changes to the environment made by agents are visible immediately.

Iteration-Order: Sequential

Global Synchronization: Yes

Thread of Execution: Shared

Message-Handling: Immediate (or Queued)

Visibility of Changes: In-Iteration

Repeatability: Deterministic

Semantics: There is no source of randomness and non-determinism, rendering this strategy to be completely deterministic in each step. Messages can be processed either immediately or queued depending on the semantics of the model. If the model requires to process the messages immediately the model must be free of potential recursions.

Variation: If the sequential iteration from agent [1..n] imposes an advantage over the agents further ahead or behind in the queue (e.g. if it is of benefit when making choices earlier than others in auctions or later when more information is available) then one could use random-walk iteration where in each time-step the agents are shuffled before iterated. Note that although this would introduce

randomness in the model the source is a random-number generator implying it is still deterministic. If one wants to have a very specific ordering, e.g. 'better performing' agents first, then this can be easily implemented too by exposing some sorting-criterion and sorting the collection of agents after each iteration.

3.2.2 Parallel Strategy

This strategy has a globally synchronized time-flow and in each time-step iterates through all the agents and updates them in parallel. Messages sent and changes to the environment made by agents are visible in the next global step. We can think about this strategy in a way that all agents make their moves at the same time.

Iteration-Order: Parallel

Global Synchronization: Yes

Thread of Execution: Separate (or Shared)

Message-Handling: Queued

Visibility of Changes: Post-Iteration

Repeatability: Deterministic

Semantics: If one wants to change the environment in a way that it would be visible to other agents this is regarded as a systematic error in this strategy. First it is not logical because all actions are meant to happen at the same time and also it would implicitly induce an ordering, violating the *happens at the same time* idea. To solve this, we require different semantics for accessing the environment in this strategy. We introduce a *global* environment which is made up of the set of *local* environments. Each local environment is owned by an agent so there are as many local environments as there are agents. The semantics are then as follows: in each step all agents can *read* the global environment and *read/write* their local environment. The changes to a local environment are only visible *after* the local step and can be fed back into the global environment after the parallel processing of the agents. It does not make a difference if the agents are really computed in parallel or just sequentially - due to the isolation of actions, this has the same effect. Also it will make no difference if we iterate over the agents sequentially or randomly, the outcome *has to be* the same: the strategy is event-ordering invariant as all events/updates happen *virtually* at the *same time*. If one needs to have the semantics of writes on the whole (global) environment in ones model, then this strategy is not the right one and one should resort to one of the other strategies. A workaround would be to implement the global environment as an agent with which the non-environment agents can communicate via messages introducing an ordering but which is then sorted in a controlled way by an agent, something which is not possible in the case of a passive, non-agent environment. It is important to note that in this strategy a reply to a message will not be delivered in the current but in the next global time-step. This is in contrast to the immediate message-delivery of the

sequential strategy where within a global time-step agents can have in fact an arbitrary number of messages exchanged.

3.2.3 Concurrent Strategy

This strategy has a globally synchronized time-flow and in each time-step iterates through all the agents and updates all agents in parallel but all messages sent and changes to the environment are immediately visible. So this strategy can be understood as a more general form of the *parallel strategy*: all agents run at the same time but act concurrently.

Iteration-Order: Parallel

Global Synchronization: Yes

Thread of Execution: Separate

Message-Handling: Queued

Visibility of Changes: In-Iteration

Repeatability: Non-Deterministic

Semantics: It is important to realize that, when running agents in parallel which are able to see actions by others immediately, this is the very definition of concurrency: parallel execution with mutual read/write access to shared data. Of course this shared data-access needs to be synchronized which in turn will introduce event-orderings in the execution of the agents. At this point we have a source of inherent non-determinism: although when one ignores any hardware-model of concurrency, at some point we need arbitration to decide which agent gets access first to a shared resource arriving at non-deterministic solutions. This has the very important consequence that repeated runs with the same configuration of the agents and the model may lead to different results.

3.2.4 Actor Strategy

This strategy has no globally synchronized time-flow but all the agents run concurrently in parallel, with their own local time-flow. The messages and changes to the environment are visible as soon as the data arrive at the local agents - this can be immediately when running locally on a multi-processor or with a significant delay when running in a cluster over a network. Obviously this is also a non-deterministic strategy and repeated runs with the same agent and model-configuration may (and will) lead to different results.

Iteration-Order: Parallel

Global Synchronization: No

Thread of Execution: Separate

Message-Handling: Queued

Visibility of Changes: In-Iteration

Repeatability: Non-Deterministic

Table 1: Update-Strategies in ABS

	Sequential	Parallel	Concurrent	Actor
Iteration-Order	Sequential	Parallel	Parallel	Parallel
Global-Sync	Yes	Yes	Yes	No
Thread	Shared	Separate	Separate	Separate
Messaging	Immediate	Queued	Queued	Queued
Visibility	In	Post	In	In
Repeatability	Yes	Yes	No	No

Semantics: It is of most importance to note that information and also time in this strategy is always local to an agent as each agent progresses in its own speed through the simulation. In this case one needs to explicitly *observe* an agent when one wants to e.g. visualize it. This observation is then only valid for this current point in time, local to the observer but not to the agent itself, which may have changed immediately after the observation. This implies that we need to sample our agents with observations when wanting to visualize them, which would inherently lead to well known sampling issues. A solution would be to invert the problem and create an observer-agent which is known to all agents where each agent sends a '*I have changed*' message with the necessary information to the observer if it has changed its internal state. This also does not guarantee that the observations will really reflect the actual state the agent is in but is a remedy against the notorious sampling. Problems can occur though if the observer-agent can't process the update-messages fast enough, resulting in a congestion of its message-queue. The concept of Actors was proposed by C. Hewitt in 1973 in his work [5] for which I. Grief in [4] and W. Clinger in [2] developed semantics of different kinds. These works were very influential in the development of the concepts of agents and can be regarded as foundational basics for ABS.

Variation: This is the most general one of all the strategies as it can emulate all the others by introducing the necessary synchronization mechanisms.

4 Case-Studies

In this section we present two case-studies in simulating the *Prisoners Dilemma* and *Heroes & Cowards* games for discussing the effect of using different update-strategies. As already emphasised both are of different nature. The first one is a discrete game, played at discrete time-steps. The second one is a continuous game where each agent is continuously playing. This has profound implications on the simulation results as will be shown below. The figures show that depending on the type of model the results can vary when using different update-strategies as happens in the case of *Prisoners Dilemma*. Results of other models seem to be stable under varying update-strategies as is the case

with *Heroes & Cowards*.

4.1 Prisoners Dilemma


4.1.1 The agent-based model

The agent-based model of this game works as follows: an agent sends its state to all its neighbours which allows to incrementally calculate the local payoff. If all neighbours have sent their state then the agent will send its local payoff to all neighbours which allows to compare all payoffs in its neighbourhood and calculate the best. When all neighbours have sent their local payoff the agent will adopt the role of the highest payoff.


4.1.2 Results

The results as seen in the left column of figure 2 were created with the same configuration as reported in the original paper: a 99x99 grid with all cooperators except one defector at the center, running for 217 steps. When comparing the pictures with the one from the original paper seen in figure 1 the only update-strategy which is able to reproduce the matching result is the *parallel strategy* - all the others clearly fail to reproduce the pattern. From this we can deduce that only the *parallel strategy* is suitable to simulate this model because only that strategy is the one which renders the results of the original paper, meaning it is the 'correct' strategy for this model. The reason why the other strategies fail to reproduce the pattern is due to the non-parallel and unsynchronized way that information spreads through the grid. In the *sequential strategy* the agents further ahead in the queue play the game earlier and influence the neighbourhood so agents which play the game later find already messages from earlier agents in their queue thus acting differently based upon these informations. In the *concurrent* and *actor strategy* the agents run in parallel but changes are visible immediately and concurrently, leading to the same non-structural patterns as in the *sequential* one. This is not the case in the *parallel strategy* where, in every step, all agents play the game at the same time based on the frozen state of the previous step, leading to a synchronized update as required by the model. Note that the *concurrent* and *actor strategy* produce different results on every run due to the inherent non-deterministic event-ordering introduce by concurrency. As there are no global time-steps in the *actor strategy*, to calculate 217 steps we just waited until the first agent arrived at a local time of 217 and then rendered the result. Note that when having queued messages instead of immediate messaging in the *sequential strategy* we will end up with the same results as in the *parallel* version. TODO: WHY? TODO: the real difference between SEQ and PAR is that SEQ with immediate messaging changes agents while iterating over the collection, and although the agents don't change unless all their neighbours have answered, this does not guarantee a synchronized update of all agents but only the one because every agent has a different neighbourhood: neighbourhood is reflexive but not transitive: if agent A is in agents B neighbour and agent c


Prisoners Dilemma

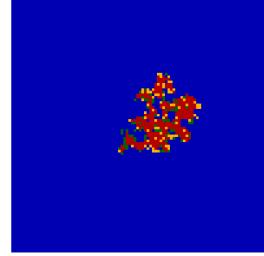


(a) sequential

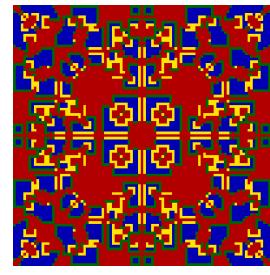

(c) parallel

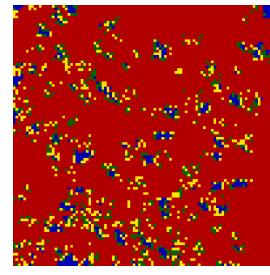


(e) concurrent

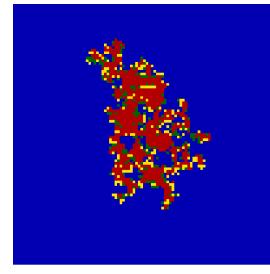


(g) actor


Heroes & Cowards

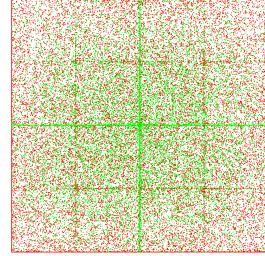


(b) sequential

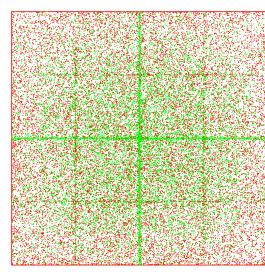

(d) parallel

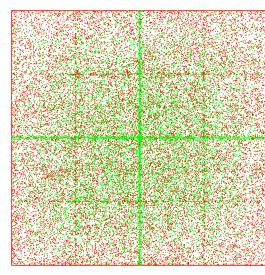

(f) concurrent

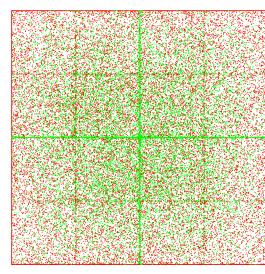

(h) actor

Table 2: Effect on results simulating the Prisoners Dilemma and Heroes & Cowards with all four update-strategies.

is agent b s neighbour this does not imply that agent a is agent c neighbour as well. as agent b receives the final payoff message from agent A and changes its state,

Also note that in the *parallel strategy* an agent cannot reply to a message within the same step which requires twice as many steps to achieve the same results as in the original paper as seen in figure 1.

4.2 Heroes & Cowards

4.2.1 The agent-based model

The agent-based model of this game works as follows: in each time-step an agent asks its friend and enemy for their positions which will answer with a corresponding message containing their current positions. The agent will then have its own local information about the position of its friend and enemy and will calculate its step based on this local information.

4.2.2 Results

The results as seen in the right column of figure 2 were created with 100.000 agents where 25% of them are heroes running for 500 steps. Although the individual agent-positions of runs with the same configuration differ between update-strategies the cross-patterns are forming in all four update-strategies. For the patterns to emerge it is important to have significant more cowards than heroes and to have agents in the tens of thousands - we went for 100.000 because then the patterns are really prominent. We can conclude that the *Heroes & Cowards* model seems to be robust to the selection of its update-strategy and that its emergent property - the formation of the cross - is stable under differing strategies.

5 Conclusion and future research

In this paper we presented general properties of ABS, derived four general update-strategies and discussed their implications. By doing this we proposed a unified terminology which allows to speak about update-strategies in a common and unified way, something that the ABS community was lacking so far. We hope our classification and terminology gets adopted. Again we cannot stress enough that selecting the right update-strategy is of most importance and must match the semantics of the model one wants to simulate. We showed that the *Prisoners Dilemma* game on a 2D-grid can only be simulated correctly when using the *parallel strategy* and that the other strategies lead to a break-down of the emergent pattern reported in the original paper. On the other hand using the *Heroes & Cowards* game we showed that there exist models whose emergent patterns exhibit a stability under varying update-strategies. Intuitively we can say that this is due to the nature of the model specification which does

not require specific orderings of actions but it would be interesting to put such intuitions on firm theoretical grounds.

References

- [1] BOTTA, N., MANDEL, A., AND IONESCU, C. Time in discrete agent-based models of socio-economic systems. Documents de travail du Centre d'Economie de la Sorbonne 10076, Université Panthéon-Sorbonne (Paris 1), Centre d'Economie de la Sorbonne, 2010.
- [2] CLINGER, W. D. Foundations of Actor Semantics. Tech. rep., Massachusetts Institute of Technology, Cambridge, MA, USA, 1981.
- [3] DAWSON, D., SIEBERS, P. O., AND VU, T. M. Opening pandora's box: Some insight into the inner workings of an Agent-Based Simulation environment. In *2014 Federated Conference on Computer Science and Information Systems* (Sept. 2014), pp. 1453–1460.
- [4] GRIEF, I., AND GREIF, I. SEMANTICS OF COMMUNICATING PARALLEL PROCESSES. Tech. rep., Massachusetts Institute of Technology, Cambridge, MA, USA, 1975.
- [5] HEWITT, C., BISHOP, P., AND STEIGER, R. A Universal Modular ACTOR Formalism for Artificial Intelligence. In *Proceedings of the 3rd International Joint Conference on Artificial Intelligence* (San Francisco, CA, USA, 1973), IJCAI'73, Morgan Kaufmann Publishers Inc., pp. 235–245.
- [6] HUBERMAN, B. A., AND GLANCE, N. S. Evolutionary games and computer simulations. *Proceedings of the National Academy of Sciences* 90, 16 (Aug. 1993), 7716–7718.
- [7] LYSENKO, M., D'SOUZA, R., AND RAHMANI, K. *A Framework for Megascale Agent Based Model Simulations on the GPU*. 2008.
- [8] NOWAK, M. A., AND MAY, R. M. Evolutionary games and spatial chaos. *Nature* 359, 6398 (Oct. 1992), 826–829.
- [9] WILENSKY, U., AND RAND, W. *An Introduction to Agent-Based Modeling: Modeling Natural, Social, and Engineered Complex Systems with NETLogo*. MIT Press, 2015.
- [10] WOOLDRIDGE, M. *An Introduction to MultiAgent Systems*, 2nd ed. Wiley Publishing, 2009.
- [11] YUXUAN, J. *The Agent-based Simulation Environment in Java*. PhD thesis, University Of Nottingham, School Of Computer Science, 2016.