



Investigating the use of pure Functional Programming for Agent-Based Simulation

by Jonathan Thaler

Thesis submitted to the University of Nottingham for the degree of Doctor of Philosophy

supervised by

Dr. Peer-Olaf Siebers Dr. Thorsten Altenkirch

November 26, 2019

To my parents Irmentraud and Wolfgang,  
For their unconditional love and support throughout all my life.

#### Abstract

Implementations of Agent-Based Simulations (ABS) primarily use object-oriented programming techniques, as in Python, Java and C++, due to the established opinion that agents map naturally to objects. These techniques have seen tremendous success throughout the last two decades in general and were able to provide the ABS community with useful simulation tools in particular.

However, the verification process of ensuring the correctness of the implementation has never been an easy task with the established object-oriented techniques, due to their inherent reliance on unrestricted side effects like mutable data and aliasing through references or pointers. Further, with the shift towards multicore CPUs in recent years, it became clear that the unrestricted side effects of the established object-oriented techniques can pose serious difficulties in arriving at a correct parallel or concurrent solution.

ABS is almost always used in the context of scientific computation, to test hypotheses, explore dynamics, support scientific theories and to make informed decisions about policies, potentially influencing many people's lives. Therefore, the aforementioned

Commented [KJ1]: Deleted "up to some specification for clarity"  
Deleted: up to some specification  
Deleted: ,

Deleted: also  
Deleted:

difficulty of the verification process is a serious issue. Because of their importance, the results of ABS need to be free of programming mistakes and reproducible given the same initial starting conditions.

This thesis investigates the use of pure functional programming with the language Haskell as a potential solution to overcome these difficulties. The central theme of this thesis is to do with purity, which identifies the lack of unrestricted side effects and referential transparency. Fundamentally, a computation does not depend on its context within the system, but will produce the same result when run repeatedly with similar inputs. This thesis explores if and how purity and the resulting concepts help to overcome the issues of the established object-oriented techniques. Purity also ensures the confidence in the correctness of an implementation, by answering the following research questions:

1. How can ABS be implemented purely functionally? What are the benefits and drawbacks in doing so?
2. How can purely functional programming be used for robust parallel and concurrent ABS implementations?
3. How can purely functional programming be used in automated code testing of purely functional ABS implementations?

Thematically, the research presented in this thesis is split into two parts. The first part deals with the approach to a pure functional ABS implementation (answering research question 1) and the second part with exploring benefits enabled through pure functional programming (answering research questions 2 and 3). First, the thesis explores how to implement ABS purely functionally, discussing both a time and event-driven approach. In each case Arrowized Functional Reactive Programming is used to derive fundamental abstractions and concepts. As use cases the well-known agent-based SIR and the Sugarscape models are used. Additionally, the thesis focuses on why it is beneficial to implement ABS purely functionally. For this research topic, we explore both robust parallel and concurrent programming, where the main focus is on how to speed up the simulation while still keeping it as pure as possible. In the parallel part, we rely on built-in language features and are able to speed the simulation up while retaining purity. In the concurrency part, Software Transactional Memory is used, sacrificing purity but still retaining certain guarantees about reproducibility. Finally, the thesis explores automated code testing of ABS implementations using property-based testing to show how to encode agent specifications and model invariants and perform model verification and hypothesis testing.

The contribution of this thesis is threefold:

1. Development of pure functional implementation techniques for ABS through the use of Arrowized Functional Reactive Programming.
2. Development of techniques using Software Transactional Memory to implement robust concurrent ABS.
3. Development of a new testing approach to ABS using randomised property-based testing for declarative and stochastic code testing.

Deleted: b

Deleted: permeating

Formatted: Highlight

Formatted: Highlight

Deleted: he one of

Formatted: Highlight

Deleted: where f

Formatted: Highlight

Formatted: Highlight

Deleted: overcoming

Deleted: -

Deleted: ,

Deleted: ensuring

Deleted: and

Deleted: w

Deleted: with t

Deleted: one

Deleted: ing

Deleted: the

Deleted: - t

Deleted: ,

Deleted: one

Deleted: Then

Deleted: of benefit

Deleted: but keeping it still

Deleted: pure as far as possible

Formatted: Highlight

The results of the respective contributions support the view that pure functional programming indeed has its place in ABS. First, a purely functional approach leads to implementations which are more likely to be valid due to the focus on purity. The approach avoids computations with unrestricted side effects. Secondly, pure parallel computation and Software Transactional Memory (lock-free) based concurrency make it possible to gain substantial speedup, with the latter one dramatically outperforming traditional lock-based approaches. While pure parallel computation fully retains static guarantees, Software Transactional Memory is less pure, but is still able to retain certain guarantees regarding reproducibility. Finally, property-based testing is shown to be extremely useful, as it naturally maps to the stochastic nature of ABS and is therefore suitable to be integrated into the development process as an additional tool for testing specifications and hypotheses.

Overall, we have fulfilled the aim and supported both the functional programming and ABS communities by giving them new technologies and application areas. We hope that this research will lead to an increased interest and higher acceptance for the use of the functional programming paradigm for the purpose of ABS.

#### Publications

Throughout the course of the Ph.D. six (6) papers with myself as the main author and contributor were written and submitted. Three (3) were accepted, two (2) remain works in progress and one (1) is pending:

1. The Art of Iterating - Update Strategies in Agent-Based Simulation [168, 132], submitted and accepted at the Social Simulation Conference 2017. This paper derives four different update strategies and their properties possible in time and event-driven ABS and discusses them from a programming paradigm agnostic point of view. It is the first paper which makes the very basics of update semantics clear on a conceptual level and is necessary to understand the options one has when implementing time- and event-driven ABS purely functionally.

2. Pure Functional Epidemics [167], submitted and accepted at the IFL Conference 2018. Using an agent-based SIR model, this paper establishes in technical detail how to implement time-driven ABS in Haskell using non-monadic Functional Reactive Programming with Yampa and monadic Functional Reactive Programming with Dunai. This paper outlines benefits and drawbacks of the above and also touches on important points for this thesis which were out of scope and edited out due to lack of space in the initial paper. However, these salient points on the topic of time-driven ABS will be addressed in more detail in this thesis.

3. A Tale Of Lock-Free Agents [172], submitted to the Complex Adaptive Systems Modeling Journal in November 2019 is currently under review. This paper is the first to discuss the use of Software Transactional Memory for implementing concurrent ABS both on a conceptual and on a technical level. It presents two case studies, with the agent-based SIR model as the first case study and the Sugarscape model as the second. Both case studies compare the performance of Software Transactional Memory and lock-based implementations in Haskell and object-oriented implementations of established languages. Although Software Transactional Memory is now not unique to Haskell anymore, this paper shows why Haskell is particularly well suited for the use of

**Deleted:** by avoiding

**Commented [KJ2]:** I'm not sure if this is a technical term. But maybe "increases in speed" sounds better?

**Deleted:** sacrifices purity

**Deleted:** about

**Deleted:** highly

**Deleted:** maps naturally

**Deleted:**,

**Deleted:** me

**Deleted:** 0

**Deleted:** -

**Deleted:** -

**Deleted:** It

**Commented [KJ3]:** Do I have the right topic here? Not sure if you would put it that way.

**Deleted:** in this paper

**Deleted:** but which

**Deleted:** ,

**Deleted:** being the

**Deleted:** one

**Deleted:** In b

**Deleted:** it

**Deleted:** s

**Deleted:**

Software Transactional Memory and is the only language which can overcome the central problem of how to prevent persistent side effects in retry semantics.

4. The Agents' New Clothes? Towards Pure Functional Agent-Based Simulation [169], submitted to the Summer Simulation Conference 2019. This paper summarizes the main benefits of using pure functional programming with Haskell to implement ABS and discusses, on a conceptual level, how to implement it and also what potential drawbacks are and where the use of a functional approach is not encouraged. It is written as a conceptual review paper, which tries to 'sell' pure functional programming to the agent-based community without too much technical detail and parlance where it refers to the important technical literature from where an interested reader can start.
5. Show Me Your Properties! The Potential of Property-Based Testing In Agent-Based Simulation [170], submitted and accepted at the Summer Simulation Conference 2019. This paper introduces property-based testing, on a conceptual level to ABS, using the agent-based SIR model and the Sugarscape model as two case studies. It shows how to encode specifications of explanatory models into properties and test individual agent behaviour and emergent properties of exploratory models.
6. Specification Testing of Agent-Based Simulation using Property-Based Testing [171], submitted to the JAAMAS Journal in August 2019, currently under review. This paper introduces property-based testing on a technical level to ABS using the agent-based SIR model as case study. It builds on the previous conceptual paper and discusses the topic in much more technical detail and also shows the use of statistically robust hypothesis testing with property-based testing.

Commented [KJ4]: Not sure if this was a spelling mistake or the actual title?

Deleted: 0

Deleted: ,

#### Acknowledgements

Thanks go to my first supervisor Peer-Olaf Siebers, who always very patiently reminded me that a Ph.D. is not about to change the world but learning how to do research on my own. He was a strong guidance throughout my three years in Nottingham and I could not have hoped for a better and more dedicated first supervisor.

I am also thankful for my second supervisor Thorsten Altenkirch, who gave strong and often very direct feedback about the technical details of my approaches. Due to the fact that his main interest is a rather theoretical spin on functional programming and computing, I am deeply grateful for his strong support of my rather practical approach to the topic.

I am in debt to the whole Functional Programming Lab at UoN, for welcoming me in their midst despite my lack of specific deep theoretical background. I owe them many open and deep discussions which resulted in new insights. Further, presenting at their FP Lunch was always a challenging but highly rewarding activity, always resulting in valuable feedback.

I am especially in debt to Ivan Perez for always having an open ear for questions and valuable discussions about his research, without this Ph.D. would have probably developed a very different spin.

Many thanks go to Martin Handley, James Hey and Thomas Schwarz for many discussions, feedback and proof reading of my papers and my thesis.

Thanks go also to Julie Greensmith for valuable discussions and pointing me into right directions at important stages of the Ph.D.

6

## Contents

### List of Figures 10 List of Tables 11

## I Introduction 12

### 1. 1 Motivation 13

1.1 Contributions..... 16 1.2 Thesisstructure..... 18

### 2. 2 Background 20

2.1 Agent-BasedSimulation ..... 20 2.2 Purefunctionalprogramming  
..... 27 2.3 ImplementingABS..... 38 2.4  
Relatedresearchandliterature ..... 45

### 3. 3 Methodology 48

## II Research 50

### 4. 4 Pure functional time-driven ABS 51

4.1 Purecomputation ..... 51 4.2 Goingmonadic ..... 59 4.3  
Addinganenvironment ..... 60 4.4 Discussion..... 63

### 5. 5 Pure functional event-driven ABS 66

5.1 Basics ..... 67 5.2 Advancedfeatures ..... 76 5.3  
Discussion..... 92

## 6 Parallel ABS

97

7

## CONTENTS 8

### 7. 7 Parallelism in ABS 100

7.1 Evaluationparallelism.....	100	7.2 Data-flowparallelism.....	101	7.3 Casestudies.....	103	7.4 Parallelruns .....	108
8. 8 Concurrency in ABS	110						
8.1 SoftwareTransactionalMemory.....	111	8.2 SoftwareTransactionalMemoryinABS .....	115	8.3 CasestudyI:SIR.....	118	8.4 CasestudyII:Sugarscape.....	123
Discussion.....	131						
9. 9 Property-based testing in ABS	133						
9.1 Relatedwork .....	134	9.2 Towardsproperty-basedtesting.....	135	9.3 Property-basedtesting.....	136		
10 Testing agent specifications	142						
10.1Event-drivenspecification .....	142	10.2Time-drivenspecification .....	148	10.3 Discussion .....	151		
11 Testing model invariants	153						
11.1 Invariants in simulation dynamics .....	153	11.2 Comparing time- and event-driven implementations .....	156	11.3 Testing the SIR model specification .....	157		
11.4 Discussion .....							
III Discussion and Conclusion							
12 General Discussion							
.....	161						
164							
165							
12.1 Drawbacks .....							
12.2 Generalising research .....							
12.3 The Gintis case revisited.....							
12.4 Do agents map naturally to objects? .....	176						
13 General Conclusion	180						
13.1 Further Research .....	181						
References	185	Appendices	201				

.....	168 .....	171 .....	172
-------	-----------	-----------	-----

## CONTENTS 9

### A Validating Sugarscape in Haskell 202

A.1 Property-based hypothesis testing .....	202	A.2 Hypotheses and test cases.....	206	A.3 Discussion.....	211
---	-----	------------------------------------	-----	---------------------	-----

### B Pure functional System Dynamics 213

B.1 Deriving the implementation .....	213	B.2 Results.....	215	B.3 Discussion.....	215	B.4 Full Implementation .....	218
---------------------------------------	-----	------------------	-----	---------------------	-----	-------------------------------	-----

### List of Figures

1. 2.1 States and transitions in the SIR compartment model .....	23
2. 2.2 Dynamics of the SIR compartment model using the System Dynamics approach .....	24
3. 2.3 Visualisation of the Sugarscape implementation .....	27
4. 2.4 Controlflow in the sequential update strategy .....	41
5. 2.5 Controlflow in the parallel update strategy .....	42
6. 2.6 Controlflow in the concurrent update strategy .....	43
7. 2.7 Controlflow in the actor update strategy .....	44
1. 4.1 FRP simulation of agent-based SIR showing the influence of different $\Delta t$ .....	56
2. 4.2 Visual explanation of undersampling and supersampling .....	57
3. 4.3 Common neighbourhoods in discrete 2D environments of ABS ..	61
4. 4.4 Simulating the agent-based SIR model on a 21x21 2D grid with Moore neighbourhood .....	63
1. 5.1 Dynamics of the event-driven SIR model .....	69
2. 5.2 Sequence diagram of synchronous agent interaction in the trading usecase.....	87
3. 5.3 Three layered architecture of event-driven ABS .....	93
1. 8.1 Diagram of the parallel time-driven lock-step approach .....	116
2. 8.2 Comparison of performance and scaling on multiple cores of the STM and Lock-Based SIR implementations .....	120
3. 8.3 Performance comparison of STM and Lock-Based SIR implementations on varying grid sizes .....	121

4.	8.4 Comparison of steps per seconds and retries of various Sugarscape implementations with constant agent numbers .....	126
5.	8.5 Steps per second of various Sugarscape implementations with varying agent numbers .....	128

B.1 Visual comparison of the SIR SD dynamics generated by AnyLogic and the implementation in Haskell..... 216

10

## List of Tables

7.1	Timings of parallel vs. sequential non-monadic SIR .....	104
1.	8.1 Machine and software specs for concurrency experiments .....	119
2.	8.2 SIR performance comparisons on 51x51 grid with varying number of cores .....	119
3.	8.3 Performance comparison of STM and Lock-Based SIR implementations on varying grid sizes .....	121
5.	8.5 SIR STM performance on 16 and 32 cores on Amazon EC2 ...	122
6.	8.6 Comparison of steps per seconds and retries of various Sugarscape implementations with constant agent numbers .....	126
7.	8.7 Steps per second of various Sugarscape implementations with varying agent numbers .....	127
8.	8.8 Sugarscape STM performance on 16 and 32 cores on Amazon EC2	129

B.1 Comparison of the SD dynamics generated by the Haskell implementation with varying  $\Delta t$  ..... 215

11

## Part I: Introduction

12

### Chapter 1

#### Motivation

The traditional approach to Agent-Based Simulation (ABS) has so far always been object-oriented, due to the influence of the seminal Sugarscape model [48], in which the authors claim "[..] object-oriented programming to be a particularly natural development environment for Sugarscape specifically and artificial societies generally [..]" (p. 179). This work established the metaphor in the ABS community, that agents map naturally to objects [125], which still holds up today.

Despite the broad acceptance and adoption of object-oriented techniques however, there seem to be struggles with established ABS approaches, as described in [9], where the author reports the vulnerability of ABS to misunderstanding. Due to informal specifications of models and change requests amongst members of a research team, bugs are very likely to be introduced. He also reported how difficult it was to reproduce the work of [7], which took the team four months, due to inconsistencies between the original code and the published paper. The consequence is that counter-intuitive simulation results can lead to weeks of checking whether the code matches the model and is bug-free as reported in [8].

The same problem was reported in [88], which tried to reproduce the work of Gintis [60]. In his work, Gintis claimed to have found a mechanism in bilateral decentralized exchange, which resulted in Walrasian General Equilibrium without the neo-classical approach of a tatonnement process through a central auctioneer. This was a major breakthrough for economics as the theory of Walrasian General Equilibrium is non-constructive. It only postulates the properties and existence of the equilibrium [33] but does not explain the process and dynamics through which this equilibrium can be reached or constructed. Gintis seemed to have found this very process.

The authors [88] failed to reproduce the results and were only able to solve the problem by directly contacting Gintis, which provided the code, the definitive formal reference <sup>1</sup>. It was found that there was a bug in the code leading to

<sup>1</sup>It seems that at this point Gintis has made his code, (written in Object Pascal), publicly available through his website [61].

Deleted: the

Deleted: as i

Deleted: -

Deleted: by now,

Deleted: ,

Deleted: ,

## CHAPTER 1. MOTIVATION

unexpected results, which were seriously damaged through this error. They also reported ambiguity between the informal model description in Gintis' paper and the actual implementation. This discovery lead to research in a functional framework for agent-based models of exchange as described in [21], which tried to give a very formal functional specification of the model, coming very close to an implementation in Haskell. The failure of Gintis was investigated in more depth in the thesis by [49] who got access to Gintis' code of [60]. They found that the code did not follow good object-oriented design principles (all of it was public, code duplication) and in accordance with [88] discovered a number of bugs serious enough to invalidate the results.

Deleted: the

However, due to the fact that ABS is primarily used for scientific research, producing often break-through scientific results, converging both on standards for testing the robustness of implementations and on its tools, ABS more importantly needs to be free of bugs. [9] It also needs to be verified against their specification, validated against hypotheses and ultimately be reproducible [9]. Further, a special issue with ABS is that the emergent behaviour of the system is generally not known in advance and researchers look for some unique emergent pattern in the dynamics. Whether the emergent pattern is then truly due to the system working correctly, or a bug in disguise is often not obvious and becomes increasingly difficult to assess with increasing system complexity.

Deleted: more in

Deleted: n't

Deleted: -

Deleted: -

Deleted: almost always

Deleted: besides on

Deleted: ,

Deleted: ms correct working

Based on the reports of failure and the special requirements of validity on ABS implementations, this thesis claims that the established object-oriented techniques have inherent difficulties with these issues as they are inherently built on unrestricted side effects. In general, this makes reasoning about the correctness and validity of an implementation difficult as all possible states of the program need to be understood, which can be too much to comprehend when unrestricted side effects are allowed.

Formatted: Highlight

As a potential remedy to these issues, this thesis explores ways of approaching ABS through the pure functional programming paradigm using the language Haskell. The focus throughout this thesis is on purity. It identifies the guaranteed lack of unrestricted side effects, thus achieving referential transparency. Thus, computations do not depend on the history or context of the system, consequently, leading to same results when run repeatedly with same inputs. This result has the effect that the state space of the implementation is dramatically reduced up to a point where it becomes feasible to understand all possible states, ultimately leading to an implementation which is more likely to be correct. This opens up the direction for parallelisation of ABS implementations, which has always been difficult with unrestricted side effects, but becomes considerably easy in pure functional programming. Further, the use of pure functional programming with Haskell opens up the opportunity to explore randomised property-based testing for ABS as an alternative approach for automated code testing as the operational unit testing. As used in the established object-oriented techniques, it is inherently not very well suited to test stochastic ABS.

Deleted: ,

Deleted: where

Deleted: thus

Deleted: direction

Deleted: of

Deleted: ,

Deleted: a

Deleted: al

To the best of the author's knowledge, this thesis is the first one to explore these ideas on a systematic level, developing a foundation by presenting funda-

mental concepts and advanced features to show how to leverage the paradigm's benefits [80] to make them available when implementing ABS functionally. By doing this, the thesis shows how to implement ABS purely functional and why it is beneficial to do so, what the drawbacks are, and when a pure functional approach should not be used. The thesis does this by answering the following questions:

1. How can ABS be implemented purely functional and what are the benefits and drawbacks in doing so?
2. How can pure functional programming be used for parallel and concurrent programming?
3. How can pure functional programming be used for testing ABS implementations?

This thesis' hypotheses that using pure functional programming for implementing ABS is indeed possible due to the pure computational character of most ABS models. They do not rely on unrestricted side effects of asynchronous, non-deterministic Input/Output (IO) and direct user interaction. This should lead to simulations which are easier to test and verify, guaranteed to be reproducible already at compile time, with fewer potential sources of bugs, and consequently, can raise the level of confidence in the correctness of an implementation to a new level. Further, it should be easier to add parallelism and concurrency. Addressing the issue of easy parallelisation and concurrency of ABS is of tremendous importance, given the rise of multicore CPU architectures and cloud computing infrastructures in the last decade. By providing concepts which make parallelisation and concurrency in ABS easier and more likely to be correct, this enables implementers to fully exploit the available resources much more easily, with more confidence in the correctness of their implementations. Finally, this thesis hypothesises that by using pure functional programming, ABS becomes applicable to randomised property-based testing, which should be a natural fit to the stochastic nature of ABS. By employing property-based testing, it should finally become possible to address the issue of code testing in ABS to a satisfactory level, further increasing the level of confidence in the validity of an implementation. The main drawbacks are hypothesised to be low performance, for which functional programming is notorious, and agent interactions, which are trivial in object-oriented techniques due to unrestricted side effects, but not available in functional programming.

Also, this thesis claims that the research has also importance for Internet of Things (IoT), currently a hot topic in the field of Multi-Agent Systems and ABS. ABS is conceptually related to IoT due to both having roots in Multi-Agent Systems: in IoT as well as in ABS things interact locally with each other, out of which the whole system behaviour emerges. Thus, ABS allows modelling and simulating of large IoT systems and networks before installing them, acting as a kind of prototype and validation and verification mechanism [146].

The usefulness and potential impact of this thesis research is further underlined by the fact that it offers directions for a few of the research challenges for the future of ABS, called out by the excellent ABS survey and review paper [110]. The challenge Large-scale ABMS which focuses on efficient modelling and simulating large-scale ABS, is directly addressed by this thesis work on parallelism and concurrency in ABS. The challenges H2: Development of ABMS as an independent discipline with a common language that extends across domains and H4: Requirement of complete descriptions of

**Deleted:**  
**Deleted:** of benefit of doing so  
**Deleted:** also

**Deleted:**,  
**Commented [KJ5]:** Make sure that the sentence says what you intend. I've tried to shorten the sentence here. But you might not like the result.  
**Deleted:** ing  
**Deleted:** thus

**Deleted:** s  
**Deleted:** much

**Deleted:** for

**Deleted:** to model  
**Deleted:** e

the simulation so others can independently replicate the results are not directly related to this thesis work, but the declarative nature of pure functional programming is of fundamental importance here. It is well known that functional programming helps in structuring computation in a very clear and precise way, leading to a deeper understanding about problems. Thus, in this thesis the functional approach is also regarded as a way to think and explore ABS in a more rigorous way, as a tool for developing abstractions and especially, to develop a deeper and more complete understanding of the computational structure underlying ABS. By implementing and generalising use cases, implicit knowledge is extracted and made explicit, thus potentially supporting the aforementioned challenges. Another relevant challenge is H5: A requirement that all models be completely validated is directly addressed by this thesis' pure functional programming approach as it is well established that this paradigm shines in program verification and validation [80, 86]. Moreover, property-based testing offers a viable direction for this challenge as well, offering a much more natural fit for code testing than unit testing. Finally, purity is a fundamentally important concept for this subject as it eases validation tremendously. Finally, the challenge H6: Developing applications of statistical and non-statistical validation techniques specifically for ABMS is addressed by the use of randomised property-based testing which might prove to be a huge step forward in this matter.

In conclusion, this thesis claims that the ABS community needs functional programming because of its scientific computing nature, where results need to be reproducible and correct, while simulations can massively scale up as well. As pointed out above, the established object-oriented approach needs a considerable level of effort and might even fail to deliver these objectives due to its conceptually different approach to computing with unrestricted side effects. It is the authors hope that this undertaking is to the whole benefit of the ABS discipline and will also feed back into the established object-oriented implementation techniques.

## 1.1 Contributions

1. To the best knowledge of the author, this thesis is the first to systematically investigate the use of the pure functional programming paradigm with Haskell, to ABS, laying out in-depth technical foundations and identifying its benefits and drawbacks. Additionally, the use of pure functional programming, which focuses on explicit data-flow representation, is a strong match with scientific computing, which is data-centric as well. Consequently, due to the increased interest in functional concepts added to object-oriented languages in recent years (lambda expressions and map, filter, reduce in Java 8, rise of functional frameworks in JavaScript, Python's functional features, etc.), because of its established benefits in concurrent programming, testing and software development in general, presenting such foundational research gives this thesis significant impact. What is more, a pure functional approach leads directly to fewer bugs and guaranteed reproducibility of repeated runs at compile time. This approach results in implementations which are more likely to be correct, which is of fundamental importance in all kind of scientific computing in general, giving this thesis considerable impact.

2. To the best knowledge of the author, this thesis is the first to show the use of Software Transactional Memory to implement concurrent ABS and its potential benefit over lock-based approaches. The use of Software Transactional Memory

Commented [JKJ6]: You might want to elaborate here...what kind of problems are you referring to? It's a bit vague.

Deleted: ,

Deleted:

Deleted: R

Deleted: Further

Deleted: tremendously

Deleted: f

Deleted: Concluding

Deleted: should be able to

Deleted: considerably high

Deleted: Iso

Deleted: to

Deleted: Thus,

Deleted: ,

Deleted: ...)

Deleted: Further

Deleted: directly

Deleted: less

Deleted: , resulting

Deleted: something

Deleted: thus

is particularly compelling in functional programming because it can guarantee, at compile time, that retry semantics exclude non-repeatable persistent side effects. By employing Software Transactional Memory it is possible to implement a simulation which allows massively large-scale ABS, but without the low level difficulties of concurrent programming. Consequently, it becomes easier and quicker to develop working and correct concurrent ABS models. Further, the use of Software Transactional Memory allows us still to approach concurrency as a data-flow approach, without cluttering model code with concurrency semantics. Although purity is lost when using Software Transactional Memory, it is still possible to retain certain guarantees about reproducibility, making it a highly attractive approach to concurrent scientific computing. Moreover, due to the increasing need for massively large-scale ABS in recent years [108], adding the possibility of a purely functional approach as well, gives this thesis substantial impact.

3. To the best of the authors knowledge, this thesis is the first to present the use of property-based testing in ABS, which allows declarative specification testing of the implemented ABS directly in code with automated random test case generation. This approach is an addition to the established Test Driven Development process and a complementary approach to unit testing, ultimately giving the developers an additional, powerful tool to test the implementation on a more conceptual level. More specifically, the thesis shows how to encode full agent specifications and model invariants and complete, validation and verification including hypothesis testing with property-based testing. This should lead to simulation software which is more likely to be correct, thus making this a highly significant contribution with valuable impact.

Deleted:,  
Deleted: making  
Deleted: still

Deleted: Further  
Deleted: making this  
Deleted: ble within

Deleted: do  
Deleted:

## CHAPTER 1. MOTIVATION 1.2 Thesis structure

The thesis is divided into three parts which act as the thematic narrative throughout the text followed by an Appendix .

Part I begins, the thesis by laying out the necessary prerequisites necessary to understand the ideas and motivation in the rest of the thesis.

Deleted: opens

Chapter 1 introduces the problem and presents the motivation, aim and hypotheses.

Chapter 2 presents related research and discusses the background necessary to understand the rest of the thesis. It presents a definition of ABS and gives an introduction to functional programming with advanced topics necessary to understand the concepts in this thesis. Further, it discusses an architectural categorisation on how to implement ABS from a language-agnostic point of view.

Chapter 3 presents the methodology.

Part II presents the main body of research.

Chapter 4 derives a time-driven ABS implementation for an agent-based SIR model. Because it is the first chapter discussing how to implement ABS purely functional, it goes quite into detail in order to lay out the basic concepts.

Chapter 5 presents an event-driven approach to ABS using an event-driven agent-based SIR and the highly complex Sugarscape model. It builds on the concepts derived in Chapter 4, generalises them and pushes them forward towards a more generic solution. Further, it also gives a brief outline how to transform the time-driven SIR implementation into an event-driven one.

**Deleted:** the previous

Chapter 6 establishes parallelism and concurrency to set the scene for the following two chapters on parallel ABS in general.

Chapter 7 shows how to achieve deterministic and pure parallelism in pure functional ABS.

**Deleted:** rather briefly

Chapter 8 presents an in-depth discussion on how to implement concurrent ABS using Software Transactional Memory.

Chapter 9 motivates property-based testing for ABS and introduces relevant concepts of property-based testing in general and the QuickCheck library in particular.

**Commented [KJ7]:** Not sure this is the best word to use?  
Indicates the benefits of...?

Chapter 10 shows how to use property-based testing to implement a full agent-specification test of the event- and time-driven SIR model in code and run it as property tests.

## CHAPTER 1. MOTIVATION 19

Chapter 11 shows how to derive and encode invariants the simulations dynamics must uphold in property tests. It also shows how to compare the dynamics of two implementations of the same underlying model, namely the time- and event-driven SIR implementations. Moreover, it shows how to put model specifications into code and check them with property tests by comparing the System Dynamics simulation to the agent-based one.

**Deleted:** the

**Deleted:**

**Deleted:** Further

Part III is the closing part which discusses and concludes the thesis.

Chapter 12 revisits and discusses the initial motivation, aim and hypotheses. Additionally, it presents the drawbacks of the pure functional approach, discusses the Gintis case described above and answers the question of whether agents map naturally to objects or not.

**Deleted:** Further

Chapter 13 concludes and presents further research.

Appendices contain additional material which relates to the overall research of this thesis but would be out of context in the respective chapters.

**Deleted:** s

Appendix A contains a brief overview over the validation process we went through when trying to get our Sugarscape implementation from Chapter 5 in line with the results from the original specification [48]. In addition, we show how we can use property-based testing in an exploratory model to formulate and test hypotheses.

**Deleted:** Further

Appendix B shows a pure functional implementation of a System Dynamics SIR simulation using Functional Reactive Programming. It shows that it is possible to

directly encode System Dynamics specification in pure functional code with extremely high accuracy rate of correctness. This implementation is used in Chapter 11 where the agent-based SIR dynamics are tested against the System Dynamics ones.

Deleted: high guarantees in

## Chapter 2 Background

### 2.1 Agent-Based Simulation

This thesis understands ABS as a method and methodology to model and simulate a system, where the global behaviour may be unknown but the behaviour and interactions of the parts making up the system is known. Those parts, called agents, are modelled and simulated, out of which then the aggregate global behaviour of the whole system emerges. So, the central aspect of ABS is the concept of an agent, a metaphor for a proactive unit, situated in an environment which is able to spawn new agents and interacting with other agents in some neighbourhood by the exchange of messages [110, 126, 152, 189]. In summary, this thesis informally assumes the following about agents:

- They are uniquely addressable entities with an internal state over which they have full, exclusive control.
- They are proactive, which means they can initiate actions on their own. For example they can change their internal state, send messages, create new agents, or terminate themselves.
- They are situated in an environment and can interact with it.
- They can interact with other agents situated in the same environment by means of messaging.

Epstein [47] identifies ABS to be particularly applicable for analysing "spatially distributed systems of heterogeneous autonomous actors with bounded information and computing capacity". Technically, ABS exhibits the following properties:

- Linearity and non-linearity - actions of agents can lead to non-linear behaviour of the system.
- Time - agents act over time, which is also the source of their proactivity.
- State - agents encapsulate state, which can be accessed and changed during the simulation.
- Feedback loop - because agents act continuously and their actions influence each other and themselves in the future of subsequent time steps, feedback loops permeate every ABS.
- Heterogeneity - agents can have properties (age, height, sex, etc) where the actual values can vary arbitrarily between individuals.
- Interactions - agents can be modelled after interactions with an environment and other agents.
- Spatiality and networks - agents can be situated within arbitrary environments, like spatial environments (discrete 2D, continuous 3D, etc) or complex networks.

There is no commonly agreed technical definition of ABS, but the field draws inspiration from the closely related field of Multi-Agent Systems [184, 189]. It is

Deleted: ,

Deleted: Summarising

Deleted: ,

Deleted: f

Formatted: Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0,63 cm + Tab after: 1,27 cm + Indent at: 1,27 cm

Deleted: ¶

Deleted: especially

Deleted: analysing "spatially"

Deleted: -

Formatted: Indent: Left: 1,27 cm

Formatted: Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0,63 cm + Tab after: 1,27 cm + Indent at: 1,27 cm

Deleted: -

Deleted: ¶

Deleted: -

Deleted: -

Deleted: ,

Deleted: ...

Deleted: -

Deleted: -

Deleted: ...

important to understand that Multi-Agent Systems and ABS are two different fields, where in Multi-Agent Systems the focus is geared towards technical details, implementing a system of interacting intelligent agents within a highly complex environment with the primary focus being solving AI problems.

Deleted:  
Deleted: much more on  
Deleted: primarily  
Deleted: on

The field of ABS can be traced back to self-replicating von Neumann machines, cellular automata and Conway's Game of Life. The famous Schelling segregation model [147] is regarded as a pioneering example. ABS as a discipline was first picked up by social simulation, which explores social norms, institutions, reputation, elections and economics. Axelrod [8, 10] has called social simulation the third way of doing science which he termed the generative approach. Axelrod's approach is in opposition to the classical inductive (finding patterns in empirical data) and deductive (proving theorems). Consequently, the generative approach can be seen as a form of empirical research and is a natural methodology for studying social and interdisciplinary phenomena as discussed in detail in the work of Epstein [46, 47]. He gives a fundamental introduction to agent-based social simulation and makes the strong claim that "If you didn't grow it, you didn't explain its emergence" <sup>1</sup>. Epstein puts considerable emphasis on the claim that ABS is indeed a scientific instrument as hypotheses which are investigated are empirically falsifiable. If the simulation exhibits an emergent pattern, then the model is one way of explaining it. On the other hand, if it does not show the emergent pattern, then the hypothesis that the micro interactions amongst the agents generate the emergent pattern is falsified <sup>2</sup> and we have not

Deleted: ,  
Deleted: ,  
Deleted: which  
Deleted: Thus  
Deleted: environment  
Deleted: more in depth  
Deleted:  
Deleted: social  
Deleted: much  
Commented [KJ8]: I don't understand this sentence. Can you re-word it?

<sup>1</sup>This can be seen as a fundamental constructivist approach to social science, which implies that the emergent properties are actually computable. When making connections from the simulation to reality, constructible emergence raises the question whether our existence is computable or not. When pushing this further, we can suppose that the future of simulation will be simulated copies of our own existence, which potentially allows us to then simulate everything. This idea is not actually new and an interesting treatment of it can be found in [19, 154].

Deleted: conjecture

<sup>2</sup>This is fundamentally following Poppers theory of science [140].

found an explanation yet. In conclusion, growing a phenomena is a necessary, but not sufficient condition for explanation [46].

The first large scale social ABS model which rose to some prominence was the Sugarscape model developed by Epstein and Axtell in 1996 [48]. Their aim was to grow an artificial society by simulation and connect observations in their simulation to the phenomenon of real-world societies. It was this simulation which strongly advertised object-oriented programming to implement ABS. Due to this influence and also due to the general popularity of the object-oriented paradigm which started to rise in the early-to-mid 1990s, object-oriented programming has become the de-facto standard in implementing ABS . We can distinguish between three categories of ABS implementation today:

Deleted: r  
Deleted: how  
Deleted: is  
Deleted: ted

1. Programming from scratch using object-oriented languages, with Python, Java and C++ being the most popular.
2. Programming with, a 3rd party ABS library using object-oriented languages where RePast and DesmoJ, both in Java, are the most popular.
3. Using a high-level ABS toolkit for non-programmers, which allow customisation through programming, if necessary. By far the most popular is NetLogo, with an imperative programming approach followed by AnyLogic with an object-oriented Java approach.

To get a better idea and deeper understanding of ABS, the next sections present two different but well-known agent-based models, to give examples of two different types: the explanatory SIR model and the exploratory Sugarscape model. Both are used throughout this thesis as sample cases for developing pure functional ABS implementation techniques, concepts and test beds for Software Transactional Memory and property-based testing.

### 2.1.1 The SIR model

The explanatory SIR model is a thoroughly studied and well understood compartment model from epidemiology [98], which allows simulation of the dynamics of an infectious disease like influenza, tuberculosis, chicken pox, rubella and measles spreading through a population. The reason for choosing this model is its simplicity. It is easy to understand fully, but complex enough to develop basic concepts of pure functional ABS, which are then extended and deepened in the much more complex Sugarscape model explained in the next section.

In this model, people in a population of size  $N$  can be in either one of three states: Susceptible, Infected or Recovered, at any particular time. It is assumed that initially there is at least one infected person in the population. People interact on average with a given rate of  $\beta$ , other people per time unit, and become infected with a given probability  $\gamma$  when interacting with an infected person. When infected, a person recovers on average after  $\delta$  time units and is then immune to further infections. An interaction between infected persons

Figure 2.1: States and transitions in the SIR compartment model.

does not lead to reinfection, thus these interactions are ignored in this model. This definition gives rise to three compartments with the transitions seen in Figure 2.1.

This model was also formalized using System Dynamics [141]. In System Dynamics a system is modelled through differential equations, which allow expressing continuous systems, changing over time. They are solved by numerically integrating over time, which gives rise to the respective dynamics. The SIR model is modelled using the following equation, with the dynamics shown in Figure 2.2 .



$$\frac{dS}{dt} = -\text{infectionRate} \cdot S \cdot I$$

$$dI = \text{infectionRate} - \text{recoveryRate} dt$$


$$dR = \text{recoveryRate} dt$$

$$\text{infectionRate} = I \beta S \gamma N$$

$$\text{recoveryRate} = I \delta$$

(2.1)

(2.2)

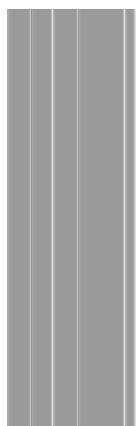

The approach of mapping the SIR model to an ABS is to discretise the population and model each person in the population as an individual agent. The transitions between the states are happening due to discrete events caused both by interactions amongst the agents and timeouts. The major advantage of ABS over System Dynamics is that it allows for the incorporation of spatiality and simulates the heterogeneity of a population, for example accounting for different sexes and ages. This is not directly possible with other simulation methods of System Dynamics or Discrete Event Simulation [190].

Deleted: with

In the ABS classification of [110], this model can be seen as an Interactive ABMS: agents are individual heterogeneous agents with a diverse set characteristics; they have autonomic, dynamic, endogenously defined behaviour; interactions happen between other agents and the environment through observed states, behaviours of other agents and the state of the environment.

### 2.1.2 Sugarscape

The seminal Sugarscape model was one of the first models in ABS, developed by Epstein and Axtell in 1996 [48]. Their aim was to grow an artificial society by simulation and connect observations in their simulation to phenomena observed in real-world societies, making it an exploratory model. In the model a

## CHAPTER 2. BACKGROUND 24

Figure 2.2: Dynamics of the SIR compartment model using the System Dynamics approach. Population Size  $N = 1,000$ , contact rate  $\beta = 1$ , infection

probability  $\gamma = 0.05$ , illness duration  $\delta = 15$  with initially 1 infected agent. Simulation run for 150 time steps. Generated using our pure functional System Dynamics approach (see Appendix B).

population of agents move around in a discrete 2D environment, where sugar and spice grow, and interact with each other and the environment in multiple ways. The main features of this model are (amongst others): searching, harvesting and consuming of resources, wealth and age distributions, population dynamics under sexual reproduction, cultural processes and transmission, combat and assimilation, bilateral decentralized trading (bartering) between agents with endogenous demand and supply, disease processes transmission and immunology.

Deleted: any different

The reasons for choosing the Sugarscape model as use case in this thesis are: it is quite well known in the ABS community, it was highly influential in sparking the overall interest in ABS; it is quite complex with non-trivial agent interactions, the original implementation was done in Object Pascal and C with about 20.000 lines of code which includes GUI, graphs and plotting, where the authors used Object Pascal for programming the agents and C for low-level graphics [11]. The authors explicitly advocate object-oriented programming as a good fit with ABS which begged the question whether and how well a pure functional implementation is possible.

Deleted: ;

Deleted: -

Deleted: ;

Deleted: ;

Deleted: t

Deleted: to


In the ABS classification of [110], the Sugarscape can be seen as an Adaptive ABMS: agents are individual heterogeneous agents with diverse set characteristics; they have autonomic, dynamic, endogenously defined behaviour, interactions happen between other agents and the environment through observed states, behaviours of other agents and the state of the environment, agents can change their behaviour during the simulation through observing their own state and learning and populations can adjust their composition.

Deleted: ;

Deleted: ;

Deleted: ;

The full specification of the Sugarscape model itself fills a small book [48] of

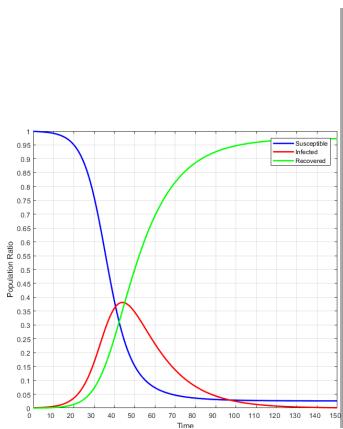

## CHAPTER 2. BACKGROUND 25

about 200 pages, so we will only give a very brief overview of the model in terms of actions that occur using this model. Generally, the Sugarscape model is stepped in discrete, natural number time steps, also called ticks, where in each tick the following actions happen:

1. Shuffle all agents and process them sequentially. The reason why the agents are shuffled is to even-out the odds of being scheduled at a specific position ~~it is equally probable to be~~ scheduled in any position. The semantics of the model follow the sequential update strategy (see Chapter 2.3), thus requiring stepping the agents sequentially. ~~Ideally, though, one wants to avoid any biases in ordering and pretend that agents act conceptually or statistically at the same time~~ ~~in parallel~~. The shuffling allows this by running the agents sequentially making their behaviour appear statistically in parallel. Every agent executes the following actions, where agents executed after the agent in the same tick can already see the changes and interactions of preceding agents

1. (a) The agent ages by 1 tick. An agent might have a maximum age, which when reached will result in the removal of the agent from the simulation (see below).
2. (b) Move to the nearest unoccupied site in sight with highest resource. In the event of combat, sites that are also occupied with agents from a different tribe are potential targets. Harvest all the resources on the site and in case of combat, additionally, reap the enemies resources, or gather a combat reward. This is one of the primary reasons why the Sugarscape model needs to be stepped sequentially: because only one agent can occupy a site at a time, it would lead to conflicts when agents actually act at the same time.
3. (c) Apply the agents' metabolism. Each agent needs to consume a given number of resources in each tick to satisfy its metabolism. The gathered resources can be stocked up during the harvesting process, but if the agent does not have enough resources to satisfy its metabolism, it will be removed from the simulation (see below).
4. (d) Apply pollution from the environment through the agent. Depending on how much the agent has harvested during its movement and consumed in its metabolism process, it will leave a small fraction of pollution in the environment.

**Deleted:** which happen

**Deleted:** s

**Deleted:** -

**Deleted:** of being

**Deleted:** to step

**Deleted:** However,

**Deleted:** i

**Commented [KJ9]:** I think that "at the same time" and "in parallel" are redundant in this sentence. They mean the same thing. However, as you are talking about actual timing of agents, I wasn't sure which to erase. You can decide perhaps how you like it done.

**Deleted:** to do

**Deleted:** which makes

**Deleted:** ,

**Deleted:** case

**Deleted:** also

**Deleted:** lso

**Deleted:** some

**Deleted:** of

- 5. (e) Check if the agent has died from age or starved to death, in the event, it removes itself from the simulation and does not execute the next steps (the previous steps are executed independently from the age of the agent). Depending on the model configuration this could also lead to the respawning of a new agent which replaces the dead agent.
- 6. (f) Engage with other neighbours in mating, which involves multiple synchronous interaction steps happening in the same tick: exchange of information and both agents agreeing on the mating action. If

**Deleted: case**

**Deleted: ied**

both agents agree to mate, the initiating agent spawns a new agent, with characteristics inherited from both parents. See Figure 2.3d.

Engage in the cultural process, where cultural tags are picked up from other agents and passed on to other agents. This action is a one-way interaction where the neighbours do not reply synchronously.

Engage in trading with neighbours where the initiating agent offers a given resource (sugar) in exchange for another resource (spice). The agent asks every neighbour and a trade will take place, if it makes both agents better off. This action involves multiple synchronous interaction steps within the same tick because of the exchange of information and agreeing on the final transaction. See Figure 2.3d.

**Deleted: transact**

**Deleted: -**

Engage in lending and borrowing, where the agent offers loans to neighbours. This action also involves multiple synchronous interaction steps within the same tick because of exchange of information and agreeing on the final transaction.

Engage in disease processes, where the agent passes on diseases it has to other neighbour agents. This action is a one-way interaction where the neighbours do not reply synchronously.

the environment which consists of an NxN discrete grid


Re-grow resources on each site according to the model configuration: either with a given rate per tick, as seen in Figure 2.3a, or immediately. Depending on whether seasons are enabled (see Figure 2.3c) the re-growing rate varies in different regions of the environment.

Apply diffusion of pollution where the pollution generated by the agents spreads out slowly across the whole environment, see Figure 2.3b.

In Figure 2.3 visualisations of our Sugarscape implementation as discussed in Chapter 5.2 are shown.

## CHAPTER 2. BACKGROUND

- (a) Animation II-2 : resource growback and infinite agent age.
- (c) Animation II-7: seasons, agents trying to migrate.

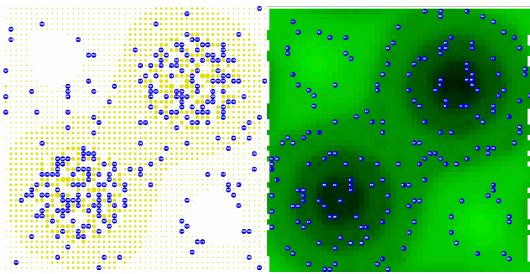

(b) Animation II-8 : active pollution with diffusion.

(d) Figure IV-14: trading, mating and finite life spans.

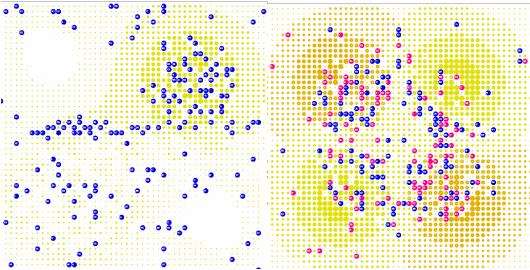


Figure 2.3: Visualisation of the Sugarscape implementation (see Chapter 5.2). The naming of the respective Animation and Figure is taken from [48].

## 2.2 Pure Functional Programming

To be able to understand the challenges of pure functional ABS as well as the solutions and concepts developed in this thesis, in this section we give a short introduction to functional programming, with an overview of its concepts and advanced features. As it is obviously beyond the focus of a thesis to give a full treatment of such a complex topic, we refer to additional literature and references for further discussions where appropriate.

Functional programming is called functional because it makes functions the main concept of programming, promoting them to first-class citizens. This means that functions can be assigned to variables, they can be passed as arguments to other functions and they can be constructed as return values from functions. The roots of functional programming lie in Lambda Calculus which was first described by Alonzo Church [29]. This is a fundamentally different approach to computing than imperative programming (including established object-orientation), the roots of which lie in the Turing Machine [174]. Rather than describing how something is computed as in the more operational approach of the Turing Machine, due to the more declarative nature of Lambda Calculus, code in functional programming describes what is computed.

In [111] the author defines functional programming as a methodology attributing the following properties to it: programming without the assignment operator, allowing for

**Deleted:** f

**Deleted:** p

**Deleted:** and

**Deleted:** ver

**Deleted:** the

**Deleted:** which

**Deleted:** the

higher levels of abstraction, to develop executable specifications and prototype implementations connected to computer science theory, performing algebraic reasoning. Further the author makes the subtle distinction between applicative and functional programming. Applicative programming can be understood as applying values to functions where one deals with pure expressions. In those expressions the value is independent from the evaluation order, also known as referential transparency. This means that such functions have no side effects and thus the outcome of their execution does not depend on the history or context of the system. Additionally, input and effects on an operation are obvious from the written form.

Applicative programming is not necessarily unique to the functional programming paradigm but can be emulated in an imperative language like C as well. Functional programming is then defined by [111] as applicative programming with higher-order functions. These are functions which operate themselves on functions: they can take functions as arguments, construct new functions and return them as values. This is in stark contrast to first-order functions, as used in applicative or imperative programming, which just operate on data alone. Higher-order functions allow the capturing of frequently recurring patterns in functional programming in the same way that imperative languages captured patterns like "goto", "while-do", "if-then-else", "for". Common patterns in functional programming are (amongst others) the "map", "fold", or "zip" functions. So, functional programming is not really possible in the same way as in classic imperative languages like C, as it is not possible to construct new functions and return them as results from functions. Object-oriented languages like Java provide mechanisms allowing us to partially work around this limitation but are still far from pure functional programming.

The equivalence in functional programming to the operator of imperative programming that allows us to compose imperative statements, is function composition. Function composition has no side effects, as opposed to the imperative ";" operator, which simply composes destructive assignment statements executed after another, resulting in side effects. At the heart of modern functional programming is monadic programming which is polymorphic function composition. One can implement a user-defined function composition by running some code in between function composition — this code, of course, depends on the type of the Monad one runs in. This allows for emulating all kinds of effective programming in an imperative style within a pure functional language (see Section 2.2.3 below). Although it might seem strange following an imperative style in a pure functional language, some problems are inherently imperative. Computations need to be executed in a given sequence exhibiting some effects. In addition, a pure functional language needs to have some way to deal with effects, otherwise it would never be able to interact with the outside world and would be practically useless. The real benefit of monadic programming is that it is explicit about side effects and allows only effects which are fixed by the type of the Monad — the side effects which are possible are determined statically during compile time by the type system. Some general patterns can be extracted such as, a "map", "zip", "fold" over Monads which results in effect-polymorphic behaviour.

## 2.2.1 Language of Choice

In our research we are using the pure functional programming language Haskell. The paper [80] gives a comprehensive overview over the history of the language, how it

Deleted: Further  
Deleted: s  
Deleted: to

Deleted: to capture  
Deleted: like  
Deleted: this way

Deleted: ;  
Deleted: ,  
Deleted: which allows  
Deleted: ;  
Deleted: :  
Deleted: o  
Deleted: allowing to run  
Deleted: -  
Deleted: -  
Deleted: to emulate  
Deleted: ful

Commented [KJ10]: Make sure that this sentence says what you want it to say. I found it hard to understand but hope I got the meaning right.

Deleted: in the way that  
Deleted: c  
Deleted: Also  
Deleted: -  
Deleted: for example  
Deleted: c  
Deleted: of

developed, and its features. It is very interesting to read and become familiar with, the background of the language. The reasons for choosing Haskell are as follows:

- Rich feature-set - it has all the fundamental concepts of the pure functional programming paradigm included, of which the most important ones are explained below. Moreover, Haskell has influenced a large number of languages, underlining its importance and influence in programming language design.
- Real-world applications - the strength of Haskell has been proven through a vast amount of highly diverse real-world applications [80, 81]. It is applicable to a number of real-world problems [130] and has a large number of libraries available [71].
- Modern - Haskell is constantly evolving through its community and adapts to keep up with the fast-paced changes in the field of computer science. Additionally, the community is the main source of high-quality libraries.
- Highly advanced type system - Haskell has a strong static type system, which catches all type errors immediately at compile time and does not allow for bypassing the type system (unless coerce or other cheating functions like unsafePerformIO are used). In addition, Haskell is a pure functional language and in our research it is absolutely paramount, that we focus on pure functional ABS, which avoids any IO type in every circumstance. This property is enabled by the advanced type system and its strong static nature.

A highly compelling example motivating the benefits of pure functional programming is the report [81]. Where, in a prototyping contest of DARPA the Haskell prototype was by far the shortest, with 85 lines of code (LoC), as compared to the C++ solution with 1105 LoC. The remarkable thing is that the jury mistook the Haskell code as specification because its approach was to implement a small embedded domain specific language (EDSL) to solve the problem. This is perfect proof as to how close an EDSL can get to a specification. When implementing an EDSL, one develops types and functions in a host language (embed) in a way where they can be combined. The combination of these primitives then looks like a language specific to a given domain. The ease of development of EDSLs in pure functional programming is also proof of the superior extensibility and composability of pure functional languages over object-orientation, and is definitely one of its major strengths.

The classic paper [74] shows a wonderful way of constructing an EDSL to denotationally construct a picture reminiscent of the works of Escher. A major strength of developing an EDSL is that one can reason and do formal verification. A nice introduction about how to do reasoning in Haskell is given in [86].

For an excellent and widely used introduction to programming in Haskell, we refer to [87]. Other, more exhaustive books on learning Haskell are [2, 106]. For an introduction to programming with the Lambda-Calculus we can refer to [120]. For a more general discussion of functional programming we refer to [80, 82, 111].

### 2.2.2 An Example

Consider the factorial function in Haskell:

```
factorial :: Integer -> Integer
```

Deleted: and  
Deleted: get accustomed to

Deleted: we explain  
Deleted: i  
Deleted: below  
Deleted: Further  
Deleted: ,

Deleted: ing to  
Deleted: fast changing  
Deleted: Further  
Deleted: already  
Deleted: to  
Deleted: Further  
Deleted: under all circumstances

Deleted: W  
Deleted:  
Deleted: J  
Deleted: -  
Deleted: t  
Deleted: a  
Deleted: that  
Deleted: a

Deleted: gives  
Commented [KJ11]: Not sure what you are trying to say here? Maybe think about instead?  
Deleted: about

Deleted: e

```
factorial 0 = 1
factorial n = n * factorial (n-1)
```

When looking at this function, the following can be identified:

1. Declarative - describe what the factorial function is, rather than how to compute it. This fact is supported by pattern matching which allows inputting multiple equations for the same function, matching on its input.
2. Immutable Data - in functional programming there are no mutable variables, after a variable is assigned, it cannot change its contents. This situation also means that there is no destructive assignment operator that can reassign values to a variable. To change values, recursion is employed.
3. Recursion - that the function calls itself with a structurally smaller argument and will eventually reach the base case of 0. Recursion is the very meat of functional programming. Because, it is the only way to implement loops in this paradigm due to immutable data.
4. Static Types - the first line indicates the name and the type of the function. In this case the function takes one Integer as input and returns an Integer as the output. Types are static in Haskell, which means that there can be no type errors at run time. An example case would be, when one tries to implicitly cast one type into another, because this is not supported by this kind of type system.
5. Explicit Input and Output - all data which are required and produced by the function have to be explicitly passed in and out of it. No global mutable data exists whatsoever and data flow is always explicit.
6. Referential Transparency - calling this function with the same argument will always lead to the same result. Meaning, one can replace this function by its value. Consequently, when implementing this function one cannot read from a file or open a connection to a server. This is also known as purity, and is indicated in Haskell in the types, which means that it is also guaranteed by the compiler.

It may seem that one runs into efficiency problems in Haskell when using algorithms which are implemented in imperative languages, through mutable data, which allows in-place update of memory. The seminal work of [127] shows that when approaching this problem with a functional mindset, this issue will not necessarily be the case. The author presents functional data structures which are asymptotically as efficient as the best imperative implementations and discusses the estimation of the complexity of lazy programs.

### 2.2.3 Purity and Side Effects

One of the fundamental strengths of Haskell is its way of dealing with side effects in functions. A function with side effects has observable interactions with some state outside of its explicit scope. Therefore, its behaviour depends on the history of the system and that it loses its referential transparency character, which makes understanding and debugging much harder. Possible examples of side effects are (amongst others): modifying a variable, await an input from the keyboard, read or write to a file, open a connection to a server, drawing random numbers.

Deleted: to give

Deleted: d

Deleted: which

Deleted: -

Deleted: because i

Deleted: t

Deleted: ,

Deleted: for example

Deleted: o

Deleted: There exists n

Deleted: t

Deleted: ,

Deleted: m

Commented [KJ12]: Delete space beween can and not

Deleted: This means that

Deleted:

Deleted: ed

Deleted: -

Deleted: does not necessarily be the case

Deleted: s

Deleted: e

Deleted: This means that

Deleted: E

Deleted: for

Obviously, to write real-world programs which interact appropriately with users, requires side effects. Haskell allows for indicating, in the type of a function that it does, or does not have side effects. What is more, there is a broad range of different effect types available, to restrict the possible effects a function can have to only the required type. This is checked by the compiler, which means that code which tries to read from a file in a function, when only allowing for drawing random numbers, will fail to compile. The most common side effect types are: reading and writing a file, creating threads, write to the standard output, read from the keyboard, opening network connections, and mutable references. Rand allows drawing random numbers; Reader allows reading from an environment; Writer allows writing to a monoid environment; State allows reading and writing the shared state of a given type.

A function without any side effect type is called pure, and the factorial function discussed above is indeed pure. Below we give the “queryUser” function as an example of a function which is not pure. It constructs a computation, which when executed, asks the user for its user name and compares it with a given user configuration. In the event that the user name matches, it returns “True”, and the opposite with “False” after printing a corresponding message.

```
queryUser :: String -> IO Bool
queryUser username = do
    -- print text to console

    putStrLn "Type in user-name: "
    -- wait for user-input
    str <- getLine
    -- check if input matches user-name if str == username

    then do
        putStrLn "Welcome!"
        return True
    else do
        putStrLn "Wrong user-name!"
        return False
```

The IO in the first line indicates that the function runs in the IO effect and can thus (amongst others) print to the console and read input from it. What seems striking is that this looks very much like imperative code, which is no coincidence, but rather very much intentional. When we are dealing with side effects, ordering becomes important. Thus Haskell introduced the so-called do notation which emulates an imperative style of programming. Whereas, in imperative programming languages like C, commands are chained or composed together using the “;” operator, in functional programming this is done using function composition. That is, feeding the output of a function directly into the next function. The machinery behind the “do” notation does exactly this and de-sugars this imperative-style code into function compositions which run custom code between each line, depending on the type of effect the computation runs in. This approach of function composition with custom code in between each function allows to emulate a broad range of imperative-style effects, including the above-mentioned ones. For a technical, in-depth discussion of the concept of side effects and how they are

**Deleted:** the outside world  
**Deleted:** to indicate  
**Deleted:** Further  
**Deleted:** are  
**Deleted:** which only allows  
**Commented [KJ13]:** It seems like you are trying to put more than one thing in the sentence here. You can't use colons like this twice  
**Deleted:** IO allows all kind of input-output related side effects:  
**Deleted:** ;  
**Deleted:** to read  
**Deleted:** to write  
**Deleted:** to  
**Deleted:** e  
**Deleted:** case  
**Deleted:** ¶  
**Deleted:** False otherwise

**Commented [KJ14]:** Amongst other what?  
**Deleted:** ded  
**Deleted:** ,  
**Deleted:** t  
**Deleted:** :  
**Deleted:** above mentioned

implemented in Haskell using Monads, we refer to the following papers: [95, 122, 178, 179, 180].

Although it might seem very restrictive at first, we get a number of benefits from making the type of effects we can use in the function explicit. First, we can restrict the side effects a function can have to a very specific type which is guaranteed at compile time. This means we can have much stronger guarantees about our program and the absence of potential errors immediately at compile time. Second, because running effects themselves is pure, we can execute effective and successful functions in a very controlled way by making the context of the effect explicit in the parameters to the effect execution. This allows for a much easier approach to isolated testing because the history of the system is made explicit.

It is important to understand that the code fragments of effectual computations are in fact made up of enclosing lambda expressions, with the do notation being a syntactic sugared version. Thus, functions which have an effect in their type can be seen as pure functions, which are referentially transparent and return such a fragment. This fragment, often called action, results in an effect and a result when executed. We have to distinguish between the execution of pure effects like Rand, Read, Write, State and the impure effect of IO. Pure effects are executed using special runner functions. They take an action together with initial values defining the history or context of the effect. For example, an initial value for the State or the read-only value of the Reader, and then run the action returning their result value. Consequently, these pure effects can be executed in a referential, transparent and completely controlled way. However, the impure IO effect works differently. There is no dedicated IO execution function that exists, but it can only be executed from within the root IO action. This action emanates from the main “:: IO ()” function of each Haskell program. As a result, IO actions can only be run within an enclosing IO action. The main IO action is then ultimately being executed by the Haskell runtime, which is linked against the executable. The reason for that is that if we did have a way of executing IO actions within pure code, we would lose all guarantees about referential transparency. The function “unsafePerformIO :: IO a → a”, does indeed exist, which allows for executing an IO action within a pure function, but its use is very limited and highly discouraged. Throughout this thesis and in all our code, we have avoided the use of this function at all costs. Consequently the IO function is not used anywhere in this work, as avoiding IO is the very meaning of purity and pure functional programming.

### 2.2.3.1 Stacking Effects Using Monad Transformers

Often it is necessary to have multiple effects available for use. For example, if we want to manipulate a global state, write to some logging mechanism and need to be able to draw random numbers. The way this is achieved in Haskell is by using Monad Transformers [94]. Haskell provides the two libraries “mtl” and “transformers” for this function, which achieve the same things with slightly different philosophies. In our approach, we primarily use “mtl” as it allows for overloading functions with monadic type classes as explained below.

Although Monads share a common interface and properties, it is not possible to compose Monads in a general way, as each Monad has different internals and semantics. Consequently, it always depends on the Monad how to compose it into another arbitrary

Commented [KJ15]: In what function? You need to be specific about the topic of the paragraph when you start a new paragraph.

Deleted: already

Deleted: ful

Deleted: ful

Deleted: -

Deleted: also

Deleted: ,

Deleted: f

Deleted: Thus

Deleted: T

Deleted: though

Deleted: exists

Deleted: ,

Deleted: which

Deleted: Thus

Deleted: ,

Deleted: with t

Deleted: would

Deleted: here exists indeed t

Deleted: to

Deleted: e

Deleted: under

Deleted: and it is not used anywhere,

Deleted: e

Deleted: u

Deleted: ,

Deleted: f

Deleted: ,

Deleted: for which

Deleted: to overload

Deleted: and thus

Monad<sup>3</sup>. Therefore, the mtl library provides so called "Transformer implementations" of each of the standard Monads.

Deleted: Thus

A Transformer has an additional type parameter in its type constructor which has to be a Monad or another Transformer. This allows for the stacking of multiple Monads or Transformers on top of each other. The stack is closed by using a non-Transformer Monad. In mtl all non-Transformer Monads are actually Transformers with the Identity Monad as a type parameter, for example State Int is StateT Int Identity. Access to the various layers of the stack is achieved with the "lift :: Monad m => m a -> t m a" function. Let's look at how we can define this type of a function which has multiple effects available:

Deleted: to stack

```
data SimState = SimState { simStateAgents :: [SimAgent] ... }
```

<sup>3</sup>The technical details are quite involved and we don't go into them here, but refer to the respective literature and tutorials on Monad Transformers listed in the reference section.

Deleted: e

```
simulationCore :: RandomGen g
  => Time
  -> StateT SimState (WriterT [String] (Rand g)) SimOut
simulationCore t = do
  -- get the agents from the simulation state
  -- encapsulated in StateT SimState
  as <- gets simStateAgents
  -- writing a logging output to the WriterT [String] -- here we need 1 lift
  lift (tell ["Next step " ++ show t])
  -- shuffle agents by running the MonadRandom action using the -- Rand Monad, need 2
  lifts as it is the innermost monad asShuf <- lift $ lift $ randomShuffle as
  -- construct return value
  return (SimOut { ... })
```

```
randomShuffle :: MonadRandom m => [a] -> m [a]
```

The Monad stack consists of three effects. The first and outermost effect is StateT with SimState as the internal state. As it is the outermost effect, no lift is required to access it. WriterT with [String] as the logging facility is a parameter to the StateT Transformer, making it the second effect in the stack, thus it requires one lift. The stack is closed using the "Rand Monad", which is the innermost effect, requiring two lifts to access it. As a result, in a Transformer, stack one needs to lift into the stack, which means that although it is constructed inside to outside ( $\text{Rand} \rightarrow \text{WriterT} \rightarrow \text{StateT}$ ) it is lifted from outside to inside ( $\text{StateT} \rightarrow \text{WriterT} \rightarrow \text{Rand}$ ).

Deleted: requiring

Deleted: Thus

Executing a Monad Transformer stack works by using various monadic runner functions, which execute a Transformer layer with a given context as is shown in the example of section 2.2.6 below. As with lifting, a Monad Transformer stack is evaluated from outside to inside ( $\text{StateT} \rightarrow \text{WriterT} \rightarrow \text{Rand}$ ).

A note on the commutativity of Monad Transformers: because we are stacking effects on top of each other, subsequent effects can change the final outcome, depending on their position within the stack → this is called commutativity of Monads. All the Monads in the example above commute. This means it does not matter where they are positioned in the stack, the outcome will be the same. An exception to this is the "MaybeT" transformer, which introduces failure as an effect within a stack, thus when failure occurs, subsequent effects will not be applied any more, making MaybeT non-commutative.

Deleted: -

Deleted: ,

Deleted: which

The function "randomShuffle" is overloaded, having the "MonadRandom" type class in its type constraints. This indicates that it is a monadic action where "m" is of type "MonadRandom", which supports the same functionality as "Rand". This is the major benefit mtl provides, often resulting in much cleaner function types, which do not require fixing the order of the Monads in the stacks. Another benefit is that we do not need lifts anymore. The drawback is that we cannot have multiple Monads of the same type, which would be still possible in a fully qualified Monad stack. The benefits become particularly clear when more than one effect is required. For example, we can write the type of simulationCore as:

Deleted: not requiring to fix

Deleted: any more

Deleted: ;

Deleted: t

Deleted: s

Deleted: ,

Deleted: f

Deleted: could have written

```
simulationCore :: (MonadState SimState m, MonadWriter [String] m, MonadRandom m)
```

```
=> Time -> m SimOut
```

## 2.2.4 Functional Reactive Programming

Functional Reactive Programming (FRP) is a way to implement systems with continuous and discrete time semantics in pure functional languages. There are many different approaches and implementations but, in this thesis, "Arrowized FRP" [83, 84] as implemented in the library "Yampa" [35, 79, 123] and "Dunai" [135] (see below) is used.

Deleted: but in this thesis

The central concept in Arrowized FRP is the signal function (SF), which can be understood as a process over time which maps an input to an output signal. A signal can be understood as a value which varies over time. Therefore, signal functions have an

Deleted: -

Deleted: -

Deleted: hus

awareness of the passing of time by having access to  $\Delta t$  which are positive time steps, the system is sampled with:

**Deleted:** .

$$\text{Signal}\alpha \approx \text{Time} \rightarrow \alpha \text{ SF } \alpha\beta \approx \text{Signal}\alpha \rightarrow \text{Signal}\beta$$

Yampa provides a number of combinators for expressing time semantics, events and state changes of the system. They allow to change system behaviour in case of events, run signal functions and generate stochastic events and random-number streams.

Below, the relevant combinators and concepts used throughout the thesis are discussed briefly. For a more in-depth discussion we refer to [35, 79, 123] [in the reference section](#).

**Event** An event in FRP is an occurrence at a specific point in time, which has no duration. [An example of such an event would be](#) the recovery [time](#) of an infected agent. Yampa represents events through the Event type, which is programmatically equivalent to the ["Maybe"](#) type.

**Formatted:** Font: Bold

**Deleted:** for example

**Dynamic behaviour** To change the behaviour of a signal function at an occurrence of an event during run time, (amongst others) the combinator switch ["::"](#):  
 $SFa(b, \text{Event}c) \rightarrow (c \rightarrow SFab) \rightarrow SFab$  is provided. It takes ["is used"](#). A signal function, which is run until it generates an event. When this event occurs, the function in the second argument is evaluated, which receives the data of the event and has to return the new signal function. [This new signal function](#) will then replace the previous one. The semantics of [the](#) switch are that the signal function, into which [it](#) is switched, is also executed at the time of switching.

**Formatted:** Font: Bold

**Deleted:** a

**Deleted:** ,

**Deleted:** which

**Formatted:** Font: CMBX10, Bold

**Randomness In ABS**, often there is the need to generate stochastic events, which occur based on a certain distribution. Yampa provides the combinator ["occasionally ::"](#):  
 $\text{RandomGen } g \Rightarrow g \rightarrow \text{Time} \rightarrow b \rightarrow SF a (\text{Event } b)$  for this. It takes a random number generator, a rate and a value the stochastic event will carry. It generates events on average with the given rate, following the exponential distribution. At most, one event will be generated and no backlog is kept. This means that when this function is not sampled with a sufficiently high frequency, depending on the rate, it will lose events.

**Formatted:** Font: Bold

**Deleted:** -

Yampa also provides the combinator ["noise :: \(RandomGen g, Random b\) ⇒ g → SF a b"](#), which generates a stream of noise by returning a random number in the default range for the type b, following the uniform distribution.

**Running signal functions** To run a signal function Yampa provides the function ["embed :: SF a b → \(a, \[\(DTime, Maybe a\)\]\) → \[b\]"](#), which allows [for running](#) an SF for a given number of steps. [Where](#), in each step one provides the ["At"](#) and an input ["a"](#). The function then returns the output of the signal function for each step. The input is optional, indicated by ["Maybe"](#). In the first step at ["t = 0"](#), the initial ["a"](#) is applied and whenever the input is ["Nothing"](#) in subsequent steps, the last ["a"](#) which was not ["Nothing"](#) is reused.

**Formatted:** Font: Bold

**Deleted:** to run

**Deleted:** w

## 2.2.5 Arrowized programming

Yampa's signal functions are Arrows, requiring us to program with Arrows. Arrows are a generalisation of Monads, which in addition to the already familiar parameterisation over the output type, allow parameterisation over their input type as well [83, 84].

In general, Arrows can be understood to be computations that represent processes, which take an input of a specific type, process it and output a value of a given type. The concept of processes, which are signal functions, maps naturally to Arrows which is the reason why Yampa is using them to represent their signal functions.

**Deleted:** are

There exists a number of Arrow combinators, which allow arrowized programming in a point-free style but due to lack of space we will not discuss them here. Instead we make use of Paterson's "do" notation for arrows [131], which makes the code more readable as it allows us to program with points.

To show how arrowized programming works, we implement a simple signal function, which calculates the acceleration of a falling mass on its vertical axis as an example: [137].

```
fallingMass :: Double -> Double -> SF () Double
fallingMass p0 v0 = proc _ -> do
  v <- arr (+v0) <<< integral -< (-9.8)
  p <- arr (+p0) <<< integral -< v
  returnA -< p
```

To create an Arrow, the proc keyword is used, which binds a variable after which the "do" of Patersons "do" notation [131] follows. Using the signal function "integral :: SF v v" of Yampa, which integrates the input value over time using the rectangle rule, we calculate the current velocity and the position based on the initial position p0 and velocity v0. The "<<<" is one of the Arrow combinators, which composes two Arrow computations and "arr" simply lifts a pure function into an Arrow. To pass an input to an Arrow, "<- is used" and "<- is also used" to bind the result of an Arrow computation to a variable. Finally, to return a value from an Arrow, "returnA" is used.

**Deleted:** is used

## Monadic Stream Functions

Monadic Stream Functions (MSF) are a generalisation of Yampa's signal functions. They have additional combinators to control and stack side effects. An MSF is a polymorphic type and an evaluation function, which applies an MSF to an input and returns an output and a continuation, both in a monadic context [134, 135]:

**Deleted:** -

**Deleted:** with

```
newtype MSF m a b = MSF {unMSF :: MSF m a b -> a -> m (b, MSF m a b)}
```

An MSF is also an Arrow, which means we can apply arrowized programming with Patersons do notation as well. MSFs are implemented in Dunai, which is available on Hackage [136]. Dunai allows for the application of monadic transformations to every sample by means of combinators like "arrM :: Monad m ⇒ (a → m b) → MSFmab". A part of the library Dunai is "BearRiver", a wrapper, which reimplements Yampa on top of Dunai. This wrapper, enables one to run arbitrary monadic computations in a signal function. BearRiver simply adds a type parameter "m" to each SF, which indicates the monadic context in which this signal function runs.

**Deleted:** to apply

**Deleted:** ,

**Deleted:** which

**Deleted:** this signal function runs in

To show how arrowized programming with MSFs works, we extend the falling mass example from above to incorporate effects. In this (artificial) example we assume that in each step we want to accelerate our velocity "v" not by the gravity constant anymore but

**Deleted:**

by a random number in the range of 0 to 9.81. Moreover, we want to count the number of steps it takes us to hit the floor, that is, when the position p is less than 0. Additionally, when hitting the floor we want to print a debug message to the console with the velocity, by which the mass has hit the floor and how many steps it took.

Deleted: Further

Deleted: ,

Deleted: Iso

We define a corresponding Monad stack with IO as the innermost Monad, followed by a RandT Transformer for drawing random numbers, and finally, a StateT Transformer as the outermost Monad, to count the number of steps we compute. We can access the monadic functions using "arrM" in case we need to pass an argument, and "arrM", if in fact, no argument to the monadic function is needed:

Deleted: in case

```
type FallingMassStack g = StateT Int (RandT g IO)
type FallingMassMSF g = SF (FallingMassStack g) ⊕ Double
fallingMassMSF :: RandomGen g => Double -> Double -> FallingMassMSF g
fallingMassMSF v0 p0 = proc _ -> do
    -- drawing random number for our gravity range

    r <- arrM_ (lift $ lift $ getRandomR (0, 9.81)) -< 0 v <- arr (+v0) <<< integral -< (-r)
    p <- arr (+p0) <<< integral -< v
    -- count steps

    arrM_ (lift (modify (+1))) -< 0
    if p > 0

    then returnA -< p
    -- we have hit the floor else do

        -- get number of steps
        s <- arrM_ (lift get) -< 0

        -- write to console
        arrM (liftIO . putStrLn) -< "hit floor with v " ++ show v ++
            " after " ++ show s ++ " steps"

returnA -< p
```

To run the fallingMassMSF function until it hits the floor we proceed as

follows:

```
runMSF :: RandomGen g => g -> Int -> FallingMassMSF g -> IO ()  
runMSF g s msf = do  
  
let msfReaderT = unMSF msf ()  
msfStateT = runReaderT msfReaderT 0.1 -- sampling with time delta of 0.1 msfRandT =  
runStateT msfStateT s  
msfIO = runRandT msfRandT g  
  
(((p, msf'), s'), g') <- msfIO  
when (p > 0) (runMSF g' s' msf')
```

Dunai does not know about time in MSF, which is exactly what BearRiver builds on top. It does so by adding a ReaderT Double, which carries the  $\Delta t$ . This is the reason why we need one extra lift for accessing StateT and RandT. Thus, unMSF returns a computation in the ReaderT Double Monad, which we need to peel away using runReaderT. This action then results in a StateT Int computation, which we evaluate by using runStateT and the current number of steps as state. This then results in another monadic computation of RandT Monad, which we evaluate using runRandT. This finally returns an IO computation, which we simply evaluate to arrive at the final result.

As explained in the previous section 2.2.3.1, this example shows how a Monad Transformer stack is lifted and evaluated from outside to inside ( $\text{ReaderT} \rightarrow \text{StateT} \rightarrow \text{RandT} \rightarrow \text{IO}$ ) but constructed inside to outside ( $\text{IO} \rightarrow \text{RandT} \rightarrow \text{StateT} \rightarrow \text{ReaderT}$ ).

Deleted: evaluated

Deleted: -

## 2.3 Implementing ABS

In this section we briefly present a general background on problems and considerations, ABS implementations need to solve problems independently from the programming paradigm. In general, an ABS implementation must solve the following fundamental problems:

1. How to represent an agent, its local state and its interface.
2. How to represent agent-to-agent interactions and enforcing their semantics.
3. How to represent an environment.
4. How to represent agent-to-environment interactions and enforcing their semantics.
5. How agents and an environment can initiate actions without external stimuli.

How to Step the Simulation.

We argue that the most fundamental concept of ABS is the proactivity of both, agents and its environment. In computer systems, proactivity is the ability to initiate actions on their own without external stimuli, and is only possible when there is some internal stimulus. This stimulus is most naturally represented by a continuous increasing time-flow. Due to the discrete nature of computer systems, this time-flow must be discretized in steps as well, and each step must be made available to the agent, consequently acting as the internal stimulus. This development then allows the agent to perceive time and become proactive depending on time. So, we can understand an ABS as a discrete time

Deleted: ,

Deleted: its

Deleted: ,

Deleted: then

simulation where time is broken down into continuous, real-valued or discrete natural-valued time steps. Independent of the representation of the time-flow we have the two fundamental choices whether the time-flow is local to the agent or whether it is a system-global time-flow. Time-flows in computer systems can only be created through threads of execution where there are two ways of feeding time-flow into an agent. Either it has its own thread-of-execution or the system creates the illusion of its own thread-of-execution by sharing the global thread sequentially among the agents where an agent has to yield the execution back after it has executed its step.

Generally, there exist time and event driven approaches to ABS [119]. In time driven ABS, time is explicitly modelled and is the main driver of the ABS dynamics. The semantics of models using this approach, centre around time. As a representative example, which will be used in Chapter 4, we use the agent-based SIR model [109, 167]. Often such models are inspired by an underlying System Dynamics approach, where the continuous time-flow is the main driving force of the dynamics. It is clear that almost every ABS models time in some way. After all, modelling a virtual system over some (virtual) time is the very heart of Simulation. Still, we want to distinguish clearly between different semantics of time representation in ABS. When time is seen as a continuous flow, such as in the example of the agent-based SIR model, we talk about a truly time-driven approach. In other words: if an agent behaves as a time signal then we speak of a time-driven approach. This means that if the system is sampled with a  $\Delta t = 0$  then, even though the agents are executed, their behaviour must stay constant and must not change.

In the case where time advances in a discrete way, either by means of events or messages, we talk about an event-driven approach. As a representative example, which will be used in Chapter 5 on event-driven ABS, we use an event-driven SIR and the Sugarscape model. In this model time is discrete and represented by the natural numbers where agents act in every tick. In such a model, the underlying semantics map more naturally to a Discrete Event Simulation core. This core is extended by ABS features, as in the event-driven SIR and to a lesser extent in the Sugarscape model.

According to the definition of ABS in Chapter 2.1, an agent is a uniquely addressable entity with an identity, an internal state it has exclusive control over and can be interacted with by means of messages. In the established object-oriented approaches to ABS all this is implemented naturally by the use of objects: an object has a clear identity, encapsulates internal state and exposes an interface through public methods through which objects can interact with each other, also called messaging. The same applies to the environment and it is by no means clear how to achieve this in a pure functional approach where we don't have objects available. This is one of the central questions this thesis is trying to answer and it will be addressed in the subsequent Chapters 4 and 5.

Before we look into pure functional ABS implementation concepts in the next chapters, we need to discuss the concept of update strategies [168]. Generally, there are four strategies to approach time and event driven ABS, where the differences deal with how the simulation is stepped, the agents are executed and the interaction semantics work.

### 2.3.1 Sequential Strategy

Deleted: -  
Deleted: -  
Deleted: -  
Deleted: center

Deleted: ,  
Deleted: a  
Deleted: :  
Deleted: w

Deleted: ,

Deleted:


Deleted: s

In this strategy there exists a globally synchronized time-flow and in each time step the simulation iterates through all the agents and updates one agent after another. Messages sent and changes to the environment made by agents are visible immediately. Meaning, that if an agent sends messages to other agents or changes the environment, agents which are executed after this agent will see these changes within the same time step. There is no source of randomness and non-determinism, rendering this strategy to be completely deterministic in each step. Messages can be processed either immediately or queued depending on the semantics of the model. If the model requires processing of the messages immediately, the model must be free of potential infinite-loops. Often in such models, the agents are shuffled when the model semantics require to average out the advantage of being executed at first. This strategy is of fundamental importance for event-driven ABS in Chapter 5. See Figure 2.4 for a visualisation of the control flow in this strategy.

Figure 2.4: Control flow in the sequential update strategy.

### 2.3.2 Parallel Strategy

This strategy has a globally synchronized time-flow, and in each time step, it iterates through all the agents and updates them in parallel. Messages sent and changes to the environment made by agents are visible in the next global step. We can think about this strategy in a way that all agents make their moves at the same time. If one wants to change the environment in a way that would be visible to other agents, this is regarded as a semantic error in this strategy. First, it is not logical because all actions are meant to happen at the same time. Second, it would implicitly induce an ordering, violating the semantics of the model, meaning that the actions would no longer be in parallel. It does not make a difference if the agents are really executed in parallel or just sequentially — due to the isolation of information, this has the same effect. Also, it will make no difference if we iterate over the agents sequentially or randomly, the outcome has to be the same: the strategy is event-ordering, invariant as all events and updates happen virtually at the same time. This strategy is of fundamental importance for time-driven ABS in Chapter 4. See Figure 2.5 for a visualisation of the control flow in this strategy.

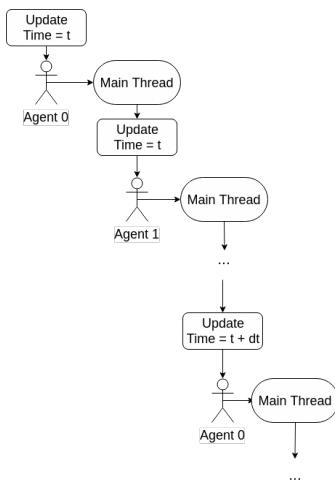

Deleted: ,

Deleted: m

Deleted: to process

Deleted: s

Deleted: s

Deleted: it

Deleted: and

Deleted: s

Deleted: ,

Deleted: the happens at the same time idea

Deleted: -

Figure 2.5: Control flow in the parallel update strategy.

### 2.3.3 Concurrent Strategy

This strategy has a globally synchronized time-flow, but in each time step all the agents are updated in parallel with messages sent. Changes to the environment are also visible immediately. As a result, this strategy can be understood as a more general form of the parallel strategy: all agents run at the same time but act concurrently. It is important to realize that when running agents, which are able to see actions by others immediately in parallel, we arrive at the very definition of concurrency. That is, parallel execution with mutual read and write access to shared data. Of course, this shared data access needs to be synchronized, which in turn, will introduce event orderings in the execution of the agents. At this point, we have a source of inherent non-determinism: although when one ignores any hardware model of concurrency, at some point we need arbitration to decide which agent gets access to a shared resource first, arriving at non-deterministic solutions. This has the very important consequence that repeated runs with the same configuration of the agents and the model may lead to different results. This strategy is of fundamental importance for concurrent ABS in Chapter 8. See Figure 2.6 for a visualisation of the control flow in this strategy.

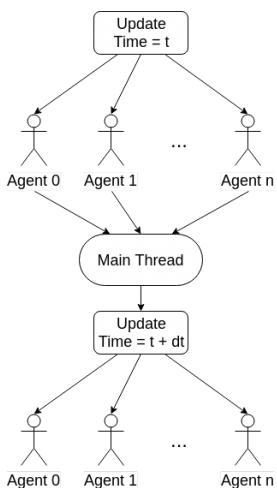


Figure 2.6: Control flow in the concurrent update strategy.

### 2.3.4 Actor Strategy

This strategy has no globally synchronized time-flow, but all the agents run concurrently in parallel, with their own local time-flow. The messages and changes to the environment are visible as soon as the data arrive at the local agents — this can happen immediately when running locally on a multiprocessor, or with a significant delay when running in a cluster over a network. Obviously, this is also a non-deterministic strategy and repeated runs with the same agent and model configuration may (and will) lead to different results.

**Deleted:** and c

**Deleted:** So


**Deleted:**,

**Deleted:** s

**Deleted:** -

**Deleted:** be

Information and time in this strategy is always local to an agent as each agent progresses in its own speed through the simulation. In this case, one needs to explicitly observe an agent when one wants to extract information from it, such as for visualisation purposes. This observation is then only valid for this current point in time, local to the observer but not to the agent itself, which may have changed immediately after the observation. This implies that we need to sample our agents with observations when wanting to visualize them, which would inherently lead to well-known sampling issues. A solution would be to invert the problem and create an observer agent which is known to all agents where each agent sends a 'I have changed' message with the necessary information to

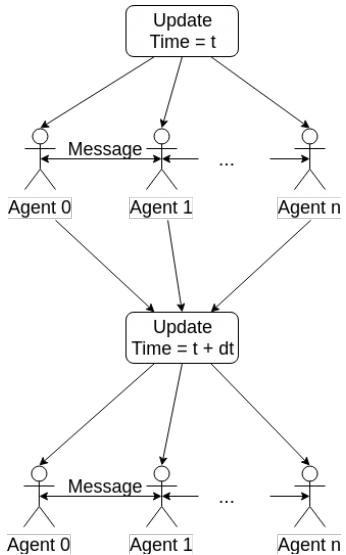

the observer if it has changed its internal state. This also does not guarantee that the observations will really reflect the actual state the agent is in, but is a remedy against the notorious sampling. The concept of Actors was proposed by [77] for which [65] and [32] developed semantics of different kinds. These works were very influential in the development of the concepts of agents and can be regarded as foundational basics for ABS. We come back to this strategy in the context of concurrent ABS in Chapter 8. See Figure 2.7 for a visualisation of the control flow in this strategy.

Figure 2.7: Control flow in the actor update strategy.

### 2.3.5 Discussion

As already outlined in Chapter 2.1, the established approaches implementing ABS use object-oriented programming and thus solve the problems outlined at the start of this chapter from this perspective. This is quite well understood in the field by now, as high quality ABS frameworks like RePast [124] prove. In object-oriented programming an

Commented [KJ16]: New paragraph

Deleted: also

Deleted: ,

Deleted: for example

Deleted:

Deleted: and

Deleted: ,

Deleted: which

Deleted:


agent is mapped directly onto an object, encapsulating the agents' state and providing methods, which implement the agents' actions. Object-orientation allows us to expose a well-defined interface using public methods, by which one can interact with the agent and query information from it. Agent objects can directly invoke other agents' methods, implicitly mutating the other agents' internal state, which makes direct agent interaction straight forward. Additionally, with object-orientation, agents have global access to an environment such as through a Singleton [57], or a simple global variable, and can mutate the environments data by direct method calls.

**Deleted:** s to expose

All these language features are not available in functional programming and compared to object-orientation, we face seemingly severe restrictions like immutable state, recursion and a static type system. What is more, we restrict our-

**Deleted:** for example

**Deleted:** Further

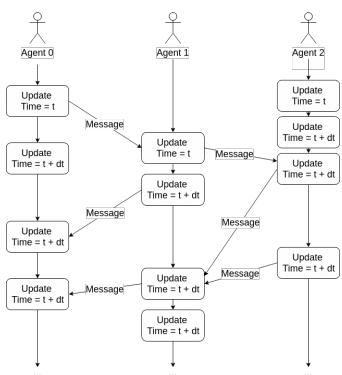

selves deliberately to pure functional programming and avoid running in the non-deterministic IO Monad under all costs. The question is then how to solve these problems in functional programming and use the restrictions to our advantage.

In the research part we discuss how to implement ABS from a pure functional perspective and why one would do so. More specifically, we show how to approach the problems discussed in this chapter using pure functional programming. The sequential strategy will be covered in depth in Chapter 5 on event-driven ABS, the parallel one in Chapter 4 on time-driven ABS and the concurrent strategy is used in Chapter 8 on concurrent ABS. The actor strategy is not used in this thesis but its implementation follows directly from the Chapters 4 and 8: instead of globally synchronising in the main thread, a closed feedback loop is run in every agent thread.

## 2.4 Related Research and Literature

**Deleted:** r

**Deleted:** l

The amount of research on using pure functional programming with Haskell in the field of ABS has been moderate so far. Most of the papers are related to the field of Multi-Agent Systems and look into how agents can be specified using the belief-desire-intention paradigm [38, 93, 157].

A multi-method simulation library in Haskell called Aivika 3 is described in the technical report [153]. It supports implementing Discrete Event Simulations, System Dynamics and comes with basic features for event-driven ABS which is realised using Discrete

Event Simulation under the hood. Additionally, it provides functionality for adding GPSS to models and supports parallel and distributed simulations. It runs within the IO Monad for realising parallel and distributed simulation, but also discusses generalising their approach to avoid running in IO.

Deleted: Further

In his master thesis [16] the author investigates Haskells' parallel and concurrency features to implement (amongst others) HLogo, (a Haskell clone of the NetLogo [186]), simulation software, focusing on using Software Transactional Memory for a limited form of agent interactions. HLogo is a reimplementation of NetLogos API in Haskell, where agents run within IO and can thus make use of Software Transactional Memory functionality. The benchmarks show that this approach does indeed result in a speedup, especially under larger agent populations. The authors' thesis is one of the first on ABS using Haskell. Despite the concurrency and parallel aspect, this thesis approach is rather different: it avoids IO within the agents under all costs and explores the use of Software Transactional Memory more on a conceptual level. In addition, this thesis compares case studies with lock-based and imperative implementations.

Deleted: ,

Deleted: thus can

Deleted: also

Deleted: and

Deleted: There exists some research

Some research does exist [40, 151, 176] using the functional programming language Erlang [5] to implement concurrent ABS. The language is inspired by the Actor Model [1] and was created in 1986 by Joe Armstrong for Eriksson, for developing distributed high reliability software in telecommunications. The Actor Model can be seen as quite influential to the development of the concept of agents in ABS, which borrowed it from Multi-Agent Systems [189]. It emphasises message passing concurrency with shared-nothing semantics (no shared state between agents), which maps nicely to functional programming concepts. The mentioned papers investigate how the actor model can be used to close the conceptual gap between agent specifications. Furthermore, they show that using this kind of concurrency allows for overcoming some problems of low level concurrent programming. Also, [16] ported NetLogos API to Erlang mapping agents to concurrently running processes, which interact with each other by message passing. With some restrictions on the agent interactions the author could deliver a working implementation of the model. This action shows that using concurrent message passing for parallel ABS is at least conceptually feasible. Despite the natural mapping of ABS concepts to such an actor language, it leads to simulations. Consequently, due to concurrency and despite same initial starting conditions, repeated runs might result in different dynamics.

Deleted: to

Deleted: e

Deleted: as well

Deleted: ,

Deleted: which

Deleted: ,

Deleted: where d

Deleted: ,

The work [108] discusses a framework, which allows to run ABS on a GPU. Amongst others, they use the SugarScape model [48] and scale it up to millions of agents on very large environment grids. They reported an impressive speedup of a factor of 9,000. Although their work is conceptually very different, this thesis draws inspiration from their work in terms of performance measurement and comparison to the Sugarscape model.

Using functional programming for Discrete Event Simulation was discussed in [93] where the authors explicitly mention the paradigm of Functional Reactive Programming to be very suitable to Discrete Event Simulation.

A domain-specific language for developing functional reactive ABS was presented in [148, 177]. This language called FRABJOUS is human readable and easily understandable by domain experts. It is not directly implemented in Functional Reactive Programming

in Haskell, but is compiled to Haskell code, which they claim is also readable. This supports that Functional Reactive Programming is a suitable approach to implement ABS in Haskell. Unfortunately, the authors do not discuss their mapping of ABS to Functional Reactive Programming on a technical level, which would be of most interest to functional programmers.

Object-oriented programming and simulation have a long history together as the former one emerged out of Simula 67 [37], which was created for simulation purposes. Simula 67 already supported Discrete Event Simulation and was highly influential for today's object-oriented languages. Although the language was important and influential, in our research we look into different approaches, orthogonal to the existing object-oriented concepts.

Lustre is a formally defined, declarative and synchronous dataflow programming language for programming reactive systems [67]. While it has solved some issues related to implementing ABS in Haskell, it still lacks a few important features necessary for ABS. There seems to be no way of implementing an environment in Lustre as it is done in Chapters 4 and 5. Also, the language does not seem to come with stochastic functions, which are the very building blocks of ABS. Finally, Lustre only supports static networks, which is clearly a drawback in ABS, where agents can be created and terminated dynamically during simulation.

In [20], the authors discuss the problem of advancing time in message-driven agent-based socio-economic models. They formulate purely functional definitions for agents and their interactions through messages.

The authors of [21] use functional programming as a specification for an agent-based model of exchange markets, but leave the implementation for further research, where they claim that it requires dependent types.

In his talk [159], Tim Sweeney, CTO of Epic Games, discussed programming languages in the development of game engines and scripting of game logic. Although the fields of games and ABS seem to be very different, Gregory [64] defines computer games as "[..] soft real-time interactive agent-based computer simulations" (p. 9). And indeed, they have striking similarities. Both are simulations which perform numerical computations and update objects in a loop either concurrently or sequentially. In games, these objects are called game objects and in ABS they are called agents, but they are conceptually the same thing. Sweeney reports that reliability suffers from dynamic failure in languages like C++, For example, random memory overwrites, memory leaks, out-of-bounds access of arrays, dereferencing null pointers, integer overflow, and accessing uninitialized variables all have a negative affect on reliability. He reports that 50% of all bugs in the game engine middleware "Unreal" can be traced back to such problems and presents dependent types as a potential rescue to those problems. The two main points Sweeney made were that dependent types could solve most of the run-time failures and that parallelism is the future for performance improvement in games. He distinguishes between pure functional algorithms, which can be parallelised easily in a pure functional language, and updating game objects concurrently using Software Transactional Memory.

## Methodology

In this section we briefly motivate and justify our methods, to point out the scientific approach used in this thesis to address the aims and answer hypotheses put forward in Chapter 1.

Fundamentally, the method we use is developing concepts step-by-step using the two well-known agent-based models SIR, introduced in Chapter 2.1.1 and Sugarscape, introduced in Chapter 2.1.2. We put our approach into the broader context of how to implement ABS from a programming language agnostic view, discussed in Chapter 2.3, which serve as underlying assumptions and a general direction to follow.

The first part of our method is dedicated to answering the question of how to implement ABS in a pure functional way, following a time-driven approach in Chapter 4 and an event-driven approach in Chapter 5. The reason for these two techniques is that both are equally important in ABS. Additionally, the concepts of event-driven ABS build on the ones developed in the preceding time-driven approach.

Generally, in both approaches, the aim is to develop a robust, maintainable and extensible implementation of the use-case models through which we develop concepts which can be adopted to ABS in general. The overall goal is a clear representation of agents with their local (immutable) state, a way for the agents to interact with an (active) environment and have one-directional and synchronous interactions between agents.

In the process of researching the pure functional event-driven approach to ABS, we also undertook a full and validated implementation of the Sugarscape model. This in itself, together with the concepts developed, is already sufficient proof that using a pure functional language to implement non-trivial ABS models is possible in a robust and maintainable way.

The second part of our method is dedicated to showing the benefits of using the previously developed pure functional approach to ABS. It is split into two parts, where in the first we investigate the hypothesis that pure functional programming makes it easy to apply parallel computation using parallelism and concurrency to ABS. The second part answers another central hypothesis, namely that randomised property-based testing is a good match to test stochastic ABS implementations. In both parts we apply the concepts in questions directly to the implementations developed in the previous part. Then we look at the resulting code, performance and implications to judge whether the outcome has the expected benefit or not as stated in the hypotheses.

Generally, all concepts we derive are driven by the hypotheses and aims from the introduction. We continuously refer back to these concepts, especially in the respective discussions and the final conclusion and discussion chapters. By taking this methodical approach, we are able to qualitatively assess whether the thesis has achieved the initial aims and answered the hypotheses in a satisfactory way.

Commented [KJ17]: Extend this section. One page is too short. Perhaps some of your background chapter can move here.

Commented [KJ18]: New paragraph

Deleted: a

Deleted: s

Deleted: and also that

Deleted: a

Deleted: and

Deleted: I

Deleted: and

Deleted: w

Deleted: m

Deleted: doing this

## Chapter 4

### Pure Functional Time-Driven ABS

In this chapter, we pose solutions to the problems outlined in the previous chapter, by deriving a pure functional approach for time-driven ABS. To attain this we use the example of the agent-based SIR model as introduced in Chapter 2.1.1. We start out with a first approach in Yampa and show its limitations. Then we generalise it to a more powerful approach, which utilises Monadic Stream Functions, a generalisation of FRP. Finally, we add a structured environment, making the example more interesting and showing the main strength of an ABS over other simulation methodologies like System Dynamics and Discrete Event Simulation. The code of all these steps can be accessed from the repository [162].

Deleted: f  
Deleted: t  
Deleted: d  
Deleted: ing

#### 4.1 Pure Computation

As described in Chapter 2.2.4, Arrowized FRP [83] is a way to implement systems with continuous and discrete time semantics, where the central concept is the signal function, which can be understood as a process over time, mapping an input to an output signal. Technically speaking, a signal function is a continuation which allows to capture state using closures and hides away the At. This has the effect that the At is never explicitly exposed to the programmer. Consequently, the programmer can neither manipulate it nor define non-causal systems where a signal function depends on a signal in the future. Early, non-arrowized implementations of FRP had this flaw and it was only possible to solve this problem through Arrowized FRP, as arrows parametrise also over the input type, thus making it possible to deal with this issue.

Deleted: c

As already pointed out, agents need to perceive time, which means that the concept of processes over time is an ideal match for agents and ABS as a whole, thus we will implement them and the whole system as signal functions.

According to the model, every agent makes on average contact with  $\beta$  random other agents per time unit. In ABS we can only contact discrete agents, thus we model this by generating a random event on average every <sup>1</sup> time units.

We need to sample from an exponential distribution because the rate is proportional to the size of the population [18]. An agent does not know the other agents' states when making contact with them, thus we need a mechanism in which agents reveal the state in which they are in at the moment of making contact. This mechanism is an implementation detail, which we will derive in our implementation steps. For now, we only assume that agents can contact each other somehow.

Deleted: ,  
Deleted: explicitly  
Deleted: ,  
Deleted: meaning  
Deleted: to solve this issue

The parallel strategy matches the semantics of the agent-based SIR model due to the underlying roots in the System Dynamics approach. As discussed already in Chapter 2.3.2, in the parallel update strategy, the agents act conceptually all at the same time in lock-step. This implies that they observe the same system state during a time step and the actions of an agent are only visible in the next time step — they are isolated from each other. As will become apparent, functional programming can be used to enforce the

Deleted: it  
Deleted: ir  
Deleted: make contact with

Deleted: -

correct application of this strategy, through the strong static type system, at compile time.

We start by defining the SIR states as Algebraic Data Type and our agents as signal functions (SF), which receive the SIR states of all agents from the previous step as input and outputs the current SIR state of the agent. This definition, and the fact that Yampa is not monadic, guarantees already at compile time, that the agents are isolated from each other, enforcing the parallel lock-step semantics of the model.

```
data SIRState = Susceptible | Infected | Recovered
type SIRAgent = SF [SIRState] SIRState
sirAgent :: RandomGen g => g -> SIRState -> SIRAgent
sirAgent g Susceptible = susceptibleAgent g
sirAgent g Infected = infectedAgent g
sirAgent _ Recovered = recoveredAgent
```

Depending on the initial state, we return the corresponding behaviour. Also, we are passing a random number generator instead of running in the Rand Monad because signal functions as implemented in Yampa are not capable of being monadic.

We see that the recovered agent ignores the random number generator because a recovered agent does nothing, stays immune forever and cannot get infected again in this model. Thus, a recovered agent is a consuming state from which there is no escape, it simply acts as a sink, constantly returning recovered:

```
recoveredAgent :: SIRAgent
recoveredAgent = arr (const Recovered)
```

Next, we implement the behaviour of a susceptible agent. It makes contact on average with  $\beta$  other random agents. For every infected agent it contacts, it becomes infected with a probability of  $\gamma$ . If an infection happens, it makes the transition to the Infected state. To make contact, it gets fed

Deleted: -

Deleted: -

Commented [KJ19]: Combine can and not

Deleted: -

Deleted: R

Deleted: gets into contact with

Deleted: ↗

CHAPTER 4. PURE FUNCTIONAL TIME-DRIVEN ABS 53

Formatted: Space Before: 0 pt, After: 0 pt

the states of all agents in the system from the previous time step, so it can draw random contacts. Observing the states of all agents from the previous step allows for a very simple, one-directional form of making contact between agents. Although simple, it works perfectly for this approach in particular and for time-driven ABS in general. We will discuss a more complex interaction mechanism between agents in Chapter 5 on event-driven ABS.

**Deleted:** the next

A susceptible agent behaves as susceptible until it becomes infected. Upon infection an Event is returned, which results in switching into the infectedAgent SF, which causes the agent to behave as an infected agent from that moment on. When an infection event occurs, we change the behaviour of an agent using the Yampa combinator switch, which is quite elegant and expressive as it makes the change of behaviour at the occurrence of an event explicit. To make contact on average, we use Yampa's "occasionally" function which requires us to carefully select the right  $\Delta t$  for sampling the system, as will be shown in the results below.

The use of "`iPre :: a → SF a a`" delays the input signal by one sample, taking an initial value for the output at time zero. The reason for this is that we need to delay the transition from susceptible to infected by one step, due to the semantics of the switch combinator. Whenever the switching event occurs, the signal function into which it is switched will be run at the time of the event occurrence. This means that a susceptible agent could make a transition to recovered within a one-time step. We want to prevent this occurrence, because the semantics should be that only one state transition can happen per time step.

**Deleted:** it

**Deleted:** :

**Deleted:** w

**Deleted:**

**Deleted:** ,

**Deleted:** which we

**Deleted:** ,

```
susceptibleAgent :: RandomGen g => g -> SIRAgent
susceptibleAgent g

= switch
-- delay switching by 1 step to prevent against transition -- from Susceptible to
Recovered within one time step (susceptible g >> iPre (Susceptible, NoEvent))
(const (infectedAgent g))
```

where

```
susceptible :: RandomGen g => g -> SF [SIRState] (SIRState, Event ())
susceptible g = proc as -> do
  -- generate make contact events with given rate
  makeContact <- occasionally g (1 / beta) 0 -< 0
  if isEvent makeContact
```

```
then (do
-- draw random element from the list a <- drawRandomElemSF g -< as
case a of
```

```
Infected -> do
-- returns True with uniform probability i <- randomBoolSF g gamma -< 0
if i

  -- got infected, signal to switch through Event
  then returnA -< (Infected, Event 0)
```

```

else returnA -< (Susceptible, NoEvent)
- -> returnA -< (Susceptible, NoEvent)

else returnA -< (Susceptible, NoEvent)

```

To deal with randomness in an FRP way, we implemented additional signal functions built on the noiseR function provided by Yampa. This is an example of the stream character and statefulness of a signal function as it allows for keeping track of the changed random number generator internally, through the use of continuations and closures. Here we provide the implementation of "randomBoolSF; drawRandomElemSF" which works similarly, but takes a list as input and returns a randomly chosen element from it:

```

randomBoolSF :: RandomGen g => g -> Double -> SF () Bool
randomBoolSF g p = proc _ -> do
  r <- noiseR ((0, 1) :: (Double, Double)) g -< ()
  returnA -< (r <= p)

```

An infected agent recovers on average after  $\delta$  time units. This is implemented by drawing the duration from an exponential distribution [18] with  $\lambda = 1$  and  $\delta$  making the transition to the Recovered state after this duration. Thus, the infected agent behaves as infected until it recovers, after which it behaves as a recovered agent by switching into recoveredAgent. As in the case of the susceptible agent, we use the "occasionally" function to generate the event when the agent recovers.

```

infectedAgent :: RandomGen g => g -> SIRAgent
infectedAgent g

= switch
-- delay switching by 1 step
(infected >>> iPre (Infected, NoEvent)) (const recoveredAgent)

where
infected :: SF [SIRState] (SIRState, Event ())
infected = proc _ -> do
  recEvt <- occasionally g delta () -< ()
  let a = event Infected (const Recovered) recEvt
  returnA -< (a, recEvt)

```

For running the simulation we use Yampas function embed:

```

runSimulation :: RandomGen g => g -> Time -> DTime -> [SIRState] -> [[SIRState]]
runSimulation g t dt as
  = embed (stepSimulation fs as) ([], dts)
where

```

Deleted: for  
Deleted: to  
Deleted: -

Deleted: ¶  
Deleted: ¶

```

steps
dts
n
(rngs, _)
sfs
    = floor(t/dt)
    = replicate steps (dt, Nothing)
    = length as
    = rngSplits g n [] -- unique rngs for each agent = zipWith sirAgent rngs as

```

What we need to implement next is a closed feedback loop, which is at the heart of every ABS. The authors of [35, 123] discusses implementing this in Yampa. The function “stepSimulation” is an implementation of such a closed feedback loop. It takes the current signal functions and states of all agents, runs them all in parallel and returns this step’s new agent states. The use of “notYet” is required to delay switching by one step, to break potentially infinite recursive switching. This is necessary because we are recursively switching back into the stepSimulation. This would then result in the immediate evaluation of the next step, overriding the output of the current step, recursively switching back into stepSimulation and so on. The combinator “notYet” breaks this up by delaying the switching event by one step.

Deleted: a  
Deleted: ,  
Deleted: which

```

stepSimulation :: [SIRAgent] -> [SIRState] -> SF [SIRState]
stepSimulation sfs as =

```

```

dpSwitch
    -- feeding the agent states to each SF
    (\_ sfs' -> (map (\sf -> (as, sf)) sfs'))
    -- the signal functions
    sfs
    -- switching event, delay by one step to prevent -- infinite recursion

```

```
(switchingEvt >>> notYet)
-- recursively switch back into stepSimulation stepSimulation

where
switchingEvt :: SF ([SIRState]) (Event [SIRState])
switchingEvt = arr (\(, newAs) -> Event newAs)
```

Yampa provides the dpSwitch combinator for running signal functions in parallel, which has the following type signature:

```
dpSwitch :: Functor col
-- routing function

=> (forall sf. a -> col sf -> col (b, sf)) -- SF collection
-> col (SF b c)
-- SF generating switching event

-> SF (a, col c) (Event d)
-- continuation to invoke upon event -> (col (SF b c) -> d -> SF a (col c)) -> SF a (col c)
```

Conceptually, dpSwitch allows us to recursively switch back into the "stepSimulation" with the continuations and new states of all the agents after they were run in parallel.

Its first argument is the pairing-function, which pairs up the input to the signal functions — it has to preserve the structure of the signal function collection. The second argument is the collection of signal functions to run. The third argument is a signal function generating the switching event. The last argument is a function, which generates the continuation after the switching event has occurred. "dpSwitch" returns a new signal function, which runs all the signal functions in parallel and switches into the continuation when the switching event occurs.

**Deleted:** -

#### 4.1.1 Results

The dynamics generated by this implementation can be seen in Figure 4.1.

By following the FRP approach we assume a continuous flow of time, which means that we need to select a correct  $\Delta t$ , otherwise we would end up with wrong (a)  $\Delta t = 0.1$  (b)  $\Delta t = 0.01$

Figure 4.1: FRP simulation of agent-based SIR showing the influence of different

$\Delta t$ . Population size of 1,000 with contact rate  $\beta = 1$ , infection probability 5

$\gamma = 0.05$ , illness duration  $\delta = 15$  with initially 1 infected agent. Simulation run for 150 time steps with respective  $\Delta t$ .

dynamics. The selection of a correct  $\Delta t$  depends, in our case ~~e., on~~ the susceptible behaviour, which randomly generates an event on average with  $\beta$  following the

**Deleted:** e on occasionally  
**Deleted:** in

exponential distribution. To arrive at the correct dynamics, this requires us to sample “occasionally”, and thus the whole system, with small enough  $\Delta t$  matching the frequency of events generated by  $\beta$ . If we choose ~~too~~ large ~~a~~  $\Delta t$ , we lose events, which will result in wrong dynamics as can be seen in Figure 4.1a. This issue is known as undersampling and is described in Figure 4.2.

~~Deleted: a too~~

~~Deleted: o~~


For tackling this issue, we have three options. The first one is to use a smaller  $\Delta t$  as can be seen in 4.1b, which results in the whole system being sampled more often, thus reducing performance. The second option is to step the simulation with  $\Delta t = 1$  and in each step, instead of using “occasionally”, to make a number of contacts drawn from the exponential distribution. If we follow this option, we abandon the time-driven approach altogether because we don’t abstract away from  $\Delta t$ . ~~This option violates~~ the fundamental abstraction of FRP, which assumes that time is continuous and signal functions are running conceptually infinitely fast and infinitely often [188]. This leaves us with the third option to implement supersampling and apply it to “occasionally”, which allows us to run the whole simulation with  $\Delta t = 1.0$  and only sample the “occasionally” function with a much higher frequency.

~~Deleted: and~~

~~Deleted: then~~

The function “`embed`”, which allows `us` to run a given signal function with provided  $\Delta t$ , does not help here because it does not return a signal function. What we need is a signal function which takes the number of super samples “`n`”, the signal function “`sf`” to sample and return a new signal function, which performs supersampling on it. We provide a full implementation of such a function, which

~~Deleted: s~~

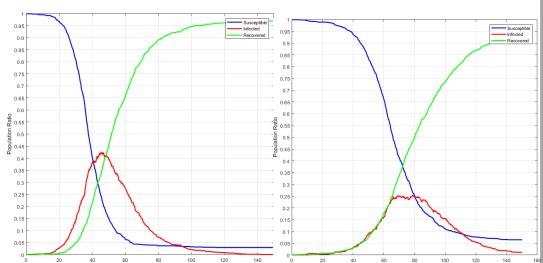

(a) Under-sampling

(b) Super-sampling

Figure 4.2: Visual explanation of undersampling and supersampling. The black dots represent the time steps of the simulation. The red dots represent virtual events, which occur at specific points in continuous time. In the case of under-sampling, three events occur in between the two time steps, but occasionally only captures the first one. By increasing the sampling frequency either through a smaller  $\Delta t$ , or supersampling, all

~~Deleted:~~

| three events can be captured. [Additionally, this instance](#) gives insight into how signal functions are implemented in Yampa, and how the  $\Delta t$  is hidden:

**Deleted:** ¶

also

**Deleted:** an

```
import FRP.Yampa.InternalCore

-- SF is the signal function defined for time t = 0 and returns -- a continuation of type SF'
-- which is the signal function
-- defined for t > 0: it receives an additional time delta --dataSFab =SF{sfTF::a-
>(SF'a,b,b)}
```

-- data SF' a b = DTime -> a -> (SF' a b, b)

```
superSampling :: Int -> SF a b -> SF a [b]
superSampling n sf0 = SF { sfTF = tf0 }
```

where

```
-- no supersampling at time 0
tf0 :: a -> (SF' a b, [b])
tf0 a0 = (tfCont, [b0])
```

where

```
(sf, b0) = sfTF sf0 a0 -- running the SF using sfTF
```

```
tfCont = superSamplingAux sf
superSamplingAux :: SF' a [b]
```


where

```
tf :: DTime -> a -> (SF' a b, [b])
tf dt a = (tf', bs)
```

where

```
(sf', bs) = superSampleRun n dt sf a
tf' = superSamplingAux sf'
superSampleRun :: Int -> DTime -> SF' a b -> a -> (SF' a b, [b])
superSampleRun n dt sf a
| n <= 1 = superSampleMulti 1 dt sf a []
```

| otherwise = (sf', reverse bs) -- reverse due to accumulator where
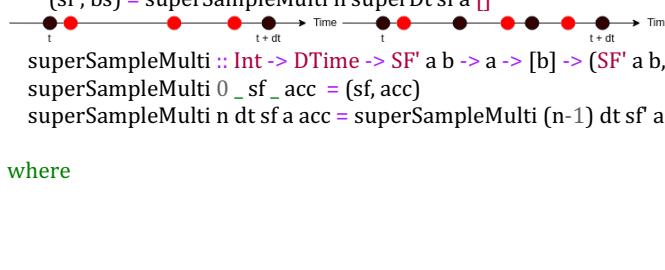
```
superDt = dt / fromIntegral n
(sf, bs) = superSampleMulti n superDt sf a []

superSampleMulti :: Int -> DTime -> SF' a b -> a -> [b] -> (SF' a b, [b])
superSampleMulti 0 _ sf _ acc = (sf, acc)
superSampleMulti n dt sf a acc = superSampleMulti (n-1) dt sf a (b:acc)
```

where

`(sf, b) = sfTF' sf dt a -- running the SF' using sfTF'`

It evaluates the SF argument for `"n"` times, each with  $\Delta t = \frac{\Delta t}{n}$  and the same `"n"` input argument `a` for all `"n"` evaluations. At time `"0"` no super-sampling is performed and just a single output of the SF argument is calculated. A list of `"b"` is returned with length of `"n"` containing the result of the `"n"` evaluations of the SF argument. If 0 or less super samples are requested exactly one is calculated.

#### 4.1.2 Discussion

We conclude that our first step already introduced most of the fundamental concepts of ABS:

- Time - the simulation occurs over virtual time which is modelled explicitly, divided into fixed  $\Delta t$ , where at each step all agents are executed.
- Agents - each agent is implemented as an individual, with the behaviour depending on its state. It is clear to see that agents behave as signals: when the system is sampled with  $\Delta t = 0$  then their behaviour will stay constant and will not change because it is completely determined by the flow of time.
- Feedback - the output state of the agent in the current time step `"t"` is the input state for the next time step `"t + Δt"`.
- Environment - as environment we implicitly assume a fully connected network (complete graph) where every agent 'knows' every other agent, including itself and thus can make contact with all of them.
- Stochasticity - it is an inherently stochastic simulation, which is indicated by the random number generator and the usage of `"occasionally"`, `randomBoolSF` and `drawRandomElemSF`.
- Deterministic - repeated runs with the same initial random number generator result in same dynamics. This may not come as a surprise, but in Haskell we can guarantee that property statically immediately, at compile time because our simulation does not run in the IO Monad. This guarantees that no external, uncontrollable sources of non-determinism can interfere with the simulation.
- Parallel, lock-step semantics - the simulation implements a parallel update strategy, where in each step, the agents are run isolated in parallel and don't see the actions of the others until the next step.

Deleted: -

Deleted: -

Deleted: -

Deleted: already

Deleted: runs not

Using FRP in Yampa results in a clear, expressive and robust implementation. State is implicitly encoded, depending on which signal function is active. By using explicit time semantics with "occasionally" we can achieve extremely fine grained stochastics by sampling the system with small  $\Delta t$ . We are treating it as a truly continuous time-driven agent-based system.

A severe problem, which is hard to find with testing, is the fact that in the susceptible agent the same random number generator is used in "occasionally", drawRandomElemSF and randomBoolSF. This means that all three stochastic functions, which should be independent from each other, are inherently correlated. This is something one wants to prevent under all circumstances in a simulation, as it can invalidate the dynamics on a very subtle level. We left this severe bug in for explanatory reasons, as it shows an example where functional programming actually encourages very subtle bugs, if one is not careful. A possible, but not very elegant, solution would be to simply split the initial random number generator in sirAgent three times and pass three random number generators to susceptibleAgent. A much more elegant solution would be to use the Rand Monad, which unfortunately is not possible, because Yampa is not monadic.

Deleted: -

Deleted: -

Deleted: -

So far we have an acceptable implementation of an agent-based SIR approach. What we are lacking at the moment is a general treatment of an environment and an elegant solution to the random-number correlation. In the next step we make the transition to Monadic Stream Functions as introduced in Dunai [135], which allows FRP within a monadic context and gives us a method for an elegant solution to the random number correlation.

Deleted: way

Deleted: -

Deleted: m

## 4.2 Going Monadic

A part of the library Dunai is BearRiver, a wrapper reimplementing Yampa on top of Dunai, which allows us to easily replace Yampa with Monadic Stream Functions (MSF). This will enable us to run arbitrary monadic computations in a signal function, solving the problem of correlated random numbers through the use of the Rand Monad.

### 4.2.1 Identity Monad

We start by making the transition to BearRiver by simply replacing Yampas signal function [with that of](#) BearRiver, which is the same but takes an additional type parameter “m”, indicating the monadic context. If we replace this type parameter with the Identity Monad, we should be able to keep the code exactly the same, because BearRiver re-implements all necessary functions we are using from Yampa. We simply redefine the agent signal function, introducing the Monad stack [in which](#) our SIR implementation runs:

```
type SIRMonad = Identity  
type SIRAgent = SF SIRMonad [SIRState] SIRState
```

Using the Identity Monad does not gain us anything, but it is a first step towards a more general solution. Our next step is to replace the Identity Monad [with](#) the Rand Monad, which will allow us to run the whole simulation within the Rand Monad with the full features of FRP. Finally [this allows us to solve](#) the problem of correlated random numbers in an elegant way. We start by redefining the SIRMonad and SIRAgent:

```
type SIRMonad g = Rand g  
type SIRAgent g = SF (SIRMonad g) [SIRState] SIRState
```

To access the Rand Monad functionality within an MSF, overloaded functions are used. For the function occasionally, there exists a monadic pendant “occasionallyM” which requires a MonadRandom type class. Because we are now running within a MonadRandom instance, we simply replace “occasionally” with “occasionallyM”.

```
occasionallyM :: MonadRandom m => Time -> b -> SF m a (Event b) -- can be used  
through the use of arrM and lift  
randomBoolM :: RandomGen g => Double -> Rand g Bool  
-- this can be used directly as a SF with the arrow notation drawRandomElemSF ::  
MonadRandom m => SF m [a] a
```

#### 4.2.3 Discussion

Running in [Rand](#) Monad elegantly solves the problem of correlated random numbers and guarantees that we will not have correlated stochastics as discussed in the previous section. In the next step we introduce the concept of an explicit, discrete 2D environment.

#### 4.3 Adding an [Environment](#)

So far we have implicitly assumed a fully connected network amongst agents, where each agent can see and knows every other agent. This is a valid environment in accordance with the System Dynamics inspired implementation of the SIR model, but [it](#) does not show the real advantage of ABS to situate agents within arbitrary environments. Often, agents are situated within a discrete 2D environment [48] which is simply a finite NxM grid with either a Moore or von Neumann neighbourhood (Figure 4.3). Agents are either static or can move freely around with cells allowing either single or multiple occupants.

Deleted: by  
Deleted: s'

Deleted: in

Deleted: ,  
Deleted: by

Deleted: ,  
Deleted: f  
Deleted: ing

Deleted: the

Deleted: e

Deleted: and

We can directly map the SIR model to a discrete 2D environment by placing the agents on a corresponding 2D grid with an unrestricted neighbourhood. The behaviour of the agents is the same but they select their interactions directly from the read-only environment, which will be passed to the agents as input. This allows agents to read the states of all their neighbours, which tells them if a neighbour is infected or not. To show the benefit over the System Dynamics

(a) von Neumann (b) Moore

Figure 4.3: Common neighbourhoods in discrete 2D environments of ABS.

approach and for purposes of a more interesting approach, we restrict the agents to a Moore neighbourhood (Figure 4.3b).

We also implemented this spatial approach in Java using the well-known ABS library RePast [124], to compare with a state of the art approach, and came to the same results as shown in Figure 4.4. This supports the hypotheses that our pure functional approach can produce such results as well and compares positively to the state of the art in the ABS field.

#### 4.3.1 Implementation

We start by defining the discrete 2D environment, for which we use an indexed two dimensional array. Each cell stores the agent state of the last time step. Consequently, we use the SIRState as type for the array data. Additionally, we redefine the agent signal function to take the structured environment SIREnv for the input instead of the list of all agents as in the previous step. For the output we keep the SIRState, which is the state the agent is in currently. Moreover, we run in the Rand Monad as introduced before to avoid the random-number correlation.

```
type Disc2dCoord = (Int, Int)
type SIREnv = Array Disc2dCoord SIRState
type SIRAgent g = SF (Rand g) SIREnv SIRState
```

The environment is not returned as the output because the agents do not directly manipulate the environment, they only read from it. Again, this enforces the semantics of the parallel update strategy, through the types where the agents can only see the previous state of the environment as well as the actions of other agents reflected in the environment only in the next step.

We could have chosen to use a StateT transformer with the SIREnv as state, instead of passing it as input. The agents would have then been able to arbitrarily read and write, but this would have violated the semantics of our model because the actions of agents would have become visible within the same time step.

The implementation of the susceptible, infected and recovered agents is almost the same with only the neighbour querying now in a slightly different way.

Stepping the simulation needs a new approach, because in each step we need to collect the agent outputs and update the environment for the next step. For this we

Deleted:

Deleted: have a comparison

Deleted: ,

Deleted: thus

Deleted: Also

Deleted: as

Deleted: As

Deleted: in

Deleted: Also

Deleted: bu

Deleted: t

Deleted: and


Deleted: see

Deleted: ,

Deleted: with the agents then

Deleted: are

implemented a separate MSF, which receives the coordinates for every agent to be able to update the state in the environment after the agent was



run. It is important to understand that we need use “`mapM`” to run the agents because we are now running the simulation, in the context of the Rand Monad. This has the consequence that the agents are, in fact, run sequentially one after the other. But, because they cannot see the other agents actions nor can they observe changes in the read-only environment, it is conceptually a parallel update strategy where agents run in lock-step, isolated from each other at conceptually the same time.

```
simulationStep :: RandomGen g => [(SIRAgent g, Disc2dCoord)]
  -> SIREnv -> SF (Rand g) () SIREnv

simulationStep sfsCoords env = MSF (\_ -> do
  let (sfs, coords) = unzip sfsCoords
    -- run agents sequentially but with read-only environment
  ret <- mapM ('unMSF` env) sfs
    -- construct new environment from all agent outputs for next step
  let (as, sfs') = unzip
  ret

  env' = foldr (\(a, coord) envAcc -> updateCell coord a envAcc)
    env (zip as coords)
  sfsCoords' = zip sfs' coords
  cont = simulationStep sfsCoords' env'
  return (env', cont))
updateCell :: Disc2dCoord -> SIRState -> SIREnv -> SIREnv
```

#### 4.3.2 Results

We implemented rendering of the environments using the `gloss` [107] library which enabled us to cycle arbitrarily through the steps and inspect the spreading of the disease over time visually as seen in Figure 4.4.

The dynamics of the spatial SIR simulation, which are seen in Figure 4.4b, look quite different from the reference dynamics of Figure 2.2. This is due to a much more restricted neighbourhood, resulting in far fewer infected agents at a time, as well as, a lower number of recovered agents at the end of the epidemic. This result then indicates, that fewer agents got infected overall.

#### 4.3.3 Discussion

Introducing a structured environment with a Moore neighbourhood, shows the ability of ABS to place the heterogeneous agents in a generic environment. This scenario, is the fundamental advantage of an agent-based approach over other simulation methodologies and allows us to simulate much more realistic scenarios.

Deleted: running now  
Deleted: b

Deleted: and  
Deleted: ,  
Deleted: meaning

Deleted: ,  
Deleted: which

An environment is not restricted to a discrete 2D grid and can be anything from a continuous N-dimensional space to a complex network. One only needs to change the type of the environment and agent input and provide corresponding neighbourhood querying functions in order to make a change of this kind.

Deleted: be

Deleted: -

Deleted: o

(a) Environment at  $t = 50$  (b) Dynamics over time

Figure 4.4: Simulating the agent-based SIR model on a  $21 \times 21$  2D grid with Moore neighbourhood (Figure 4.3b), a single infected agent at the centre and same SIR parameters as in Figure 2.2. Simulation run until  $t = 200$  with fixed  $\Delta t = 0.01$ . Last infected agent recovers around  $t = 194$ . The susceptible agents are rendered as blue hollow circles for better contrast.

#### 4.4 Discussion

Our FRP based approach is different from traditional approaches in the ABS community. First it builds on the already quite powerful FRP paradigm. Second, due to our continuous time approach, it forces one to think properly of the time semantics of the model and what the correct  $\Delta t$  should be. Third, it requires one to think about agent interactions in a new way instead of being just method calls. Thus, the result of using FRP allows for the expression of continuous time semantics in a very clear, compositional and declarative way, abstracting away the low-level details of time stepping and progress of time within an agent.

Commented [KJ20]: I don't understand this wording

Deleted: expressing

##### 4.4.1 Static Guarantees


Deleted: g

Because no part of the simulation runs in the IO Monad and we do not use “unsafePerformIO” we can rule out a serious class of bugs caused by implicit data dependencies and side effects, which can occur in traditional imperative implementations.

Our approach can guarantee reproducibility already at compile time, which means that repeated runs of the simulation with the same initial conditions will always result in the same dynamics. This scenario is something highly desirable in simulations s in general. Although we allow side effects within agents, we restrict them to the Rand Monad in a controlled, deterministic way and never use the IO Monad, which guarantees the absence of non-deterministic side effects within the agents and other parts of the simulation. This proves that this implementation is indeed

Deleted: ,

Deleted: only

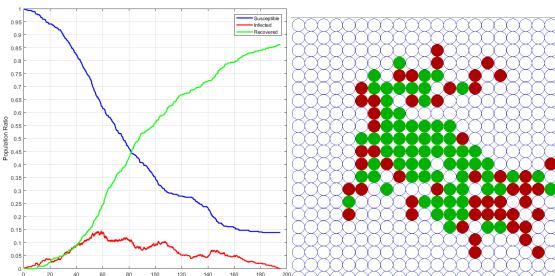

pure computation. This can only be achieved through purity, which guarantees the absence of implicit side effects. Purity also allows for ruling out non-deterministic influences at compile time through the strong static type system, something which is not possible with traditional object-oriented approaches.

Deleted: which allows to rule

Determinism is also ensured by fixing the  $\Delta t$  and not making it dependent on the performance of a rendering loop or other system-dependent sources of non-determinism as described by [137]. Additionally, by using FRP we gain all the benefits from it and can use research on testing, debugging and exploring FRP systems [133, 137].

Deleted: -

Deleted: Iso

Moreover, we show how to implement the parallel update strategy [168] in a way that the correct semantics are enforced and guaranteed already at compile time. Using pure functional programming, we can enforce the correct semantics of agent execution through types where we demonstrate that this allows us to have both, sequential monadic behaviour, and agents acting conceptually at the same time in lock-step. This is not possible in traditional imperative implementations and poses another unique benefit for the use of functional programming in ABS.

Deleted: Also

Deleted: through the types

#### 4.4.2 Drawbacks

Despite the strengths and benefits we get by leveraging on FRP, there are errors that are not raised at compile time. For example, we can still have infinite loops and run-time errors. This was investigated in [149] where the authors use dependent types to avoid some run-time errors in FRP.

Deleted: ,

Deleted: f

We propose that one could go further and develop a domain specific type system for FRP that makes the FRP-based ABS more predictable, supporting further mathematical analysis of its properties. Furthermore, moving to dependent types would pose a unique benefit over the traditional object-oriented approach and should allow us to express and guarantee even more properties at compile time. We will leave this for further research at a later date.

Commented [KJ21]: New paragraph

Deleted: suggest

In our pure functional approach, agent identity is not as clear as in traditional object-oriented programming, where there is a quite clear concept of object-identity through the encapsulation of data and methods. Signal functions don't offer this strong identity, and one needs to build additional identity mechanisms on top. An example of an appropriate scenario would be when sending messages to specific agents as will be shown in the next chapter.

Deleted:

Deleted: ,

Deleted: for

We can conclude that the main difficulty of a pure functional approach evolves around the communication and interaction between agents, which is a direct consequence of the issue with agent identity. Agent interaction is straightforward in object-oriented programming, where it is achieved using method calls mutating the internal state of the agent. But, that comes at the cost of a new class of bugs due to implicit data flow. In pure functional programming these data flows are explicit but our current approach of feeding back the states of all agents as inputs is not very general. We address this problem in the next chapter.

Deleted: -

Deleted: ,

Deleted: b

#### 4.4.3 Performance

Currently, the performance of this approach does not come close to imperative implementations. We compared the performance of the time-driven SIR as presented in Section 4.3 to an implementation in Java using the ABS library RePast [124]. We ran the simulation until  $t = 100$  on a  $51 \times 51$  (2,601 agents) with  $\Delta t = 0.1$  (unknown in RePast) and averaged 8 runs. The performance results make the lack of speed of our approach quite clear: the pure functional approach needs around 72.5 seconds whereas the Java RePast version just 10.8 seconds on our machine to arrive at  $t = 100$ . It must be mentioned, that RePast does implement an event-driven approach to ABS, which can be much more [effective](#) [119] than a time-driven one, so the comparison is not completely valid.

Deleted: performant

As a remedy, we compared a time-driven SIR implementation [of us in Java](#) (without RePast) to the pure functional implementations of Chapter 4.1 without [the Rand Monad](#) and the environment. In the Java implementations we tried to follow conceptually similar approaches to the pure functional implementations, but obviously, that is not possible for every aspect. For example, we are not using a [reactive programming library](#), but we follow a similar time-sampling approach. We [ran the program](#) for 150 time steps with 1,000 susceptible and 1 infected agents,  $\beta = 1$ ,  $\gamma = 0.05$ ,  $\delta = 15$  and  $\Delta t = 0.01$ . Moreover, we fixed the random number generators to guarantee identical dynamics in every run and averaged 8 runs. The time-driven Java implementation averages at a performance of 0.5 seconds, compared to 27.6 seconds in Haskell. As a comparison, the Haskell implementation of section 4.3 with the same configuration using a  $10 \times 10$  environment with no neighbourhood restrictions averages at 19 seconds.

Commented [KJ22]: Not sure this is right. What is us in this context?

Deleted: ¶

Deleted: ny

Deleted: un

Deleted: ¶

Deleted: Further

Deleted: -

Deleted: ¶

We expect a substantial performance improvement when switching to an event-driven approach [119] in the next chapter. Additionally, the performance issue will be addressed more in depth in the chapters on parallelism (Chapter 7) and concurrency (Chapter 8).

## Chapter 5

### Pure Functional Event-Driven ABS

Deleted: e

Deleted: d

In this chapter we build on the previous discussion of update strategies in Chapter 2.3 and the implementation techniques presented in the time-driven approach of Chapter 4 to develop concepts for event-driven ABS in a pure functional way.

In event-driven ABS [119], the simulation is advanced through events. Agents and the environment schedule events into the future and react to incoming events scheduled by themselves, other agents, the environment or the simulation kernel. Time is discrete in this approach and it advances step-wise from event to event, where each event has an associated receiver and  $\Delta t$ , indicating the delay to the current virtual simulation time when the event should be scheduled. This implies that time could stay constant, such as, when an event is scheduled with  $\Delta t = 0$  the virtual simulation time does not advance. In addition, agents can schedule events to themselves, emulating a recurring behaviour, which in turn emulates proactive behaviour. Because agents can adapt and change their state and behaviour when processing an event, this means that even if time does not advance, agents can change. This non-signal behaviour is the fundamental difference to the time-driven approach in Chapter 4. Furthermore, this mechanism is used to implement synchronous agent interactions purely functional as discussed in the respective sections below.

**Deleted:** for example

**Deleted:** Further

**Deleted:** o

The event-driven approach makes the simulation kernel technically closely related to a Discrete Event Simulation [190]. Due to the necessity of imposing a correct ordering of events in this type of ABS, it needs to be stepped event by event, with the sequential update strategy as introduced in Chapter 2.3.1. It is important to emphasise that only the semantics of the sequential update strategy allow the kind of features presented in the following sections, as the agents act one after the other, seeing the effects of previous agents in the same time step. This would not make sense in the parallel update strategy as used in time-driven ABS, where agents act conceptually at the same time. This means that event-driven ABS is inherently sequential due to its fundamental reliance on effects as will become clearer in the sections below. There exists also Parallel Discrete Event Simulation [54], which processes events in parallel and deals with inconsistencies by reverting to consistent states. We hypothesise that a pure functional approach could be beneficial in such an approach due to persistent data structures and explicit handling of side effects but we leave this for further research.

**Deleted:**,

**Deleted:** ¶

66 ¶

CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 67 ¶

We start the chapter by introducing the concepts of agent identity and event scheduling using an event-driven agent-based SIR model, inspired by [109]. We then use the highly complex Sugarscape model as introduced in Chapter 2.1.2, to develop more advanced features of ABS in a pure functional context: dynamic creation and removal of agents during simulation, adding a shared mutable environment, local mutable agent state and synchronous agent interactions.

## 5.1 Basics

In this section we derive the basics of event-driven ABS using the SIR model, as introduced in Chapter 2.1.1, with an event-driven approach inspired by [109]. Although it is a fundamentally different approach to ABS than the time-driven implementation in Chapter 4.1, both solutions are quantitatively equal as they produce the same class of dynamics. Qualitatively they differ in terms of expressivity and performance as we will see in the discussion.

The basics of event-driven ABS are the concept of agent identity, events and event scheduling. We introduce them step-by-step using various Monads and then generalise to a tagless final approach, which has various benefits as pointed out in the respective section.

### 5.1.1 An Event-Driven SIR

Before we can derive implementation concepts, we first need to discuss how an event-driven SIR model works, as inspired by [109]. Fundamentally, what is required is to transform all time-dependent behaviour and agent interactions into the scheduling and receiving of events. For the SIR this should be trivial and straightforward, taking inspiration from the time-driven implementation, where we simply translate the occurrences of events generated by “occasionally” into scheduling of events. For agent interactions we also use events, making this more explicit than in the time-driven approach. As already pointed out, assuming that events have a receiver and a scheduling time given as  $\Delta t$  relative to the current simulation time, we end up with three event types:

1. MakeContact is used to let susceptible agents proactively make contact with  $\beta$  (contact rate) other agents per 1 time unit.

Deleted: -

2. ContactSender, SIRState are used to make contact between agents where, agents reveal their state by sending or replying with their current state.

Deleted: -

Deleted: is

3. Recover is used to let infected agents recover proactively after the given  $\delta$  (illness duration).

Deleted: -

Deleted: ¶

Now we can give a concise definition of all three agent behaviours:

#### Susceptible Agent

- A susceptible agent initially schedules a MakeContact event with  $\Delta t = 1$  to itself.
- When receiving MakeContact, the agent sends a Contact event to  $\beta$  (contact rate) random other agents with  $\Delta t = 0$  and the SIRState of Susceptible, resulting in these events being scheduled immediately. Furthermore, the agent schedules MakeContact with  $\Delta t = 1$  to itself, to keep the proactive process of making contact with other agents active.
- When the agent receives a Contact event, it checks if this is from an infected agent (SIRState is Infected). If the event is not from an infected agent, it ignores it, otherwise it becomes infected with a given probability.

Deleted: to be

Deleted: it

#### Infected Agent

- An infected agent initially schedules a Recover event to itself, with an exponentially distributed random  $\Delta t$  of  $\delta$  (illness duration).
- When the agent receives a Contact event, it checks if it is from a susceptible agent (SIRState is Susceptible). If the event is not from a susceptible agent, it ignores it, otherwise it simply replies to the same susceptible agent with a Contact event with  $\Delta t = 0$  and SIRState of Infected.

Deleted: his

Recovered Agent The recovered agent does not change anymore, reacts to no incoming events and schedules no events - it stays constantly Recovered forever.

Deleted:

It is easy to see that this behaviour emulates the time-driven one and indeed in Figure 5.1 it is also visually clear that it produces similar dynamics. A striking difference are the small spikes and steps in the dynamics. These changes stem from the fact that time advances discretely and not continuously as in the time-driven implementation. In Chapter 11, we use property-based testing to show that both implementations indeed produce similar distributions in their dynamics, thus putting the claim that both implementations are quantitatively equal on a much more robust ground.

Deleted: ,

Deleted: which

Figure 5.1: Dynamics of the event-driven SIR model. Population Size  $N = 1,000$ , contact rate  $\beta = 1$ , infection probability  $\gamma = 0.05$ , illness duration  $\delta = 15$  with initially 1 infected agent. Simulation run for 150 time steps.

### 5.1.2 Events, Agent Identity and Scheduling

We can now start to discuss the concepts from an implementation perspective. First, we need to make the concept of an event explicit. An event is of a given type, has a receiver and a timestamp in absolute simulation time when it shall be scheduled. We keep the event type polymorphic and represent the receiver by an `AgentId` which is a simple `Int`. For efficient scheduling, the events are kept in a priority queue `"Data.PQueue.Min"` [182], sorted ascending by the timestamp. Thus, we define the following:


```
type Time    = Double
type AgentId = Int
data QueueItem e = QueueItem e AgentId Time
-- the event priority queue
type EventQueue e = PQ.MinQueue (QueueItem e)
-- implement Ord for QueueItem for acended sorting
instance Ord (QueueItem e) where
  compare (QueueItem _ t1) (QueueItem _ t2) = compare t1 t2
```

Next, we define a polymorphic type for the agent. In event-driven ABS, due to the fact that agents are not signals anymore, we abandon time-aware signal functions of BearRiver from the previous chapter and focus solely on MSF. In event-driven ABS agents receive events, thus as input to an MSF the polymorphic event type `"e"` is used. As output, the polymorphic output type `"o"` is used, which will be instantiated to a specific monomorphic type in the SIR model below. The question now becomes, what Monad shall be used? For scheduling

Deleted:

Deleted: is now

Deleted: .

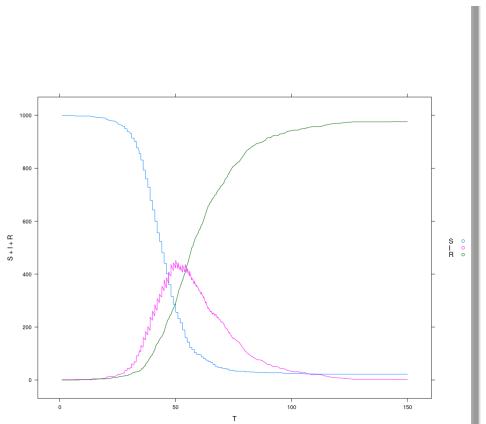

purposes (and because models might require it), agents should be able to read the current simulation time: this is accomplished through a ReaderT Time. Further [more](#), agents should be able to read the identities of the other agents available in the simulation so they can schedule events to them when necessary, which is accomplished through a ReaderT [AgentId]. Most importantly, agents have to be able to schedule events. [Agents](#) they have to be able to write the events into some sink where they are accumulated for scheduling, which is achieved through a WriterT [QueueItem e]. Finally, the transformer stack needs to be extendible by other Monads, specified in concrete models like the SIR below. [As such](#), we add another polymorphic type “m”, indicating the closing Monad (stack).

```
type ABSMonad m e = ReaderT Time (WriterT [QueueItem e] (ReaderT [AgentId] m))
type AgentMSF m e o = MSF (ABSMonad m e) e o
```

BearRivers SF [also has](#) a ReaderT Double as the outermost Monad, but we deliberately avoided its use because the intended semantics of an SF are different. The value in the ReaderT of the SF represents the sampling time delta and not the absolute time, as in the event-driven case.

We can already implement a few polymorphic functions, operating on the given Monad stack. First, we implement [the function “allAgentIds”](#) which simply returns the AgentId of all agents, the contents of the ReaderT [AgentId]. Second, we implement a function “scheduleEvent”. [This function](#) allows [for the scheduling of](#) a given event to a given receiver into the future, given a specific time delay, relative to the current simulation time.

```
allAgentIds :: Monad m => (ABSMonad m e) [AgentId]
allAgentIds = lift (lift ask)
```

```
scheduleEvent :: Monad m =>
```

```
-- ^ event
-- ^ receiver
-- ^ time delay
```

**Deleted:** ,  
**Deleted:** meaning  
**Deleted:** ,  
**Deleted:** so

**Deleted:** has also

**Deleted:** a  
**Deleted:** which  
**Deleted:** to schedule

```

-> AgentId
-> Double
-> (ABSMonad m e) ()
```

```

scheduleEvent e aid dt = do
-- get current simulation time
t <- ask
-- construct queue item
let q = QueueItem e aid (t + dt)
-- write/append (tell) to the WriterT (QueueItem e) lift (tell [q])
```

Processing events can also be implemented generically and is straightforward. Therefore, we only discuss it conceptually. For efficient lookup of event receivers all agents are organised into an “IntMap”, which also holds the current output of the agent, to allow sampling of the domain state. In general, the domain state is highly model specific, thus a generic implementation needs to offer some mechanism to update the domain state after an event. We named this process “domain state sampling”. Our approach is to call a function, which receives the agent map and returns a new domain state for the current event or time step. These domain states are appended to an infinite list which forms the output of the simulation.

The events are then processed in the order provided by the queue and each event is executed with the given receiver. Running a receiver is simply achieved using the agent map, where a reviver is looked up and its MSF is evaluated with the given event as input and the resulting monadic actions executed with the given parameters.

### 5.1.3 Parametrising for SIR

With the generic concepts now established, we show how to parametrise them to the concrete SIR model. First, we define the already well-known states the agents can be in and the three different event types, as already introduced above.

```

data SIRState = Susceptible | Infected | Recovered
data SIREvent = MakeContact | Contact AgentId SIRState | Recover
```

Next, we parametrise the ABSMonad to the SIR model. Because behaviour is stochastic, we need to make use of the Rand Monad, which also closes the Monad stack of ABSMonad. Further, the event type is obviously parametrised to SIREvent.

```
type SIRMonad g = ABSMonad (Rand g) SIREvent
```

Now we define a SIRAgent which can be understood as a constructing function, run once upon construction of the agent. This constructing function runs in the SIRMonad, thus agents can already make full use of the functionality. So they can schedule initial events, depending on their initial state. This is important for the susceptible and infected agent, which both need to schedule initial events for their proactive behaviour. The constructing functions also take the AgentId of the agent, thus making it available to the agent at construction time. It returns the initial agent behaviour as AgentMSF.

```
type SIRAgent g
```

Deleted: ,  
Deleted: thus

Deleted: a  
Deleted: we named

Deleted:

Deleted: s  
Deleted: ,  
Deleted: s  
Deleted: s

`= AgentId -> (SIRMonad g) (AgentMSF (SIRMonad g) SIREvent SIRState)`

The implementation of the constructing function of type SIRAgent is straight forward and follows the specification given above. It makes use of the functions `_scheduleMakeContact` and `_scheduleRecovery` which are implemented using the generic `_scheduleEvent` from above.

Deleted: -

```
sirAgent :: RandomGen g
  => Int
  -> Double
  -> Double
  -> SIRState
  -> SIRAgent g
-- ^ contact rate (beta)
-- ^ infectivity (gamma)
-- ^ illness duration (delta)
-- ^ initial state of the agent

sirAgent beta gamma delta Susceptible aid = do -- on start, schedule MakeContact to
itself scheduleMakeContact aid 1
-- return susceptible behaviour

  return (susceptibleAgent aid beta gamma delta)
sirAgent _ delta Infected aid = do
```

## CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 72

```
-- on start, schedule Recover to itself
scheduleRecovery aid delta
-- return infected behaviour
return (infectedAgent aid)

sirAgent ___ Recovered_ =
-- simply return recovered behaviour return recoveredAgent

scheduleMakeContact :: RandomGen g => AgentId -> Double -> (SIRMonad g) ()
scheduleMakeContact aid = scheduleEvent MakeContact aid
scheduleRecovery :: RandomGen g => AgentId -> Double -> (SIRMonad g) ()
scheduleRecovery aid delta = do
  dt <- (lift . lift . lift) (randomExpM (1 / delta))
  scheduleEvent Recover aid dt
-- returns random value following exponential distribution with given lambda
randomExpM :: MonadRandom m => Double -> m Double
```

Now we are finally ready to implement the actual behaviour of an agent, where we discuss the full implementation of the susceptible agent behaviour. The basic structure should be already familiar from the time-driven approach, using switch to dynamically change the behaviour to infectedAgent in case of an infection. The behaviour is then a simple event handler, pattern matching on the incoming events:

```

susceptibleAgent :: RandomGen g
  => AgentId
  -> Int
  -> Double
  -> Double
  -> SIRAgentMSF g

• --^ agents id
• --^ contact rate (beta)
• --^ infectivity (gamma)
• --^ illness duration (delta)

susceptibleAgent aid beta gamma delta =
  switch susceptibleAgentInfected (const (infectedAgent aid))

```

where

```

susceptibleAgentInfected :: RandomGen g
  => MSF (SIRMonad g) SIREvent (SIRState, Maybe ())

```

```

susceptibleAgentInfected = proc e -> do
  -- handle incoming event in monadic action ret <- arrM handleEvent -< e
  case ret of
    Nothing -> returnA -< (Susceptible, ret)
    _ -> returnA -< (Infected, ret)

```

We strictly follow the specification as above. In case the agent receives Contact from an infected agent it might become infected with a given probability. If it becomes infected, it schedules the recovery as it will make the transition to an infected agent.

```

handleEvent :: RandomGen g => SIREvent -> (SIRMonad g) (Maybe ())
handleEvent (Contact_ Infected) = do
  -- become infected with gamma probability
  r <- (lift . lift . lift) (randomBoolM gamma)
  if r
    -- got infected

```

then do

```

  -- schedule Recovery to self, because switching to infected
  scheduleRecovery aid delta

return (Just ()) -- no infection else return Nothing

-- returns True with given probability
randomBoolM :: MonadRandom m => Double -> m Bool

```

In case the agent receives MakeContact with itself, it will send Contact with Susceptible to  $\beta$  (contact rate) other agents without delay and MakeContact with itself with a delay of 1 time unit.

Deleted: from  
Deleted: to

```
handleEvent MakeContact = do
  ais <- allAgentIds
  -- get beta random agents
  receivers <- (lift . lift . lift) (forM [1..beta] (const (randomElemM ais))) -- make contact
  with random agents

  mapM_ makeContactWith receivers
  -- reschedule MakeContact to self
  scheduleMakeContact aid 1
  return Nothing
makeContactWith :: AgentId -> (SIRMonad g) ()
makeContactWith receiver =
  -- schedule Contact event immediately

scheduleEvent (Contact aid Susceptible) receiver 0 -- picks an element randomly from
the (non empty) list

randomElemM :: MonadRandom m => [e] -> m e
```

The infected and recovered behaviours are conceptually equivalent and thus left as a trivial exercise to the reader.

#### 5.1.4 Tagless Final

At this point, the basics of event-driven ABS should be clear: how events are represented and processed using an event queue, how agents are represented with an MSF and the idea behind the underlying polymorphic Monad Transformer stack. Furthermore, by parametrising the polymorphic concepts to the SIR model, we showed how to instantiate the generic concepts into a concrete model. Thus, we arrived at a robust, maintainable, and solid solution which is very likely to be correct up to the initial informal specification.

Deleted: to arrive at

In this section we briefly want to show how the so-called tagless final approach [100] can be used to arrive at a cleaner and more extensible interface of our implementation, which is also open to different interpretations. The idea behind tagless final is simple: specify the interface of operations in a type class and then write one or multiple interpreters for it, which simply means writing an instance implementation for the given type class. We start by defining the type class `MonadAgent` with all the necessary methods, making up the effective API of our agents. We need to enable two language extensions: `MultiParamTypeClasses`, because we want to have more than a single type parameter in the type class. Besides the `Monad m`, we also want to parametrise over the event type `e`; `FunctionalDependencies` because the event type `e` is determined by the `Monad type m`.

Deleted: ful  
Deleted: -  
Deleted: b

```
class Monad m => MonadAgent e m | m -> e where
```

```

randomBool :: Double -> m Bool
randomExp :: Double -> m Double
randomElem :: [a] -> m a
getAgentIds :: m [AgentId]
getTime :: m Time
getMyId :: m AgentId
schedEvent :: e -> AgentId -> Double -> m ()

```

The methods are self-explaining. This type class is now used to replace the Monad stack by an overloaded type definition in the respective functions. Thus, the implementation of the agent constructing function and the agent behaviours are the same, with only the types changing slightly, lifts becoming obsolete and calls to function replaced by calls to methods of the type class. We don't give the full implementation again but only the type of the agent construction function as example, the types of the agent behaviours follow a similar pattern:

**Deleted: self explaining**

### sirAgent

We added a "getMyId" method, which returns the AgentId of the agent itself, avoiding the need for the agent of keeping the agent id around and also making it possible to implement more robust self-scheduling functions. For example, the "scheduleRecovery" function is implemented in the tagless final approach in the following way:

**Deleted: shall**

```

scheduleRecovery :: MonadAgent SIREvent m => Double -> m ()
scheduleRecovery delta = do
  -- draw random value from exponential distribution

  dt <- randomExp (1 / delta)
  -- get id of agent, no more need to pass it explicitly ai <- getMyId
  -- schedule Recover to itself
  schedEvent Recover ai dt

```

What we are missing is a pure interpreter for the agent implementation and the MonadAgent type class. We start by defining a newtype, which basically is a conceptually similar Monad stack as in the original implementation without the tagless final approach. We let Haskell automatically derive monadic type classes, Functor, Applicative and Monad instances which saves a lot of boiler plate code, for which the GeneralizedNewtypeDeriving language extension is required. Instead of the Rand Monad, a StateT SimState is used, which carries

```

:: MonadAgent SIREvent m -- CHANGED: overloaded with type class

=> Int
-> Double
-> Double
-> SIRState
-> m (MSF m SIREvent SIRState) -- CHANGED: no Monad stack

-- ^ contact rate (beta)
-- ^ infectivity (gamma)

```

```
-- ^ illness duration (delta)
-- ^ initial state of the agent
```

the random-number generator and other data for synchronous agent interactions as will be discussed in the sections on advanced features.

```
newtype SIRAgentPure a = SIRAgentPure
{ unSIRAgentPure :: ReaderT (Time, AgentId, [AgentId]) -- combined into one

  (WriterT [QueueItem SIREvent]
   (State SimState)) a}
deriving (Functor, Applicative, Monad,
         MonadReader (Time, AgentId, [AgentId]),
         MonadWriter [QueueItem SIREvent],
         MonadState SimState)
```

Having this newtype we can now write a pure interpreter for the MonadAgent. The implementations are straightforward and should be self-explanatory. To run the existing Rand Monad actions, the function runRandWithSimState is used, which extracts the random-number generator from SimState, runs the action and puts the changed random-number generator back into the SimState.

Deleted: self explanatory

```
instance MonadAgent SIREvent SIRAgentPure where randomBool =
runRandWithSimState . randomBoolM randomElem = runRandWithSimState .
randomElemM randomExp = runRandWithSimState . randomExpM
-- schedEvent :: SIREvent -> AgentId -> Double -> m () schedEvent e receiver dt = do
  t <- getTime
  tell [QueueItem e receiver (t + dt)] -- getAgentIds :: m [AgentId] getAgentIds = asks trd
  -- getTime :: m Time
  getTime = asks fst3
  -- getMyId :: m AgentId getMyId = asks snd3
  fst3 :: (a,b,c) -> a
  snd3 :: (a,b,c) -> b
  trd :: (a,b,c) -> c
  runRandWithSimState :: MonadState SimState m => Rand StdGen a -> m a
```

The main benefit of a tagless final approach is that it is a solution to the expression problem [100], where it allows us to add new interpreters of an embedded language and add new functionality without breaking the existing implementations. Interpretation in our case means that we can use different underlying Monads to run the agents. When we want to guarantee purity, no IO Monad shall be used. Otherwise, when concurrency with a lock-based or lock-free approach is required IO or STM can be used in the underlying interpreter. Additionally, for reproducible unit testing, one can write custom test interpreters where methods always return a-priori known results, similar to mocking. Adding new functionality is discussed in the next section and also might become highly important when designing a more general ABS library, building on the tagless final

Deleted: lso

approach. It would allow the user of such a library to extend existing agents or default behaviour with new, custom-built methods, without breaking the existing ones. We leave that for further research.

## 5.2 Advanced Features

In the previous section we established the basics of event-driven ABS. It is now clear how events are represented, how agent identity is handled, how agents receive and schedule events, how events are scheduled and domain state is sampled. Furthermore, by using the tagless final approach, we arrived at an elegant, extensible and robust solution, which separates specification, the agent and its behaviour, from its implementation, the pure interpreter.

In this section we present more advanced concepts of event-driven ABS, necessary in models with much higher complexity than the simple SIR. We developed these concepts using the Sugarscape model as introduced in Chapter 2.1.2. Consequently we will discuss them from this model's perspective. More specifically, we show how to create and remove agents dynamically during simulation, add a shared mutable environment, model local mutable agent state and finally how synchronous agent interactions can be implemented. Together with the basics of event-driven ABS, with these concepts established it should be possible to implement a wide range of event-driven ABS models. For this we developed a full implementation of the Sugarscape model, in which we explored the concepts presented in this chapter, with the code accessible from the repository [165].

### 5.2.1 An Event-Driven Sugarscape

The event-driven approach of Sugarscape alters slightly from the event-driven SIR, discussed before. In the SIR, the dynamics are driven by the pro-activity of the agents through the MakeContact and Recover events. The agents (re-)schedule these events to themselves and thus drive time and the dynamics forward as a group without central authority. In Sugarscape, the semantics of the model are different, where in each time step all agents are executed in random order where they perform their actions and interact with each other. Time is advanced discretely, in natural numbers, centrally through the simulation kernel, by scheduling a Tick event to each of the agents in random order. Thus, events have no associated timestamp as there is no need for scheduling of events into the future. Indeed, beside the simulation kernel-specific Tick event, the model-specific events in Sugarscape are used solely for the purpose of agent interactions as will be discussed below. This follows the same approach of the event-driven SIR, where agent interactions between the susceptible and infected are implemented by scheduling events with a time delay of 0. The Sugarscape implementation follows the same idea but does that without the use of time delays as model specific events are scheduled immediately within the same Tick event.

The polymorphic event definition in Sugarscape is thus split into two parts: Tick, which is scheduled by the simulation kernel and indicates to the agent the start of a new time step. Secondly, DomainEvent, which is scheduled by other agents to a specific receiver within a given Tick and received by the target agent within the same Tick. The Tick event carries the time delta between steps to avoid the necessity of hardcoding it into the agent; DomainEvent also carries the sender of the event, to support easy replying to

Deleted: f

Deleted: have

Deleted:

Deleted: thus

Deleted: e

Deleted: d

Deleted: , which

Deleted:

Deleted: t

Deleted: ,

Deleted:

Deleted: ;

events which avoids the need to add the sender to the actual event type as was done in the event-driven SIR. Due to the discrete time semantics of Sugarscape, where time is advanced in natural numbered steps, time and time delta between steps are represented both as Int.

```
type Time
type DTime
type AgentId
data ABSEvent e = Tick DTime
    | DomainEvent AgentId e
```

The fact that Sugarscape schedules events without timestamps also has implications for the simulation kernel, which does not require a priority queue. Although the Sugarscape kernel also keeps track of the agents using an "IntMap" for the agent mappings, it uses a list to keep track of the events. Processing of events is implemented in the pure function "processEvents", which takes the "EventList" (the simulation state) which contains the agent mappings amongst others. This returns the new simulation state as soon as the event list is empty, indicating that all events in the current Tick have been processed and agents are idle.

```
type EventList e = [(AgentId, ABSEvent e)] -- (receiver, ABSEvent) processEvents :: 
EventList e -> SimulationState g
```

In each call, the function extracts the event at the front of the EventList. In the event, the list is empty, it returns the simulation state unchanged, otherwise looks up the receiver and runs it with the given event. The newly scheduled events of the receiver are prepended at the front of the EventList through a recursive call. The initial EventList passed to processEvents is a list with Tick events scheduled for every agent, in random order. The fact that the events an agent schedules are prepended to the front of the EventList. This action ensures that those events are processed next, which is of utmost importance for a correct working of the synchronous agent interactions discussed below. The implication is then that processEvents is a potentially non-terminating function, in case there is at least one agent which produces at least one event for every event it receives.

### 5.2.2 Dynamic Agent Creation and Removal

Some models of ABS in general, and Sugarscape in particular, require the dynamic creation and removal of agents during simulation. The specific requirements here are that the agents themselves must be able to both remove themselves from the simulation and create new agents with given attributes. To achieve that, in such a simulation the output type of an agent must be richer than the one in the event-driven SIR. First, we define the output of an agent:

```
data AgentOut m e o = AgentOut
{ aoKill :: Any -- True if this agent should be removed , aoCreate :: [AgentDef m e o] -- a
list of agents to create
, aoEvents :: [(AgentId, e)] -- a list of events (receiver, event)
}
```

Deleted: has also

Deleted: ,

Deleted: ,

Deleted: ,

Deleted: and

Deleted: case

Deleted: N

Deleted: ,

Deleted: ,

Deleted: his also implies

Deleted: a

Deleted: c

Deleted: r

Deleted: .

```
= Int  
= Int  
= Int
```

“AgentOut” already contains the list of scheduled events, which makes it clear that the scheduling of events in this approach is implemented differently than in the event-driven SIR, where the agents Monad stack had a WriterT with which to write events. The reason for that is that we treat agent-local abstractions differently here because of the need to encapsulate local agent state as explained in subsequent sections.

If the agent wants to remove itself from the simulation, it simply sets “aoKill” to True. If it wants to create new agents it adds an agent definition “AgentDef” to the aoCreate list. The agent definition AgentDef holds the new id of the agent<sup>1</sup>, the MSF of the agent to create and the initial output of the new agent. Consequently, it has a representation in the visual or textual output for the current step without the need to run the new agent.

```
data AgentDef m e o = AgentDef  
{ addId  
, adMSF  
, adInitOut  
}  
  
:: AgentId -- unique agent id  
:: AgentMSF m e o -- the agent behaviour function  
:: o -- the value of the initial output
```

Furthermore, the simulation must provide a global mechanism to create new, unique AgentIds for the newly created agents. The generating of ids for the new agents have to occur within the parent agents themselves. Because, in some models they might need this very id to communicate with their children and an indirection through the kernel would only complicate matters. Therefore, we start with a data definition, holding the next agent id. If an agent creates a new agent it simply reads that value and increments it by 1.

```
data ABSState = ABSState { absNextId :: AgentId }
```

To make it globally available to all agents a StateT ABSState Monad transformer is used, which is also the outermost Monad of the Monad stack of Sugarscape<sup>2</sup>.

```
type AgentMonad m = StateT ABSState m
```

Finally, we can define the polymorphic type of the agent MSF, as it is used in Sugarscape, where it is parametrised with model specific types in the next sections. It is similar to the event-driven SIR, where the agent takes the ABSEvent as input, but the output is now a tuple of “AgentOut” and the polymorphic agent output type o. The reason why the output type o is not part of AgentOut is to keep AgentOut a Monoid, which allows accumulative and iterative changes to AgentOut. The importance of this action comes through creating new agents and scheduling events, as explained in the agent-local abstractions below.

Deleted: already  
Deleted: to  
Deleted: to

Deleted: ,  
Deleted: so

Deleted: ids  
Deleted: b  
Deleted: W  
Deleted: thus

Deleted: ,  
Deleted: which is important for

```
type AgentMSF m e o = MSF (AgentMonad m) (ABSEvent e) (AgentOut m e o, o)
```

<sup>1</sup>An agent-controlled id makes it possible to reuse ids in case an agent dies and in case the ids have no other purpose than identifying event receivers in a model.

Deleted: s

<sup>2</sup>In the Sugarscape implementation, "ABSState" also holds the current simulation time, which is omitted here for clarity reasons.



### 5.2.3 Shared Mutable Proactive Environment

In many agent-based models, agents are placed on a discrete 2D grid environment and can move around and interact with the environment. Often, there exist specific constraints. For example, each position can only be occupied by one agent at most. This restriction requires specific iteration semantics, which make it impossible that two agents end up at the same time in the same spot. In general, such models solve this problem by using the sequential strategy as described in Chapter 2.3.1, where agents are run in random order, one after another. This allows the agents to access the globally shared, mutable environment exclusively when it is their turn and they interact and change it without the danger of other agents interfering.

Deleted: m

Deleted: p

Deleted: e

Deleted: ,

Deleted: f

Deleted: that

To implement a shared, mutable and proactive environment, first we define a generic discrete 2D grid environment with polymorphic cells. The selection of the right data structure is crucial. Initially we used an "IArray" from the array library [104]. This data structure has excellent read performance, but in performance tests we experienced serious performance and memory leak issues with updates. This issue lead to allocation of about 40 MByte per second on our machine. Clearly this is unacceptable for simulation purposes, where software often runs for hours and requires memory consumption to stay within reasonable bounds. The solution was to switch to IntMap from the container's library [105] as an underlying data structure which solved both the performance and memory leak issues.

Deleted: ,

Deleted: , leading

Deleted: , which

```
type Discrete2dCoord = (Int, Int)
type Discrete2dCell c = (Discrete2dCoord, c)
type Discrete2d c   = Map.IntMap (Discrete2dCell c)
```

Having introduced the AgentMSF and fixed the AgentMonad with the StateT ABSState as the outermost Monad, adding a globally shared, mutable environment is straightforward. The solution is to simply add another StateT Transformer with the given environment as type. Below, we give the parametrised definition as in the Sugarscape implementation. Sugarscape closes the Monad stack with the Rand Monad as stochastics, which play an important role in the Sugarscape model as well. Therefore, a full expansion of the Monad stack used in Sugarscape is StateT ABState (StateT SugEnvironment (Rand g)) is as follows:

```
data SugEnvSite = SugEnvSite
{ sugEnvSiteSugarLevel :: Double
, sugEnvSiteSpiceLevel :: Double
, sugEnvSitePolutionLevel :: Double
...
}
type SugEnvironment = Discrete2d SugEnvSite
type SugAgentMonad g = AgentMonad (StateT SugEnvironment (Rand g))
```

When implementing the proactivity of the environment, we must make a clear distinction between the environment's data structure, how agents access it, and the environment's behaviour. In the Sugarscape model, the behaviour of the environment is quite trivial, as it simply regrows resources over time and diffuses pollution in case the pollution is turned on. This behaviour is achieved by providing a pure function without any monadic context or MSF. This is not necessary because the environment in which we implement it, does not encapsulate local state and it does not interact with agents through messages and vice versa. Thus, a pure function of type "Time → SugEnvironment → SugEnvironment", which maps the environment to the environment is enough for our purpose. It also takes the current simulation time so it can implement seasons, where the speed of regrowth of resources is different in different regions and swaps after some time. This function is called in the simulation kernel after every Tick.

Generally, one can distinguish between four different types of environments in ABS:

1. Passive Read Only - Implemented in Chapter 4.3, where the environment itself is not modelled as an active process and is static information, for example, a list of neighbours, passed to each agent. The agents cannot change the environment actively and in the case of Chapter 4.3, this is enforced at compile time by simply making it read only. It becomes input to the agent but does not add it to the output type of an agent. The agents change the environment implicitly by changing their state, but there is no notion of an active environment process.

Deleted: .

2. Passive Read and Write - The environment is just shared data, which can be accessed and manipulated by the agents. This situation forces some arbitration mechanism to prevent conflicting updates. An example for preventing these updates would be, running the agents sequentially one after the other, to ensure that only one agent has access at a time.

Deleted: how

3. Active Read and Write - As implemented above. To make it active a pure function is used where the environment data is owned by the simulation kernel and then made available to the agents through a State Monad. Another approach would be to implement

Deleted: r

Deleted: o

Deleted: i

Deleted: ,

Deleted: f

Deleted: ,

Deleted: as

Deleted: ing

Deleted: r

Deleted: w

Deleted: ,

Deleted: for example

Deleted: r

Deleted: w

Deleted: a

the environment process as an agent, which is run together with all the other agents. This allows the environment to send and receive messages, but the guarantees about when the environment will be run is lost if agents are run sequentially in random order.

4. Active Read Only - Can be implemented as above but instead of providing the environment data through a State Monad, a Reader Monad is used. The environment data is owned by the simulation kernel and the process runs as a pure function as before, but the data is provided in a read only way through the Reader Monad. The same can also be achieved by passing it as input only to the agent as was done in Chapter 4.3.

#### 5.2.4 Agent-Local Abstractions

After having established Sugarscape's full Monad stack, we can now move on to specify the agent behaviour and develop advanced agent-local concepts and abstractions.

Before we can parametrise the AgentMSF, we need to define model-specific data definitions for the event type e and the output type o. Thus, we define the event type "SugEvent", which defines all the event types of Sugarscape and the output type "SugAgentObservable", which contains all observable properties, an agent wants to communicate to the outside world, for visualisation or exporting purposes.

```
data SugEvent = MatingRequest AgentGender
  | MatingReply
    (Maybe (Double, Double, Int, Int, CultureTag, ImmuneSystem))
  ...
data SugAgentObservable = SugAgentObservable { sugObsSugMetab :: Int -- metabolism
, sugObsSugLvl :: Double -- sugar wealth , sugObsAge :: Int -- current age ...
}
```

We can now parametrise the AgentMSF with the right types for the Sugarscape model.

```
type SugAgentMSF g = AgentMSF (SugAgentMonad g) SugEvent SugAgentObservable
```

Next, we define the type of the top-level agent behaviour function. We want to make the unique agent id and the model configuration (scenario) explicit, so it will be passed as curried arguments to the function. Furthermore, the initial agent state is passed as curried input as well.

```
data SugarScapeScenario = SugarScapeScenario
{ sgScenarioName :: String
, sgPollutionActive :: Bool
...
}
data SugAgentState = SugAgentState
{ sugAgSugarMetab :: Int -- metabolism
  , sugAgVision :: Int -- vision in all four directions
}
```

Deleted: r  
Deleted: o  
Deleted: c

Deleted: l  
Deleted: a

Deleted: -

- , sugAgSugarLevel :: Double -- sugar wealth , ...
- }
- type SugarScapeAgent g
- = SugarScapeScenario -> AgentId -> SugAgentState -> SugAgentMSF g

Now we have fully specified types for the Sugarscape agent. The types indicate very clearly the intention and the interface. What is of high importance is that we don't have any impure IO monadic context anywhere in our type definitions and we can also guarantee that it will not someday sneak in. The transformer stack of the agents MSF is terminated through the Rand Monad. consequently, it is simply not possible to add other layers.

**Deleted:** very

**Deleted:** get sneaked in

**Deleted:** thus

An agent is fully represented by a top level SugarScapeAgent function, which encapsulates the whole agent behaviour. Next we will look at how to define agent-local behaviour, which is hidden behind the SugarScapeAgent function type. Whereas the previously defined types are exposed to the whole simulation, the following section deals with types and behaviour which are locally encapsulated and hidden from the simulation kernel. In the next sections we show how to encapsulate the agents' state locally while retaining mutability. Further, we explain how sending of events works in the Sugarscape implementation and how to achieve read-only access to the agents unique id and the model configuration.

**Deleted:** We next

**Deleted:**

#### 5.2.4.1 Agent-local state

To implement the local encapsulation of the agents' state is straightforward with MSFs as they are continuations, allowing them to capture local data using closures.

Fortunately we do not need to implement the low-level plumbing, as Dunai provides us with the suitable function feedback :: Monad m ⇒ c → MSF m (a, c) (b, c) → MSF m a b. It takes an initial value of type c and an MSF which takes in addition to its input a also the given type c and outputs in addition to type b also the type c, which clearly indicates the read and write property of type c. The function returns a new MSF which only operates on a as input and returns b as output by running the provided MSF and feeding back the c (with the initial c at the first call).

```
sugarscapeAgent :: RandomGen g => SugarScapeAgent g
sugarscapeAgent scen aid s0 = feedback s0 (proc (evt, s) -> do ... )
```

Before we can move on to write a function handling incoming events, we need to define the agent-local Monad stack. The event handler must be able to manipulate the agent-local state we just encapsulated through feedback, support reading the unique agent id and model scenario and scheduling of events.

Providing the local, mutable agent state is done using a State Monad. Providing the model configuration (scenario) and the unique agent id is done using the Reader Monad. For implementing event scheduling, a Writer Monad is used, which is the same mechanism as in the event-driven SIR. As the Monoid type for WriterT, the AgentOut is used. All fields of its data definition are Monoid instances, making AgentOut a Monoid as well, thus writing a type class instance for it is trivial. This approach allows to easily add new agent definitions and mark an agent for removal throughout the agents behaviour. Further, it should be clear now why AgentOut contains the list of events, as discussed in

the previous section 5.2.2. Having established this, we define the agent local Monad which is only used within AgentMSF.

```
type AgentLocalMonad g = WriterT (SugAgentOut g)
    (ReaderT (SugarScapeScenario, AgentId))
-- FULLY EXPANDS TO:
(StateT SugAgentState (SugAgentMonad g)))
```

CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 83

```
-- WriterT (SugAgentOut g)
-- (ReaderT (SugarScapeScenario, AgentId))
```

```
-----
```

```
(StateT SugAgentState
(StateT ABSState
(StateT SugEnvironment
(Rand g))))
```

Now we can define the MSF which handles an event. It has the AgentLocalMonad monadic context, takes an ABSEvent parametrised over SugEvent (it has also to handle Tick). What might come as a surprise is that it returns unit type, implying that the results of handling an event are only visible as side effects in the Monad stack. This is intended. We could pass all arguments explicitly as input and output but that would complicate the handling code substantially, thus we opted for a monadic, imperative style handling of events.

```
type EventHandler g = MSF (AgentLocalMonad g) (ABSEvent SugEvent) ()
```

To run the handler within the SugarScapeAgent, we make use of Dunai's functionality which provides functions to run MSFs with additional monadic layers within MSFs. We use runStateS, runReaderS and runWriterS (S indicates the stream character) to run the generalEventHandler, providing the initial values for the respective Monads, s for the StateT, (params, aid) for the ReaderT and the evt as the input to the event handler. WriterT does not need an initial value, it will be provided through the Monoid instance of AgentOut.

```
sugarscapeAgent :: RandomGen g => SugarScapeAgent g
sugarscapeAgent scen aid s0 = feedback s0 (proc (evt, s) -> do
  (s', (ao', _)) <- runStateS
  (runReaderS
    (runWriterS generalEventHandler)) -< (s, ((scen, aid), evt))
  let obs = sugObservableFromState s
  returnA -< ((ao', obs), s'))
```

```
sugObservableFromState :: SugAgentState -> SugAgentObservable
generalEventHandler :: RandomGen g => EventHandler g
```

Now it is also clear why the output of an agent is a tuple of AgentOut and the polymorphic type o: the latter one is parametrised to SugAgentObservable, which is not

constructed through the use of WriterT but simply a projection of the agent state through sugObservableFromState. In the next section we explain the details of generalEventHandler, which implements the main event handling mechanisms of an agent.

#### 5.2.4.2 Handling and sending of events

Now we are ready to implement handling of events on an agent-local level: we receive the events from the simulation kernel as input and run within a six-layered Monad Transformer stack which is partly global, controlled by the simulation kernel, and partly local to the agent, controlled by the agent itself. The layers are the following (inner to outer):

#### CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 84

1. WriterT (SugAgentOut g) - local; provides write-only functionality for constructing the agent output for the simulation kernel communicating whether to kill the agent, a list of new agents to create and a list of events to send to receiving agents.
2. ReaderT (SugarScapeScenario, AgentId) - local; provides the read-only model configuration and unique agent id.
3. StateT SugAgentState - local; provides the local mutable agent state.
4. StateT ABSState - global; provides unique agent ids for new agents.
5. StateT SugEnvironment - global; provides the Sugarscape environment which the agents can read and write.
6. Rand g - global; provides the random-number stream for all agents.

Finally we can implement the event handler generalEventHandler, which simply matches on the incoming events, extracts data and dispatches to respective handlers. What is crucial here to understand is that only the top level sugarscapeAgent and the EventHandler function are MSFs which simply dispatch to monadic functions, implementing the functionality in an imperative programming style. The main benefit of the MSFs are their continuation character, which allows to encapsulate local state. An additional benefit of MSFs is that the Dunai library adds a lot of additional functionality of composing MSFs and running different monadic context on top of each other. It even provides exception handling through MSFs with the Maybe type, thus programming with exceptions in ABS models can be done as well. We didn't make use of exceptions, as the Sugarscape model simply does not specify any exception handling on the model level and there was also no opportunity to use exceptions from which to recover on a technical level <sup>3</sup>.

```
generalEventHandler :: RandomGen g => EventHandler g
generalEventHandler =
```

```
continueWithAfter -- optionally switching the top event handler (proc evt ->
```


```
case evt of
  Tick dt -> do
    mhdl <- arrM handleTick -< dt
    returnA -< ([], mhdl)
```

```

(DomainEvent sender (MatingRequest otherGender)) -> do
    arrM (uncurry handleMatingRequest) -< (sender, otherGender)
    returnA -< ([], Nothing)
...
handleTick :: RandomGen g => DTime -> AgentLocalMonad g (Maybe (EventHandler g))
handleMatingRequest :: AgentId -> AgentGender -> AgentLocalMonad g []

```

<sup>3</sup>There are exceptions on a technical level but they are non-recoverable and should never occur at runtime, thus the function error is used, which terminates the simulation with an error message.

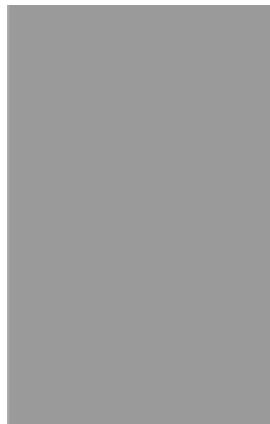

## CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 85

The use of continueWithAfter is a customised version of the already known switch combinator. It allows to swap out the event-handler for a different one, which is the foundation for the synchronous agent interactions, as discussed in the next section.

To see how an event handler works, we provide the implementation of handleMatingRequest. It is sent by an agent to its neighbours to request whether they want to mate with this agent. The handler receives the sender and the other agents gender and replies with sendEventTo which sends a MatingReply event back to the sender. The function sendEventTo operates on the WriterT to append (using tell) an event to the list of events this agent sends when handling this event. The use of agentProperty reads the value of a given field of the local agent state.

```

handleMatingRequest :: AgentId
    -> AgentGender
    -> AgentLocalMonad g []
handleMatingRequest sender otherGender = do
    -- check if the agent is able to accept the mating request:
    -- fertile + wealthy enough + different gender
    accept <- acceptMatingRequest otherGender

```

```

-- each parent provides half of its sugar-endowment for the new-born child acc <- if not
accept

    -- can't mate, simply send Nothing in MatingReply
    then return Nothing
    else do

        sugLvl <- agentProperty sugAgSugarLevel
        spiLvl <- agentProperty sugAgSpiceLevel
        metab <- agentProperty sugAgSugarMetab
        vision <- agentProperty sugAgVision
        culTag <- agentProperty sugAgCultureTag
        imSysGe <- agentProperty sugAgImSysGeno -- immune system genotype -- able to mate,
        send Just share in MatingReply

    return Just (sugLvl / 2, spiLvl / 2, metab, vision, culTag, imSysGe) -- reply to sender with
    MatingReply
    sendEventTo sender (MatingReply acc)

```

Finally, we have a look at how to actually run an agents' MSF using the function `runAgentMSF`. It is a pure function as well and thus takes all input as explicit arguments. It might look like an overkill to pass in five arguments and get a six-tuple as result but this is the price we have to pay for pure functional programming where everything is explicit, with all its benefits and drawbacks.

#### `runAgentMSF`

```

    ABSState, SugEnvironment, g)
runAgentMSF msf evt absState env g = (ao, obs, msf', absState', env', g')

```

where

```

-- extract the monadic function to run
msfAbsState = unMSF msf evt

:: RandomGen g
=> SugAgentMSF g
-> ABSEvent SugEvent
-> ABSState
-> SugEnvironment
->g
-> (SugAgentOut g, SugAgentObservable, SugAgentMSF g,

-- ^ RandomGen type class for g
-- ^ agents MSF to run.
-- ^ event it receives.
-- ^ ABSState (next agent id and current time)
-- ^ environment state
-- ^ random-number generator

```

## CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 86

```
-- peel away one State layer: ABSState  
  
msfEnvState = runStateT msfAbsState absState  
-- peel away the second State layer: SugEnvironment  
msfRand = runStateT msfEnvState env  
-- peel away the 3rd and last layer: Rand Monad  
((((ao, obs), msf'), absState'), env'), g') = runRand msfRand g
```

We run only the three global monadic layers in here, the three local layers are indeed completely local to the agent itself as shown above.

### 5.2.5 Synchronous agent interactions


With the concepts introduced so far we can achieve already a lot in terms of agent interactions. Agents can react to incoming events, which are either the Tick event advancing simulation time by one step or a message sent by another agent, or the agent itself. This is enough to implement simple one-directional agent interactions where one agent sends a message to another agent but does not await an answer within the same Tick. One-directional interactions are used in the model to implement the passing on of diseases, the paying back of debt and passing on of wealth to children upon death, where in all cases the agent simply sends a message and forgets about it.

Unfortunately, this mechanism is not enough to implement the other agent interactions in the Sugarscape model, which are structurally richer as they need to be synchronous. In the use cases of mating, trading and lending, two agents need to come to an agreement over multiple interaction steps within the same Tick which need to be exclusive and synchronous. This means that an agent A initiates such a multi-step conversation with another agent B by sending an initial message to which agent B has to react by a reply to agent A who upon reception of the message, will pick up computation from that point and reply with a new message and so on. Both agents must not interact with other agents during this conversation to guarantee resource constraints, otherwise it would become quite difficult and cumbersome to ensure that agents don't spend more than they have when trading with multiple other agents at the same time. Also, the initiating agent A must be able to pick up processing of its Tick event from the point where it started the conversation with agent B because sending a message always requires handing the control back to the simulation kernel. See Figure 5.2 for a visualisation of the sequence of actions.

The way to implement this is to allow an agent to be able to change its internal event-handling state by switching into different event-handlers, after having sent an event, to be able to react to the incoming reply in a specific way by encapsulating local state for the current synchronous interaction through closures and currying. By making use of continuations, the agent can pick up the processing of the Tick event after the synchronous agent interaction has finished. Key to this is the function `continueWithAfter` which we already shortly introduced through `generalEventHandler` in the previous section. This function takes an MSF which returns an output of type b and an optional MSF. If this optional Maybe MSF is Just then the next input is handled by this new MSF.

## CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 87

Figure 5.2: Sequence diagram of synchronous agent interaction in the trading use case. Upon the handling of the Tick event, agent A looks for trading partners and finds agent B within its neighbourhood and sends a TradeOffer message. Agent B replies to this message with TradeReply and agent A continues with the trading algorithm by picking up where it has left the execution when sending the message to agent B. After agent A has finished the trading with agent B, it turns to agent C, where the same procedure follows.

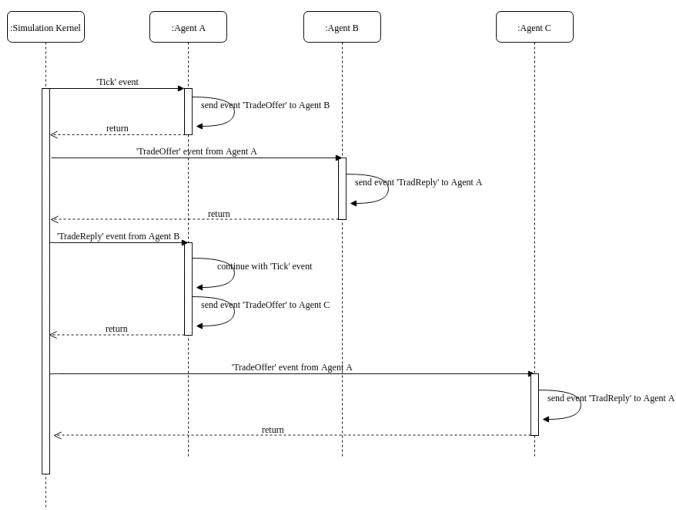

## CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 88

In case no new MSF is returned (`Nothing`), the MSF will stay the same. This is a more specialised version of the switch combinator introduced in Chapter 2.2.4 in the way that it doesn't need an additional function to produce the actual MSF continuation. The semantics are different though. Whereas switch runs the new MSF immediately, `continueWithAfter` only applies the new MSF in the next step. The implementation of the function is as follows:

```

continueWithAfter :: Monad m => MSF m a (b, Maybe (MSF m a b)) -> MSF m a b
continueWithAfter msf = MSF (\a -> do
  ((b, msfCont), msf') <- unMSF msf a
  let msfNext = fromMaybe (continueWithAfter msf') msfCont
  return (b, msfNext))
  
```

Finally, we can discuss the Tick handling function. It returns a value of type `"Maybe (EventHandler g)"` which if `Just` will result in a change of the top-level event handler through `_continueWithAfter` as shown in `"generalEventHandler"` above. Note the use of continuations in the case of `agentMating`, `agentTrade` and `agentLoan`. All these functions return a `Maybe (EventHandler g)` because all of them can potentially result in synchronous agent interactions which require changing the top-level event handler. The

Deleted: to change

function `"agentDisease"` is the last in the chain of agent behaviour, thus we are passing a default continuation which simply switches back into `"generalEventHandler"` to finish the processing of a Tick in an agent.

```
handleTick :: RandomGen g => DTime -> AgentLocalMonad g (Maybe (EventHandler g))
handleTick dt = do
    -- perform ageing of agent
    agentAgeing dt
    -- agent move, returns amount it of resources it harvested

    harvestAmount <- agentMove
    -- metabolise resources, depending on agents metabolism rate -- returns amount
    -- metabolised
    metabAmount <- agentMetabolism
    -- pollute environment given harvest and metabolism amount agentPolute
    harvestAmount metabAmount
    -- check if agent has starved to death or died of age ifThenElseM

    (starvedToDeath `orM` dieOfAge)
    (do
        -- died of age or starved to death: remove from simulation
        agentDies agentMsf

    return Nothing)
    -- still alive, perform the remaining steps of the behaviour
    -- pass agentContAfterMating as continuation to pick up after mating -- synchronous
    -- conversations have finished
    (agentMating agentMsf agentContAfterMating)

    -- after mating continue with cultural process and trading
    agentContAfterMating :: RandomGen g
        => AgentLocalMonad g (Maybe (EventHandler g))

    agentContAfterMating = do
        agentCultureProcess
        -- pass agentContAfterTrading as continuation to pick up after trading -- synchronous
        -- conversations have finished

    agentTrade agentContAfterTrading

    -- after trading continue with lending and borrowing
    agentContAfterTrading :: RandomGen g
        => AgentLocalMonad g (Maybe (EventHandler g))
    agentContAfterTrading = agentLoan agentContAfterLoan
    -- after lending continue with diseases, which is the step in a Tick event
    agentContAfterLoan :: RandomGen g
        => AgentLocalMonad g (Maybe (EventHandler g))
    agentContAfterLoan = agentDisease defaultCont
    -- safter diseases imply switch back into the general event handler
    defaultCont :: RandomGen g => AgentLocalMonad g (Maybe (EventHandler g))
```

```
defaultCont = return (Just generalEventHandler)
```

### 5.2.5.1 Tagless final

Although the indirect, continuation-based approach to synchronous agent interactions as shown before works, it is quite cumbersome, fragile and it is easy to get something wrong. What would be more desirable is to have a truly synchronous approach, where the reply to an event happens directly as a result of the "sendEventTo" function. In this case, when calling sendEventTo, behind the scenes the receiving agent is executed and the result is returned directly to the caller, without any indirections. With the tagless final approach as introduced in the event-driven SIR in section 5.1.4, this becomes possible in an elegant and robust way. We have developed this concept for the event-driven SIR only. It should be equally applicable for the Sugarscape, but we will leave that for further research. We start by extending the API by defining a new type class MonadAgentSync:

```
class Monad m => MonadAgentSync e m | m -> e where
    sendSync :: e -> AgentId -> m (Maybe [e])
```

The semantics behind the sendSync method are, that it allows to send an event of type e to agent with the id AgentId. If the agent cannot be found it will return Nothing. Otherwise it will return Just the list of events the receiving agent replies to the sending agent.

The only place which has to be changed is the susceptible agent, but due to the different semantics parts of its behaviour needs to be rewritten. The receiving agents are left unchanged because, at the moment a receiver has no means to distinguish between asynchronous and synchronous events and is not forced to reply to the sender in case of a synchronous event. It would be useful to have some mechanism in the event of a synchronous event, the receiver can only reply to the sender. We will leave that issue for further research.

Handling an incoming Contact from an Infected agent is no longer necessary as it will not happen, because the interactions go directly through "sendSync" and infected agents don't make contact proactively. Thus, the "MakeContact" handler has to be changed to take into account that the infection can happen directly there:

```
handleEvent MakeContact = do
    ais <- getAgentIds
    ai <- getMyId
    isInfected <- makeContact beta ai ais
    if isInfected
        -- got infected, signal event to switch
        then return (Just ())
    else do
        -- not infected, reschedule MakeContact
        scheduleMakeContact
        return Nothing
```

Deleted: continuation based

Deleted: shall be

Deleted: ,

Deleted: o

Deleted: ,

Deleted: as

Deleted: that in case

The function makeContact recursively “makeContactWith  $\beta$  (contact rate)” other agents. Whereas previously, sending a Contact event to itself was not a problem, this is not allowed anymore and must be prevented explicitly. The reason for that is discussed below when introducing the sendSync method of the pure interpreter. Sending to itself counts against the  $\beta$  contacts, as it would make no difference. Receiving a Contact from a Susceptible has no effect on a susceptible agent anyway. If the case arises in a model that agents need to send events to themselves, it cannot happen through mechanisms like sendSync but it must to go through the normal scheduling of events which decouples sending from receiving.

Commented [KJ23]: Deleted space between any and more

Deleted:

Deleted: as r

Deleted: has

```
makeContact :: (MonadAgent SIREvent m, MonadAgentSync SIREvent m) => Int -- ^
number of contacts to make
```

```
-> AgentId -- ^ sender agent id
-> [AgentId] -- ^ all agent ids (including self) -> m Bool
```

```
makeContact 0 _ _ = return False
makeContact n ai ais = do
```

receiver <- randomElem ais -- prevent sending to self if ai == receiver

```
-- self counts against beta contacts
then makeContact (n-1) ai ais
else do
  -- make contact
  ret <- makeContactWith receiver
  if ret
    -- got infected, stop
```

```
then return True
-- not infected, continue else makeContact (n-1) ai ais
```

Finally we can use sendSync to directly send events to a receiving agent, which replies with a list of events to the sender. We need to add the new “MonadAgentSync” type class to the overloaded function, to make the sendSync method available.

```
makeContactWith :: (MonadAgent SIREvent m, MonadAgentSync SIREvent m)
=> AgentId -> m Bool
```

```
makeContactWith receiver = do
ai <- getMyId
-- DIRECT SYNCHRONOUS AGENT INTERACTION HAPPENS HERE
```

CHAPTER 5. PURE FUNCTIONAL EVENT-DRIVEN ABS 91

```
retMay <- sendSync (Contact ai Susceptible) receiver
case retMay of
  -- receiver not found, no infection
```

```

Nothing -> return False
-- receiver found, replied with es events (Just es) -> do

    -- check if any event in replies is from Infected
    let fromInf = any (\(Contact s) -> s == Infected) es
    if not fromInf
        -- none from Infected, no infection

then return False
-- at least one from Infected, might become infected else do

    r <- randomBool inf
    if r
        -- got infected, become infected

then do

    scheduleRecoveryM ild
    return True
    else return False

```

The sendSync method needs to be implemented in a new pure interpreter, which follows exactly the same concept as scheduling an event so we briefly discuss it conceptually. The method looks up the receiving agent, runs it with the given event of the sender and filters the replies to the sending agent. To do that, the method needs to have all agents available to actually execute them. This is achieved by keeping the agent mappings in the SimState. They are managed using a State Monad and thus can be read and written, both of which are necessary, as after a successful run of the receiving agent, its new MSF needs to be put back into the agent mappings.

**Deleted:** -

**Deleted:** which both is

Now it becomes clear why an agent cannot send an event with sendSync to itself and why circular sendSync (agent A sendSync to agent B sendSync to agent C sendSync to agent A) are also not allowed. The new MSF of an agent which was just run and updated in the SimState will be overridden by the subsequent updates of runs which were initiated earlier. Fortunately, this can be conveniently checked within the sendSync method and an error or exception can be generated which is better than silently ignoring it, resulting in unexpected behaviour. It is possible that because the initiating agent's id is always known, and because it is easy to keep track of the agent ids currently engaged in a sendSync by storing their ids in the SimState, we can arrive, at some kind of call stack management.

**Deleted:** thus arriving

The idea of circular event sending is closely related to the concept of open recursion from object-oriented programming, where a method of an object can invoke another method of the same object directly or indirectly and still mutate that object. With our approach this is simply not possible due to the lack of mutable data and side effects.

Although the tagless final approach makes things easier under certain circumstances, it comes also with subtle drawbacks, thus it depends on the model semantics which approach to synchronous agent interactions should be chosen. Still we think that this approach is another demonstration of the usefulness of a tagless final approach. We

**Deleted:** -

**Deleted:** easier

have shown how to extend the existing API with new operations without breaking the existing implementation. Also we think that we only scratched the surface with this approach of direct synchronous agent interactions but we leave a more in-depth exploration of it for further research.

### 5.3 Discussion

In this chapter we have shown at length how to implement event-driven ABS purely functional. We built on the concepts developed in the previous Chapter 4 on time-driven ABS and substantially extended them by various new concepts, necessary for an event-driven approach. Throughout this chapter it became clear that an event-driven approach relies much more on side-effect than a time-driven one and thus requires the sequential update strategy, as side-effects always impose an ordering of execution.

Transforming a time-driven into an event-driven approach should always be possible because the ability to schedule events with timestamps allows to map all features of time-driven ABS to an event-driven one. The process of turning the time-driven SIR into an event-driven one should give a good direction of how this works. Still for some models one can argue that the time-driven approach is much more expressive than an event-driven one, and we think this is certainly the case for the SIR model. The event-driven approach leads to a quite fragmented logical flow and agent behaviour especially in the case of synchronous agent interactions. Still, we have shown a possible direction of reducing the fragmentation using the tagless final approach.

#### 5.3.1 A Related Approach

The work of [20] tries to solve a similar problem as we do in this chapter. The authors also use Haskell to implement ABS, and more specifically, look into the use of messages and the problem of when to advance time in models with an arbitrary number of synchronised agent interactions. The biggest difference is that we approach our agents fundamentally differently through the use of Monads and FRP. In our approach an agent is only a single MSF and thus cannot be directly queried for its internal state, its ID, or outgoing messages. Instead of taking a list of messages, our agents take a single event and can produce an arbitrary number of outgoing events together with an observable state. These actions would allow us to query the agent for its ID and its state by simply sending a corresponding event to the agents MSF and let the agent handle it. Additionally, the state of our agents is completely localised and there is no means of accessing the state from outside the agent, they are thus 'fully encapsulated agents' [20]. The authors define their agents with a polymorphic agent-state "type s", which implies that without knowledge of the specific type of s there would be no way of accessing the state, rendering it also fully encapsulated. The problem of advancing time in our approach is conceptually very similar. After sending

Deleted: a

Deleted: b

Deleted: c

Deleted: d

Deleted: e

Deleted: f

Deleted: g

Deleted: h

Deleted: i

Deleted: j

Figure 5.3: Three layered architecture of event-driven ABS.

a Tick message to each agent in random order, we process all agents until they are idle and there are no more enqueued events in the list. The similarities in both approaches might hint at that this seems to be indeed the 'right' way to go.

#### 5.3.2 Layered architecture


Our approach is designed as a triple layered architecture, see Figure 5.3:

1. Pure Functions are the work horses that do the actual computations of the simulation. They are mostly used to build up the 2nd layer. Additionally, layer 1 might access them to achieve pure computations when there is no need for effects.
2. Monad Transformer Stack (global and local) does the dirty work of effective computation: sending messages, mutating the environment, reading model configuration, drawing random numbers, mutating agent state. This layer uses the pure functions to build up its functionality and also propagates between the 1st and 3rd layer.
3. MSF is the backbone of the architecture and defines the dynamic structure of the system. This layer builds heavily on the 2nd layer and can also be seen as a high-level delegation mechanism.


Separating those three concerns from each other makes the code more robust, easier to refactor and maintain. Further it makes code much easier to test as will be shown in Chapter 9.

### 5.3.3 Imperative Nature

Both event-driven use cases make heavy use of the State Monad, thus one might ask what the benefits are of our pure functional approach. After all, we seem to fall back into stateful, imperative-style of programming. The crucial point is that it is highly restricted to very specific types and operations. In the Monad stack we control the operations possible in the respective layers, for example sending events is a write-only operation, accessing the unique agent ID and the model

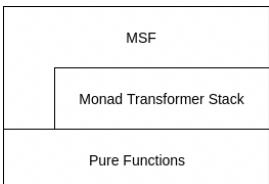

configuration is read only. All this is guaranteed at compile time, which makes it much more manageable, maintainable, robust, composable and testable. To quote John Carmack [28]: "A large fraction of the flaws in software development are due to programmers not fully understanding all the possible states their code may execute in.". We claim that despite using an imperative style, the static guarantees of the types we operate on and the operations provided, make it easier to fully understand the possible states of the simulation code. This is directly related to the power of polymorphism in Haskell, which goes far beyond the polymorphism of existing object-oriented<sup>4</sup> languages. We see a particular instance of that in the polymorphism we developed in the concepts behind Sugarscape where we can compose effects depending on the model and we can easily swap out environment and events with very few changes with the benefit that the compiler will inform us about breaking changes. This is directly related to refactoring, which is very convenient and quickly becomes the standard in the development process. Guided by defining types first and relying on the compiler to point

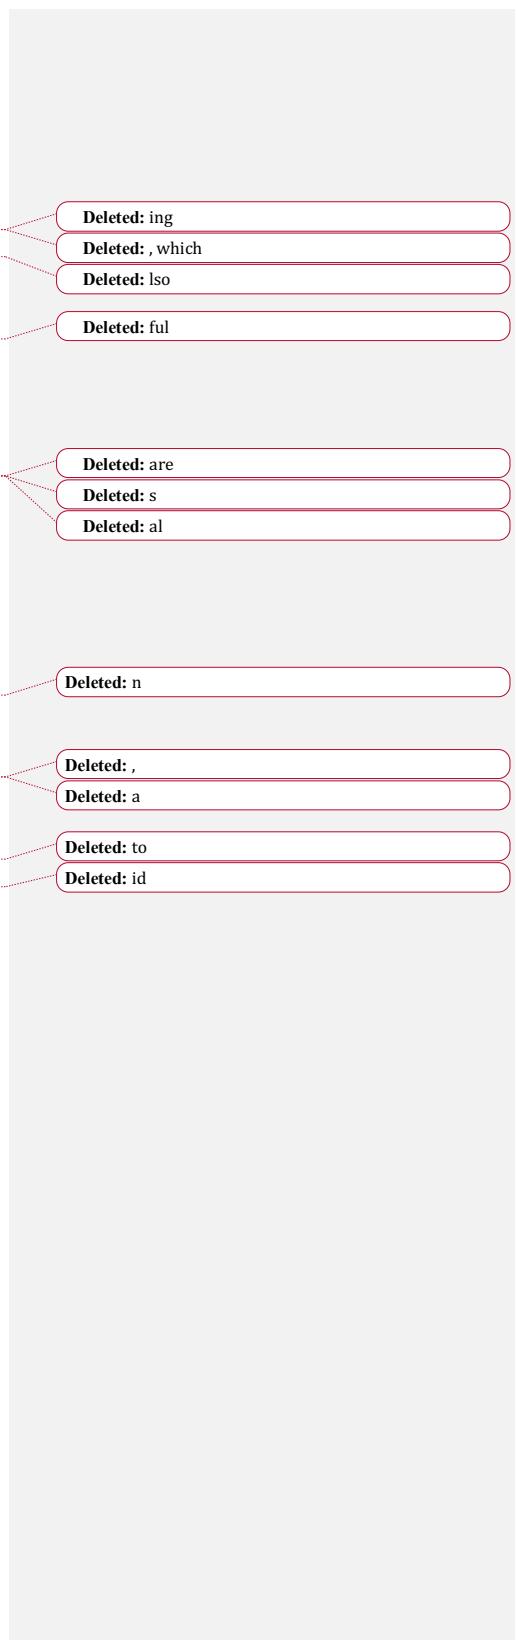

out problems, results in very effective and quick changes without danger of bugs showing up at run time. This is not possible in dynamic object-oriented languages like Python because of its lack of a compiler and types, and is also much less effective in Java due to its rather dynamic type system which is only remedied through strong IDE support.

#### 5.3.4 Handling IO

This thesis directly capitalises on the fact that most ABS models are primarily of computational nature, thus CPU bound, not involving IO inside the agents while running the simulation. The concurrent approach with Software Transactional Memory in Chapter 8 is an exception but at least we retain the guarantees that the non-determinism within the agent behaviour originates from the concurrency using Software Transactional Memory and nothing else. Even if some IO is required, like rendering the simulation as we did in Sugarscape, due to the loose coupling and compositional qualities of pure functional programming it is straightforward to separate these concerns and keep the impure rendering parts from the pure agent behaviour.

If there arises the use case where agents absolutely need to perform some impure IO within their behaviour, then there ~~are~~ three options. The first one is to let agents construct IO actions and pass them to the simulation kernel for execution, requiring the simulation kernel to run now in IO instead of being pure. This is especially suitable for one-way IO actions, where an agent does not need to synchronously wait for a result. If a synchronous IO action is required with the agent waiting for a result, it could be communicated back from the simulation kernel. This keeps the agent behaviour still pure, but with the consequence of indirection and higher complexity. The second option is to use a tagless final approach as discussed in Chapter 5.1.4, where the actions requiring IO are abstracted behind methods of the given type class, for which

<sup>4</sup>Polymorphism is not unique to object-oriented programming.

~~Deleted: exist~~

then an interpreter running in IO has to be written. The benefit is that this allows for direct synchronous IO behaviour, while still restricting the available operations to only the required ones instead of running fully in the IO Monad as would be the third option.

~~Deleted: a~~

In all cases everything becomes possible and all bets are off regarding static guarantees and reproducibility, whereas the tagless final approach provides the most control.

### 5.3.5 Multiple types of Agents

Deleted: a

In the Sugarscape example we have only considered one type of agents, thus the whole population is a homogeneous one in regards of the type of the agent. It is quite straightforward to have heterogeneous agent types as well, which is accomplished through adding additional data declarations to the observable output and the agent state. A consequence is that all agent types have to speak the same event language, because in regards of types the agents are treated the same way. This is also true for the monadic stack where different agent types cannot have different effect types in this approach as they are seen as the same on the type level.

### 5.3.6 Performance

The event-driven implementation from this Chapter is around 60 - 70% faster than the time-driven implementation from Chapter 4.1, which is non-monadic and uses the FRP library Yampa. For the monadic time-driven approach of Chapter 4.3 the difference is much more dramatic as it is about 700 - 800% faster. These results dramatically highlight the problem of time-driven ABS and shows that its performance cannot compete with an event-driven approach. This situation is exaggerated even more so when making use of MSFs as in Chapter 4.3. In this case, a time-driven approach becomes extremely expensive in terms of performance and one should consider an event-driven approach. In case the model is specified in a time-driven way, a transformation into an event-driven approach should always be possible as outlined above.

We compared an event-driven SIR implementation we did in Java to the Haskell one here. We run for 150 time steps with 1,000 susceptible and 1 infected agent,  $\beta = 1$ ,  $\gamma = 0.05$ ,  $\delta = 15$ . Further, we fixed the random-number generators to guarantee identical dynamics in every run and averaged 8 runs. The Java implementation averages at 1.2 seconds, whereas the Haskell implementation at 6.8 seconds. These performance figures are closer than the ones in the time-driven approach of the previous chapter. This shows that event-driven indeed performs much better and is also more flexible as [119] has pointed out. Curiously, the time-driven Java implementation outperforms the event-driven one. Although, we have improved the performance substantially compared to the time-driven approach, we address it more in depth in the chapter 7 on parallelism and chapter 8 concurrency.

Deleted: is

Deleted: performing

Deleted: s

Deleted: 7

Deleted: 8

### 5.3.7 Conclusion

Overall, we think that this event-driven approach is quite feasible and is the way to go to implement ABS in a pure functional way. The time-driven approach is quite expressive but is not as flexible and general as the event-driven one. Additionally the performance is considerably better in an event-driven approach.

Deleted: Iso

We conclude that synchronous agent interaction is the most difficult part to figure out and get right and thus poses the greatest challenge. This concept is indeed cumbersome and clearly more complex than direct method invocation in object-oriented programming. Unfortunately, with the goal of staying pure we do not have much other options. We didn't aim to encapsulate its complexity behind domain-specific combinators, but this is certainly possible and should reduce the difficulty and complexity considerably. This is left for further research and open work which should be undertaken in the future, when putting all the concepts of this thesis into a general purpose library for pure functional ABS in Haskell.

Deleted: as

Deleted: t

## Chapter 6

### Parallel ABS

In the introduction in Chapter 1, this thesis hypothesised that functional programming should allow the easy application of parallel computation to ABS. The subsequent two chapters tests this hypothesis by performing a deeper investigation of the potential of parallel programming offered by pure functional programming to apply to ABS. An additional motivation for this undertaking is the notorious performance problems of our time and event-driven implementations. And the work in these chapters can be seen as an attempt to at least mitigate the notorious performance problems of functional programming.

Deleted: to easily apply

Deleted: are

Deleted: -

Deleted: ,

Deleted: a

It is reasonable to say that pure functional programming as in Haskell is well known and accepted as a remedy against the difficulties and problems of parallel computation [80]. The reason for it is that immutable data and explicit control of side effects removes a large class of bugs due to data conflicts and data races. A fundamental benefit and

strength of Haskell is that it clearly distinguishes between parallelism and concurrency in its types [95]. It is very important for us to do so in this thesis as well:

- Parallelism - in parallelism, code runs in parallel solely for the purpose of doing more work within the same time frame, without interfering with other code through shared data (references, mutexes, semaphores,...). An example is the function map ":: (a → b) → [a] → [b]", which maps each element of type a to b using the function "(a → b)". It is a pure function and thus no sharing of data either through some monadic context or through the function (a → b) is possible. This opens the potential to run it in parallel as each function evaluation (a → b) could theoretically be executed at the same time, if we had enough CPU cores. Whether it actually runs in parallel or not has no influence on the outcome as it is not subject to any non-deterministic influences. Thus, we identify parallelism with pure and deterministic execution of data transformations in parallel (data parallelism).
- Concurrency - concurrency refers to the decomposability property of a program, algorithm, or problem into order-independent or partially-ordered components or units [102]. Those parts can be run in parallel, which as a consequence, might give rise to asynchronous, non-deterministic events<sup>1</sup>.

An example is two threads, running in parallel, which share data through a reference. Depending on the scheduling and the code, which is run in each thread, they may, give rise to very different access patterns to the events to the shared data, with the potential for race conditions and dirty reads. In concurrency, per definition ordering is important. The challenge of implementing parallel, concurrent programs is to write the program in a way that, despite these non-deterministic events, the program still works correctly. Thus, we identify concurrency with a parallel, impure, non-deterministic execution of imperative-style and ordered monadic evaluation.

In the next two chapters we investigate the application of both parallelism and concurrency to our pure functional ABS approach. In general, we want to see if and how parallel and concurrent programming in Haskell is transferable to pure functional ABS and what the benefits are. In particular, we are interested in speeding up the existing implementations by generally developing techniques that allow us to run agents in parallel<sup>2</sup>.

The focus here is primarily on the conceptual nature of how to apply parallelism and concurrency to pure functional ABS, thus we refrain from doing in-depth performance analysis up front as it is beyond the scope of this work. Still, we are very well aware that mindlessly trying to apply parallel computation can actually result in loss of performance as a problem. Moreover, parallel computation can only be sped up in so far as we can partition it and run those partitions in parallel. Further more, parallel computation comes with an overhead. If the partitioning is too fine, this overhead might eat up the speedup, or make it even worse. Thus, in real-world problems, performance measurements have to come first. Then, one can investigate where and why the performance is lost. Only if this is understood properly can one then decide whether parallelism or concurrency is applicable, or if neither is applicable, because the problem is actually completely sequential.

Deleted: actually

Deleted:

Deleted: are

Deleted: this

Deleted: s

Deleted: -

Deleted: -

Deleted: and t

Deleted: ,

Deleted: of

Deleted: it is still a correctly working program

Deleted: -

Deleted: and

Deleted: i

Deleted: - grained

Deleted: ,

Deleted: t

Deleted: one can

Deleted: -

Deleted: none at all

Besides performance improvement, we are generally interested in the implications of the way Haskell deals with parallelism and concurrency in its types. In particular, we ask about the ability of keeping deterministic guarantees about the reproducibility of our simulations. We hypothesise that parallelism will allow us to retain all static guarantees about reproducibility and gives us noticeable speedup. What is more, we hypothesise that in concurrency we might see a bigger speedup, but sacrifice the guarantee about reproducibility. However,

<sup>1</sup>The functional concurrent programming language Erlang [5], which uses the actor model for its concurrency model, was single threaded from its conception in 1986 until around 2008. This description might sound surprising, but it underlines the fact that concurrency per se has nothing to do with parallel execution.

<sup>2</sup>We use the term parallel to identify both parallelism and concurrency and we distinguish between them whenever necessary using their respective terms.



we assume that by using Haskell's unique approach to Software Transactional Memory, we don't lose this guarantee completely. But, the Software Transactional Memory will become weaker, by guaranteeing that the non-deterministic influence is through concurrency only and nothing else.

## Chapter 7

### Parallelism in ABS

The promise of parallelism in Haskell is compelling: speeding up the execution but still retaining all static compile time guarantees about determinism. In other words, using parallelism could give us substantial performance improvement without sacrificing the static guarantees of reproducible outputs from repeated runs with initial conditions.

Generally, parallelism can be applied whenever the execution of code is order-independent, referential transparent, and has no implicit or explicit side effects. In this section we introduce the two most important parallelism concepts of Haskell, evaluation and data-flow parallelism. Then we discuss their potential use in pure functional ABS in

Deleted: a  
Deleted: Further  
Deleted: ,  
Deleted: very

Deleted: ,  
Deleted: b  
Deleted: it  
Deleted: get weakened

Deleted: a

Deleted: that is  
Deleted: ,  
Deleted: ,  
Deleted: and

general. We follow [116] and refer to it for an in-depth discussion. Furthermore, we show how these concepts can be added to our previously discussed use cases in Chapters 4.1, 4.3 and Sugarscape. We then compare their performance over the original sequential approaches.

## 7.1 Evaluation Parallelism

Evaluation parallelism introduces so called strategies to evaluate lazy data structures in parallel. Example, strategies would be to evaluate a list, or tuples in parallel where a spark is created for each element. The fundamental concept Haskell uses to achieve evaluation parallelism is its own non-strictness nature. Non-strictness means that expressions are not eagerly evaluated when defined, like in imperative programming languages but only evaluated when their result is actually needed. This is implemented internally using thunks, which are pointers to ex-pressions. When the value of an expression is needed, this thunk is accessed and the expression is reduced until the next data constructor or lambda expression is encountered. This is called Weak Head Normal Form (WHNF) evaluation because it only reduces the 'head' of the expression, which could consist of sub expressions. This indirection, the separation of data creation from consumption and evaluation, enables evaluation parallelism and Haskell provides two additional functions to support this:

- “`par :: a → b → b`” returns the second argument b but evaluates the first argument a in parallel. It is used when the result of evaluating a is required later.
- “`seq :: a → b → b`” returns the second argument b but is strict in its first argument, which means it forces its evaluation to WHNF. It is used when the result of evaluating a is required now.

Internally, evaluation parallelism is handled through so-called sparks, which are thunks evaluated in parallel. The Haskell runtime system manages sparks and distributes them to threads where they get executed. Due to their extremely light-weight nature, it is easy to create tens of thousands of sparks. One has to bear in mind that, although evaluating in parallel through sparks is extremely cheap, it still has some overhead. Thus, if the work load of each element in a list might be too low for a spark, then one can distribute thunks of a list onto a single spark. All this works without side effects and the strategy combinators are all pure functions building on par and seq. This action allows us to add parallelism to an algorithm by applying a parallel evaluation strategy to its result which could be a lazy list. This is made possible by the non- strictness nature of Haskell, which separates the construction of data from its consumption.

### 7.1.1 Evaluation Parallelism in ABS

Using compositional parallelism is exactly what we used to aim at adding evaluation parallelism for agent execution in the non-monadic SIR implementation in Chapter 4.1. We know that the whole simulation is a completely pure computation because Yampa is non-monadic. Consequently, it is guaranteed that there are no side effects. Moreover, agents are then run conceptually in parallel using map, which should enable us to add parallelism without needing to reimplement dpSwitch (the function running the agents in parallel).

Deleted: -  
Deleted: of  
Deleted: and

Deleted: p

Deleted: s are  
Deleted: for each element

Deleted:  
Deleted: no problem

Deleted: c

Deleted: p

Deleted: of  
Deleted: ,  
Deleted: thus  
Deleted: Thus

The solution is to add evaluation parallelism in the agent-output collection phase, where the recursive switch into the “stepSimulation” function happens. It is there where we use an evaluation strategy to evaluate the outputs of all agents in parallel. The agents will then be evaluated in parallel due to compositional parallelism, when we force the output of each in parallel. We provide more details on this topic in a short case study in section 7.3.1.

Deleted: ,

Deleted: give

Deleted: f

Deleted: p

Deleted: reason about

## 7.2 Data-Flow Parallelism

When relying on a lazy data structure to apply parallelism is not an option, evaluation strategies as presented before are not applicable. Furthermore, although lazy evaluation brings compositional parallelism, it makes it hard to evaluate performance. Data-flow parallelism offers an alternative over evaluation strategies, where the programmer can give more details, but gains more control as data dependencies are made explicit and reliance on lazy evaluation is avoided [117].

Data-flow parallelism is implemented through the Par Monad, which provides combinators for expressing data flows. In this Monad it is possible to fork parallel tasks which communicate with each other through shared locations, so called “IVars”. Internally these tasks are scheduled by a work-stealing scheduler, which distributes the work evenly on available processors at runtime. IVars behave like futures or promises which are initially empty and can be written once. Reading from an empty IVar will cause the calling task to wait until it is filled. An example is a parallel evaluation of two fibonacci numbers:

```
runPar (do
  i <- new
  j <- new
  fork (put i (fib n))
  fork (put j (fib m))
  a <- get i
  b <- get j

  return (a,b)

-- create new IVar
-- create new IVar
-- fork new task compute fib n and put result into IVar i
-- fork new task compute fib m and put result into IVar j
-- wait for the result from IVar i and collect it
-- wait for the result from IVar j and collect it
-- return the sum
```

Note that data-flow parallelism makes it possible to express parallel evaluation of a list or a tuple, as with evaluation strategies. The difference though is that data-flow parallelism does avoid lazy evaluation. More importantly, putting a value into an IVar requires the type of the value to have an instance of the NFData type class. This simply means that a value of this type can be fully evaluated, not just to WHNF but to evaluate the full expression to the value it represents.

Deleted: ,

Deleted: it

### 7.2.1 Data-Flow Parallelism in ABS

The Par Monad seems to be a very suitable mechanism to enable agents to express data-flow parallelism within their behaviour. This is only possible with the monadic ABS approach as in the time-driven SIR implementation of Chapter 4.3 and event-driven ABS of Chapter 5 in general. An important fact is that if the Par Monad is used, it has to be the innermost Monad because it cannot be a transformer. This is emphasised by the fact that no ParT transformer instance exists as in other Monads. Making the Par Monad a transformer would have the same semantics as running the bind in parallel. It is quite clear that this simply makes no sense, as bind is a function for composing and sequencing monadic actions, which generally involves side effects of some kind. Side effects inherently impose some sequencing where evaluation of different sequences has different meanings in general, resulting in the sequential nature of bind. Therefore, running monadic code in parallel is simply not possible due to side effects<sup>1</sup> and thus, there is no (meaningful) way to put the Par Monad into a Transformer stack.

<sup>1</sup> Additionally, it would not be very clear what we are running in parallel within the bind operator as there is nothing to parallelise. For example, there is no structure over which we can parallelise in general.



### 7.3 Case Studies

In this section we go into a little bit more detail as to how to apply the parallelism concepts that were already outlined above to our use cases from Chapters 4.1, 4.3 and Sugarscape. All timings are rough averages over multiple runs and not precise measurements because that is not the point here. We are only interested in showing what rough potential there is for speeding up computation through deterministic parallelism. Again, we are not interested in high-performance computation, but rather in conceptual comparisons between sequential and parallel implementations.

#### 7.3.1 Non-monadic SIR

Deleted: f

Deleted: p

Deleted: there exists

Deleted: , like

Deleted: of

Deleted: in general

Deleted: in general

Deleted: Besides

Deleted: be not

Deleted: in general

Deleted: ,

Deleted: f

Deleted: s

Deleted: into

Deleted: as

Deleted: here

In evaluation parallelism, as outlined above, we want to apply parallelism to agent evaluation by composing the output with parallel evaluation through slightly changing the function "switchingEvt". This function receives the output of all agents from the current simulation step and generates an event to recursively switch back into "stepSimulation" to compute the next simulation step. The code is as follows:

```
switchingEvt :: SF ([], [SIRState]) (Event [SIRState])
switchingEvt = arr (\(, newAs) -> parEvalAgents newAs)
```

where

```
-- NOTE: need a seq here otherwise would lead to GC'd sparks because
-- the main thread consumes the output already when aggregating, so using seq -- will
force parallel evaluation at that point
parEvalAgents :: [SIRState] -> Event [SIRState]
parEvalAgents newAs = newAs `seq` Event newAs'
```

where

```
-- NOTE: chunks of 200 agents seem to deliver the best performance -- when we are
purely CPU bound and don't have any IO
newAs' = withStrategy (parListChunk 200 rseq) newAs
-- NOTE: alternative is to run every agent in parallel

    -- only use when IO of simulation output is required
    -- newAs' = withStrategy (parList rseq) newAs
```

Which evaluation strategy results in the best performance depends on how we observe the results of the simulation. Due to Haskell's non-strict nature, as long as no output is observed, nothing would get computed ever. We have developed three different ways to observe the output of this simulation and thus we measured the timings for all of them:

1. Printing the output of the last simulation step. This requires running the simulation for the whole 150 time steps because each step depends on the output of the previous one. Because the simulation is completely CPU bound, the best performance increase turned out to run agents in batches. For this purpose, model 200 seems to deliver the best performance. If each agent is run in parallel, we still achieve a substantial performance increase but not as high as the batched version. An analysis shows that around

#### Output type

Print of last step (1) Writing simulation output (2) Appending current step (3) (1) and (2) combined

Parallel Sequential Factor 4.24

1.08 1.03 3.92

3.9	16.38
9.41	10.17

Deleted: E

Deleted: A

Deleted: by

Deleted: to run

Deleted: where for this

Deleted: d

Deleted: ed

Deleted: CHAPTER 7. PARALLELISM IN ABS

Deleted: 104

9.73	10.04
5.02	19.68

Table 7.1: Timings of parallel vs. sequential non-monadic SIR. Values in the Parallel and Sequential column indicate seconds (lower is better). Values in the Factor column indicate the ratio between the Sequential and Parallel timings (higher is better).

1.5 million (!) sparks were, created, but most of them were never evaluated. There is a limit in the spark pool and we have obviously hit that.

Deleted: got

2. Writing the aggregated output of the whole simulation to an export file. In principle this requires running the simulation until the last time step. But, due to non-strictness, the writing to the export file begins straight away. This writing interferes with parallelism due to system calls which get interleaved with parallelism, leading to less of a performance increase than the previous one. It turned out that, in this case, running each agent in parallel didn't lead to reduced performance, because we are IO bound.
3. Appending the aggregated output of the current step to an export file. This is necessary when we have a very long running simulation for which we want to write each step to the file as soon as it is computed. The function which runs this simulation is tail recursive and can thus run forever, which is not possible in the previous case where the function is not necessarily tail recursive and aggregates the outputs. Here we use a strategy which evaluates each agent in parallel as well.
4. A combined approach of 1 and 2 where the output of the last simulation step is printed and then the aggregate is written to a file.

Deleted: This requires in principle to run

Deleted: till

Deleted: b

The timings are reported in Table 7.1. All timings were measured with 1000 agents running for 150 time steps, and  $\Delta t = 0.1$ . We performed 8 runs and report the average timing in seconds. The parallel version was compiled with the '-threaded' option and used 8 available cores with the '-N' option. For the sequential implementation the '-threaded' option and the evaluation strategies were removed, to leave no chance that it is purely sequential code. All experiments were carried out on the same machine <sup>2</sup>

Deleted: s

Deleted: was removed as well as the evaluation strategies

The table clearly indicates that because we are purely CPU bound we get quite an impressive speedup of 4.24 on 8 cores. Parallelism clearly pays off here, especially because it is so easy to add. On the other hand, it seems that as soon as we are IO bound, the parallelism performance benefit is completely wasted. This does not come as a surprise and it is well established that generally as soon

Deleted: ,

Deleted: in case

Deleted: a

<sup>2</sup>Dell XPS 13 (9370) with Intel Core i7-8550U (8 cores), 16 GB, plugged in.



as IO is involved, performance benefits from parallelism will suffer. This point will be addressed by the use of concurrency, where due to concurrent evaluation, IO is decoupled from the computation, making the latter completely CPU bound and resulting in an impressive speedup in this case, as well.

What comes as a bit of a surprise is that, in the case of the sequential implementation, the CPU bound implementation (1) that performs no IO is actually slower than the ones which do perform IO. This result can be attributed to lazy evaluation, which seems to increase performance, because IO can actually be performed while the simulation computes the next step, interleaving the evaluation and IO. Thus, when comparing the parallel CPU bound approach (1) to the IO bound sequential ones (2), and (3) results in a lower speedup factor of roughly 2.6. The combined approach (4) then shows that we can actually have a substantial speedup of CPU bound (1), but still write the result to the file as in (2). This sequence is of fundamental importance in simulation, because after all, simulations almost always produce large amounts of data that needs to be stored somewhere for later analysis.

Data-flow parallelism The book [116] mentions that the Par Monad and evaluation strategies roughly result in the same performance in most of the benchmarks. Without going into much detail, we also applied the Par Monad here to run the agents in parallel by evaluating their output. Indeed, in cases (1) and (4) above we reached approximately the same speedup. The IO bound cases (2) and (3) performed slower, where (2) is nearly 50% slower than its evaluation strategy pendant and (3) is about 25% slower. It is interesting that running all agents in their own task seems to be fine with data-flow parallelism, whereas it was slower with the evaluation strategy in the CPU bound case:

```
-- NOTE: with the Par monad, splitting the list into chunks seems not
-- to be necessary - we get the same speedup as in evaluation strategies
parMonadAgents :: [SIRState] -> Event [SIRState]
parMonadAgents newAs = Event (runPar (do
    -- simply return the value of the agent, resulting in a deepseq due to -- NFData instance
    of put in IVar
```

Deleted: ,  
Deleted: one  
Deleted: such a case  
Deleted: a bit as  
Deleted: , which  
Deleted: actually  
  
Deleted: actually  
Deleted: the  
Deleted: like  
Deleted: which

Deleted: result  
Deleted: of  
Deleted: about

```
ivs <- mapM (spawn . return) newAs  
mapM get ivs)
```

### 7.3.2 Monadic SIR

We will now try to apply the same techniques of parallelising the agents as we did in the previous section in the monadic version of the SIR model. There is, however, a fundamental problem in this case, which we have already outlined in the section on data-flow parallelism: we are running the simulation in the monadic context of a ReaderT and Rand Monad stack. In monadic execution, depending on the Monad stack, we deal with side effects, which immediately necessitates the ordering of execution.

Because, whether an effective expression is evaluated before another one can have very fundamental differences indeed, and in general, we have to assume that it does. Indeed, the way the agents are evaluated is through the "mapM" function, which evaluates them sequentially, applying their side effects in sequence. It does not matter that the agents behave as if they are run in parallel without the possibility of interfering, with each other. The simple fact that the agents are run within the ReaderT (Rand g) Transformer stack requires sequencing. It is not the ReaderT which causes this delicate issue, it is instead the Rand Monad. The Rand Monad in such a scenario, basically behaves like a State Monad with the random number generator as its internal state that gets updated with each draw. Due to this sequential evaluation, we can hypothesise that our approach is doomed from the beginning and that we will not see any speedup when we apply parallelism. On the contrary, we can expect the performance to be worse, due to the overhead caused by applying parallelism.

Indeed, when we put our hypotheses to the test<sup>3</sup> we see exactly that behaviour. The sequential implementation, which does not use any parallelism and is not compiled with the '-threaded' option takes, on average, 41.76 seconds to finish. When adding parallelism with evaluation strategies in the same way as we did in non-monadic SIR, we end up with 49.63 seconds on average to finish. Consequently, we see, a clear performance decrease. For the Par Monad approach, the results are even worse as it, averages 52.98 seconds to finish. These timings clearly show that 1) agents which are run in a monadic context with mapM are not applicable to parallelism, 2) the parallelism mechanisms add a substantial overhead, which is in accordance with the reports in [116].

Still, we do not give up completely and we want to see if continuing to run the agents sequentially while parallelising code within them using the Par Monad could gain us some speedup. The function we target is the neighbourhood querying function, which looks up the 8 (Moore) surrounding neighbours of an agent. It is a pure function and uses map and is thus perfectly suitable to parallelism. We simply extend the Transformer stack by adding the Par Monad as the innermost Monad and run the neighbours function within the Par Monad:

```
-- type simplified for explanatory reasons  
neighbours :: Disc2dCoord -> SIREnv -> Par [SIRState]  
neighbours (x, y) e = do  
    ivs <- mapM (\c -> spawn (return (e ! c))) nCoords  
  
    mapM get ivs
```

Deleted: try now

Deleted: but

Deleted: ,

Deleted: b

Deleted: ful

Deleted: indeed

Deleted: to interfere

Deleted: ,

Deleted: t

Deleted: they

Deleted: e

Deleted: rather

Deleted: ,

Deleted: which

Deleted: -

Deleted: , which

Deleted: it

Deleted: a

Deleted: ,

Formatted: Font: Italic

Deleted: !

Deleted: it is

Deleted: , which

Deleted: at

Deleted: don't

Deleted: keep

Deleted: running

Deleted: but

where

```
nCoords = ... -- create neighbours coordinates
```

Unfortunately, the performance is even worse, averaging 66.68 seconds to finish. The workload seems to be too low for parallelism to pay off. Further more, when keeping the Par Monad as the innermost Monad while using the original pure neighbours function without Par, we arrive at an average of 55.9 seconds to finish when running multithreaded on 8 cores and 45.56 seconds when compiled with threading enabled and running on a single core. These measurements demonstrate that using the Par Monad and parallelism in general can lead to substantially reduced performance, due to massive overhead and parallelism that is too fine-grained.

<sup>3</sup>We used the same experiment setup as in the non-monadic implementation.



This leaves us, more or less, without any options for parallelism of the monadic SIR model. Still, we will come back to this use case in the chapter on concurrency, where we will show that by using concurrency it is possible to achieve a substantial speedup even in monadic computations.

### 7.3.3 Sugarscape

As already shown in the case of the monadic SIR implementation from the previous section, running agents in parallel within a monadic context does not bring us any speedup. On the contrary, we get penalised with a substantial performance loss due to the overhead incurred by adding parallelism. Further more, running the agents in the Par Monad alone also incurs a substantial overhead. Consequently, these roads are dead ends for our Sugarscape implementation as well.

However, there is one direction for parallelism left that we did not explore so far: the behaviour of the environment. The environment behaviour consists of a pure computation, using maps and folds<sup>4</sup> over an “IntMap”. It might look like we are out of luck as it seems that we cannot parallelise the updating of an IntMap. Nevertheless, the

Deleted: ,

Deleted: at

Deleted: but

Deleted: and

Deleted: a

Deleted: d

Deleted: too fine-grained parallelism

Deleted: basically

Deleted: also

Deleted: ,

Deleted: thus ultimately

Deleted: Still

Deleted: ,

Deleted: n't

Deleted: which is

Deleted: ,

Deleted: which is

Deleted: but

work of [116] shows that it is indeed possible to perform this action through a combination of the Par Monad and the Applicative type class. The IntMap provides the function “traverseWithKey :: Applicative t ⇒ (Key → a → t b) → IntMap a → t (IntMap b)”. We can use this function whenever we need to traverse the whole IntMap to update every cell in the list. The obvious use case for this is the regrowing of resources (sugar and spice) in every step.

Unfortunately, measurements quickly reveal that this parallelism makes the performance worse than the sequential example. It seems that the regrowing of resources is not computation heavy and the parallelism incurs more overhead than the speedup it provides.

Another thing we can parallelise is the computation of the pollution diffusion. This computation uses map to compute the new pollution level of each cell, withStrategy (parList rseq)<sup>4</sup> is then applied to the list of all cells, but the parallelism is too fine-grained and we get worse performance than without it.

Thus, we end up with the same conclusion as with the monadic SIR implementations. There is practically no opportunity to parallelise the implementation. We refer to the concurrency chapter where we show how to achieve substantial performance improvements when we employ concurrency instead of parallelism.


<sup>4</sup>In general, folds can be parallelized only when the operation being folded is associative, where the linear fold can be turned into a tree. Although applicable, we don't follow that approach here and will leave it for further research.

Deleted: which

Deleted: Using

Deleted: is

Deleted: and w

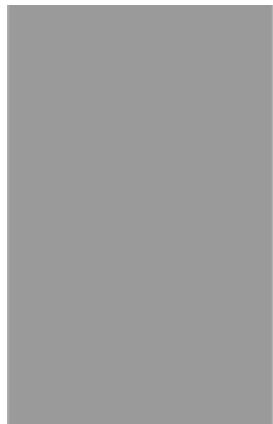

## 7.4 Parallel Runs

Often, one needs to perform a large number of runs of the same simulation. The most prominent use cases for this are:

- Parameter sweeps and variations - to explore the parameter space and the dynamics under varying parameter configurations, the same simulation is run with varying parameters and the results are recorded for statistical analysis.

- Stochastic replications - due to ABS stochastic nature, running a simulation only once does not allow for generalising or predicting overall behaviour as one might have just hit an (un)fortunate special case. To counter this problem, multiple replications of the simulation are run in ABS with same initial model parameters, but with different random-number streams. All the results are collected and analysed stochastically (averaged, median,...) from which more general properties can then be derived.

**Deleted:** to generalise  
**Deleted:** in ABS  
**Deleted:** -  
**Deleted:** then

In each case potentially thousands of runs of the same simulation with different model parameters and varying random-number streams are needed, requiring a considerable amount of computing power.

Parallelism is a remedy to the computing power problem, because in each of these cases individual runs do not interfere with each other. The runs can also be seen as isolated from each other, like referential transparent pure computations. Our approaches shown in Chapters 4 and 5 make this very explicit. The top-level functions can always be made pure computations because we are ruling out IO. Consequently, even though Monads are employed in many cases, they are still pure. One benefit of our approach is the guarantee, at compile time, that individual runs do not interfere with each other and thus there is no danger that parallel runs influence each other.

**Deleted:** this  
**Deleted:** and thus  
**Deleted:** as t  
**Deleted:**  
**Deleted:** and thus  
**Deleted:** A  
**Deleted:** that it is guaranteed  
**Deleted:**,  
**Deleted:** All this allows to  
**Deleted:** another very compelling use case - probably the most striking one -  
**Deleted:** as i

Parallelism allows for implement parameter sweeps and stochastic replications both through evaluation and data-flow parallelism making probably the most convincing use case for the use of parallelism in ABS. We hypothesise that data-flow parallelism is better suited for this task because it makes parallelism more explicit. It is indeed a data-flow problem because we pass parameters to single replications which are run and return their results. To apply this function, we simply run the top level replication logic in the Par Monad, where replications are run in parallel by forking tasks and results are handed back through IVars. If we want the convenience of having a monadic random-number generator within the Par Monad, one can use the combined ParRand Monad which provides both.

## 7.5 Discussion

In this chapter we briefly explored how to apply parallelism to our pure functional ABS approach and run case studies on our existing models to get a rough estimate of what performance increase we can expect. In general, we aimed at running agents in parallel, employing both the techniques of evaluation and data-flow parallelism. Because of the very sequential nature of the agent behaviour itself, there is much less potential for parallelism within an agent, and so, the idea was to run them all in parallel. This action should create enough workload, as an agent is an obvious unit of partitioning which can indeed be run in parallel under the given circumstances.

**Deleted:** quite  
**Deleted:** thus

Although we showed how to apply the techniques, unfortunately, the case studies showed that performance improvement was only possible in the case of the non-monadic SIR as introduced in Chapter 4.1. The speedup stemmed from the fact that the agents ran in parallel as was our original goal, consequently, resulting in a significant speedup factor of over 4 on 8 cores.

**Deleted:** indeed  
**Deleted:** was  
**Deleted:** thus

Regretfully, all attempts to parallelise the monadic SIR and the Sugarscape implementations failed, which was expected. As soon as we switch to monadic agents, evaluation parallelism is impossible, as agents can't be run in parallel anymore. Side effects require imposing, a sequential ordering, which is exactly the idea behind a Monad.

We further showed how to apply parallelism within a SIR agent and for updating the environment of the Sugarscape in parallel using the Par Monad. It did not show any speedup either, but this was not the primary objective, as we instead explored a conceptual demonstration of how it can be used. Other models might benefit massively from such an approach as they may contain much more potential for data-flow parallelism.

We did not discuss data parallelism on large array structure or parallelism on GPU as they are used in massively large numerical computation. These techniques achieve tremendous speedups but are not applicable to ABS in general. These speedups can be achieved, only in very model specific cases, where for example, each agent needs to crunch through arrays of numbers to perform numerical computations. We refer to [116] for a more in-depth discussion of both topics in Haskell and leave the application to pure functional ABS for further research.

In conclusion, we see a direct consequence of the fact that types reflect the semantics of our model. When the agents are pure they can be run in parallel and independently from each other. But, if they are monadic, then they are not applicable to parallelism. In the next chapter, we show how to approach this problem and come up with a solution where we can run monadic agents in parallel. This is only possible within a concurrent context, where we utilise Software Transactional Memory. Consequently, we have to sacrifice determinism in our solution. Still, by favouring Software Transactional Memory using the STM Monad instead of resorting to IO, we get the guarantee that the only source of non-determinism is due to the concurrency of STM and nothing else. Furthermore, we will show that an additional benefit of using STM over IO is that the STM approach reaches a considerably higher speedup compared to a lock-based approach based on IO.

## Chapter 8

### Concurrency in ABS

In an ideal world, we would like to solve all our problems using parallelism but unfortunately, it can't be applied to all parallel problems and ABS is no exception. As soon as there are data dependencies, like we have them in the Sugarscape model in the form of the mutable environment and synchronous agent interactions, and to a lesser extent in the monadic SIR with the Rand Monad, we cannot avoid concurrency. More general, this is due to the fact that agents are executed within a monadic context, from which the sequencing of effectful computations immediately follows, the very meaning of the Monad abstraction. Indeed, we have shown both by argument and measurement in the previous chapter the very fact that parallelism is simply not applicable to monadic execution of agents due to sequencing of effects, which renders all attempts of running monadic agents in parallel void. In this chapter we discuss the use of concurrency to run agents with a monadic context in parallel, which is the only way we can execute monadic agents at the same time.

Deleted: Unfortunately

Deleted: in

Deleted: ing

Deleted: out of the window

Deleted:

Deleted: because

Deleted: s

Deleted: to impose

Deleted: what

Deleted: is

Deleted: n't

Deleted: as well

Deleted: rather

Deleted: conceptually to demonstrate

Deleted: ight

Deleted: n't

Deleted: but

Deleted: Concluding

Deleted: b

Deleted: ,

Deleted: ,

Deleted: which means

Deleted: the

Deleted: le

Traditional approaches to concurrency follow a lock-based approach, where sections which access shared data are synchronised through synchronisation primitives like mutexes, semaphores or monitors. The lock-based path is a well-trodden one, with most problems and benefits well established. In this chapter we follow a different path and look into using Software Transactional Memory (STM) for implementing concurrent ABS, which promises to overcome the problems of lock-based approaches. Although STM exists in other languages as well, Haskell was one of the first to build it into its core, thus it is a natural choice to follow that direction when already investigating pure functional ABS.

**Deleted:** well trodden

The idea of applying transactional memory to simulation was already explored in the work [72], where the authors looked into how to apply Intel's hardware transactional memory to simulations in the context of a Time Warp Parallel Discrete Event Simulation (PDES). The results showed that their approach generally outperformed traditional locking mechanisms. Although PDES is a different problem than ABS, they are related as both deal with events (in case of an event-driven ABS) and PDES has been successfully adopted to simulate parallel ABS [158].

The paper [43] gives a good indication of how difficult and complex constructing a correct concurrent program can be, and shows how much easier, concise and less error-prone an STM implementation is over traditional locking with mutexes and semaphores. More importantly, it shows that STM consistently outperforms the lock-based implementations. When following this work and comparing the performance of lock-based and STM implementations, we can hypothesise that the reduced complexity and increased performance will be directly applicable to ABS as well.

**Deleted:** is

**Deleted:**

**Deleted:** e follow t

**Deleted:** e

**Deleted:** and

**Deleted:** We compare

We present two case studies using the already introduced SIR (Chapter 2.1.1) and Sugarscape (Chapter 2.1.2) models. Comparing the performance of lock-based and STM implementations in each case where we investigate both the scaling performance under increasing number of CPUs and agents. We show that the STM implementations consistently outperform the lock-based ones and scale much better to an increasing number of CPUs, both on local machines and on Amazon Cloud Services.

Unfortunately, as soon as we employ concurrency, we lose all static guarantees about reproducibility and the use of STM is no exception. Still, STM has the unique benefit that it can guarantee the lack of persistent side effects at compile time, allowing unproblematic retries of transactions, something of fundamental importance in STM as will be described below. This implies also another very compelling advantage of STM over unrestricted lock-based approaches. By using STM, we can reduce the side effects allowed substantially and guarantee at compile time, that the differences between runs of same initial conditions will only stem from the fact that we run the simulation concurrently, and from nothing else. All this makes the use of STM very compelling and to our best knowledge we are the very first to investigate the use of STM for implementing concurrent ABS in a systematic way.

## 8.1 Software Transactional Memory

Software Transactional Memory was introduced by [150] in 1995 as an alternative to lock-based synchronisation in concurrent programming which, in general, is notoriously difficult to get right. This is because reasoning about the interactions of multiple

concurrently running threads and low level operational details of synchronisation primitives is very hard. The main problems are:

- Race conditions due to forgotten locks;
- Deadlocks resulting from inconsistent lock ordering; • Corruption caused by uncaught exceptions;
- Lost wake-ups induced by omitted notifications.

Worse, concurrency does not compose. It is very difficult to write two functions (or methods in an object) acting on concurrent data which can be composed into a larger concurrent behaviour. The reason for it is that one has to

## CHAPTER 8. CONCURRENCY IN ABS 112

know about internal details of locking, which breaks encapsulation and makes composition dependent on knowledge about their implementation. Therefore, it is impossible to compose two functions where for example one withdraws some amount of money from an account and the other deposits this amount of money into a different account. The problem is that one ends up with a temporary state where the money is in none of either accounts, creating an inconsistency, a potential source for errors because threads can be rescheduled at any time.

STM promises to solve all these problems for a low cost by executing actions atomically, where modifications made in such an action are invisible to other threads and changes by other threads are invisible as well until actions are committed - STM actions are atomic and isolated. When an STM action exits, either one of two outcomes happen: if no other thread has modified the same data as the thread running the STM action, then the modifications performed by the action will be committed and become visible to the other threads. If other threads have modified the data then the modifications will be discarded, the action rolled back and automatically restarted.

### 8.1.1 Software Transactional Memory in Haskell

The work of [69, 70] added STM to Haskell, which was one of the first programming languages to incorporate STM with composable operations into its main core. There exist various implementations of STM in other languages as well (Python, Java, C#, C/C++) but we argue that it is in Haskell with its type system and the way how side effects are treated where it truly shines.

In the Haskell implementation, STM actions run within the STM Monad. This restricts the operations to only STM primitives as shown below, which allows to enforce that STM actions are always repeatable without persistent side effects because such persistent side effects (for example writing to a file, launching a missile) are not possible in the STM Monad. This is also the fundamental difference to IO, where all bets are off because everything is possible as there are basically no restrictions because IO can run everything.

Thus the ability to restart an action without any persistent effects is only possible due to the nature of Haskell's type system and by restricting the effects to STM only, ensures that only controlled effects, which can be rolled back, occur.

STM comes with a number of primitives to share transactional data. Amongst others the most important ones are:

- TVar - a transactional variable which can be read and written arbitrarily;
- TMVar - a transactional synchronising variable which is either empty or full. To read from an empty or write to a full TMVar will cause the current thread to block and retry its transaction when any transactional primitive of this action has changed.
- TArray - a transactional array where each cell is an individual transactional variable TVar, allowing much finer-grained transactions instead of having the whole array in a TVar.

CHAPTER 8. CONCURRENCY IN ABS 113 • TChan - a transactional channel, representing an unbounded FIFO channel,

based on a linked list of TVar.

Further STM also provides combinators to deal with blocking and composition:

- retry :: STM () retries an STM action. This will cause to abort the current transaction and block the thread it is running in. When any of the transactional data primitives has changed, the action will be run again. This is useful to await the arrival of data in a TVar or put more general, to block on arbitrary conditions.
- orElse :: STM a → STM a → STM a allows to combine two blocking actions where either one is executed but not both. The first action is run and if it is successful its result is returned. If it retries, then the second is run and if that one is successful its result is returned. If the second one retries, the whole orElse retries. This can be used to implement alternatives in blocking conditions, which can be obviously nested arbitrarily.

To run an STM action atomically :: STM a → IO a is provided, which performs a series of STM actions atomically within the IO Monad. It takes the STM action, which returns a value of type a and returns an IO action which returns a value of type a. The IO action then can only be executed from within the IO Monad, either within the main thread or an explicitly forked thread.

STM in Haskell is implemented using optimistic synchronisation, which means that instead of locking access to shared data, each thread keeps a transaction log for each read and write to shared data it makes. When the transaction exits, the thread checks whether it has a consistent view to the shared data or not. It checks whether other threads have written to memory it has read, thus it can identify whether a rollback is required or not.

In the paper [73] the authors use a model of STM to simulate optimistic and pessimistic STM behaviour under various scenarios using the AnyLogic simulation software. They conclude that optimistic STM may lead to 25% less retries of transactions. The authors of [138] analyse several Haskell STM programs with respect to their transactional behaviour. They identified the roll-

back rate as one of the key metric which determines the scalability of an application. Although STM might promise better performance, they also warn of the overhead it introduces which could be quite substantial in particular for programs which do not perform much work inside transactions as their commit overhead appears to be high.

### 8.1.2 An example

We provide a short example to demonstrate the use of STM. To make it more interesting and to show the retry semantics, we use it within a StateT transformer where STM is the innermost Monad. It is important to understand that

#### CHAPTER 8. CONCURRENCY IN ABS 114

STM does not provide a transformer instance for very good reasons. If it would provide a transformer then we could make IO the innermost Monad and perform IO actions within STM. This would violate the retry semantics as in case of a retry, STM is unable to undo the effects of IO actions in general. This stems from the fact, that the IO type is simply too powerful and we cannot distinguish between different kinds of IO actions in the type, be it simply reading from a file or actually launching a missile. Lets look at the example code:

```
stmAction :: TVar Int -> StateT Int STM Int
stmAction v = do
    -- print a debug output and increment the value in StateT

    Debug.trace "increment!" (modify (+1))
    -- read from the TVar
    n <- lift (readTVar v)
    -- await a condition: content of the TVar >= 42 if n < 42

    -- condition not met: retry

    then lift retry
    -- condition met: return content of TVar else return n
```

In this example, the STM is the innermost Monad in a stack with a StateT transformer. When `stmAction` is run, it prints an 'increment!' debug message to the console and increments the value in the StateT transformer. Then it awaits a condition for as long as `TVar` is less than 42 the action will retry whenever it is run. If the condition is met, it will return the content of the `TVar`. We see the combined effects of using the transformer stack were we have both the `StateT` and the `STM` effects available. The question is how this code behaves if we actually run it. To do this we need to spawn a thread:

```
stmThread :: TVar Int -> IO ()
stmThread v = do
    -- the initial state of the StateT transformer

    let s = 0
    -- run the state transformer with initial value of s (0) let ret = runStateT (stmAction v) s
```

```
-- atomically run the STM block
(a, s') <- atomically ret
-- print final result
putStrLn("final StateT state = " ++ show s' ++
", STM computation result = " ++ show a)
```

The thread simply runs the StateT transformer layer with the initial value of 0 and then the STM computation through atomically and prints the result to the console. The value of a is the result of stmAction and s' is the final state of the StateT computation. To actually run this example we need the main thread to updated the TVar until the condition is met within stmAction:

```
main :: IO ()
main = do
  -- create a new TVar with initial value of 0
  v <- newTVarIO 0
  -- start the stmThread and pass the TVar
```

## CHAPTER 8. CONCURRENCY IN ABS 115

```
forkIO (stmThread v)
-- do 42 times...
forM_ [1..42] (\i -> do
  -- use delay to 'make sure' that a retry is happening for ever increment threadDelay
  10000
  -- write new value to TVar using atomically
  atomically (writeTVar v i))
```

If we run this program, we will see 'increment!' printed 43 times, followed by 'final StateT state = 1, STM computation result = 42'. This clearly demonstrates the retry semantics where stmAction is retried 42 times and thus prints 'increment!' 43 times to the console. The StateT computation however is carried out only once and is always rolled back when a retry is happening. The rollback is easily possible in pure functional programming due to persistent data structure by simply throwing away the new value and retrying with the original value. This example also demonstrates that any IO actions which happen within an STM action are persistent and can obviously not be rolled back. Debug.trace is an IO action masked as pure using unsafePerformIO.

### 8.2 Software Transactional Memory in ABS

In this section we give a short overview of how we apply STM to pure functional ABS. In both case studies we fundamentally follow a time-driven, parallel approach as introduced in Chapter 2.3.2, where the simulation is advanced by a given  $\Delta t$  and in each step all agents are executed. To employ parallelism, each agent runs within its own thread and agents are executed in lock-step, synchronising between each  $\Delta t$ , which is controlled by the main thread. See Figure 8.1 for a visualisation of the concurrent, parallel time-driven lock-step approach.

By running each agent in a thread will guarantee the execution in parallel even if the agent has a monadic context. This forces us to evaluate each agents monadic context separately instead of running them all in a common context. This means that we are ending up in the IO Monad because STM can be only transacted from within an IO context due to non-deterministic side effects. This is no contradiction to our original claim. Yes we are running in IO but not the agent behaviour itself, which is a fundamental difference.

An agent thread will block until the main thread sends the next  $\Delta t$  and runs the STM action atomically with the given  $\Delta t$ . When the STM action has been committed, the thread will send the output of the agent action to the main thread to signal it has finished. The main thread awaits the results of all agents to collect them for output of the current step, for example visualisation or writing to a file.

As will be described in subsequent sections, central to both case studies is an environment which is shared between the agents using a TVar or TArray primitive, through which the agents communicate concurrently with each other. To get the environment in each step for visualisation purposes, the main thread can access the TVar and TArray as well.

#### CHAPTER 8. CONCURRENCY IN ABS 116

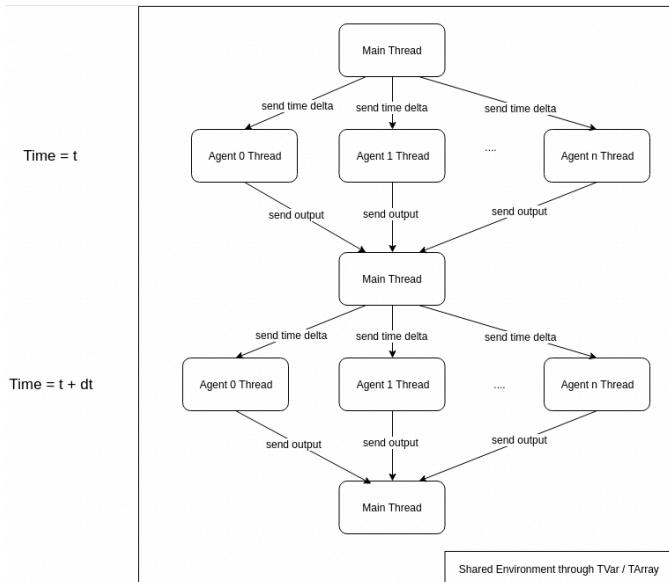


Figure 8.1: Diagram of the parallel time-driven lock-step approach.

#### CHAPTER 8. CONCURRENCY IN ABS 117 8.2.1 Adding STM to agents

We briefly discuss how to add STM to agents on a technical level and also show how to run them within their own threads. We use the SIR implementation as example -

applying it to the Sugarscape implementation works exactly the same way and is left as a trivial exercise to the reader.

The first step is to simply add the STM Monad as the innermost level to the already the existing Transformer stack. Further, the environment is now passed as a transactional data primitive to the agent at construction time. Thus, the agent does not receive the SIREnv as input any more but receives it through cur- rying when constructing its initial MSF. Further, the agent modifies the SIREnv directly through the TVar, as demonstrated in the case of the infected agent.

-- Make Rand a transformer to be able to add STM as innermost monad

```
type SIRMonad g = RandT g STM
-- Input to agent is now an empty tuple instead of the Environment type SIRAgent g = SF
(SIRMonad g) () SIRState
```

-- The MSF construction function takes now the TVar with the environment.

```
sirAgent :: RandomGen g => TVar SIREnv -> Disc2dCoord -> SIRState -> SIRAgent g
```

-- The infected agent behaviour is nearly the same except that

-- the agent modifies the environment through the TVar

```
infected :: RandomGen g => SF (SIRMonad g) () (SIRState, Event ()) infected = proc _ ->
do
```

```
    recovered <- occasionally illnessDuration () -< ()
    if isEvent recovered
```

```
    then (do
```

```
        -- update the environment through the TVar
        arrM_ (lift $ lift $ modifyTVar env (changeCell coord Recovered)) -< () returnA -<
        (Recovered, Event ()))
    else returnA -< (Infected, NoEvent)
```

The agent thread is straightforward. It takes MVar synchronisation primitives to synchronise with the main thread and simply runs the agent behaviour each time it receives the next DTime:

```
agentThread :: RandomGen g
            => Int
            -> SIRAgent g
            -> g
            -> MVar SIRState -> MVar DTime
            -> IO ()
0 _____ = return

-- ^ Number of steps to compute
-- ^ Agent behaviour MSF
-- ^ Random-number generator of the agent
```

```

-- ^ Synchronisation back to main thread
-- ^ Receiving DTime for next step
agentThread
agentThread n sf rng retVar dtVar = do
  () -- all steps computed, terminate thread -- wait for dt to compute current step

  dt <- takeMVar dtVar
  -- compute output of current step
  let sfReader = unMSF sf()
    sfRand = runReaderT sfReader dt
    sfSTM = runRandT sfRand rng
  -- run the STM action atomically within IO
  ((ret, sf'), rng') <- atomically sfSTM

```

#### CHAPTER 8. CONCURRENCY IN ABS 118

```

-- post result to main thread
putMVar retVar ret
-- tail recursion to next step
agentThread (n - 1) sf' rng' retVar dtVar

```

Computing a simulation step is now trivial within the main thread. All agent threads MVars are signalled to unblock followed by an immediate block on the MVars into which the agent threads post back their result. The state of the current step is then extracted from the environment, which is stored within the TVar which the agent threads have updated.

```

simulationStep :: TVar SIREnv -- ^ environment
-> [MVar DTime] -- ^ sync dt to threads

-> [MVar SIRState] -- ^ sync output from threads -> DTime -- ^ time delta
-> IO SIREnv

```

```

simulationStep env dtVars retVars dt = do
  -- tell all threads to continue with the corresponding DTime mapM_ (putMVar` dt)
  dtVars
  -- wait for results but ignore them, SIREnv contains all states mapM_ takeMVar retVars
  -- return state of environment when step has finished readTVarIO env

```

The difference to an implementation which uses IO are minor but far reaching. Instead of using STM as innermost Monad, we use IO, thus running the whole agent behaviour within the IO Monad. Instead of receiving the environment through a TVar, the agent receives it through an IORef. It also receives an MVar which is the synchronisation primitive to synchronise the access to the environment in the IORef amongst all agents. Agents grab and release the synchronisation lock of the MVar when they enter and leave a critical section in which they operate on the environment stored in the IORef.

#### 8.3 Case study I: SIR

Our first case study is the SIR model as introduced in Chapter 2.1.1. The aim of this case study is to investigate the potential speedup a concurrent STM implementation gains over a sequential one under varying number of CPU cores and agent populations. The behaviour of the agents is quite simple and the interactions are happening indirectly through the environment, where reads from the environment outnumber the writes to it by far. Further, a comparison to a lock-based implementation with the IO Monad is done to show that STM outperforms traditional lock-based concurrency in a functional ABS implementation while still retaining some static guarantees. The code of all implementations can be accessed freely from the repository [163].

1. Sequential - this is the original implementation as discussed in Chapter 4.3, where the discrete 2D environment is shared amongst all agents as

## CHAPTER 8.

### CONCURRENCY IN ABS 119

OS RAM CPU HD Haskell

Fedora 28, 64-bit  
16 GByte  
Intel i5-4670K @ 3.4GHz 250Gbyte SSD GHC 8.2.2






Table 8.1: Machine and software specs for concurrency experiments.

Cores	Duration	Sequential	72.5	60.6
-------	----------	------------	------	------

1
1
2
3
4
1
2
3
4

Lock-Based

STM

42.8	38.6	41.6
------	------	------

53.2	27.8	21.8	20.8
------	------	------	------

Table 8.2: SIR performance comparisons on 51x51 (2,601 agents) grid with varying number of cores. Timings in seconds (lower is better).

read-only data and the agents are executed sequentially within the main thread without any concurrency.

2. STM - based on the Sequential implementation with the difference that agents are running in the STM Monad and have access to the discrete 2D environment through a

transactional variable TVar. This means that the agents now communicate indirectly by reads and writes through the TVar.

3. Lock-Based - based on the STM implementation with the difference that agents are running in the IO Monad. They share the discrete 2D environment using an IORef and have access to an MVar lock to synchronise access to it.

Each experiment was run until  $t = 100$  and stepped using  $\Delta t = 0.1$ . For each experiment we conducted 8 runs on our machine (see Table 8.1) under no additional work load and report the mean. In the experiments we varied the number of agents (grid size) as well as the number of cores when running concurrently - the numbers are always indicated clearly.

### 8.3.1 Constant grid size, varying cores

In this experiment we held the grid size constant to  $51 \times 51$  (2,601 agents) and varied the cores. The results are reported in Table 8.2.

## CHAPTER 8. CONCURRENCY IN ABS 120

Figure 8.2: Comparison of performance and scaling on multiple cores of the STM and Lock-Based SIR implementations. The Lock-Based implementation seems to perform slightly worse on 4 than on 3 cores probably due to lock contention.


The STM implementation running on 4 cores shows a speedup factor of 3.6 over Sequential, which is a quite impressive number when considering that we can achieve at most a factor of 4 when running on 4 cores. It seems that STM allow us to push the practical limit very close to the theoretical one, whereas the Lock-Based approach just arrives at a factor of 1.74 on 4 cores.

Comparing the performance and scaling to multiple cores shows that the STM implementation significantly outperforms the Lock-Based one and scales better to multiple cores. The Lock-Based implementation performs best with 3 cores and shows slightly worse performance on 4 cores as can be seen in Figure 8.2. This is no surprise because the more cores are running at the same time, the more contention for the lock, thus the more likely synchronisation happening, resulting in higher potential for reduced performance. This is not an issue in STM because no locks are taken in advance.

### 8.3.2 Varying grid size, constant cores

In this experiment we varied the grid size and used always 4 cores. The results are reported in Table 8.3 and plotted in Figure 8.3.

It is clear that the STM implementation outperforms the Lock-Based implementation by a substantial factor.

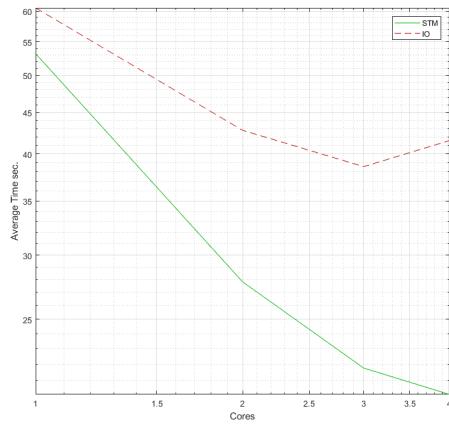

## CHAPTER 8.

### CONCURRENCY IN ABS 121

#### Grid-Size STM Lock-Based Ratio


20.2	41.9
74.5	170.5
168.5	376.9
302.4	672.0
495.7	1,027.3

51 x 51 (2601) 101 x 101 (10201) 151 x 151 (22801) 201 x 201 (40401) 251 x 251  
(63001)

2.1 2.3 2.2 2.2 2.1

Table 8.3: Performance comparison of STM and Lock-Based SIR implementations on varying grid sizes. Timings in seconds (lower is better). Ratio compares STM to Lock-Based (higher is better).

Figure 8.3: Performance comparison of STM and Lock-Based SIR implementations on varying grid sizes.

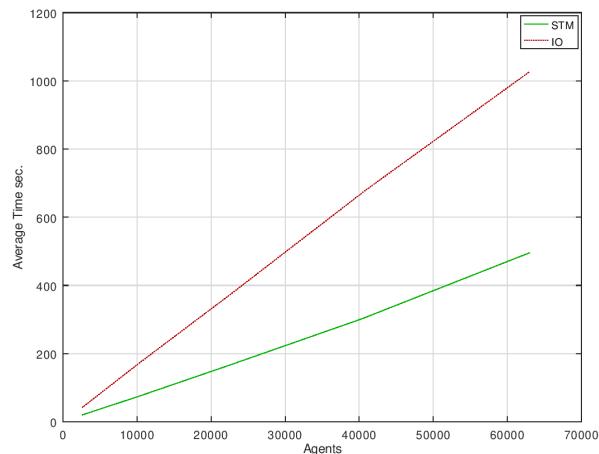

## CHAPTER 8.

### CONCURRENCY IN ABS

122

Grid-Size

51 x 51 (2,601) 101 x 101 (10,201) 151 x 151 (22,801) 201 x 201 (40,401) 251 x 251 (63,001)

Commits

Retries

Ratio 0.0 0.0 0.0 0.0 0.0

2,601,000	1306.5
10,201,000	3712.5
22,801,000	8189.5
40,401,000	13285.0
63,001,000	21217.0

Table 8.4: Retry ratios of SIR STM implementation on varying grid sizes on 4 cores]Retry ratios of SIR STM implementation on varying grid sizes on 4 cores. Cores 51x51 251x251

16	72.5
32	73.1

16	8.6
32	12.0

Lock-Based STM

1830.5 1882.2

237.0

248.7

Table 8.5: SIR STM performance on 16 and 32 cores on Amazon EC2. Timings in seconds (lower is better).

### 8.3.3 Retries

Of very much interest when using STM is the retry ratio, which obviously depends highly on the read-write patterns of the respective model. We used the `stm-stats` library [26] to record statistics of commits, retries and the ratio. The results are reported in Table 8.4.

Independent of the number of agents we always have a retry ratio of 0. This indicates that this model is very well suited to STM, which is also directly reflected in the much better performance over the Lock-Based implementation. Obviously this ratio stems from the fact that in our implementation we have very few writes, which happen only in case when an agent changes from Susceptible to Infected or from Infected to Recovered. On the other hand, there are a very large number of reads due to indirect agent interaction. For STM this is no problem because no lock is taken but the Lock-Based approach is forced to conservatively take the lock to ensure mutual exclusive access to the critical section across all agents.

### 8.3.4 Going large scale

To test how far we can scale up the number of cores in both the Lock-Based and STM cases, we ran two experiments, 51x51 and 251x251, on Amazon EC2 instances with a larger number of cores than our local machinery, starting with 16 and 32 to see if we are running into decreasing returns. The results are reported in Table 8.5.

As expected, the Lock-Based approach doesn't scale up to many cores be-

## CHAPTER 8. CONCURRENCY IN ABS 123

cause each additional core brings more contention to the lock, resulting in an even more decreased performance, even worse than the Sequential implementation. This is particularly obvious in the 251x251 experiment because of the much larger number of concurrent agents. The STM approach returns better performance on 16 cores but fails to scale further up to 32 where the performance drops below the one with 16 cores. In both STM cases we measured a retry ratio of 0, thus we assume that with 32 cores we become limited by the overhead of STM transactions [138] because the workload of an STM action in our SIR implementation is quite small.

Compared to the Sequential implementation, STM reaches a speedup factor of 8.4 on 16 cores, which is still impressive but is much further away from the theoretical limit than in the case of only 4 cores which is a further indication that this model in particular and our approach in general does not scale up arbitrarily.

### 8.3.5 Discussion

The timing measurements speak a clear language. Running in STM and sharing state using a transactional variable TVar is much more time efficient than both the Sequential and Lock-Based approach. On 4 cores STM achieves a speedup factor of 3.6, nearly reaching the theoretical limit. Obviously both STM and Lock-Based sacrifice determinism, which means that repeated runs might not lead to same dynamics despite same initial conditions. Still, by sticking to STM, we get the guarantee that the source of this non-determinism is concurrency within the STM Monad but nothing else. This we can not guarantee in the case of the Lock-Based approach as all bets are off when running within the IO Monad. The fact to have both the better performance and the stronger static guarantees in the STM approach makes it very compelling.

## 8.4 Case study II: Sugarscape

The second case study is the Sugarscape model as introduced in Chapter 2.1.2. In this case study we look into the potential performance improvement in a model with much more complex agent behaviour and dramatically increased writes on the shared environment.

We implemented the Carrying Capacity (p. 30) section of Chapter II of the Sugarscape book [48]. In each step agents move to the cell with the highest sugar they see within their vision, harvest all of it from the environment and consume sugar because of their metabolism. Sugar regrows in the environment over time. Only one agent can occupy a cell at a time. Agents don't age and cannot die from age. If agents run out of sugar due to their metabolism, they die from starvation and are removed from the simulation. The authors report that the initial number of agents quickly drops and stabilises around a level depending on the model parameters. This is in accordance with our results as

CHAPTER 8. CONCURRENCY IN ABS 124 we show in Appendix A and guarantees that we don't run out of agents. The

model parameters are as follows:

- Sugar endowment: each agent has an initial sugar endowment randomly uniform distributed between 5 and 25 units;
- Sugar metabolism: each agent has a sugar metabolism randomly uniform distributed between 1 and 5;
- Agent vision: each agent has a vision randomly uniform distributed between 1 and 6, same for each of the four directions N, W, S, E;
- Sugar growback: sugar grows back by 1 unit per step until the maximum capacity of a cell is reached;
- Agent population: initially 500 agents;
- Environment size: 50 x 50 cells with toroid boundaries wrapping around

in both x and y dimension.

In this implementation (as in the full Chapter II of the book), no direct and

no synchronous agent interactions as we implemented them in Chapter 5 are happening. As in the SIR example, all agents interact with each other indirectly through the shared environment. This allows us to regard the implementation as a time-driven, parallel one wherein each step agents act conceptually at the same time.

We compare four different implementations with the code freely accessible from the repository [164]:

1. Sequential - all agents are run after another, including the environment, where the environment is shared amongst the agents using a StateT Trans- former.
2. Lock-Based - all agents are run concurrently in the IO Monad and the environment is shared between the agents, using an IORef with the access synchronised through an MVar lock.
3. STM TVar - all agents are run concurrently in the STM Monad and the environment is shared using a TVar between the agents.
4. STM TArray - all agents are run concurrently in the STM Monad and the environment is shared using a TArray between the agents.

We follow [108] and measure the average number of steps per second of the simulation over 60 seconds. For each experiment we conducted 8 runs on our machine (see Table 8.1) under no additional work load and report the average. In the experiments we varied the number of cores and agents when running concurrently - the numbers are always indicated clearly.

## CHAPTER 8. CONCURRENCY IN ABS 125

Ordering The model specification requires to shuffle agents before every step ([48], footnote 12 on page 26). In the Sequential approach we do this explicitly but in the Lock-Based and both STM approaches we assume this to happen automatically due to race conditions in concurrency, thus we arrive at an effectively shuffled processing of agents because we implicitly assume that the order of the agents is effectively random in every step. The important difference between the two approaches is that in the Sequential approach we have full control over this randomness but in the STM not. This has the consequence that repeated runs with the same initial conditions might lead to slightly different results. This decision leaves the execution order of the agents ultimately to Haskell's runtime system and the underlying operating system. We are aware that by doing this, we make assumptions that the threads run uniformly distributed (fair) but such assumptions should not be made in concurrent programming. As a result we can expect this fact to produce non-uniform distributions of agent runs but we assumed that for this model this does not have a significant influence. In case of doubt, we could resort to shuffling the agents before running them in every step. This problem, where also the influence of non-deterministic ordering on the correctness and results of ABS has to be analysed, deserves in-depth research on its own. We introduce techniques allowing to perform such analyses in Chapters 10 and 11 on property-based testing but leave it for further research as this issue is beyond the focus of this thesis.

#### 8.4.1 Constant agent population

In a first approach we compare the performance of all implementations on varying numbers of cores. The results are reported in Table 8.6 and plotted in Figure 8.4.

As expected, the Sequential implementation is the slowest, followed by the Lock-Based and TVar approach whereas TArray is the best performing one.

We clearly see that using a TVar to share the environment is a very inefficient choice in this model because every write to a cell leads to a retry independent whether the reading agent reads that changed cell or not, because the data structure can not distinguish between individual cells. By using a TArray we can avoid the situation where a write to a cell in a far distant location of the environment will lead to a retry of an agent which never even touched that cell. Also the TArray seems to scale up by 10 steps per second for every core added. It will be interesting to see how far this could go with the Amazon EC2 experiment, as we seem not to hit a limit with 4 cores yet.

The inefficiency of TVar is also reflected in the nearly similar performance of the Lock-Based implementation which even outperforms it on 4 cores. This is due to very similar approaches because both operate on the whole environment instead of only the cells as TArray does. This seems to be a bottleneck in TVar reaching the best performance on 3 cores, which then drops on 4 cores due to an increasing retries ratio. The Lock-Based approach seems to reduce its returns on increased number of cores, hitting a limit with 4 cores as well.

## CHAPTER 8.

### CONCURRENCY IN ABS 126

Cores Steps Retries Sequential -

139.4
143.0
251.8
357.4
458.1
147.3
253.5
357.1
453.0
145.4
265.3
375.7
484.4

Lock-Based


```

STM TVar
STM TArray
-
0.0 1.1 2.2 3.2
0.0 0.02 0.04 0.05

```

Table 8.6: Comparison of steps per seconds (higher is better) and retries (lower is better) of various Sugarscape implementations with constant agent numbers. Using 50x50 grid with 500 initial agents on varying cores.

Figure 8.4: Comparison of steps per seconds (higher is better) and retries of various Sugarscape implementations with constant agent numbers. Using a 50x50 grid and 500 initial agents on varying cores.

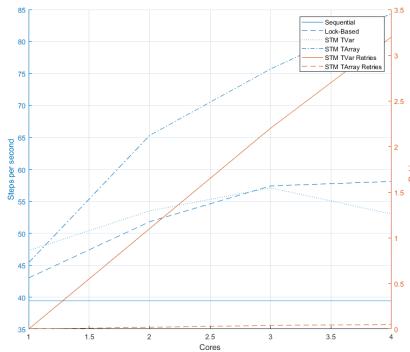

## CHAPTER 8. CONCURRENCY IN ABS

127

Agents Sequential Lock-Based TVar (3 cores) TVar (4 cores) TArray 500 71.9 1,000 54.8  
1,500 44.1 2,000 37.0 2,500 33.3

Table 8.7: Steps per second (higher is better) of various Sugarscape implementations with varying agent numbers. Using 50x50 grid with varying number of agents with 4 (and 3) cores except the Sequential (1 core) implementation.

### 8.4.2 Scaling up agent population

So far we kept the initial number of agents at 500, which due to the model specification, quickly drops and stabilises around 200 due to the carrying capacity of the environment as described in the book [48] section Carrying Capacity (p. 30).

We now want to measure the performance of our approaches under increased number of agents. For this we slightly change the implementation, inspired by the ageing and birthing feature of Chapter III in the book [48] where always when an agent dies it spawns a new one. This ensures that we keep the number of agents roughly constant over the whole duration though it still fluctuates but doesn't drop to low levels. This ensures a constant load of concurrent agents interacting with each other and demonstrates also the ability to terminate and create concurrent agents (threads) dynamically during the simulation.

Except for the Sequential approach we ran all experiments with 4 cores and TVar with 3 as well. We looked into the performance of 500, 1,000, 1,500, 2,000 and 2,500 which is the maximum possible capacity of the 50x50 environment. The results are reported in Table 8.7 and plotted in Figure 8.5.

As expected, the TArray implementation outperforms all others substantially. Also as expected, the TVar implementation on 3 cores is faster than on 4 cores as well when scaling up to more agents. The Lock-Based approach performs about the same as the TVar on 3 cores because of the very similar approaches because both access the whole environment. Still the TVar approach uses one core less to arrive at the same performance, thus strictly speaking outperforming the Lock-Based implementation.

What seems to be very surprising is that in the Sequential and TVar cases the performance with 2,500 agents is better than the one with 2,000 agents. The reason for this is that in the case of 2,500 agents, an agent can't move anywhere because all cells are already occupied. In this case the agent will not rank the cells in order of their maximum sugar to move to but just stays where it is. We hypothesise that due to Haskells laziness the agents actually never look at the content of the cells in this case but only the number which means that the cells themselves are never evaluated which further increases performance. This leads to the better performance in case of Sequential and TVar because both

14.4	20.2	20.1	18.5
6.8	10.8	10.4	9.5
4.7	8.1	7.9	7.3
4.4	7.6	7.4	6.7
5.3	5.4	9.2	8.9

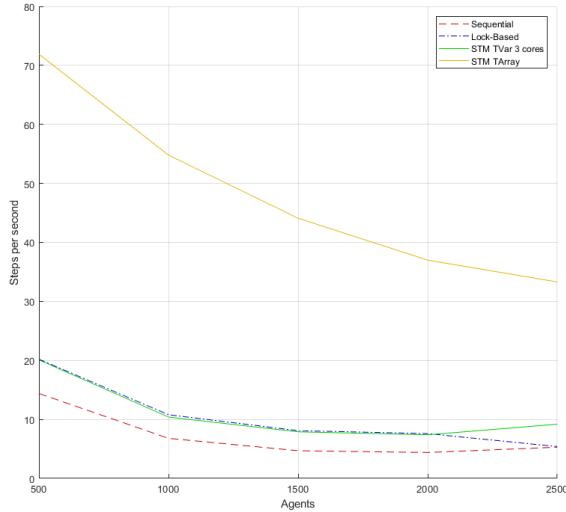


Figure 8.5: Steps per second (higher is better) of various Sugarscape implementations with varying agent numbers. Using 50x50 grid and varying number of agents with 4 (and 3) cores except the Sequential (1 core) implementation.

## CHAPTER 8. CONCURRENCY IN ABS

### Cores Carrying Capacity

#### Lock-Based STM TArray

Table 8.8: Sugarscape STM performance on 16 and 32 cores on Amazon EC2. Values are steps per second (higher is better).

exploit laziness. In the case of the Lock-Based approach we still arrive at a lower performance because the limiting factor are the unconditional locks. In the case of the TArray approach we also arrive at a lower performance because it seems that STM performs reads on the neighbouring cells which are not subject to lazy evaluation. In Haskell it is notoriously difficult to reason about efficiency and this behaviour of improved performance due to Haskell's laziness is no exception. We leave an in-depth investigation for further research as it is beyond the focus of this thesis.

We also measured the average retries both for TVar and TArray under 2,500 agents where the TArray approach shows best scaling performance with 0.01 retries whereas TVar averages at 3.28 retries. Again this can be attributed to the better transactional data structure which reduces retry-ratio substantially to near-zero levels.

#### 8.4.3 Going large scale

To test how far we can scale up the number of cores in both the Lock-Based and TArray cases, we ran the two experiments (carrying capacity and rebirthing) on Amazon EC2 instances with increasing number of cores starting with 16 and 32 to see if we run into decreasing returns. The results are reported in Table 8.8.

As expected, the Lock-Based approach doesn't scale up to many cores because each additional core brings more contention to the lock, resulting in even more decreased performance. This is particularly obvious in the rebirthing experiment because of the much larger number of concurrent agents. The TArray approach returns better performance on 16 cores but fails to scale further up to 32 where the performance drops below the one with 16 cores. We indicated the retry ratio in brackets and see that they roughly double from 16 to 32, which is the reason why performance drops as at this point.

#### 8.4.4 Comparison with other approaches

The paper [108] reports a performance of 17 steps in RePast, 18 steps in MASON (both sequential) and 2,000 steps per second on a GPU on a 128x128 grid. Although our Sequential implementation, which runs non-parallel as well, outperforms the RePast and MASON implementations of [108], one must be very

129

Rebirthing

4.4.3.6

39.5 (0.08) 31.3 (0.18)

16	53.9
32	44.2
16	116.8 (0.23)
32	109.8 (0.41)

#### CHAPTER 8. CONCURRENCY IN ABS 130

well aware that these results were generated in 2008, on current hardware of that time.

The very high performance on the GPU does not concern us here as it follows a very different approach than ours. We focus on speeding up implementations on the CPU as directly as possible without locking overhead. When following a GPU approach one needs to map the model to the GPU which is a delicate and highly non-trivial matter. With our approach we show that speedup with concurrency is very possible without the low-level locking details or the need to map to a GPU. Also some features as bilateral trading between agents, where a pair of agents needs to come to a conclusion over multiple synchronous steps, is difficult to implement on a GPU whereas this should be easier using STM.

We kept the grid size constant because we implemented the environment as a single agent which works sequentially on the cells to regrow the sugar. Obviously this doesn't really scale up on parallel hardware and experiments show that the performance goes down dramatically when we increase the environment to 128x128 with same number of agents. This is the result of Amdahl's law where the environment becomes the limiting factor of the simulation. Depending on the underlying data structure used for the environment we have two options to solve this problem. In the case of the Sequential and TVar implementation we build on an indexed array, which can be updated in parallel using the existing data-parallel support in Haskell. In the case of the TArray approach we have no option but to run the update of every cell within its own thread. We leave both for further research as it is out of scope of this thesis.

#### 8.4.5 Discussion

This case study showed clearly that besides being substantially faster than the Sequential implementation, STM implementations are also able to perform considerably better than a Lock-Based approach even in the case of the Sugarscape model which has a much higher complexity in agent behaviour and dramatically increased number of writes to the environment.

Further, this case study demonstrated that the selection of the right transactional data structure is of fundamental importance when using STM. Selecting the right transactional data structure is highly model-specific and can lead to dramatically different performance results. In this case study the TArray performed best due to many writes but in the SIR case study a TVar showed good enough results due to the very low number of writes. When not carefully selecting the right transactional data structure which supports fine-grained concurrency, a lock-based implementation might perform as well or even outperform the STM approach as can be seen when using the TVar.

Although the TArray is the better transactional data structure overall, it might come with an overhead, performing worse on low number of cores than a TVar approach but has the benefit of quickly scaling up to multiple cores. Depending on the transactional data structure, scaling up to multiple cores hits a limit at some point. In the case of the TVar the best performance is reached with 3 cores. With the TArray we reached this limit around 16 cores.

#### CHAPTER 8. CONCURRENCY IN ABS 131

The comparison between the Lock-Based approach and the TArray implementation is a bit unfair due to a very different locking structure. A more suitable comparison would have been to use an indexed Array with a tuple of (MVar, IORef) in each cell to support fine-grained locking on the cell level. This would be a more just comparison to the TArray where fine-grained transactions happen on the cell level. We hypothesise that STM will still outperform the lock-based approach but to a lesser degree. We leave the proof of this for further research.

#### 8.5 Discussion

In this chapter we have shown how to apply concurrency to monadic ABS to gain substantially speedup. We developed a novel approach, using STM, which to our best knowledge has not been discussed systematically in the context of ABS so far. This new approach outperforms a traditional lock-based implementation running in the IO Monad and guarantees that the differences between runs with same initial conditions stem from the non-determinism of STM but nothing else. The latter point can't be guaranteed by the lock-based approach as it runs in the IO Monad, which allows literally anything from reading from a file, to launching a missile. Further, with STM, concurrency becomes more a control-flow oriented concern, so using STM allows us to treat the concurrent problem within an agent as a data-flow oriented one without cluttering the model code with operational details of concurrency. This gives strong evidence that STM should be favoured over lock-based approaches in general for implementing concurrent ABS in Haskell.

We assumed that concurrent execution has no qualitative influence on the dynamics. Although repeated runs with same initial conditions might lead to different results due to non-determinism, the dynamics follow still the same distribution as the one from the sequential implementation. To verify this we can make use of the techniques of property-based testing as shown in Chapters 10 and 11 of this thesis but we leave it for further research.

The next step would be to add synchronous agent interactions as they occur in the Sugarscape use cases of mating, trading and lending. We have started to do work on this already and could implement also one-directional agent interactions as they occur in the disease transmission, payback of loans and notification of inheritance upon the death of a parent agent. We use the TQueue primitive to emulate the behaviour of mailboxes through which agents can post events to each other. The result is promising but needs more investigation. We have also started looking into synchronous agent interactions using STM which is a lot trickier and is very susceptible to deadlocks, which are still possible in STM! We have yet to prove how to implement reliable synchronous agent interactions without deadlocks in STM. It might be very well the case that a truly concurrent approach is doomed due to the following [116] (Chapter 10. Software Transactional Memory, "What Can We Not Do with STM?"): "In general, the class of operations that STM cannot express are those that involve multi-way

#### CHAPTER 8. CONCURRENCY IN ABS 132

communication between threads. The simplest example is a synchronous channel, in which both the reader and the writer must be present simultaneously for the operation to go ahead. We cannot implement this in STM, at least compositionally [...]: the operations need to block and have a visible effect — advertise that there is a blocked thread — simultaneously.”.

Further, STM is not fair because all threads, which block on a transactional primitive, have to be woken up, thus a FIFO guarantee cannot be given. We hypothesise that for most models, where the STM approach is applicable, this has no qualitative influence on the dynamics as agents are assumed to act conceptually at the same time and no fairness is needed. We leave the test of this hypothesis for future research.

We didn't look into applying distributed computation to our approach. One direction to follow would be to use the Cloud Haskell library, which is very similar to the concurrency model in Erlang. We leave this for further research as it is beyond the scope of this thesis.

## Chapter 9

### Property-Based Testing in ABS

When implementing an ABS, it is of fundamental importance that the implementation is correct up to some specification and that this specification matches the real world in some way. This process is called verification and validation (V&V), where validation is the process of ensuring that a model or specification is sufficiently accurate for the purpose at hand and, verification is the process of ensuring that the model design has been transformed into a computer model with sufficient accuracy [144]. In other words, validation determines if we are building the right model, and verification determines if we are building the model up to a particular specification [12].

One can argue that ABS should require more rigorous programming standards than other computer simulations [139]. Due to the fact that researchers in ABS are looking for an emergent behaviour in the dynamics of the simulation, they are always tempted to look for surprising behaviour and expect something unexpected from their simulation. Also, due to ABS's constructive and exploratory nature [46, 47], there exists some uncertainty about the dynamics that the simulation will produce before running it. The authors [129] see the current process of building ABS as a discovery process, where models of an ABS often lack an analytical solution in general, which makes verification much harder if there is no such solution. Thus, it is often very difficult to judge whether an unexpected outcome can be attributed to the model, or has its roots in a subtle programming error [56].

In general, this implies that it is not possible to prove that a model is valid, but that the best we can do is to raise the confidence in the correctness of the simulation. Therefore, the process of V&V is not proof that a model is correct, but it is the process of trying to show that the model is not incorrect. The more checks one carries out which show that it is not incorrect, the more confidence we can place in the model's validity. To tackle such a problem in software, engineers have developed the concept of test-driven development (TDD). TDD was popularised in the early 2000s by Kent Beck [14] as a more agile approach to software engineering, where instead of doing each step (requirements, implementation, testing, delivery) separately, from each other, all of them are combined in shorter cycles. In short, in TDD tests are written for each feature before actually implementing it. Then, the feature is fully implemented and the tests for it should pass. This cycle is repeated until the implementation of all the requirements has finished. Traditionally, TDD relies on so called unit tests which can be understood as a piece of code which when run isolated, tests some functionality of an implementation. Thus, we can say that test-driven development in general and unit testing, together with some measure of code coverage in particular, guarantee the correctness of an implementation to some informal degree. This level of accuracy has been proven to be sufficient through years of practice in the software industry all over the world.

#### 9.1 Related Work

Deleted: b

Deleted: t

Deleted: whereas

Deleted: ,

Deleted: right

Deleted: some

Deleted: in fact

Deleted: in general

Deleted: the

Deleted: way to a

Deleted: as separated

Deleted: Put shortly

Deleted: ,

Deleted: t

Deleted: up

Deleted: ,

Deleted: which has

Deleted: tly enough

Deleted: w

The work [34] was the first to discuss how to apply TDD to ABS, using unit testing to verify the correctness of the implementation up to a certain level. They show how to implement unit tests within the RePast Framework [124] and make the important point that such a software needs to be designed to be sufficiently modular otherwise testing becomes too cumbersome and involves too many parts. The paper [6] discusses a similar approach to Discrete Event Simulation in the AnyLogic software toolkit.

The paper [128] proposes Test Driven Simulation Modelling (TDSM) which combines techniques from TDD to simulation modelling. The authors present a case study for maritime search operations where they employ ABS. They emphasise that simulation modelling is an iterative process, where changes are made to existing parts, making a TDD approach to simulation modelling a good match. They present how to validate their model against analytical solutions from theory. First is the use of unit tests and running the whole simulation within a unit test, then performing a statistical comparison against a formal specification.

The paper [66] gives an in-depth and detailed overview over verification, validation and testing of agent-based models and simulations and proposes a generic framework for it. The authors present a generic UML class model for their framework which they then implement in the two ABS frameworks RePast and MASON. Both of them are implemented in Java and the authors provide a detailed description of how their generic testing framework architecture works and how it utilises unit testing with JUnit to run automated tests. To demonstrate their framework, they also provide a case study of an ABS of synaptic connectivity where they provide an in-depth explanation of their levels of tests together with code.

## 9.2 Towards Property-Based Testing

According to [42], unit testing in Haskell is quite common and robust but, generally speaking, it tends to be of less importance in Haskell since the type system makes an enormous amount of invalid programs completely inexpressible by construction. Unit tests tend to be written later in the development lifecycle and also tend to be about the core logic of the program and not the intermediate plumbing [42]. Although it would be interesting to see how we can apply unit testing to our approach, it is straightforward, not particularly novel, and does not constitute unique research.

Thus, in this chapter we introduce an additional technique for TDD, property- based testing, which can be seen as complementary to unit testing. Property- based testing has its origins in Haskell [30, 31, 145], where it was first conceived and implemented. It has been successfully used for testing Haskell code for years and has also been proven to be useful in the industry [85]. We show and discuss how this technique can be applied to test pure functional ABS implementations. To our best knowledge property-based testing has never been looked at in the context of ABS and this thesis is the first one to do so.

The main idea of property-based testing is to express model specifications and laws directly in code and test them through automated and randomised test data generation. Thus, a central hypothesis of this thesis is that due to ABS's s stochastic, exploratory, generative and constructive nature, property-based testing is a natural fit for testing ABS generally and pure functional ABS implementations in particular. It should

Deleted:  
Deleted: using  
Deleted: by  
Deleted: and

Deleted: also

Deleted: p  
Deleted: b  
Deleted: t

Deleted: generally

Deleted: thing new

Deleted: also

Deleted: in general  
Deleted: thus

consequently pose a valuable addition to the already existing testing methods in this field, which is, worth exploring.

Deleted:

To substantiate and test our hypothesis, we conduct a few case studies. First, we look into how to express and test agent specifications for both the time and event-driven SIR implementations in Chapter 10. Then we show how to encode model invariants of the SIR implementation and validate it against the formal specification from System Dynamics using property tests in Chapter 11. We explicitly exclude obvious applications of property-based testing, for example boundary checks of the environment and helper functions of agents. Although they are used within an ABS implementation, there is nothing new in testing them, and we instead, apply property-based testing to specification as well as on the model level.

Deleted: ed

Deleted: -

Deleted: rather

Deleted: and

Property-based testing has close connections to model checking [118], where properties of a system are proved in a formal way. The important difference is that in property-based testing the checking happens directly in code and not on the abstract, formal model. Consequently, one can say that property-based testing combines model checking and unit testing, embedding it directly in the software development and TDD process without an intermediary step. We think that adding it to the already existing testing methods in the field of ABS is of substantial value as it allows for, covering a much wider range of test cases due to automatic data generation. This can be used in two ways. First, to verify an implementation against a formal specification and second, to test hypotheses about an implemented simulation. This puts property-based testing on the same level as agent and system testing, where the technical implementation details are not checked as in unit tests, but their individual complete behaviour and the system behaviour as a whole is reviewed.

Deleted: Thus

Deleted: to

Deleted: not

Deleted: like

Deleted: to write

Deleted:

Deleted: manually

Deleted: enough

Deleted: though

Deleted: ,

Deleted: ing

Deleted: ing

Deleted: and focusing on

Deleted: on

Deleted: b

Deleted: t

Deleted: to formulate

Deleted: which

Deleted: much

Deleted: for which t

Deleted: ,

Deleted: for example

Deleted: ,

Deleted: meaning w

Deleted: Iso

Deleted: very well

### 9.3 Property-Based Testing

Property-based testing allows us to formulate functional specifications in code, then a property-based testing library tries to falsify this by automatically generating test data, covering as many cases as possible. When a case is found for which the property fails, the library then reduces the test data to its simplest form. Then the test still fails in one way for another, for example, shrinking a list to a smaller size. It is clear to see that this kind of testing is especially suited to ABS, because we can formulate specifications. We describe what to test instead of how to test. Additionally, the deductive nature of falsification in property-based testing suits the constructive and exploratory nature of ABS very well. Furthermore, the automatic test generation can make testing of large scenarios in ABS feasible because it does not require the programmer to specify all test cases by hand, as is required in traditional unit tests.

Property-based testing is introduced in [30, 31] where the authors present the QuickCheck library in Haskell, which tries to falsify the specifications by randomly sampling the test space. According to the authors of QuickCheck "The major limitation is that there is no measurement of test coverage." [30]. Although QuickCheck provides help to report the distribution of test cases, it is not able to measure the coverage of tests in general. This could lead to failed test cases never being tested because of the stochastic nature of QuickCheck. Fortunately, the library provides mechanisms for the developer to measure coverage in specific test cases where the data and its expected distribution is known to the developer. This is a powerful tool for testing randomness in ABS as will be shown in the next chapters.

Deleted: was

As a remedy for the potential coverage problems of QuickCheck, there is a deterministic property-testing library called SmallCheck [145], which instead of randomly sampling the test space, enumerates test cases exhaustively up to some depth. It is based on two observations derived from model-checking: (1) "If a program fails to meet its specification in some cases, it almost always fails in some simple case" and (2) "If a program does not fail in any simple case, it hardly ever fails in any case" [145]. This non-stochastic approach to property-based testing might be a complementary addition in some cases. This is particularly so, where the tests are of a non-stochastic nature with a search space too large to test manually by unit testing, but small enough to enumerate exhaustively. The main difficulty of using SmallCheck is to reduce the dimensionality of the test case depth search to prevent combinatorial explosion, which would lead to exponential number of cases. Thus, one can see QuickCheck and SmallCheck as complementary instead of in opposition to each other.

Deleted: exists also

Deleted: ,

Deleted: , that

Deleted:

Deleted: and weakness

### 9.3.1 A Brief Overview of QuickCheck

To give a good understanding of how property-based testing works with QuickCheck, we provide a few examples of property tests on lists, which are directly expressed as functions in Haskell. This function has to return a Bool which indicates True in case the test succeeds, or False if it does not, and can take input arguments as to which data is automatically generated by QuickCheck.

Deleted: b

Deleted: o

Deleted: give

Deleted: Such a

```
-- append operator (++) is associative
```

```
prop_append_associative :: [Int] -> [Int] -> [Int] -> Bool
prop_append_associative xs ys zs = (xs ++ ys) ++ zs == xs ++ (ys ++ zs)
-- The reverse of a reversed list is the original list
```

```
prop_reverse_reverse :: [Int] -> Bool
prop_reverse_reverse xs = reverse (reverse xs) == xs
```

```
-- reverse is distributive over append (++)
```

```
-- This test fails for explanatory reasons, for a correct
-- property xs and ys need to be swapped on the right-hand side!
prop_reverse_distributive :: [Int] -> [Int] -> Bool
prop_reverse_distributive xs ys = reverse (xs ++ ys) == reverse xs ++ reverse ys
```

When testing each property with QuickCheck, we get the following output:

```
> quickCheck prop_append_associative
+++ OK, passed 100 tests.
```

```

> quickCheck prop_reverse_reverse
+++ OK, passed 100 tests.
> quickCheck prop_reverse_distributive
*** Failed! Falsifiable (after 5 tests and 6 shrinks):
[0]
[1]

```

We see that QuickCheck generates 100 test cases for each property test and it does this by generating random data for the input arguments. We have not specified any data for our input arguments because QuickCheck is able to provide a suitable data generator through type inference. For lists and all the existing Haskell types custom data generators already exist. We have to use a monomorphic list, in our case “Int”, and cannot use polymorphic lists because QuickCheck would not know how to generate data for a polymorphic type. Still, by appealing to genericity and polymorphism, we have a guarantee that the test case is the same for all types of a lists.

QuickCheck generates 100 test cases by default and requires all of them to pass. If there is a test case that fails, the overall property test fails and QuickCheck shrinks the input to a minimal size, which still fails and reports it as a counter example. This is the case in the last property test prop reverse distributive, which is wrong as xs and ys need to be swapped on the right-hand side. In this run, QuickCheck found a counter example to the property after 5 tests and applied 6 shrinks to find the minimal failing example of xs = [0] and ys = [1]. If we swap xs and ys, the property test passes 100 test cases just like the other two did. It is possible to configure QuickCheck to generate more or less random test cases, which can be used to increase the coverage if the sampling space is quite large — this will become useful later.

### 9.3.1.1 Generators

QuickCheck comes with a lot of data generators for existing types like “String”, “Int”, “Double”, or “[]”, but in case one wants to randomize custom data types, one has to write custom data generators. There are two ways to do this. Either fix them at compile time by writing an Arbitrary instance, or write a run-time generator running in the Gen Monad. The advantage of having an Arbitrary instance is that the custom data type can then be used as random argument to a function as in the examples above.

Here we implement a custom data generator for the SIRState for both cases. We start with the run-time option, running in the Gen Monad:

```

genSIRState :: Gen SIRState
genSIRState = elements [Susceptible, Infected, Recovered]

```

This implementation makes use of the elements “:: [a] → Gen a func- tion”, which picks a random element from a non-empty list with uniform probability. If a skewed distribution is needed, one can use the frequency “:: [(Int, Gen a)] → Gen” a function, where a frequency can be specified for each element. Generating on average 80% Susceptible, 15% Infected and 5% Recovered can be achieved using this function:

```

genSIRState :: Gen SIRState
genSIRState = frequency [(80, Susceptible), (15, Infected), (5, Recovered)]

```

**Deleted:** there exist

**Deleted:** get the

**Deleted:** which

**Deleted:** -

**Deleted:**

**Deleted:** .

**Deleted:** Lets

**Deleted:** For example

**Deleted:** g

Implementing an Arbitrary instance is straightforward, one only needs to implement the arbitrary `":: Gen a"` method:

```
instance Arbitrary SIRState where
    arbitrary = genSIRState
```

When we have a random Double as `the` input to a function, but want to restrict its random range to (0,1) because it reflects a probability, we can do this easily with `"newtype"` and implementing an Arbitrary instance. The same can be done for limiting the simulation duration to a lower range than the full Double range.

```
newtype Probability = P Double

newtype TimeRange = T Double
instance Arbitrary Probability where
    arbitrary = P <$> choose (0, 1)
instance Arbitrary TimeRange where
    arbitrary = T <$> choose (0, 50)
```

The simulations we run all rely on a random-number generator. Thus, we need a randomly initialised random-number generator each time we run a simulation. This can be easily achieved by drawing a seed from the full Int range and creating an `"StdGen"` from it:

```
genStdGen :: Gen StdGen
-- min/maxBound are defined in the Haskell Prelude and
-- define the smallest and largest value of a Bounded type genStdGen = mkStdGen <$>
choose (minBound, maxBound)
```

```
instance Arbitrary StdGen where
    arbitrary = genStdGen
```

This generator then can be used to write another custom data generator which generates simulation runs. Here we give an example for the time-driven SIR:

Deleted: ,

Deleted: t

genTimeSIR

genTimeSIR as beta gamma delta dt tMax  
= runTimeSIR as beta gamma delta dt tMax <\$> genStdGen

### 9.3.1.2 Distributions

As already mentioned, QuickCheck provides functions to measure the coverage of test cases. This can be done using the label `":: Testable prop => String → prop → Property function"`. It takes a String as first argument and a testable property and constructs a Property. QuickCheck collects all `the` generated labels, counts their occurrences and reports their distribution. For example, it could be used to get a rough idea `of` the length of the random lists created in the `"reverse reverse"` property shown above:

Deleted: about

Deleted: reverse

```
reverse_reverse_label :: [Int] -> Property
reverse_reverse_label xs
= label ("length of random-list is " ++ show (length xs))
  (reverse (reverse xs) == xs)
```

When running the test, we see the following output:

```
:: [SIRState]
-> Double
-> Double
-> Double
-- ^ Population
-- ^ Contact rate (beta)
-- ^ Infectivity (gamma)
-- ^ Illness duration (delta)
-- ^ Time Delta
-- ^ Time Limit
-> Double
-> Double
-> Gen [(Double, (Int, Int, Int))]
```

+++ OK, passed 100 tests:

```
5% length of random-list is 27
5% length of random-list is 0
4% length of random-list is 19
...

```

### 9.3.1.3 Coverage

The most powerful functions to work with test-case distributions though are cover and checkCoverage. The function “cover :: Testable prop  $\Rightarrow$  Double  $\rightarrow$  Bool  $\rightarrow$  String  $\rightarrow$  prop  $\rightarrow$  Property” allows us to explicitly specify that a given percentage of successful test cases belong to a given class. The first argument is the expected percentage, the second argument is a Bool indicating whether the current test case belongs to the class or not, the third argument is a label for the coverage, and the fourth argument is the property which needs to hold for the test case to succeed.

Here we look at an example where we use cover to express that we expect 15% of all test cases to have a random list with at least 50 elements.

```
reverse_reverse_cover :: [Int] -> Property
reverse_reverse_cover xs
= cover 15 (length xs >= 50) "Length of random list at least 50"
  (reverse (reverse xs) == xs)
```

When repeatedly running the test, we see the following output:

```
+++ OK, passed 100 tests (10% length of random list at least 50).
Only 10% Length of random-list at least 50, but expected 15%.
+++ OK, passed 100 tests (21% length of random list at least 50).
```

As can be seen, QuickCheck runs the default 100 test cases and prints a warning if the expected coverage is not reached. This is a useful feature, but it is up to us to decide whether 100 test cases are suitable and whether we can really claim that the given coverage will be reached or not. Fortunately, QuickCheck provides the powerful function “checkCoverage :: Testable prop  $\Rightarrow$  prop  $\rightarrow$  Property” which does this for us. When checkCoverage is used, QuickCheck will run an increasing number of test cases until it can decide whether the percentage in cover was reached or cannot be reached at all. The way QuickCheck does this is by using sequential statistical hypothesis testing [181]. Thus, if QuickCheck comes to the conclusion that the given percentage can or cannot be reached, it is based on a robust statistical test giving us extreme confidence in the result.

When we run the example from above with checkCoverage we get the following output:

```
+++ OK, passed 12800 tests
(15.445% length of random-list at least 50).
```

We see that after QuickCheck ran 12,800 tests it came to the statistically robust conclusion that, indeed, at least 15% of the test cases have a random list with at least 50 elements.

### 9.3.1.4 Emulating Failure

Deleted: ;  
Deleted: ;  
Deleted: ;

Deleted: Lets

Deleted: it,  
Deleted: ,  
Deleted: t  
Deleted: strong confidence in  
Deleted: but now

Deleted: has run

Deleted: f

As already mentioned, all test cases have to pass in order for the whole property test to succeed. If just a single test case fails, the whole property test fails. This requirement is sometimes too difficult, especially when we are dealing with stochastic systems like ABS.

Deleted: strong

The function cover can be used to emulate failure of test cases and get a measurement of failure. Instead of computing the True/False property in the last prop argument, we always set the last argument to True and compute the True/False property in the second Bool argument, indicating whether the test case belongs to the class of passed tests or not. This has the effect that all test cases are successful, but we get a distribution of failed and successful cases. In combination with checkCoverage, this is a particularly powerful pattern for testing ABS, which allows us to test hypotheses and statistical tests on distributions as will be shown in the following chapters.

Deleted: always

Deleted: that

Deleted: ones

## Chapter 10

### Testing Agent Specifications

In this chapter we show, how to use QuickCheck to encode full agent specifications directly in code as property tests of both time and event-driven implementations of the agent-based SIR model. These properties serve as formal specification and tests at the same time, which is a fundamental strength of property-based testing that is not possible with unit testing in such a strong and expressive form. Aside from the high expressivity, QuickCheck also allows us to state statistical coverage for certain cases, which allows us to express statistical properties of the agents' behaviour, something that is also not directly possible with unit testing. This is a very strong indication that property-based testing is a natural fit for testing ABS.

Deleted: a

Deleted: s

Deleted: are showing

Deleted: -

Deleted: ,

Deleted: this

Deleted: Besides

Deleted: to test

Deleted: d

Deleted: s

In this section we present how QuickCheck can be used to test event-driven agents by expressing their specification as property tests in the case of the event-driven SIR implementation from chapter 5.1.

Deleted: to which

In general, testing event-driven agents is fundamentally different and more complex than testing time-driven agents, as their interface surface is generally much larger. Events form the input to the agents, then they react with new events where the dependencies between those can be quite complex and deep. Using property-based testing we can encode the invariants and end up with an actual specification of their behaviour, acting as documentation, a regression test within a TDD, and property tests.

The concepts presented here are applicable, with slight adjustments, to the Sugarscape implementation as well. But, we focused on the SIR model, as its specification is shorter and does not require as much in-depth detail.

Deleted: b

Deleted: one

Deleted: s

Deleted: ,

With event-driven ABS, a good starting point in specifying and testing the system is simply relating the input events to expected output events. In the SIR implementation we have only three events, making it feasible to give a full formal specification. The Sugarscape implementation has more than 16 events, which makes it much harder to test it with sufficient coverage. Consequently, the SIR implementation is more efficient for explanatory purposes.

Deleted: ,

Deleted: giving a good reason to primarily focus on

### 10.1.1 Deriving the Specification

Deleted: s

We start by giving the full specification of the susceptible, infected, and recovered agent by stating the input-to-output event relations. The susceptible agent is specified as follows:

1. MakeContact - if the agent receives this event, it will output  $\beta$  Contact ai Susceptible events, where ai is the agent's own id. The events have to be scheduled immediately without delay, thus having the current time as the scheduling timestamp. The receivers of the events are uniformly randomly chosen from the agent population. The agent does not change its state, stays Susceptible, and does not schedule any events other than the ones mentioned.
2. Contact Infected - if the agent receives this event there is a chance of uniform probability  $\gamma$  (infectivity) that the agent will become Infected. If this happens, the agent will schedule a Recover event to itself into the future, where the time is drawn randomly from the exponential distribution with  $\lambda = \delta$  (illness duration). If the agent does not become infected, it will not change its state, stays Susceptible and does not schedule any events.
3. Contact or Recover - if the agent receives any of these other events it will not change its state, it stays Susceptible and does not schedule any events.

Deleted: n't

Deleted: other events

Deleted: becomes

This specification implicitly covers that a susceptible agent can never transition from a Susceptible to a Recovered state within a single event as it can only make the transition to Infected or stay Susceptible. The infected agent is specified as follows:

1. Recover - if the agent receives this, it will not schedule any events and make the transition to the Recovered state.
2. Contact sender Susceptible - if the agent receives this, it will reply immediately with Contact ai Infected to sender, where ai is the infected agent's id and the scheduling timestamp is the current time. It will not schedule any events and stays Infected.
3. In case of any other event, the agent will not schedule any events and stays Infected.

Deleted: '

This specification implicitly covers that an infected agent never goes back to the Susceptible state as it can only make the transition to Recovered, or stay Infected. From

the specification of the susceptible agent it becomes clear that a susceptible agent who became infected, will always recover as the transition to Infected includes the scheduling of Recovered to itself. The recovered agent specification is very simple. It stays Recovered forever and does not schedule any events.

The question is now how to put these into a property test with QuickCheck. We focus on the susceptible agent, as it is the most complex one, which concepts can then be easily applied to the other two. Generally speaking, we create a random susceptible agent and a random event, feed it to the agent to get the output and check the invariants accordingly to input and output.

#### 10.1.2 Encoding Invariants

We start by encoding the invariants of the susceptible agent directly into Haskell, implementing a function which takes all necessary parameters and returns a Bool indicating whether the invariants hold or not. The encoding is straightforward when using pattern matching and it nearly reads like a formal specification due to the declarative nature of functional programming.

```
susceptibleProps :: SIREvent -- ^ Random event sent to agent -> SIRState -- ^ Output state of the agent
-> [QueueItem SIREvent] -- ^ Events the agent scheduled -> AgentId -- ^ Agent id of the agent
-> Bool

-- received Recover => stay Susceptible, no event scheduled

susceptibleProps Recover Susceptible es_ = null es
-- received MakeContact => stay Susceptible, check events susceptibleProps
MakeContact Susceptible es ai

= checkMakeContactInvariants ai es cor
-- received Contact_Recovered => stay Susceptible, no event scheduled
susceptibleProps (Contact_Recovered) Susceptible es_ = null es
-- received Contact_Susceptible => stay Susceptible, no event scheduled
susceptibleProps (Contact_Susceptible) Susceptible es_ = null es
-- received Contact_Infected, didn't get Infected, no event scheduled susceptibleProps
(Contact_Infected) Susceptible es_ = null es
-- received Contact_Infected AND got infected, check events susceptibleProps (Contact_Infected) Infected es ai

= checkInfectedInvariants ai es
-- all other cases are invalid and result in a failed test case susceptibleProps _____ = False
```

Next, we give the implementation for the `checkMakeContactInvariants` and `checkInfectedInvariants` functions. The function `checkMakeContactInvariants` encodes the invariants which have to hold when the susceptible agent receives a `MakeContact` event. The `checkInfectedInvariants` function encodes the invariants which have to hold when the susceptible agent gets Infected. Both implementations read

Deleted: t

Deleted: i

Deleted: ot

like a formal specification, again thanks to the declarative nature of functional programming and pattern matching:

```
checkInfectedInvariants :: AgentId -- ^ Agent id of the agent
-> [QueueItem SIREvent] -- ^ Events the agent scheduled

-> Bool

checkInfectedInvariants sender
-- expect exactly one Recovery event
[QueueItem receiver (Event Recover) t']
-- receiver is sender (self) and scheduled into the future = sender == receiver && t' >= t
-- all other cases are invalid
```

checkInfectedInvariants \_ = False  
The checkMakeContactInvariants is a bit more complex but reads as a

formal specification as well:

```
checkMakeContactInvariants :: AgentId -- ^ Agent id of the agent
-> [QueueItem SIREvent] -- ^ Events the agent scheduled

-> Int -- ^ Contact Rate

-> Bool
checkMakeContactInvariants sender es contactRate

-- make sure there has to be exactly one MakeContact event and -- exactly contactRate
Contact events
= invOK && hasMakeCont && numCont == contactRate
```

where

```
(invOK, hasMakeCont, numCont)
= foldr checkMakeContactInvariantsAux (True, False, 0) es
checkMakeContactInvariantsAux :: QueueItem SIREvent
-> (Bool, Bool, Int)
-> (Bool, Bool, Int)
checkMakeContactInvariantsAux
  (QueueItem (Contact sender' Susceptible) receiver t') (b, mkb, n)
= (b && sender == sender'
  && receiver `elem` ais
  && t == t', mkb, n+1)
-- sender in Contact must be self
-- receiver of Contact must be in agent ids
-- Contact event is scheduled immediately
checkMakeContactInvariantsAux
  (QueueItem MakeContact receiver t') (b, mkb, n)
= (b && receiver == sender'
```

```

    && t' == t + 1
-- receiver of MakeContact is agent itself
-- MakeContact scheduled 1 timeunit into future
-- there can only be one MakeContact event
    && not mkb, True, n)
checkMakeContactInvariantsAux_ (, , , )
= (False, False, 0) -- other patterns are invalid

```

The last activity is to actually write a property test using QuickCheck. We are making heavy use of random parameters to express that the properties have to hold invariants of the model parameters. We make use of additional data generator modifiers: Positive ensures that the value generated is positive and NonEmptyList ensures that the randomly generated list is not empty.

Deleted: What is left

Deleted: ;

```

prop_susceptible_invariants
prop_susceptible_invariants
:: Positive Int
-> Probability
-> Positive Double
-> Positive Double
-> NonEmptyList AgentId
-> Gen Property
-- ^ Contact rate (beta)
-- ^ Infectivity (gamma)
-- ^ Illness duration (delta)
-- ^ Current simulation time
-- ^ population agent ids

```

(Positive beta) (P gamma) (Positive delta) (Positive t) (NonEmpty ais) = do -- generate random event, requires the population agent ids  
evt <- genEvent ais  
-- run susceptible random agent with given parameters

(ai, ao, es) <- genRunSusceptibleAgent beta gamma delta t ais evt -- check properties  
return \$ property \$ susceptibleProps evt ao es ai

When running this property test, all 100 test cases pass. Due to the large random sampling space with 5 parameters, we increase the number of test cases to generate to 100,000 → still all test cases pass.

Deleted: -

Deleted: t

Deleted: p

Deleted: s

Deleted: We look now

### 10.1.3 Encoding Transition Probabilities

In the specifications above there are probabilistic state transitions, for example an infected agent will recover after a given time, which is randomly distributed with the exponential distribution. The Susceptible agent might become infected, depending on the events it receives and the infectivity ( $\gamma$ ) parameter. Now we look into how we can encode these probabilistic properties using the powerful cover and checkCoverage feature of QuickCheck.

### 10.1.3.1 Susceptible Agent

Deleted: a

We will follow the same approach as in encoding the invariants of the susceptible agent but instead of checking the invariants, we compute the probability for each case. In this property test we cannot randomise the model parameters because this would lead to random coverage. This might seem like a disadvantage, but we do not really have a choice here, still the model parameters can be adjusted arbitrarily and the property must hold. We then make use of the cover function together with checkCoverage, which ensures that we get a statistically robust estimate, whether the expected percentages can be reached or not. Implementing this property test is then simply a matter of computing the probabilities and of case analysis over the random input event and the agents' output.

...

```
case evt of
  Recover ->
    cover recoverPerc True
    ("Susceptible receives Recover, expected " ++ show recoverPerc) True
```

...

Note the usage pattern of cover, where we unconditionally include the test case in the coverage class so that all test cases pass. The reason for this is that we are just interested in testing the coverage, which is in fact the property we want to test. We could have combined this test into the previous one, but then we could not have used randomised model parameters. For this reason, and to keep the concerns separated, we opted for two different tests, which also makes them much more readable.

Deleted: to

Deleted: n't

Deleted: also

When running the property test we get the following output:

```
+++ OK, passed 819200 tests:
33.3582% Susceptible receives MakeContact, expected 33.33%
33.2578% Susceptible receives Recover, expected 33.33%
11.1643% Susceptible receives Contact * Recovered, expected 11.11%
11.1096% Susceptible receives Contact * Susceptible, expected 11.11%
10.5616% Susceptible receives Contact * Infected, stays Susceptible, expected 10.56%
0.5485% Susceptible receives Contact * Infected, becomes Infected, expected 0.56%
```

After 819,200 (!) test cases QuickCheck concludes that the distributions generated by the test cases reflect the expected distributions and pass the property test. We see that the values do not match exactly in some cases, but by using sequential statistical hypothesis testing, QuickCheck is able to conclude that the coverage is statistically equal.

Deleted: comes to the conclusion

Deleted: es

Deleted: are

Deleted: a

### 10.1.3.2 Infected Agent

We want to write a property test which checks whether the transition from Infected to Recovered actually follows the exponential distribution with a fixed  $\delta$  (illness duration). The idea is to compute the expected probability for agents having an illness duration of less or equal  $\delta$ . This probability is given by the Cumulative Density Function (CDF) of the

exponential distribution. The question is how to get the infected illness duration. The ~~e~~  
~~solution~~ is achieved ~~simply~~ by infecting a susceptible agent and taking the scheduling time of the Recover event. We have written a custom data generator for this:

Deleted: is  
Deleted: simply

```
getInfectedAgentDuration :: Double -> Gen (SIRState, Double)
getInfectedAgentDuration ild = do
    -- with these parameters the susceptible agent WILL become infected
    (ao, es) <- genRunSusceptibleAgent 1 1 ild 0 [0] (Contact 0 Infected)
    return (ao, recoveryTime es)
where
    -- expect exactly one event: Recover
    recoveryTime :: [QueueItem SIREvent] -> Double
    recoveryTime [QueueItem Recover _t] = t
    recoveryTime _ = 0
```

Encoding the probability check into a property test is straightforward:

```
prop_infected_duration :: Property
prop_infected_duration = checkCoverage (do
    -- fixed model parameter, otherwise random coverage

    let ild = 15
    -- compute probability drawing a random value less or equal -- ild from the exponential
    -- distribution (follows the CDF) let prob = 100 * expCDF (1 / ild) ild

    -- run random susceptible agent to become infected and -- return agents state and
    -- recovery time
    (ao, dur) <- getInfectedAgentDuration ild

    return (cover prob (dur <= ild)
        ("Infected agent recovery time is less or equals " ++ show ild ++
        ", expected at least " ++ show prob)
        (ao == Infected)) -- final state has to Infected
```

When running the property test we get the following output:

```
+++ OK, passed 3200 tests
(63.62% Infected agent recovery time is less or equals 15.0,
expected at least 63.21%).
```

QuickCheck is able to determine after only 3,200 test cases that the expected coverage is met and passes the property test.

## 10.2 Time-driven specification

The time-driven SIR agents have a very small interface as they only receive the agent population from the previous step and output their state in the current step. We can also assume an implicit forward flow of time, statistically guaranteed by Yampas Arrowized

FRP. Thus, a specification of a time-driven approach is given in terms of probabilities and timeouts, rather than in events as in the event-driven testing, presented before.

Deleted: as

- Susceptible agent - makes on average contact with  $\beta$  (contact rate) agents per time unit. The distribution follows the exponential distribution with  $\lambda = 1$ . If a susceptible agent gets into contact with an infected agent, it  $\beta$  will become infected with a uniform probability of  $\gamma$  (infectivity).
- Infected agent - will recover on average after  $\delta$  (illness duration) time units. The distribution follows the exponential distribution with  $\lambda = \delta$ .
- Recovered agent - stays recovered forever.

#### 10.2.1 Specifications of the Susceptible Agent

We cannot directly observe that a susceptible agent contacts other agents like we can in the event-driven approach, but only indirectly through its change of state. The change of state says that a susceptible agent might become infected if there are infected agents in the population. Consequently, when we run a susceptible agent for some time, we have three possible outcomes of the agents output stream: 1. the agent did not get infected and thus all elements of the stream are Susceptible. 2. the agent got infected and up to a given index in the stream all elements are Susceptible and change to Infected after. 3. the agent got Infected and then Recovered thus the stream is the same as in infected, but there is a second index after where, all elements change to Recovered. Encoding them in code is straightforward:

Deleted: s  
Deleted: a  
Deleted: makes contact with  
Deleted: which  
Deleted: Thus  
Deleted: ;  
Deleted: thus  
Deleted: ;  
Deleted: which

```
susceptibleInv :: [SIRState] -- ^ -> Bool -- ^ -> Bool -- ^
```

output stream of the susceptible agent  
population contains an infected agent

True in case the invariant holds

```
susceptibleInv aos inflnPop
-- Susceptible became Infected and then Recovered | isJust recIdxMay
= inflIdx < recIdx && -- agent has to become infected before recovering all
(==Susceptible) (take inflIdx aos) &&
all (==Infected) (take (recIdx - inflIdx) (drop inflIdx aos)) &&
```

CHAPTER 10. TESTING AGENT SPECIFICATIONS 149 all (==Recovered) (drop recIdx aos) &&

inflnPop -- can only happen if there are infected in the population

```
-- Susceptible became Infected
| isJust inflIdxMay
= all (==Susceptible) (take inflIdx aos) &&
all (==Infected) (drop inflIdx aos) &&
```

inflnPop -- can only happen if there are infected in the population

```
-- Susceptible stayed Susceptible
| otherwise = all (==Susceptible) aos
where
```

-- look for the first element when agent became Infected

```
inflIdxMay = elemIndex Infected aos
-- look for the first element when agent became Recovered recIdxMay = elemIndex
Recovered aos
-- extract index
inflIdx = fromJust inflIdxMay
recIdx = fromJust recIdxMay
```

Putting this into a property test is also straightforward. We generate a random population, run a random susceptible agent with a sampling rate of  $\Delta t = 0.01$ , and check the invariants on its output stream. These invariants all have to hold independently of the positive duration in which we run the random susceptible agent. Consequently, we run the agent for a random amount of time units. The invariants also have to hold for arbitrary positive beta (contact rate), gamma (infectivity), and delta (illness duration). At the same time, we want to get an idea of the percentage of agents which stayed susceptible, became infected, or made the transition to recovered. Therefore, we label all our test cases accordingly.

```
prop_susceptible_inv
prop_susceptible_inv
:: Positive Double
-> Probability
-> Positive Double
-> TimeRange
-> [SIRState]
```

Deleted: for  
Deleted: ,  
Deleted: thus  
Deleted: it  
Deleted: ,  
Deleted: thus  
Deleted: w

```

-> Property
-- ^ beta, contact rate
-- ^ gamma, infectivity within (0,1)
-- ^ delta, illness duration
-- ^ simulation duration, within (0,50)
-- ^ random population

(Positive beta) (P gamma) (Positive delta) (T t) as = property (do -- population contains
an infected agent True/False
let inflPop = Infected`elem` as
-- run a random susceptible agent for random time units with

-- sampling rate dt 0.01 and return its stream of output

aos <- genSusceptible beta gamma delta as t 0.01 -- construct property
return

-- label all test cases
label (labelTestCase aos)
-- check invariants on output stream
(property (susceptibleInv aos inflPop))

```

where

```

labelTestCase :: [SIRState] -> String
labelTestCase aos
| Recovered `elem` aos = "Susceptible -> Infected -> Recovered"
| Infected `elem` aos = "Susceptible -> Infected"
| otherwise           = "Susceptible"

```

Due to the high dimensionality of the random sampling space, we run 10,000

tests. All succeed as expected.

#### SIR Agent Specifications Tests

```

Susceptible agents invariants: OK (12.72s)
+++ OK, passed 10000 tests:
55.78% Susceptible -> Infected -> Recovered
37.19% Susceptible -> Infected
7.03% Susceptible

```

This test has not stated anything so far about the probability of a susceptible agent getting infected. The probability for it is bimodal (see next chapter) due to the combined probabilities of the exponential distribution of the contact rate  $\beta$  and the uniform distribution of the infectivity  $\gamma$ . Unfortunately, the bimodality makes it impossible to compute a coverage percentage of Infected in this case, as we did in the event-driven test. The reasoning for this deviation is because the bimodal distribution can only be described in terms of a distribution and not a single probability. This was possible in the

**Deleted:** so far

**Deleted:** did not state

**Deleted:** not possible

**Deleted:** i

even-driven approach because we decoupled the production of the Contact Infected event from the infection. Both were uniformly distributed; thus we could compute a coverage percentage. Therefore, we see that different approaches also allow different explicitness of testing.

#### 10.2.2 Probabilities of the Infected Agent

An infected agent will recover after a finite amount of time, thus we assume that an index exists in the output stream, where the elements will change to Recovered. From the index we can compute the time of recovery, knowing the fixed sampling rate  $\Delta t$ .

```
infectedInvariant :: [SIRState] -- ^ stream of outputs from infected agent -> Double -- ^
Sampling rate dt
=> Maybe Double -- ^ Just recovery time, Nothing if no recovery
infectedInvariant aos dt
-- search for the index of the first Recovery element

recIdx <- elemIndex Recovered aos
-- all elements up to the index need to be Infected, -- because the agent cannot go back to Susceptible if all (==Infected) (take recIdx aos)

then Just (dt * recIdx)
else Nothing
```

To put this into a property test, we follow a similar approach as in the event-driven case of the infected agents' invariants. We employ the CDF of the exponential distribution to get the probability of an agent recovering within  $\delta$  (illness duration) time steps. We then run a random infected agent for an unlimited time with a sampling rate of  $\Delta t = 0.01$ . Next, we search in its potentially infinite output stream for the first occurrence of an Infected element to compute the recovery time, as shown in the invariant above. The code is conceptually exactly the same as in the event-driven case, so we will not repeat the property test here.

When running the test, we get the following output indicating that QuickCheck

Deleted: distributed,  
Deleted: Thus

Deleted: i  
Deleted: a  
Deleted: there exists

Deleted: and  
Deleted: do

Deleted: ,

finds the coverage to be satisfied after 3,200 test cases:

+++ OK, passed 3200 tests (62.28% infected agents have an illness duration of 15.0 or less, expected 63.21).

The fact that we run the random infected agent explicitly without time limit expresses the invariant that an infected agent will recover in finite time steps. A correct implementation will produce a stream, which contains an index after which all elements are Infected, thus resulting in Just recovery time. This is also a direct expression of the fact that the CDF of the exponential distribution reaches 1 at infinity. An approach that would guarantee the termination would be to limit the time to run the infected agent to  $\delta$  (illness duration) and always evaluate the property, to True. This approach guarantees termination but removes an important part of the specification. We decided to stick to the initial approach to make the specification really clear, and in practice it has turned out to terminate within a very short time (see below).

#### 10.2.3 The Non-Computability of the Recovered Agent Test

The property test for the recovered agent is trivial. We run a random recovered agent for a random number of time units with  $\Delta t = 0.01$  and require that all elements in the output stream are Recovered. Of course, this is no proof that the recovered agent stays recovered forever as this would take forever to test and is thus not computable. Here we are hitting the limits of what is possible with random black-box testing. Without looking at the actual implementation it is not possible to prove that the recovered agent is really behaving as specified. We made this fact very clear at the beginning of Chapter 6 that property-based testing is not proof for correctness, but is only the support for raising the confidence in correctness by constructing cases that show that the behaviour is not incorrect.

To be really sure that the recovered agent behaves as specified we need to employ white-box verification and look at the actual implementation. It is immediately obvious that the implementation follows the specification and actually is the specification. And we can even regard it as very concise proof that it will stay recovered forever:

```
recoveredAgent :: SIRAgent
recoveredAgent = constant Recovered
```

The signal function constant is the “const” function lifted into an arrow: constant  $b = \text{arr}(\text{const } b)$ . This should be proof enough that a recovered agent will stay recovered forever.

### 10.3 Discussion

In this section we have shown how to express the specifications of both the event and time-driven agent behaviour directly in code as properties and how to implement property tests in QuickCheck for them. The approach to event-driven properties was to establish a correspondence between an input event, the current agent state, the output events, and the new agents' state. In the case of the time-driven agent, the properties are expressed in terms of a potentially infinite stream of agent output states. Although both implementations follow the same underlying model, the technical details of the

Deleted: which

Deleted: always

Deleted: ,

Deleted: n

Deleted: c

Deleted: r

Deleted: a

Deleted: t

Deleted:

Deleted: a

Deleted: a

Deleted: which

Deleted: ,

Deleted: a

Deleted: a

Deleted: -

Deleted:

Deleted: and

properties differ substantially. The reason for this is that although property-based testing is a black-box verification technique, the implementation often requires substantial knowledge of the internal details as can be seen especially in the event-driven case.

The resulting properties are highly expressive due to pattern matching and declarative programming and can be regarded as a kind of formal specification. Together with the properties, which check the state transition probabilities, we claim that the property tests shown in this chapter fully specify both the event and time-driven agent behaviour. This is the first example emphasising the usefulness of QuickCheck for testing ABS, providing the first strong evidence for the hypothesis that randomised property testing is a good match for testing ABS.

Curiously, the implementation of all the specifications and property tests have substantially more lines of code than the original implementations. However, this is not relevant here. We showed how to implement a full specification of an ABS model as a property test and we succeeded! This is definitely a strong indication that our hypothesis that randomised property-based testing is a suitable tool for testing ABS is valid. With unit tests we would be quite lost here, as even for the SIR model, it is hard to enumerate all possible interactions and cases. But, by stating invariants as properties and generating random test cases we make sure they are checked.

We have not looked into more complex testing patterns like the synchronous agent interactions of Sugarscape. We didn't look into testing full agent and interacting agent behaviour using property tests as its complexity would justify a thesis on its own. Due to its inherent stateful nature, with complex dependencies between valid states and agents' actions we need a more sophisticated approach. Similarly this is outlined in [39], where the authors show how to build a meta model and commands, which allow for specifying properties and valid state transitions that can be generated automatically. We will, however, leave this for further research.

By exploiting lazy evaluation in the time-driven tests, we scratch on what is conveniently possible in established approaches to ABS. We can let the simulation run potentially forever as in the case of the infected agent and rely on the correctness of the implementation to terminate in finite steps when consuming the potentially infinite stream.

We did not include an explicit environment in our agent specification tests and assumed a full connected network where all agents can contact each other. We claim that property-based testing is highly useful there as well, especially when dealing with random environments like in Sugarscape or social and random networks [45, 89]. We will leave this for further research, but we hypothesise that for the SIR model all properties presented here should still hold under different environments.

## Chapter 11

### Testing Model Invariants

The tests of the event-driven implementation in the previous chapter were stateless: only one computational step of an agent was considered by feeding a single event and

Deleted: -

Deleted: a

Deleted: a

Deleted: s

Deleted: b

Deleted: as

Deleted: to

Deleted: which

Deleted: make contact with

Deleted: m

Deleted: i

Deleted: -

ignoring the agent continuation. Additionally, the events did not contain any notion of time as they would carry within the queue. Feeding follow-up events into the continuation would make testing inherently stateful as we introduce history into the system. Such tests would allow to test the full lifecycle of one agent or a full population.

Deleted: lso  
Deleted: n't

In this chapter we will discuss how we can encode properties and specifications that require stateful testing. We define stateful testing here as evolving a simulation state consisting of one or more agents over multiple events, which means running the whole simulation and not only isolated agents.

Deleted: -  
Deleted: which

We first show how we can encode actual laws of the underlying SIR model into properties and write property tests in QuickCheck for them. We then employ random event sampling to check whether these invariants also hold when ignoring the event-interdependencies between agents. Furthermore, we compare the dynamics of both the event-and time-driven implementations, giving an excellent use case for property-based testing in ABS. Finally, we show how to verify both the time-and event-driven implementations against the original System Dynamics specification.

Deleted: -  
Deleted: -

### 11.1 Invariants in Simulation Dynamics

Deleted: s  
Deleted: d

By informally reasoning about the agent specification and by realising that they are, in fact, a state machine with a one-directional flow of “Susceptible → Infected → Recovered”, we can come up with a few invariants which have to hold for any SIR simulation run, independent of the random-number stream and the population:

1. Simulation time is monotonic increasing. Each event carries a timestamp when it is scheduled. This timestamp may stay constant between multiple events but will eventually increase and must never decrease. Obviously, this invariant is a fundamental assumption in most simulations where time advances into the future and does not flow backwards.
2. The number of total agents N stays constant. In the SIR model no dynamic creation or removal of agents during simulation happens. This is in contrast to the Sugarscape where, depending on the model parameters, this can be very well the case.
3. The number of susceptible agents S is monotonic decreasing. Susceptible agents might become infected, reducing the total number of susceptible agents but they can never increase because neither an infected nor recovered agent can go back to susceptible.
4. The number of recovered agents R is monotonic increasing. This is because infected agents will recover, leading to an increase of recovered agents but once the recovered state is reached, there is no escape from it.
5. The number of infected agents I respects the invariant of the equation  $I = N - (S + R)$  for every step. This follows directly from the first property which says  $N = S + I + R$ .

Deleted: i

#### 11.1.1 Encoding the Invariants

All of those properties are easily expressed directly in code and read like a formal specification due to the declarative nature of functional programming:

```

sirInvariants :: Int -- ^ N total number of agents
-> [(Time,(Int,Int,Int))] -- ^ output each step: (Time,(S,I,R)) -> Bool

sirInvariants n aos = timeInc && aConst && susDec && recInc && inflInv
where
  (ts, sirs) = unzip aos
  (ss, rs) = unzip3 sirs
  -- 1. time is monotonic increasing

timeInc = allPairs (<=) ts
-- 2. number of agents N stays constant in each step aConst = all agentCountInv sirs
-- 3. number of susceptible S is monotonic decreasing susDec = allPairs (>=) ss
-- 4. number of recovered R is monotonic increasing recInc = allPairs (<=) rs
-- 5. number of infected I = N - (S + R)
inflInv = all infectedInv sirs

agentCountInv :: (Int,Int,Int) -> Bool
agentCountInv (s,i,r) = s + i + r == n
infectedInv :: (Int,Int,Int) -> Bool
infectedInv (s,i,r) = i == n - (s + r)
allPairs :: (Ord a, Num a) => (a -> a -> Bool) -> [a] -> Bool

```

allPairs f xs = all (uncurry f) (pairs xs)

```

pairs :: [a] -> [(a,a)]
pairs xs = zip xs (tail xs)

```

Putting this property into a QuickCheck test is straightforward. We randomise the model parameters  $\beta$  (contact rate),  $\gamma$  (infectivity) and  $\delta$  (illness duration) because the properties have to hold for all positive, finite model parameters.

```

prop_sir_invariants
prop_sir_invariants
:: Positive Int
-> Probability
-> Positive Double
-> TimeRange
-> [SIRState]
-> Property
-- ^ beta, contact rate
-- ^ gamma, infectivity in range (0,1)
-- ^ delta, illness duration
-- ^ random duration in range (0, 50)
-- ^ population

(Positive beta) (P gamma) (Positive delta) (T t) as = property (do -- total agent count
let n = length as
-- run the SIR simulation with a new RNG

```

```
ret <- genSimulationSIR as beta gamma delta t -- check invariants and return result
return (sirInvariants n ret)
```

Due to the large sampling space, we increase the number of test cases to run to 10,000 and all tests pass as expected. We put a random time limit within the range of (0,50) on the simulations to run. Meaning, that if a simulation does not terminate before that limit, it will be terminated at that random t. The reason for this is entirely practical as it ensures that the clock time to run the tests stays within reasonable bounds while still retaining randomness. In fact, limiting the duration is actually not necessary because we can reason that the SIR simulation will always reach an equilibrium in finite steps.

### 11.1.2 Random Event Sampling Invariants

An interesting question is whether or not these properties depend on correct interdependencies of events the agents send to each other, in reaction to events they receive. In other words, do these invariants also hold under random event sampling? To test this, instead of using the actual SIR implementation, which inserts the events generated by the agents into the event queue, we wrote a new SIR kernel. It completely ignores the events generated by the agents and instead makes use of an infinite stream of random queue elements from which it executes a given number: 100,000 in our case. Queue elements contain a timestamp, the receiving agent id, and the actual event where the timestamp is ensured to be increasing. To hold up the monotonic time property, the receiving agent id is drawn randomly from the constant list of all agents in the simulation and the actual event is randomly generated. As it turns out, all tests pass, which means that the SIR properties are also invariant under random event sampling.

### 11.1.3 Time-Driven Invariants

We can expect that the invariants above also hold for the time-driven implementation. The property test is exactly the same, with the time-driven implementation running instead of the even-driven one. A big difference is that is not necessary to check the property of monotonic increasing time, as it is an invariant statically guaranteed by Arrowized FRP through the Yampa implementation. Due to the fact that the flow of time is always implicitly forward and no time variable is explicitly made accessible within the code, it is not possible to violate the monotonic increase of time.

When we ran the property test we got a big surprise though. After a few test cases the property test failed due to a violation of the invariants! After a little bit of investigation, it became clear that the invariant (3) number of susceptible agents is monotonic decreasing was violated. In the failing test case the number of susceptible agents is monotonic decreasing with the exception of one step where it increases by 1 just to decrease by 1 in the next step. A coverage test reveals that this happens in about 66% of 1,000 test cases.

The technicalities of the problem are highly involved and not provided in depth here. The source of the problem are the semantics of switch and dpSwitch, which could lead to a delayed output of the agent state. In turn, it would also lead to inconsistencies when feeding it back as environment in the next step. The solution is to delay the output of the susceptible agent by one step using iPre as already shown in the original time-driven implementation of 4.1. This solves the problem and the property test passes.

Deleted: ,  
Deleted: m  
Deleted: that

Deleted: e  
Deleted: s  
Deleted: i  
Deleted: Put i  
Deleted: :

Deleted: ,  
Deleted: ,  
Deleted: t

Deleted: d  
Deleted: i

Deleted: , leading

## 11.2 Comparing Time and Event-Driven Implementations

Having two conceptually different implementations of the same model, an obvious question we want to answer is whether they are producing the same dynamics or not. To be more precise, we need to answer the question whether both simulations produce the same distributions under random model parameters and simulation time. This is a perfect use case for QuickCheck as well and easily encoded into a property test.

We generate random values for  $\beta$  (contact rate),  $\gamma$  (infectivity) and  $\delta$  (illness duration) as well as a random population and a random duration to run the simulations. We again restrict the random duration to be drawn from the range of (0,50) to reduce the clock time duration to a reasonable amount without taking away the randomness.

Both simulation types are run with the same random parameters for 100 replications, collecting the output of the final step. The samples of these replications are then compared using a Mann-Whitney test with a 95% confidence (p-value of 0.05). The reason for choosing this statistical test over a Two Sample t-Test is that the Mann-Whitney test does not require the samples to be normally distributed. We know both from experimental observations and discussions in [109] that both implementations produce a bimodal distribution, thus we have to use a non-parametric test like Mann-Whitney to compare them.

We expect a high coverage of at least 90%, which makes our assumption explicit that we expect both simulations to produce highly similar distributions despite their different underlying implementations.

```
prop_event_time_equal
prop_event_time_equal
:: Positive Int
-> Probability
-> Positive Double
-> TimeRange
-> [SIRState]
-> Property
-- ^ beta, contact rate
-- ^ gamma, infectivity, (0,1) range
-- ^ delta, illness duration
-- ^ time to run, (0, 50) range
-- ^ population
```

```
(Positive beta) (P gamma) (Positive delta) (T t) as = checkCoverage (do -- run 100
replications for time- and event-driven simulation
(ssT, isT, rsT) <- unzip3 <$> genTimeSIRRepls 100 as beta gamma delta t (ssE, isE, rsE)
<- unzip3 <$> genEventSIRRepls 100 as beta gamma delta t -- confidence of 95 for Mann
Whitney test
```

```
let p = 0.05
-- perform statistical tests
let ssTest = mannWhitneyTwoSample ssT ssE p
```

Deleted: t  
Deleted: -  
Deleted: e  
Deleted: d  
Deleted: i

Deleted: for

```

isTest = mannWhitneyTwoSample isT isE p

rsTest = mannWhitneyTwoSample rsT rsE p
-- all tests have to pass
let allPass = ssTest && isTest && rsTest
-- add the test to the coverage tests only if it passes. return

(cover 90 allPass "SIR implementations produce equal distributions" True)

```

Indeed, when running this test, enforcing QuickCheck to perform sequential statistical hypothesis testing with checkCoverage, after 800 tests QuickCheck passes the test.

+++ OK, passed 800 tests  
 (90.4% SIR event- and time-driven produce equal distributions).

This result shows that both implementations produce highly similar distributions although they are not exactly the same as the 10% of failure shows. We will discuss this issue in a broader context in the next section.

### 11.3 Testing the SIR Model Specification

In the previous chapters and sections, we have established the correctness of our event and time-driven implementation up to our informal specification, we derived from the formal SD specification from Chapter 2.1.1. What we are lacking is a verification whether the implementations also match the formal SD specification or not. We aim to connect the agent-based implementation to the SD specification, by formalising it into properties within a property test.

The SD specification can be given through the differential equations shown in

Chapter 2.1.1, which we repeat here:

$$\frac{dS}{dt} = -\text{infectionRate } I \beta S \gamma$$

Deleted: m

Deleted: s

Deleted: -

Deleted: at connecting

$$dI = \text{infectionRate} - \text{recoveryRate} N$$

(11.1)

Solving these equations is done by integrating over time. In the SD terminology, the integrals are called Stocks and the values over which is integrated over time are called Flows. At  $t = 0$  a single agent is infected, because if there were no infected agents, the system would immediately reach equilibrium. This is the formal definition of the steady state of the system, where as soon as  $I(t) = 0$  the system will not change any more.

**Deleted:** wouldn't be any

$$\frac{dt}{\text{recoveryRate}} = I$$

$\int_{t_0}$

$\int_{t_0}$

### 11.3.1 Deriving a property

$$I(t) = R(t) =$$

$$\text{infectionRate} - \text{recoveryRate} dt \text{ recoveryRate} dt$$

$$dR = \text{recoveryRate} \delta dt$$

$$S(t) = N - I(0) + I(0) = 1$$

$$\exists t \geq 0$$

$$-\text{infectionRate} dt$$

(11.2) (11.3) (11.4)

(11.5)

The goal now is to derive a property which connects those equations with our implementation. We have to be careful and realise a fundamental difference between the System Dynamics (SD) and ABS implementations: SD is deterministic and continuous, ABS is stochastic and discrete. Thus, we cannot compare single runs but can only compare averages. Stated informally, the property we want to implement is that the ABS dynamics matches the SD ones on average. This implementation should be independent of the finite population size, model parameters  $\beta$  (contact rate),  $\gamma$  (infectivity),  $\delta$  (illness duration), and duration of the simulation. To be able to compare averages, we run 100 replications of the ABS simulation with same parameters, with the exception of a different random-number generator in each replication and then collect the output of the final steps. The next step is to run a Two Sided t-Test on the replication values with the expected values generated by an SD simulation.

Deleted: is

Deleted: we

Deleted: ,

Deleted: and

Deleted: except

Deleted: We then

```
compareSDToABS :: Int  
-> Int
```

```

-> Int
-- ^ Initial number of susceptibles
-- ^ Initial number of infected
-- ^ Initial number of recovered

-> [Int] -- ^ Final number of susceptibles in replications

-> [Int]
-> [Int]
-> Int
-> Double
-> Double
-> Time
-> Bool

compareSDToABS s0 r0 i0
  ss is rs
-- ^ Final number of infected in replications
-- ^ Final number of recovered in replications
-- ^ beta (contact rate)
-- ^ gamma (infectivity)
-- ^ delta (illness duration)
-- ^ duration of simulation

beta gamma delta t = sTest && iTest && rTest -- run SD simulation to get expected
averages

(s, i, r) = simulateSD s0 i0 r0 beta gamma delta t
confidence = 0.95
sTest = tTestSamples TwoTail s (1 - confidence) ss
iTest = tTestSamples TwoTail i (1 - confidence) is
rTest = tTestSamples TwoTail r (1 - confidence) rs

```

The implementation of `simulateSD` is discussed in depth in Appendix B. We are very well aware that comparing the output against an SD simulation is dangerous because after all, why should we trust the SD implementation? As outlined in Appendix B, great care has been taken to ensure correctness. The formulas from the SIR specification are directly put into code, allowed by Yampa's Arrowized FRP, which guarantees that at least that translation step is correct. We then only rely on a small enough sampling rate and the correctness of the Yampa library. The former is very well within our reach and we pick a sufficiently small sample rate; the latter is beyond our reach, but we expect the library to be mature enough to be correct for our purposes.

### 11.3.2 Implementing the Test

Implementing a property test is straightforward. Here we give the implementation for the time-driven SIR implementation. The implementation for the event-driven SIR implementation is exactly the same with the exception of “`genTimeSIRRepls`”. We again make use of the `checkCoverage` feature of QuickCheck to get statistically robust results and expect that in 75% of all test cases the SD and ABS dynamics match on average. We discuss below why we chose to use 75% coverage. QuickCheck will run as many tests as

Deleted: b

Deleted: the

Deleted: one

Deleted: in

Deleted: y

Deleted: one

Deleted: m

Deleted: t

Deleted: a

necessary to reach a statistically robust result, which either rejects or accepts this hypothesis.

Deleted: allows to

where

```
prop_sir_time_spec
prop_sir_time_spec
:: Positive Int
-> Propability
-> Positive Double
-> TimeRange
-> [SIRState]
-> Property
-- ^ beta, contact rate
-- ^ gamma, infectivity, (0,1) range
-- ^ delta, illness duration
-- ^ time to run, (0, 50) range
-- ^ population
```

(Positive beta) (P gamma) (Positive delta) (T t) as = checkCoverage (do -- get initial agent numbers  
let (s0,i0,r0) = aggregateSIRStates as

```
-- run 100 replications of time-driven SIR implementation
(ss, is, rs) <- unzip3 <$> genTimeSIRRepls 100 as beta gamma delta t
let prop = compareSDToABS s0 i0 r0 ss is rs beta gamma delta t
return $ cover 75 prop "SIR time-driven passes t-test with simulated SD" True
```

### 11.3.3 Running the Test

When running the tests for the time and event-driven implementation, QuickCheck reports the following:

```
+++ OK, passed 400 tests
(85.2% SIR time-driven passes t-test with simulated SD).
+++ OK, passed 3200 tests
(74.84% SIR event-driven passes t-test with simulated SD).
```

The results show clearly that in both cases we reach the expected 75% coverage. The distributions of the time and event-driven implementations match the simulated SD dynamics to at least 75%, in the case of the time-driven approach this result is substantially higher. Still, this result raises two questions:

1. Why does the performance of the time-driven implementation surpass the event-driven one by more than 10%?
2. Why are we not reaching a far higher coverage beyond 90%? Why have we chosen 75% in the first place? After all, our initial assumption was that the time and event-driven implementations are simply agent-based implementations of the SD model and thus, their dynamics should generate the same distributions as the SD ones.

Deleted: t

Deleted: -

Deleted: of

Deleted: -

Deleted: -

Deleted: even

Deleted: es

Deleted: and

Deleted: w

Deleted: -

First of all, the results are a very strong indication that although both implementation techniques try to implement the same underlying model, they generate different distributions and are thus not statistically equal. This was already established in Chapter 11, where we have compared the distributions of both simulations and found that, although we reach 90% similarity, this means that they are still different in some cases. The results of this property test reflect that as well and we argue that this is also the reason why we see different performance ~~in~~ each when compared to SD.

Deleted: of

An explanation why the time-driven approach seems to be closer to the SD dynamics is that in the event-driven approach we are dealing with discrete events, jumping from time to time instead of moving forward in time continuously as it happens conceptually in the time-driven approach. Time is also continuous in SD, thus it seems intuitively clear that a time-driven approach is closer to the SD implementation than the event-driven one. The implication is that, depending on our intention, picking a time-driven or an event-driven implementation can and will make a statistical difference. When one is transferring an SD to an ABS model, one might consider ~~following~~ the time-driven approach as it seems to come much closer to the SD dynamics than the event-driven approach.

Deleted: to follow

The reason that we are not reaching a coverage level up to and beyond 90% is rooted in the fundamental difference between SD and ABS. Due to ABS's stochastic nature, its dynamics cannot match an SD exactly because it generates a distribution, whereas the SD is deterministic. This enables ABS to explore and reveal paths which are not possible in deterministic SD. In the case of the SIR model, an alternative path would be the immediate recovery of the single infected agent at the beginning, without infecting any other agent. This is not possible in the SD case where ~~if~~ there is 1 infected agent, the whole epidemic will ~~unfold~~.

Deleted: such

Deleted: in case

Commented [KJ24]: I'm not sure about this word. Do you mean that if there is one infected agent then it will create an epidemic or that the epidemic will somehow unravel or stop?

Deleted: to compare

Deleted: a a

The difficulty of comparing dynamics between SD and ABS and the impracticality ~~in~~ ~~comparing~~ them exactly was shown by [109] in the case of the SIR model, where the authors showed that it generates a bimodal distribution. Furthermore, the authors report that a 70% envelope contains both the results of the SD and ABS implementation, which is the reason why we chose 75% coverage as our initial guess, which has turned out to work well and is in accordance with the results of [109].

The question which remains is whether it actually makes sense to compare the approaches to SD or even amongst each other. After all, ~~these approaches~~ can be seen as fundamentally different. We can argue that they are qualitatively equal as [51] has already emphasised in a different study on comparing ABS and SD. Although dynamics of ABS models are statistically different from SD ones, they look similar. The main difference is that ABS can contribute additional insight through revealing extra patterns due to its stochasticity, something not possible with SD. Thus, in the end we simply have to accept that the respective coverage ratios are probably the closest we can get and that this is also ~~the closest~~ in terms of validating our implementations against the original SD specification.

Deleted: even

Deleted: -

Deleted: ,

Deleted: a

Deleted: y

Deleted: approaches

Deleted: :

Deleted: a

Deleted: the clos- est we can get

## 11.4 Discussion

In this chapter we have shown how to encode properties about simulation dynamics, generated by executing agents over time. This allowed for us to encode actual laws of the underlying SIR model in code and check them under random model parameters.

In the case of the time-driven implementation we saw that our initial assumption, that the invariants will hold for this implementation as well was wrong: QuickCheck revealed a very subtle bug in our implementation. Although the probability of this bug is very low, QuickCheck found it due to its random testing nature. This is another strong evidence, that random property-based testing is an excellent approach for testing ABS. On the other hand, this bug revealed the difficulties in getting the subtle semantics of FRP right to implement pure functional ABS. This is a strong case that in general an event-driven approach should be preferred. The approach is also much faster and not subject to the sampling issues discussed in Chapter 4.1.

Further, we showed that property-based testing also allows us to compare two conceptually different implementations of the same underlying model with each other. This is indeed a perfect use case for property-based testing as it compares whole distributions and not only single runs using unit tests, making this another strong case for the use of property-based testing in ABS.

Finally, after having shown in previous chapters, that individual agent behaviour is correct up to some specification, in this chapter we also focused on validating the dynamics of the simulation with the original SD specification. By using QuickCheck, we showed how to connect both ABS implementations to the SD specification by deriving a property, based on the SD specification. This property is directly expressed in code and tested through generating random test cases with random agent populations and random model parameters.

Although our initial idea of matching the ABS implementation to the SD specifications has not worked out in an exact way, we still showed a way of formalizing and expressing these relations in code and testing them using QuickCheck. The results showed that the ABS implementation comes close to the original SD specification but does not match it exactly — it is indeed richer in its dynamics as [51 and 109] have already shown. Our approach might work out better for a different model, which has a better-behaved underlying specification than the bimodal SIR.

Concluding the chapters on property-based testing we had an extensive look into the usefulness of randomised property-based testing in the development, specification and testing of pure functional ABS. We found property-based testing particularly well suited for ABS firstly due to ABS stochastic nature and second because we can formulate specifications, meaning we describe what to test instead of how to test. Also, the deductive nature of falsification in property-based testing suits the constructive and often exploratory nature of ABS very well.

Indeed, we can see property-based testing not only as a post-implementation testing tool but as an extension to the development process. The developer engages in an interactive cycle of implementing agent and simulation behaviour and then immediately puts specifications into property tests and running them. This approach of expressing specifications instead of special cases like in unit tests is arguably a much more natural

Deleted: ,  
Deleted: which  
Deleted: also

Deleted: -  
Deleted: ,  
Deleted: better behaved

Deleted:  
Deleted: suits  
Deleted: very well  
Deleted: ,  
Deleted: where t  
Deleted: ting

approach to test-driven development in ABS development than relying only on unit tests.

In these chapters we only focused on the explanatory SIR model and ignored the exploratory Sugarscape. It is important to understand that testing of exploratory models is also possible through hypothesis testing. We discuss this approach in Appendix A in the context of validating our Sugarscape implementation.

We have only touched the tip of the iceberg and expect tremendous potential from applying property-based testing to different kind of models and in implementing ABS in general. Indeed, although property-based testing has its origins in Haskell, similar libraries have been developed for other languages like Java, Python and C++. In addition, we hope that our research will spark an interest in applying property-based testing to the established object-oriented languages in ABS as well.

### Part III: Discussion and Conclusion

#### Chapter 12

##### General Discussion

This thesis started out by challenging the established views that "[..] object-oriented programming [is] a particularly natural development environment for Sugarscape specifically and artificial societies generally [...]” [48] (p. 179) and that agents map naturally to objects [125]. As an alternative, a radically different approach to implementing ABS was proposed, using the pure functional programming paradigm. As the language of choice, Haskell was motivated due to its pure functional features, matureness and increasing relevance to real-world applications.

The conjecture was that by using Haskell, one can directly transfer the promises made by pure functional programming to ABS as well, directly gaining a few highly important benefits. The relevance of each of these promises to ABS was already pointed out in the respective chapters and it is quite obvious that these benefits would clearly be of substantial value in ABS. The common baseline is that all those benefits support implementing ABS which are more likely to be correct, something of fundamental value in simulation.

1. The static strong type system allows for removing a substantial number and class of bugs at run time and if one programs careful one can even guarantee that no bugs as in crashes or exceptions will occur at run time. This is particularly the case for purely computational problems, without non-deterministic, persistent side effects running in the IO context<sup>1</sup>, as ABS almost always are.
2. Explicit handling and control of side effects delivers even more static guarantees at compile time and allows us to deal with deterministic side effects (random-number streams, read-and write-only contexts, state) in a referential transparent way. In combination with strong static typing this allows to reduce logical bugs, subject to the domain of the problem, by

Deleted: as well and

Deleted:

Deleted: to be

Deleted: -

Deleted: to

Deleted: e

Deleted: -

<sup>1</sup>Obviously IO is involved in all ABS, otherwise the results are not observable. By purely computational, we mean the lack of IO in the agents, as a fundamental part of the model specification, other than visualisation and exporting to an output file.

165



dramatically reducing available, valid operations on data after all stateful applications are a fact, the challenge is how to deal with state. As ABS is an inherently stateful problem due to agents and the environment, this should increase the correctness of an ABS implementation as well. Further, this should allow us to produce an implementation which is guaranteed to be reproducible at compile time, where runs with same initial conditions will result in same dynamics.

3. Parallel and concurrent programming is claimed to be a lot easier, less painful and less error prone in functional programming in general and in Haskell in particular due to immutable data and the explicit handling of side effects. The concept of STM, which allows to express a problem as a data-flow problem, is highly promising. Besides, data-parallel programming promises to speedup code without the need for changing any of the logic or types. This seemed to offer a straightforward way of speeding up ABS implementations either through data parallelism or concurrency. This has always been quite difficult to achieve in traditional object-oriented ABS and pure functional programming seems to offer a solution.
4. The data-centric declarative style, referential transparency and immutability of data makes testing substantially easier due to composability: functions can be easily tested in isolation from each other even if they involve side effects. This opens the door for randomised property-based testing, which intuitively seemed to be a perfect match to test ABS implementations which are almost always stochastic in nature.

The central question which needed to be answered first was how ABS could be done purely functional, as no research exists which offered a systematic solution to that problem. More specifically, it was unclear how to represent agents, how to express agent identity, local agents' state, changing behaviour and interactions amongst agents and the

**Deleted:** there didn't exist any

environment. After all, this is straightforward in object-oriented programming due to method calls and mutable shared state, encapsulated in objects. This thesis solution was to use Arrowized FRP, both in the pure implementation of Yampa and the monadic version as in the library Dunai. Building on top of them allowed for implementing pro-activity of agents, encapsulation of local agent state, an environment as a shared mutable state and synchronous agent interactions based on an event-driven approach. The central concept behind these approaches are Signal Functions, generalised in Dunai to Monadic Stream Functions, which are implemented using closures and continuations, fundamental building blocks and concepts of pure functional programming. With these techniques it became possible to implement time-driven models like the agent-based SIR, as introduced in Chapter 2.1.1 and the highly complex event-driven Sugarscape model as introduced in Chapter 2.1.2. The fact that the developed concepts can manage the complexity of a full Sugarscape implementation is proof that they are suitable for most agent-based models, running on single machines.

Probably the biggest strength coming out of these implementation techniques is that we can guarantee reproducibility at compile time: given identical initial conditions, repeated runs of the simulation will lead to same outputs. This is of fundamental importance in simulation and addressed in the Sugarscape model: "... when the sequence of random numbers is specified ex ante the model is deterministic. Stated yet another way, model output is invariant from run to run when all aspects of the model are kept constant including the stream of random numbers." (page 28, footnote 16) — the pure functional approach can guarantee that at compile time. Furthermore, we can enforce update semantics to a certain degree by dramatically restricting the state agents can manipulate. For example, in the time-driven approach the fact that the environment is provided as read-only, agents cannot interfere with other agents due to purity, and complete lack of side effects, factually enforces the parallel update strategy. There is simply no way for agents to misbehave and violate the semantics of updates by mutating state, they are not allowed.

The thesis then turned to the additional opportunities a pure functional approach offers, with focus on parallelism and concurrency and property-based testing. By applying compositional parallelism, it was possible to speed up the non-monadic time-driven ABS by a substantial factor, without losing static guarantees about reproducibility. The same was not possible with a monadic approach, which motivated the transition to concurrency using STM, where a substantial speedup was achieved in a monadic, event-driven implementation sacrificing purity. Still, by limiting the side effects of STM guarantees that the differences of the dynamics of repeated runs come only from the side effects of concurrency and nothing else.

It was shown that adding data parallelism is easy and often requires simply swapping out a data structure or library function against its parallel version. Concurrency, although still hard, is less painful to address and add in a pure functional setting due to immutable data and explicit side effects. Further, the benefits of implementing concurrent ABS based on STM has been shown at length in the respective chapter, which underlines the strength of Haskell for concurrent ABS due to its strong guarantees about retry semantics.

The last step was to apply property-based testing to pure functional ABS, to test the hypothesis as to whether stochastic ABS and random property-based testing are a good

Deleted: to

Deleted: theses

Deleted:

Deleted: is

Deleted: -

Deleted: and

Deleted: ,

Deleted: :

Deleted: t

Deleted: to

Deleted: ,

Deleted: to

match. Indeed, it has turned out to be a perfect match: it was possible to fully specify the agents' behaviour of the time and event-driven SIR model directly in code and verify them with QuickCheck. Further more, other important techniques relevant for ABS like validation against specifications and comparisons of different implementations of the same model are easily done with property-based testing. Also, by showing how to perform hypothesis testing with property-based testing in the case of the Sugarscape model, we were able to show how to apply it to exploratory models which have no formal grounds in truth as well.

Deleted: -

It was shown that functional programming in general gives much more control and checking of invariants due to the explicit handling of effects. Together with the strong static type system, testing code is in full, explicit control over the functionality it checks. Property-based testing in particular is a perfect match for testing ABS due to the stochastic nature of both and because it supports convenient expressing of specifications.

This concludes that the thesis successfully proved the usefulness of a pure functional approach, where the initial hypotheses and claims about the benefits as outlined in Chapter 1, were definitely fulfilled.

Deleted: being

## 12.1 Drawbacks

The initially hypothesised drawbacks of performance issues and agent interaction were confirmed in our research. We discuss them here more in detail, together with other drawbacks and propose solutions where applicable.

### 12.1.1 Efficiency

As mentioned already in the discussions of the respective chapters, currently the performance of our approaches does not come close to imperative implementations. There are two main reasons for it: First, functional programming is known for being slower due to higher levels of abstraction, which are bought by slower code in general and second, updates are the main bottleneck due to immutable data requiring copying of the whole or subparts of a data structure in cases of a change. The first one is easily addressable through the use of data parallelism and concurrency as shown in Chapter 7 and 8. The second reason can be addressed by the use of linear types [15], which allow to annotate a variable with how often it is used within a function. From this a compiler could derive aggressive optimisations, potentially resulting in imperative-style performance but retaining the declarative nature of the code. We leave this for further research. Also, the use of Monad Transformer stacks has performance implications, which can be quite subtle. A possible optimisation we followed is the careful usage and reordering of lifts, using lift (mapM ...) instead of mapM (lift ...), which potentially results in increased performance.

Deleted: f

Deleted: to copy

Deleted:

However, it was shown by various people [101, 155, 156] that Haskell does not necessarily have to be slow and that it is indeed possible to reach C speed in Haskell. The direction to do this is using the worker/wrapper transformation [58], a clever combination of techniques with strict "fold!" and data declaration with strictness annotation instead of lazy tuples and Stream Fusion [36, 115]. The problem is, of course, that to apply these techniques one needs to have deep knowledge of Haskell and its

subtle details of lazy evaluation, making this a highly non-trivial task. Another problem is that those techniques seem only applicable in the context of a tight loop, which crunches numbers of a list, thus it is not directly applicable in our case as we are clearly bound by the effect~~ive~~ computations: MSF and Monad Transformers are the limiting factor, not inner loops.

Deleted: ful

Concluding we can say that the current performance makes our approach not very attractive for real-world use at the moment. Also, the fact that the sequential object-oriented implementation seems to outperform the concurrent and parallel implementations as well, seems to question our motivation as to why we are using pure functional programming and parallel computation at all. Still, the bad performance results do not invalidate our research, as this thesis aim is not the development of high-performance pure functional implementations, but rather exploring concepts of ABS in pure functional programming. Thus, this work is seen as a first step which needs to be developed further into something to be used in the real world. We think that our pure functional approach will not be able to reach Java performance, but we hypothesise that it should be possible to come considerably closer, making it more applicable for real-world usage. We leave a deeper investigation of this problem for further research.

### 12.1.2 Space Leaks

Deleted: l

Haskell is notorious for its memory leaks due to lazy evaluation: data is only evaluated when required. Even for simple programs, one can be hit hard by a serious space leak where unevaluated code pieces (thunks) build up in memory until they are needed, leading to dramatically increased memory usage. It is no surprise that our highly complex Sugarscape implementation initially suffered severely from space leaks, piling up about 40 MBytes/second. In simulation this is a big issue, threatening the value of the whole implementation despite its other benefits. Due to the fact that simulations might run for a (very) long time or conceptually forever, one must make absolutely sure that the memory usage stays within reasonable bounds. As a remedy, Haskell allows us to add so-called strictness pragmas to code modules, which force strict evaluation of all data even if it is not used.

Deleted:

Deleted:

Another memory leak was caused by selecting the wrong data structure for the environment, for which we initially used an immutable array. The problem is that in the case of an update the whole array is copied, causing memory leaks and a performance problem. We replaced it by an IntMap, which uses integers as key and is internally implemented as a radix tree which allows for very fast lookups and inserts because whole sub-trees can be reused.

### 12.1.3 Agent Interactions

Deleted: i

Synchronous, direct agent interactions do work in Haskell but they are cumbersome to get right when building from scratch. Further~~more~~, as we pointed out in Chapter 8, it seems that our approach to synchronous direct agent interactions is not applicable to concurrency with STM.

This leads to the fundamental conclusion that in models which require complex agent interactions in a potentially concurrent environment, we are hitting the limits of our pure functional approach. The reason for it is that we have a conceptual mismatch, as in

such a setting, agents are more naturally represented using the Actor Model. The Actor Model, a model of concurrency, was initially conceived by Hewitt in 1973 [77] and refined later on [75], [76]. It was a major influence in designing the concept of agents and although there are important differences between actors and agents there are important similarities, thus the idea to use actors to build ABS comes quite natural. An actor is a uniquely addressable entity which can do the following in response to a message:

- Send an arbitrary number of messages to other actors.
- Create an arbitrary number of actors.
- Define its own behaviour upon reception of the next message.

When comparing this definition to the one of agents we give in Chapter 2.1, it is clear that the Actor Model was quite influential to the development of the concept of agents in ABS, which borrowed it initially from Multi-Agent Systems [189]. Technically, it emphasises message-passing concurrency with shared-nothing semantics (no implicitly shared state through side effects between agents), which maps nicely to functional programming concepts.

Indeed, the programming model of actors [1] was the inspiration for the functional programming language Erlang, thus we argue that a true concurrent actor approach like Erlang is substantially more natural and much more performant especially in a concurrent setting. Furthermore, we hypothesise that actor based ABS implementations might have a bright future as ABS tends to develop towards larger and larger, distributed, always-online simulations, for which Erlang is arguably perfectly suited. We have prototyped highly promising concurrent event-driven SIR and Sugarscape implementations in Erlang supporting our hypothesis. Unfortunately, an in-depth discussion is beyond the scope of this thesis and we leave this topic for further research.

#### 12.1.4 Productivity and Learning Curve

A case study in [68] hints that simply by switching to a static type system alone does not gain anything and can even be detrimental. To be useful, it needs to have a certain level of abstractions like Haskells' type system. Although such case studies have to be taken with care, there is also some truth in it: working in a statically strong type system prevents the developer from moving quickly and making quick and dirty changes. This can be both a benefit and a drawback: in general, it prevents one from breaking changes which show up at compile time. But, at the same time, the whole program is much more rigid and a proper structure needs to be thought out and designed often up-front, slowing down the process. However, it is a contribution of this thesis that it outlines exactly these structures within ABS, so that implementers who want to use the same approach do not have to reinvent the wheel.

A more severe problem is that pure functional programming, especially Haskell, is seen as hard to learn with a steep learning curve, putting a high barrier to implementers picking up a pure functional approach to ABS. Thus, the lack of broad availability of Haskell expertise can be enough to pose a serious drawback even if the approach of this thesis seems to be desirable in a project.

#### 12.2 Generalising Research

Deleted: 1

Deleted: c

Deleted: has

Deleted: b

Deleted: this

We hypothesise that our research might be applicable to related fields as discussed below, which puts our contributions into a much broader perspective, giving it more impact.

#### 12.2.1 Simulation in General

Deleted: g

We showed at length in this thesis that purity in a simulation leads to reproducibility, which is of utmost importance in scientific computation. These insights are easily transferable to simulation software in general and might be of huge benefit there. We think the use of STM for implementing concurrent simulations is not only beneficial to ABS in particular, but potentially applies to a wide range of simulation problems with a data-driven approach. Also, we demonstrated the usefulness of property-based testing in this thesis, which we believe can be a useful tool for simulation in general, to encode specifications, explore dynamics, test hypotheses and perform verification and validation directly in code.

#### 12.2.2 System Dynamics

We have implemented a System Dynamics simulation in Appendix B. Although it is only an implementation of the SIR model, it shows clearly how a System Dynamics specification can directly be encoded in pure functional programming using Arrowized FRP. The approach is simple enough to be generated automatically, is high-performing and could serve as language of choice for a System Dynamics simulation engine backend.

Deleted: ly performant

#### 12.2.3 Discrete Event Simulation

We have already implemented basic mechanics of a Discrete Event Simulation in the case of the event-driven SIR. However, it would be very interesting to see whether we can express a Discrete Event Simulation model network directly in code, guaranteeing compatibility of elements statically at compile time. This should be possible due to the declarative nature of pure functional programming and the process-oriented nature of Arrowized FRP. In the end both Discrete Event Simulation and FRP model data-flow networks which are fixed at compile time, so it should be a natural fit.

A parallel version of Discrete Event Simulation also exists, called Parallel Discrete Event Simulation [55], which is concerned about the problem of running a Discrete Event Simulation in parallel, where the challenge is how to deal with sequential dependencies. Optimistic approaches run them in parallel, just like STM does, and rolls back actions in case sequential orderings are violated. Transactional memory has already been investigated in this problem [72], but only in the context of hardware transactional memory. However, to the best of our knowledge research in the context of software transactional memory would be new. We hypothesise that in a pure functional language, with or without STM, it should be conceptually easier to implement such rollback semantics due to immutable persistent data structures and controlled side effects.

Deleted: There also exists

Deleted: a

Deleted: ,

Deleted: been

Deleted: and

Deleted: w

#### 12.2.4 Recursive Simulation

Deleted: s

Due to the recursive nature of functional programming we believe that it is also a natural fit to implement recursive simulations as the one discussed in [59]. In recursive

ABS agents are able to halt time and anticipate an arbitrary number of actions, compare their outcome, resume time and continue with a specifically chosen action with the best outcome. More precisely, an agent has the ability to run the simulation recursively a number of times where the number is not determined initially but can depend on the outcome of the recursive simulation. So recursive ABS gives each agent the ability to run the simulation locally from its point of view to project its actions into the future and change them in the present. Due to controlled side effects and referential transparency, combined with the recursive nature of pure functional programming, we think that implementing a recursive simulation in such a setting should be straightforward.

### 12.2.5 Multi-Agent Systems

The fields of Multi-Agent Systems and ABS are closely related, where ABS has drawn much inspiration from Multi-Agent Systems [184, 189]. In both fields, the concept of interacting agents is of fundamental importance, so we expect our research also to be applicable in parts to the field of Multi-Agent Systems. Particularly, the work on static guarantees and property-based testing should be very useful in this context, because Multi-Agent Systems is very interested in correctness, verification and formally reasoning about a system and their agents, to show that a system follows a formal specification.

**Deleted:** Especially

**Deleted:** there

### 12.3 The Gintis Case Revisited

After having discussed all the benefits and drawbacks pure functional programming has to offer for ABS, we want to return to the Introduction chapter again, where we mentioned the work of Gintis [60]. To repeat, in this paper the author has claimed to have found a mechanism in bilateral decentralized exchange, which resulted in Walrasian General Equilibrium without the neo-classical approach of a tatonnement process through a central auctioneer. Due to its high-impact result for economics, researchers [88] tried to reproduce the results independently but were not able to do so. After Gintis provided the code, it was found that there was a bug in his implementation which led to the unexpected results, which were seriously damaged through this error. The work of [49] investigated the specific nature of Gintis bugs and reported the following (Section 3.1.1 Deviations from the paper, page 23):

**Deleted:** c

**Deleted:** r

**Deleted:**

1. An agent calculates the optimum inventory (or demand) according to a specific formula, which involves a factor  $\lambda$  which gets computed as  $\lambda = \frac{r}{\sum_j p_{ij} x_{ij}}$ . What the specific computation denotes is not important here,

$\sum_j p_{ij}x_{ij}$   
what is important is that this computation is always 1. The authors [49]

$\sum_j p_{ij}x_{ij}$   
claim that the correct formula should have been:  $\lambda = \sum_j p_{ij} o_j$  with  $o$  in

the denominator instead of  $x$ .

2. There seems to be a discrepancy between the paper and the implementation describing the trading of agents. According to the paper the amount

they exchange follows  $x_{ig} \equiv p_{ig} x_{ig}$ . In the implementation however, Gintis pih

uses  $x_{ig} \equiv p_{ihxih}$  but seems to do so inconsistently throughout his code,  $p_{ig}$

leading to incorrect calculations.

Deleted: wrong

3. Another bug was due to reversed ordering of events, where agents use old price vectors due to missing recalculation, which only happens in the next step.
4. There are a number of other subtle bugs, which, according to the authors of [49] seemed to have no impact on the outcome of the simulation: slight miscalculation of the standard deviation for consumer and producer prices, crashing the program at runtime when dividing the agents unequally between different production goods due to a negative random number which in turn raises an exception in the Delphi random function.

Deleted: s

| After having hypothesised in the introduction chapter that pure functional programming might be of help in implementing simulations which are more likely to be correct, the following questions arise:

Deleted: I

Do the techniques introduced in this thesis transfer to this problem and model as well? The short answer is, yes, they obviously do. Gintis models interact with individual agents, which consume and produce and trade with each other. This could be implemented both with our time and event-driven approach, with a better choice probably being the event-driven one due to agents directly trading with each other. However, for some models, our techniques introduced in Chapters 4 and 5 are too powerful and a much simpler approach would suffice to implement it. In general, too much power should always be avoided (at least in programming and software engineering) because with much power comes much responsibility: more power requires to pay more attention to details and thus there is increased risk to make mistakes. Thus, we should always look for the technique with minimal power but maximum abstraction, which solves our problem sufficiently. Gintis model is such an example: it resides in a very different domain of ABS, called Agent-Based Computational Economics (ACE).

ACE is a very important field, which picked up ABS as a method for research in recent years. The field of economics is an immensely vast and complex one with many facets to it, ranging from firms, to financial markets to whole economies of a country [22]. Today its very foundations rest on rational expectations, optimization and the efficient market hypothesis. The idea is that the macroeconomics are explained by the micro foundations [33] defined through behaviour of individual agents. These agents are characterised by rational expectations, optimizing behaviour, having perfect information, and equilibrium [52]. This approach to economics has come under heavy criticism in the last few years for not being realistic. It makes impossible assumptions such as perfect information, not being able to provide a process under which equilibrium is reached [99], and failing to predict crashes like the sub-prime mortgage crisis despite all the promises — the science of economics is perceived to be detached from reality [52].

ACE is a promise to repair the empirical deficit which (neo-classic) economics seem to exhibit by making more realistic, empirical assumptions about the agents which form the micro foundations. The ACE agents are characterised by bounded rationality, local information, restricted interactions over networks, and out-of-equilibrium behaviour [50]. Works which investigate ACE as a discipline and discuss its methodology are [13, 17, 142, 160]. Tesfatsion [161] defines ACE as [...] computational modelling of economic processes (including whole economies) as open-ended dynamic systems of interacting agents.

It is important to understand that ACE utilises ABS different than the social sciences do. The latter one focuses more on agent interactions, as it is apparent in the Sugarscape model, where in ACE the rational and non-rational actions of individual agents are more important. Thus, in many ACE models, the full power of the techniques introduced in Chapters 4 and 5 is not required. More specifically, agents of ACE models tend to have much simpler state, behave often in only one specific way, don't use synchronised direct agent interactions, and are very rarely located in a spatial environment. However they focus more on network connections [62, 187], or avoid the notion of connectivity altogether. This is certainly a fact in the case of the Gintis model, as implemented by Gintis himself and the Java implementation of [49]:

- Even though it is an agent-based model and there is a clear notion of agents in the code, where they are represented as objects, the agents are very simple in terms

Deleted: yes

Deleted: as

Deleted: ing

Deleted: -

Deleted: being not

Deleted: ,

Deleted: ing

Deleted: like

Deleted: -

Deleted: allowing to make

Deleted: .

Deleted: ,

Deleted: but

Deleted: the

of their structure. They are characterised by a few floating-point values with very simple behaviour that does not change over time.

- There are only very simple direct agent interactions, exchanging bids and asks, leading to an exchange.
- There is no environment whatsoever and a fully connected network is implicitly assumed because each agent can trade with all other agents.
- The only side effect necessary in this simulation is to draw random numbers.

Thus, a Haskell implementation in this domain can be achieved completely without the full force of our techniques: agents can be represented as simple data structures without SF or MSF, interactions handled by the kernel, no need for an environment, scheduling is handled directly by the kernel and side effects are restricted to run in the Rand Monad only. Due to the substantial complexity of the Gintis model, we have refrained from attempting a full implementation of it in Haskell. However, to investigate this point more in depth, we implemented a simulation [166] with so called Zero Intelligence traders [63], a well-known and fundamental concept found in ACE. Our implementation was inspired by an implementation in Python by LeBaron [103] and is a satisfactory proof-of-concept underlining the fact that we can also do pure functional ABS in a robust way without the full power offered by our techniques. However, a full treatment of this is beyond the scope of this thesis and is left for further research.

Would the use of Haskell have prevented the bugs which Gintis made?

The first and second bugs as reported above are an indication for a problematic use of indexed lists or arrays. Generally, one can say that independent of programming languages, indices into an array or list are always problematic because it is very easy to make subtle mistakes by getting indices wrong. Pure functional programming would suffer the same problem if a similar technique would be used. However, Haskell is immutable, an idiomatic implementation following pure functional programming concepts. As such, we would have probably not seen the use of lists but (Generalised) Algebraic Data Types, making this kind of bug much less likely. Further more, due to the declarative nature of pure functional programming in Haskell, it is more likely that the implementer, reading through the existing code might have spotted the bug: there is much less noise in an idiomatic functional implementation than in imperative code making code highly expressive and concise. Consequently, there is less to read and more obvious.

The third bug is a very subtle logical error, regarding the semantics of the simulation. A pure functional implementation alone would not have helped avoiding this mistake. However, we think the declarative style and immutability of data in pure functional programming would have made the fact that an old version of data is used much more explicit thus we think it would have been easier to spot.

The last bugs are typical run-time errors, which would and do occur in Haskell as well, so a pure functional approach would not necessarily avoid these kinds of bugs. However, such bugs can be avoided by using a dependently typed functional language like Idris [23]. This particular kind of type system allows one to ensure in the types that only positive random numbers are drawn, and that the input ranges are strictly positive.

Deleted:

Deleted: also

Deleted: very

Deleted: hav

Deleted: e been

Deleted: due to the fact that data in

Deleted: ,

Deleted: ,

Deleted: ,

Deleted: thus

Deleted: these kind of bugs

Deleted: as such a

Thus, summarizing we hypothesise that with a clean and idiomatic pure functional implementation it would have been very likely that Gintis would have avoided or spot the bugs. What is more, we claim that dependent types might have been of substantial benefit in the Gintis case, but we leave this for further research as it is beyond the scope of this thesis.

Deleted: Further

Would property-based tests have been of any help to prevent the bugs? We hypothesise that it is very likely that if Gintis would have applied rigorous unit and property-based testing to his model —, which he should have, due to the high impact of his outcome —, he would have found the inconsistencies and could have corrected them. The code of [49] contains numerous checkInvariants and assertions, which are properties expressed in code, thus immediately applicable for property-based testing. However, due to the mathematical nature of the problem, many properties in the form of formulas can be found in the paper specification, which should be directly expressible using property-based and unit testing.

Deleted: -

Deleted: -

Deleted: to

Deleted: Further

#### 12.4 Do Agents Map Naturally to Objects?

One of the initial motivations of this thesis was the claim of North et al. [125] that agents map naturally to objects. At the very end of this thesis we want to revisit this claim in the new light of our pure functional approach and finally answer the questions whether agents do map naturally to objects or not.

Deleted: a

Deleted: m

Deleted: n

Deleted: o

To give a satisfactory answer, we first need to re-examine the abstractions used in our pure functional approach, where the fundamental building blocks are recursion and continuations. In recursion a function is defined in terms of itself: in the process of computing the output it might call itself with changed input data. Continuations in turn, are functions which allow us to encapsulate the execution state of a program by capturing local variables (known as closure) to pick up computation from that point later on by returning a new function.

As an explanatory example, we implement a continuation in Haskell which sums up integers and stores the sum locally as well as returning it as return value of the current step. First, we define the type of a general continuation, which takes a polymorphic type "i" as input and returns a polymorphic type "o" as output together with a new continuation.

```
newtype Cont i o = C (i -> (o, Cont i o))
```

Then we implement an actual instance of a continuation with input and output types fixed to Int. It takes an initial value x and sums up the values passed to it. It returns adder with the new sum recursively as the new continuation.

```
adder :: Int -> Cont Int Int  
adder x = C (\x' -> let s = x + x' in
```

```
(s, adder s))
```

To run a continuation, we implement a function which runs a given continuation for a given number of steps and always passes x as input and prints the continuations output.

```

runCont :: Int -> Int -> Cont Int Int -> IO ()
runCont 0 x _ = return []
runCont n x (C cont) = do
    -- run the continuation with x as input, cont' is the new continuation
    let (x', cont') = cont x
    print x'
    runCont (n-1) x cont'

```

When actually running the continuation adder with an initial value of -1 for 10 steps and increments of 2, we get the following output:

```

> runCont 100 2 (adder (-1))
1
3
...
17 19

```

This explanatory example should make it clear that we can encapsulate arbitrary complex state, which is only visible and accessible from within the continuation. Further, with a continuation it becomes possible to switch behaviour dynamically, like switching from one mode of behaviour to another as in a state machine, simply by returning new functions which encapsulate the new behaviour. If no change in behaviour should occur, the continuation simply recursively returns itself with the new state captured as seen in the example above.

**Deleted:** -

In fact, Yampas signal functions (SF) and Dunais Monadic Stream Functions (MSF) are nothing more, than such continuations: SF are pure, without a monadic context, as can be seen in the implementation of the supersampling in Chapter 4.1.1; MSFs have an additional monadic context, which makes it possible to execute effectiive computations within the continuation, as can be seen in the implementation of the simulation stepping MSF in Chapter 4.3.1.

**Deleted:** else

**Deleted:** ful

When looking closer at the example from above, it becomes clear that the continuation adder is non-terminating and is a potentially infinite structure, possible through lazy evaluation of Haskell, where the function "runCont decon- structs / consumes /" observes the output of this infinite structure step-by-step. This is related to the concepts of corecursion which are an even deeper under- lying theory to continuations in general and our approach in particular. Technically speaking, corecursion is the opposite of recursion, where instead of starting with a data structure and reducing it stepwise until a base case is reached, corecursion starts with an initial value and iterates it ad infinity. It produces an infinite data structure as the output, enabled through lazy evaluation. Indeed, our agents produce infinite streams as output, potentially running for infinite time, as it is implemented in the time-driven approach and to a lesser extent in the event-driven SIR. Now it is also easy to see why agents are not represented by pure functions: they have to change over time, which is precisely what pure functions cannot do, as they cannot rely on a context or history of a system.

**Deleted:** dual

**Deleted:** to

**Deleted:** ,

**Deleted:** producing

**Deleted:**

**Deleted:** thus

**Deleted:** and did not fall from the sky

The fact that we represented pure functional agents as SF and MSF is therefore, no coincidence; they are in fact representations of coalgebras, which is the way to express

dynamical systems in mathematics and in pure functional programming: "In general, dynamical systems with a hidden, black-box state space, to which a user only has limited access via specified (observer or mutator) operations, are coalgebras of various kinds" [92]. Informally speaking, a coalgebra is of the form " $S \rightarrow -^c$ ", with a state space  $S$ , a function  $c$  and a structured output (the box), which also contains the original domain  $S$  [90]. This is precisely what we see in the recursive type definition of `Cont` above.

Deleted: ¶

This sounds very much like agents, and indeed, coalgebras have been used (amongst others) in Process Theory to model communicating processes, a topic closely related to Actors and ABS; and objects in object-oriented programming [91]. It seems that we have found an underlying theory which connects both object-oriented programming and our pure functional ABS approach. This hints that it might indeed be the case that agents map naturally to objects, as we discuss below. We refer to [90, 92] for a proper, formal introduction and discussion of coalgebras as it is beyond the scope of this thesis.

Deleted: indeed

When following the concepts of continuations and coalgebras from above and the viewpoint that "... a closure is just a primitive form of object: the special case of an object with just one method." [96] then one way to look at SF and MSF is to see them as very simple immutable objects with a single method ~~→ the continuation → following a~~ shared-nothing semantics.

Deleted: an

Deleted: -

Deleted: -

Like in coalgebras and in continuations we have some internal state which can be altered through specified set of operations (events/inputs) and the effect can be observed through the output but not directly. This is particularly clear in the Sugarscape model, where agents have indeed a complex internal state, which changes only through events and is only observable through the output of data type `SugAgentObservable` as a result of sending an event. Furthermore, we added a notion of agent identity, a clearly specified agent interface, local agent state and synchronous direct agent interactions through tagless final.

This interpretation and the fact that we seem to have achieved all the relevant concepts, like encapsulation of local agent state and interactions purely functional, it seems that we indeed have to agree that agents do actually map naturally to objects. However, we can also argue that we have to think of objects in a much broader context than in, existing object-oriented terminology as with, the popular family of Java, C++ and Python. The fact that we can represent agents as objects also in a purely functional way, with sound underlying theories like coalgebras, leads us to the question of what actually constitutes objects. We have to be careful not to confuse the concept of objects with their implementation within a language.

Deleted: the one of

Deleted: in

Deleted: ,

Deleted: ,

Deleted: and w

A commonly agreed upon definition of objects and object-oriented programming does not exist. Instead, we have a bunch of ideas and concepts [185]. It is agreed that the original ideas of objects and object-oriented programming were conceived by Kristen Nygaard, the inventor of Simula 67, the first object-oriented language [37] and Alan Kay, the inventor of SmallTalk, another pioneering object-oriented language in the early 70s [97].

Deleted: There does not exist a

Deleted: but rather

Kristen Nygaard identified object-oriented programming by "A program ex-

... S ...

ecution is regarded as a physical model, simulating the behaviour of either a real or imaginary part of the world." Thus he puts the focus on the modelling aspect of the problem. Alan Kay claims to have coined the term object-oriented and defines it in more technical terms: everything is an object; every object is an instance of a class; the class holds the shared behaviour for its instances; objects communicate by sending and receiving messages. Alan Kay puts a strong emphasis on sending and receiving messages, with a shared-nothing interpretation. This becomes especially clear in a quote attributed to him: "The big idea is "messaging" ... "I invented the term Object-Oriented and I can tell you I did not have C++ in mind."

Deleted: , t

So, we see that the original concepts of objects and object-oriented programming vary considerably from how objects and object-oriented programming are implemented today in the family of popular object-oriented programming languages like Java, C++ and Python. Our approach is one method of doing that in a pure, strong, statically typed language — Haskell. It can be seen as an object-centric approach, which implements a very simple concept of shared-nothing, immutable, pure functional objects.

Deleted: is

Deleted: answer to

Deleted: do

Deleted: -

Deleted:

## Chapter 13

### General Conclusion

This thesis has shown at length how pure functional ABS is possible in a robust, maintainable way and why it is beneficial. Each chapter gives strong evidence as to our claim that pure functional programming indeed has its place in ABS is valid. Particularly, a full implementation in Sugarscape is a highly complex and non-trivial matter and our highly structured and robust approach can be seen as proof of success. At the same time, we conclude that it is still too early to pick up this paradigm for ABS. We think that engineering a proper implementation of a complex ABS model takes substantial effort in pure functional programming, due to the different techniques required and due to its strong static type system. We believe that at the moment, the effort pays off only in cases of high-impact and large-scale simulations, the results of which might have far-reaching consequences, for example influencing policy decisions. It is only there where the high requirements for reproducibility, robustness and correctness provided by functional programming are really needed. Still, we plan on distilling these techniques into a general-purpose ABS library. This should allow for the implementation of models much more easily and quickly, making the pure functional programming approach an attractive alternative for prototyping, opening the direction for a broad use of functional programming in the field of ABS.

Deleted: of benefit

Deleted: indeed

Deleted: -

Deleted: especially

Deleted: yet

Deleted: such an

Deleted: which results

Deleted: e

Deleted: developed

Deleted: general purpose

Deleted: implementing models much

Deleted: easier and quicker

Furthermore, this thesis deepened the understanding of the structure of agent-based computation by expressing it in a pure functional context. Leading to a deeper and more general understanding of agents, how they can be represented and whether they indeed map naturally to objects or not. This central question as to whether they map naturally to objects or not, permeates the whole thesis and drives it forward. The last chapter gave an in-depth answer to that question and we see that objects indeed have their place in ABS. But, as we have carefully explained, the question is what objects constitute. By approaching the problem from a pure functional perspective, we also arrived at a deeper and broader understanding of objects, not only restricted to the traditional object-

Deleted:

Deleted: ,

Deleted: l

Deleted: of

Deleted: of

Deleted: b

oriented definition of Java, C++ or Python. So we can say: Yes, agents map naturally to objects, but we have to be precise as to what constitute objects. Whether they are newtypes, tuples, (Generalised) Algebraic Data Types, pure functions, Monads, Comonads, Arrows, SF, MSF, Actors or object-oriented objects. They are all valid ways of representing agents with varying degree of abstraction, flexibility and power. They all come with their benefits and drawbacks, which have to be clearly understood together with the problem to solve. This thesis simply added a promising new tool to the family of existing ones and only time will tell whether this tool is indeed as valuable as hinted in this thesis.

Deleted: "  
Deleted: s  
Deleted: "  
Deleted: ,  
Deleted: t  
Deleted: and t

### 13.1 Further Research 13.1.1 A General-Purpose Library

For pure functional ABS to reach an ever larger audience and have acceptance, it will need a lot of support, especially in the form of a well-designed, easy to use, robust, correct, high quality Haskell library. Designing and developing such a library is a full research project on its own, as it needs to combine all the separate concepts introduced in this thesis into one code base. We hope that from this development further insights into ABS in general, and pure functional ABS in particular, will emerge. Any further developments can then be published to the community.

Deleted: g  
Deleted:  
Deleted: p  
Deleted: l  
Deleted: ever  
Deleted:  
Deleted: ,  
Deleted: which can then  
Deleted: t

### 13.1.2 Dependent Types

We see this thesis as an intermediary and necessary step towards dependent types, for which we initially needed to understand the potential and limitations of a non-dependently typed pure functional approach in Haskell. Dependent types are extremely promising in functional programming as they allow us to provide stronger guarantees about the correctness of programs and go as far as to formulate programs and types as constructive proof, which must be total by definition [3, 4, 173].

Deleted: first  
Deleted: express  
Deleted: allowing  
Deleted: s

To the best of our knowledge, so far, no research using dependent types in agent-based simulation exists at all. We aim to explore this for the first time and ask more specifically how we can add dependent types to our pure functional approach, what conceptual implications this has for ABS, and what we gain from doing so. We plan on using Idris [23] as the language of choice, as it is very close to Haskell. The further research will have a focus on real-world application and running programs as opposed to other languages with dependent types like Agda and Coq.

Deleted: ich  
Deleted: with

We hypothesise that dependent types could help in ruling out even more classes of bugs at compile time and encode invariants and model specifications on the type level, which implies that we don't need to test them using property testing. This would allow the ABS community to reason about a model directly in code. We think that a promising approach is to follow the work of [24, 25, 53] in which the authors utilize Generalised Algebraic Data Types to implement an indexed Monad, which allows for implementing correct-by-construction software.

Deleted: to implement

### 13.1.3 Shallow Encoding

Deleted: e

Using Arrowized FRP with pure signal functions as in Yampa and Monadic Stream Functions as in Dunai is only one approach to ABS. As we have shown at length in this

thesis, although it is a robust and maintainable approach with highly valuable and promising benefits, there are other potential approaches left unexplored.

A standard approach to encode a problem in Haskell is by designing an embedded domain specific language (EDSL) for that (domain) problem and then implement the problem at hand in this specifically designed language. One has to distinguish between a deep and a shallow encoding: in the former, the EDSL is expressed "deeply" using direct data types and functions of the host language Haskell — our approach using SF and MSF is of this nature.

Deleted: one

Deleted: -

The shallow encoding approach, on the other hand, provides a language on top of the host language, often expressed using Generalised Algebraic Data Types, which are used to encode a problem as a data structure. The execution of the problem is done by an interpreter that evaluates this data structure and translates it to the semantics of the host language. An example of a shallow embedded EDSL is a language for mathematical expressions consisting of constants, multiplication and subtractions, which are represented as syntax trees and then translated into Haskell multiplication and subtraction to arrive at the final result.

Deleted: ,

Deleted: where t

Deleted: which

The main benefit of a shallow encoding is that, similarly to tagless final, it allows us to separate definition from implementation due to the separation of the EDSL and its interpretation. This allows for, strictly separate implementation from specification, composes very well, and thus should also be easy to test, as mocking of parts is straightforward.

Deleted: to

A popular and powerful approach to implement shallow EDSLs are so called "Freer Monads" [143]. One big advantage of them is that they free one from the ordering of effects imposed through Monad Transformers as already mentioned in Chapter 2.2. Unfortunately, Freer Monads seem to be around 30 times slower than the equivalent MTL code with a complexity of  $O(n^2)$  [112]. For IO bound problems like business applications, this is not a big deal but as already mentioned, ABS are almost always never IO bound. So, raw computation is what counts and this is undoubtedly worse with Freer Monads. Even though there seems to be better encoding possible that is about 2x slower than MTL [113], the fact that we are already performance limited in our deep encoding makes the Free Monads approach not very appealing [114]. Still, we hypothesise that it will be highly interesting and valuable research with a strong focus on formal reasoning about correctness.

Deleted: somewhere

Deleted: ,

Deleted: s

Deleted: all

Deleted: a

Deleted: , which

### 13.1.4 Actor-Based ABS

Deleted: b

We hypothesise that the future of concurrent, agent interaction centric ABS lies in a functional, actor based concurrent approach. This hypothesis, required the full thesis to come to this conclusion. Consequently, this thesis has only scratched the surface of the potential for actor-based ABS as in Erlang or Cloud Haskell. We think that this topic deserves rigorous research as well, as it is currently strongly neglected with very few papers existing that only scratch the surface. Functional programming with an actor language seems to be the way to do ABS in the future as it gives us almost all the properties introduced in this thesis, with the exception that the performance is substantially better and agent interactions are a lot easier and naturally expressed.

Deleted: It

Deleted: thus

Deleted:

Deleted: only

Deleted: , which just

Deleted: The idea seems compelling:

Deleted: f

There have been a few attempts to implement the actor model in real programming languages, the most notable ones being Erlang and Scala. Both languages saw some use in implementing ABS with notable papers [16, 40, 41, 151, 176].

Deleted: on implementing  
Deleted: where  
Deleted: are  
Deleted: being

Furthermore, process calculi like the CSP [78] and  $\pi$ -Calculus [121] become applicable in the context of an Actor Model, which should allow us to actually prove the correctness of a specification. Due to the direct mapping of the process calculi languages to Erlang, we see this research as highly promising.

### 13.1.5 A Theory of Pure Functional Agents

The work in this thesis is quite applied, with a heavy software-engineering approach. In general the thesis does not follow a grand underlying formal theory of (pure functional) agents. The reason for that is, that to the best knowledge of the author, such a theory does not (yet) exist and this thesis's rather practical and experimental approach of distilling out certain patterns and recurring concepts of ABS computation shows that.

Deleted: t  
Deleted: p  
Deleted: f  
Deleted: a  
Deleted: heavy  
Deleted: and  
Deleted: i  
Deleted: ,  
Deleted: Still  
Deleted: ,  
Deleted: is

However, after having investigated the underlying concepts behind SF and MSF, namely continuations in the discussions, it became clear that the basic computational concepts of our pure functional approach are closely related to coalgebras.

Deleted: Put shortly  
Deleted: -  
Deleted: d  
Deleted: ,  
Deleted: has close re-lations  
Deleted: can be seen  
Deleted: as of  
Formatted: Font: CMR10  
Deleted: are conceptually closely related to  
Deleted: and have been used to model that paradigm, thus  
Deleted: a  
Deleted: lurk  
Deleted: s  
Deleted: ,  
Deleted: it  
Deleted: and  
Deleted: and u  
Deleted: more rigorously

Another closely related concept here is codata [44]. Whereas in data, we construct a complex (opaque) data type from primitive types (data definitions in Haskell), in codata we extract components from a complex (opaque) data type through eliminators. In short, data is concerned with how values are constructed and codata is concerned with how those values are used [44]. Data types are directly observable, but, codata types are only indirectly observable through their interface. Again, this is conceptually closely related to object-oriented programming and the authors of [44] believe that codata is a common ground between functional and object-oriented programming. Yet another concept, which is closely related to objects are comonads [175]. They can be seen as a structure with notions of context-dependent computation or streams, of which ABS is a part.

What is striking is that those concepts have been used to model the object-oriented programming paradigm. Consequently, it seems that we have come around full circle and found a potential link between our pure functional and the established object-oriented approach to ABS. This implies that there might be some programming paradigm agnostic, unified theory of agents as used in ABS lurking somewhere behind these concepts. We believe that such a theory would help ABS to put itself on solid formal ground. It could then be connected to other areas of computation, as well as, other sciences. Ultimately, it would be a powerful tool to more rigorously investigate certain aspects of models and be of help in specification, validation and verification.

## References

- [1] Agha, G. Actors: A Model of Concurrent Computation in Distributed Systems. MIT Press, Cambridge, MA, USA, 1986.
- [2] Allen, C., and Moronuki, J. Haskell Programming from First Principles. Allen and Moronuki Publishing, July 2016. Google-Books-ID: 5FaXDAEACAAJ.

3. [3] Altenkirch, T., Danielsson, N. A., Loeh, A., and Oury, N. Pi Sigma: Dependent Types Without the Sugar. In Proceedings of the 10th International Conference on Functional and Logic Programming (Berlin, Heidelberg, 2010), FLOPS'10, Springer-Verlag, pp. 40–55.
4. [4] Altenkirch, T., McBride, C., and McKinna, J. Why dependent types matter. In <http://www.e-pig.org/downloads/ydtm.pdf> (2005).
5. [5] Armstrong, J. Erlang. Commun. ACM 53, 9 (Sept. 2010), 68–75.
6. [6] Asta, S., Özcan, E., and Siebers, P.-O. An investigation on test driven discrete event simulation. In Operational Research Society Simulation Workshop 2014 (SW14) (Apr. 2014).
7. [7] Axelrod, R. The Convergence and Stability of Cultures: Local Convergence and Global Polarization. Working Paper, Santa Fe Institute, Mar. 1995.
8. [8] Axelrod, R. Advancing the Art of Simulation in the Social Sciences. In Simulating Social Phenomena. Springer, Berlin, Heidelberg, 1997, pp. 21–40.
9. [9] Axelrod, R. Chapter 33 Agent-based Modeling as a Bridge Between Disciplines. In Handbook of Computational Economics, L. T. a. K. L. Judd, Ed., vol. 2. Elsevier, 2006, pp. 1565–1584.
10. [10] Axelrod, R., and Tesfatsion, L. A Guide for Newcomers to Agent-Based Modeling in the Social Sciences. Staff General Research Papers Archive, Iowa State University, Department of Economics, Jan. 2006.

185

## REFERENCES 186

11. [11] Axtell, R., Axelrod, R., Epstein, J. M., and Cohen, M. D. Aligning simulation models: A case study and results. Computational & Mathematical Organization Theory 1, 2 (Feb. 1996), 123–141.
12. [12] Balci, O. Verification, Validation, and Testing. In Handbook of Simulation, J. Banks, Ed. John Wiley & Sons, Inc., 1998, pp. 335–393.
13. [13] Ballot, G., Mandel, A., and Vignes, A. Agent-based modeling and economic theory: where do we stand? Journal of Economic Interaction and Coordination 10, 2 (2015), 199–220.
14. [14] Beck, K. Test Driven Development: By Example, 01 edition ed. Addison-Wesley Professional, Boston, Nov. 2002.
15. [15] Bernardy, J.-P., Boespflug, M., Newton, R. R., Jones, S. P., and Spiwack, A. Linear Haskell: practical linearity in a higher-order polymorphic language. Proceedings of the ACM on Programming Languages 2, POPL (Dec. 2017), 1–29. arXiv: 1710.09756.
16. [16] Bezirgiannis, N. Improving Performance of Simulation Software Using Haskell's Concurrency & Parallelism. PhD thesis, Utrecht University - Dept. of Information and Computing Sciences, 2013.
17. [17] Blume, L., Easley, D., Kleinberg, J., Kleinberg, R., and Tardos, E. Introduction to computer science and economic theory. Journal of Economic Theory 156 (Mar. 2015), 1–13.
18. [18] Borshchev, A., and Filippov, A. From System Dynamics and Discrete Event to Practical Agent Based Modeling: Reasons, Techniques, Tools.
19. [19] Bostrom, N. Are We Living in a Computer Simulation? The Philosophical Quarterly 53, 211 (2003), 243–255.

20. [20] Botta, N., Mandel, A., and Ionescu, C. Time in discrete agent-based models of socio-economic systems. *Documents de travail du Centre d'Economie de la Sorbonne* 10076, Université Panthéon-Sorbonne (Paris 1), Centre d'Economie de la Sorbonne, 2010.
21. [21] Botta, N., Mandel, A., Ionescu, C., Hofmann, M., Lincke, D., Schupp, S., and Jaeger, C. A functional framework for agent-based models of exchange. *Applied Mathematics and Computation* 218, 8 (Dec. 2011), 4025–4040.
22. [22] Bowles, S., Edwards, R., and Roosevelt, F. *Understanding Capitalism: Competition, Command, and Change*, 3 edition ed. Oxford University Press, New York, Mar. 2005.
23. [23] Brady, E. Idris, a general-purpose dependently typed programming language: Design and implementation. *Journal of Functional Programming* 23, 05 (2013), 552–593.

## REFERENCES 187

24. [24] Brady, E. Programming and Reasoning with Algebraic Effects and Dependent Types. In Proceedings of the 18th ACM SIGPLAN International Conference on Functional Programming (New York, NY, USA, 2013), ICFP '13, ACM, pp. 133–144.
25. [25] Brady, E. State Machines All The Way Down - An Architecture for Dependently Typed Applications. Tech. rep., 2016.
26. [26] Breitner, J. stm-stats library. <http://hackage.haskell.org/package/stm-stats>, Oct. 2019. Last Access October 11, 2019.
27. [27] Burnstein, I. *Practical Software Testing: A Process-Oriented Approach*, 1st ed. Springer Publishing Company, Incorporated, 2010.
28. [28] Carmack, J. In-depth: Functional programming in C++. [https://www.gamasutra.com/view/news/169296/Indepth\\_Functional\\_programming\\_in\\_C.php](https://www.gamasutra.com/view/news/169296/Indepth_Functional_programming_in_C.php), 2012. Last Access October 11, 2019.
29. [29] Church, A. An Unsolvable Problem of Elementary Number Theory. *American Journal of Mathematics* 58, 2 (Apr. 1936), 345–363.
30. [30] Claessen, K., and Hughes, J. QuickCheck - A Lightweight Tool for Random Testing of Haskell Programs. In Proceedings of the Fifth ACM SIGPLAN International Conference on Functional Programming (New York, NY, USA, 2000), ICFP '00, ACM, pp. 268–279.
31. [31] Claessen, K., and Hughes, J. Testing Monadic Code with QuickCheck. *SIGPLAN Not.* 37, 12 (Dec. 2002), 47–59.
32. [32] Clinger, W. D. Foundations of Actor Semantics. Tech. rep., Massachusetts Institute of Technology, Cambridge, MA, USA, 1981.
33. [33] Colell, A. M. *Microeconomic Theory*. Oxford University Press, 1995. Google-Books-ID: dFS2AQAAQAAJ.
34. [34] Collier, N., and Ozik, J. Test-driven agent-based simulation development. In 2013 Winter Simulations Conference (WSC) (Dec. 2013), pp. 1551–1559.
35. [35] Courtney, A., Nilsson, H., and Peterson, J. The Yampa Arcade. In Proceedings of the 2003 ACM SIGPLAN Workshop on Haskell (New York, NY, USA, 2003), Haskell '03, ACM, pp. 7–18.
36. [36] Coutts, D., Leshchinskiy, R., and Stewart, D. Stream Fusion. From Lists to Streams to Nothing at All. In Icfp'07 (2007).

37. [37] Dahl, O.-j. The birth of object orientation: the simula languages. In Software Pioneers: Contributions to Software Engineering, Programming, Software Engineering and Operating Systems Series (2002), Springer, pp. 79–90.

#### REFERENCES 188

38. [38] De Jong, T. Suitability of Haskell for Multi-Agent Systems. Tech. rep., University of Twente, 2014.
39. [39] De Vries, E. An in-depth look at quickcheck-state-machine. <http://www.well-typed.com/blog/2019/01/qsm-in-depth/>, Jan. 2019. Last Access October 11, 2019.
40. [40] Di Stefano, A., and Santoro, C. Using the Erlang Lan- guage for Multi-Agent Systems Implementation. In Proceedings of the IEEE/WIC/ACM International Conference on Intelligent Agent Technol- ogy (Washington, DC, USA, 2005), IAT '05, IEEE Computer Society, pp. 679–685.
41. [41] Di Stefano, A., and Santoro, C. eXAT: an Experimental Tool for Programming Multi-Agent Systems in Erlang. Tech. rep., 2007.
42. [42] Diehl, S. What I Wish I Knew When Learning Haskell. <http://dev.stephendiehl.com/hask/>, Mar. 2016. Last Access October 11, 2019.
43. [43] Discolo, A., Harris, T., Marlow, S., Jones, S. P., and Singh, S. Lock Free Data Structures Using STM in Haskell. In Proceedings of the 8th International Conference on Functional and Logic Programming (Berlin, Heidelberg, 2006), FLOPS'06, Springer-Verlag, pp. 65–80.
44. [44] Downen, P., Sullivan, Z., Ariola, Z. M., and Peyton Jones, S. Codata in Action. In Programming Languages and Systems (2019), L. Caires, Ed., Lecture Notes in Computer Science, Springer International Publishing, pp. 119–146.
45. [45] Easley, D., and Kleinberg, J. Networks, Crowds, and Markets: Rea- soning About a Highly Connected World. Cambridge University Press, July 2010. Google- Books-ID: 8xf1nAEACAAJ.
46. [46] Epstein, J. M. Chapter 34 Remarks on the Foundations of Agent-Based Generative Social Science. In Handbook of Computational Economics, L. T. a. K. L. Judd, Ed., vol. 2. Elsevier, 2006, pp. 1585–1604.
47. [47] Epstein, J. M. Generative Social Science: Studies in Agent-Based Com- putational Modeling. Princeton University Press, Jan. 2012. Google- Books-ID: 6jPiuMbKKJ4C.
48. [48] Epstein, J. M., and Axtell, R. Growing Artificial Societies: Social Science from the Bottom Up. The Brookings Institution, Washington, DC, USA, 1996.
49. [49] Evensen, P., and Maărdin, M. An Extensible and Scalable Agent-Based Simulation of Barter Economics. Master's thesis, Chalmers University of Technology, G oteborg, 2010.

#### REFERENCES 189

50. [50] Farmer, J. D., and Foley, D. The economy needs agent-based mod- elling. Nature 460, 7256 (Aug. 2009), 685–686.

51. [51] Figueiredo, G. P., Siebers, P.-O., Owen, M. R., Reps, J., and Aickelin, U. Comparing Stochastic Differential Equations and Agent-Based Modelling and Simulation for Early-Stage Cancer. *PLOS ONE* 9, 4 (Apr. 2014), e95150.
52. [52] Focardi, S. Is economics an empirical science? If not, can it become one? *Frontiers in Applied Mathematics and Statistics* 1 (2015), 7.
53. [53] Fowler, S., and Brady, E. Dependent Types for Safe and Secure Web Programming. In Proceedings of the 25th Symposium on Implementation and Application of Functional Languages (New York, NY, USA, 2014), IFL '13, ACM, pp. 49:49–49:60.
54. [54] Fujimoto, R. M. Parallel Discrete Event Simulation. *Commun. ACM* 33, 10 (Oct. 1990), 30–53.
55. [55] Fujimoto, R. M., Bagrodia, R., Bryant, R. E., Chandy, K. M., Jefferson, D., Misra, J., Nicol, D., and Unger, B. Parallel discrete event simulation: The making of a field. In 2017 Winter Simulation Conference (WSC) (Dec. 2017), pp. 262–291.
56. [56] Galáñ, J. M., Izquierdo, L. R., Izquierdo, S. S., Santos, J. I., del Olmo, R., Lopez-Paredes, A., and Edmonds, B. Errors and Artefacts in Agent-Based Modelling. *Journal of Artificial Societies and Social Simulation* 12, 1 (2009), 1.
57. [57] Gamma, E., Helm, R., Johnson, R., Vlissides, J., and Booch, G. Design Patterns: Elements of Reusable Object-Oriented Software, 1 edition ed. Addison-Wesley Professional, Oct. 1994.
58. [58] Gill, A., and Hutton, G. The Worker/Wrapper Transformation. *J. Funct. Program.* 19, 2 (Mar. 2009), 227–251.
59. [59] Gilmer, Jr., J. B., and Sullivan, F. J. Recursive Simulation to Aid Models of Decision Making. In Proceedings of the 32Nd Conference on Winter Simulation (San Diego, CA, USA, 2000), WSC '00, Society for Computer Simulation International, pp. 958–963.
60. [60] Gintis, H. The Emergence of a Price System from Decentralized Bilateral Exchange. *Contributions in Theoretical Economics* 6, 1 (2006), 1–15.
61. [61] Gintis, H. Herbert Gintis Website. <https://people.umass.edu/gintis/>, 2019. Last Access October 11, 2019.
62. [62] Glasserman, P., and Young, P. Contagion in Financial Networks. SSRN Scholarly Paper ID 2681392, Social Science Research Network, Rochester, NY, Oct. 2015.

## REFERENCES 190

63. [63] Gode, D. K., and Sunder, S. Allocative Efficiency of Markets with Zero-Intelligence Traders: Market as a Partial Substitute for Individual Rationality. *Journal of Political Economy* 101, 1 (1993), 119–137.
64. [64] Gregory, J. Game Engine Architecture, Third Edition. Taylor & Francis, Mar. 2018.
65. [65] Grief, I., and Greif, I. SEMANTICS OF COMMUNICATING PARALLEL PROCESSES. Tech. rep., Massachusetts Institute of Technology, Cambridge, MA, USA, 1975.
66. [66] Gurcan, O., Dikenelli, O., and Bertron, C. A generic testing framework for agent-based simulation models. *Journal of Simulation* 7, 3 (Aug. 2013), 183–201.
67. [67] Halbwachs, N., Caspi, P., Raymond, P., and Pilaud, D. The synchronous data flow programming language LUSTRE. *Proceedings of the IEEE* 79, 9 (Sept. 1991), 1305–1320.

68. [68] Hanenberg, S. An Experiment About Static and Dynamic Type Systems: Doubts About the Positive Impact of Static Type Systems on Development Time. In Proceedings of the ACM International Conference on Object Oriented Programming Systems Languages and Applications (New York, NY, USA, 2010), OOPSLA '10, ACM, pp. 22–35. event-place: Reno/Tahoe, Nevada, USA.
69. [69] Harris, T., Marlow, S., Peyton-Jones, S., and Herlihy, M. Composable Memory Transactions. In Proceedings of the Tenth ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming (New York, NY, USA, 2005), PPoPP '05, ACM, pp. 48–60.
70. [70] Harris, T., and Peyton Jones, S. Transactional memory with data invariants. In First ACM SIGPLAN Workshop on Languages, Compilers, and Hardware Support for Transactional Computing (TRANSACT'06) (June 2006).
71. [71] HaskellWiki. Haskell Applications and Libraries. [https://wiki.haskell.org/Applications\\_and\\_libraries](https://wiki.haskell.org/Applications_and_libraries), 2019. Last Access October 11, 2019.
72. [72] Hay, J., and Wilsey, P. A. Experiments with Hardware-based Transactional Memory in Parallel Simulation. In Proceedings of the 3rd ACM SIGSIM Conference on Principles of Advanced Discrete Simulation (New York, NY, USA, 2015), SIGSIM PADS '15, ACM, pp. 75–86. event-place: London, United Kingdom.
73. [73] Heindl, A., and Pokam, G. Modeling Software Transactional Memory with AnyLogic. In Proceedings of the 2Nd International Conference on Simulation Tools and Techniques (ICST, Brussels, Belgium, Belgium,

REFERENCES 191 2009), Simutools '09, ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), pp. 10:1–10:10.

74. [74] Henderson, P. Functional Geometry. In Proceedings of the 1982 ACM Symposium on LISP and Functional Programming (New York, NY, USA, 1982), LFP '82, ACM, pp. 179–187.
75. [75] Hewitt, C. What Is Commitment? Physical, Organizational, and Social (Revised). In Coordination, Organizations, Institutions, and Norms in Agent Systems II, P. Noriega, J. Vazquez-Salceda, G. Boella, O. Boissier, V. Dignum, N. Fornara, and E. Matson, Eds., no. 4386 in Lecture Notes in Computer Science. Springer Berlin Heidelberg, 2007, pp. 293–307.
76. [76] Hewitt, C. Actor Model of Computation: Scalable Robust Information Systems. arXiv:1008.1459 [cs] (Aug. 2010). arXiv: 1008.1459.
77. [77] Hewitt, C., Bishop, P., and Steiger, R. A Universal Modular ACTOR Formalism for Artificial Intelligence. In Proceedings of the 3rd International Joint Conference on Artificial Intelligence (San Francisco, CA, USA, 1973), IJCAI'73, Morgan Kaufmann Publishers Inc., pp. 235–245.
78. [78] Hoare, C. A. R. Communicating Sequential Processes. Prentice-Hall, 1985. Google-Books-ID: tpZLQgAACAAJ.
79. [79] Hudak, P., Courtney, A., Nilsson, H., and Peterson, J. Arrows, Robots, and Functional Reactive Programming. In Advanced Functional Programming, J. Jeuring and S. L. P. Jones, Eds., no. 2638 in Lecture Notes in Computer Science. Springer Berlin Heidelberg, 2003, pp. 159–187.
80. [80] Hudak, P., Hughes, J., Peyton Jones, S., and Wadler, P. A History of Haskell: Being Lazy with Class. In Proceedings of the Third ACM SIGPLAN Conference on History of Programming Languages (New York, NY, USA, 2007), HOPL III, ACM, pp. 12:1–12:55.

81. [81] Hudak, P., and Jones, M. Haskell vs. Ada vs. C++ vs. Awk vs. ... An Experiment in Software Prototyping Productivity. Research Report YALEU/DCS/RR-1049, Department of Computer Science, Yale University, New Haven, CT, Oct. 1994.
82. [82] Hughes, J. Why Functional Programming Matters. *Comput. J.* 32, 2 (Apr. 1989), 98–107.
83. [83] Hughes, J. Generalising Monads to Arrows. *Sci. Comput. Program.* 37, 1-3 (May 2000), 67–111.
84. [84] Hughes, J. Programming with Arrows. In Proceedings of the 5th International Conference on Advanced Functional Programming (Berlin, Heidelberg, 2005), AFP'04, Springer-Verlag, pp. 73–129.

## REFERENCES 192

85. [85] Hughes, J. QuickCheck Testing for Fun and Profit. In Proceedings of the 9th International Conference on Practical Aspects of Declarative Languages (Berlin, Heidelberg, 2007), PADL'07, Springer-Verlag, pp. 1– 32.
86. [86] Hutton, G. A Tutorial on the Universality and Expressiveness of Fold. *J. Funct. Program.* 9, 4 (July 1999), 355–372.
87. [87] Hutton, G. Programming in Haskell. Cambridge University Press, Aug. 2016. Google-Books-ID: 1xHPDAAQBAJ.
88. [88] Ionescu, C., and Jansson, P. Dependently-Typed Programming in Scientific Computing. In Implementation and Application of Functional Languages (Aug. 2012), R. Hinze, Ed., Lecture Notes in Computer Science, Springer Berlin Heidelberg, pp. 140–156.
89. [89] Jackson, M. O. Social and Economic Networks. Princeton University Press, 2008. Google-Books-ID: IpA9LwEACAAJ.
90. [90] Jacobs, B. Introduction to Coalgebra. Cambridge University Press, 2017. Google-Books-ID: tApQDQAAQBAJ.
91. [91] Jacobs, B., and Poll, E. Coalgebras and Monads in the Semantics of Java. *Theor. Comput. Sci.* 291, 3 (Jan. 2003), 329–349.
92. [92] Jacobs, B., and Rutten, J. A Tutorial on (Co)Algebras and (Co)Induction. *EATCS Bulletin* 62 (1997), 62–222.
93. [93] Jankovic, P., and Such, O. Functional Programming and Discrete Simulation. Tech. rep., 2007.
94. [94] Jones, M. P. Functional Programming with Overloading and Higher- Order Polymorphism. In Advanced Functional Programming, First International Spring School on Advanced Functional Programming Techniques- Tutorial Text (Berlin, Heidelberg, 1995), Springer-Verlag, pp. 97–136.
95. [95] Jones, S. P. Tackling the Awkward Squad: monadic input/output, concurrency, exceptions, and foreign-language calls in Haskell. In Engineering theories of software construction (2002), Press, pp. 47–96.
96. [96] Kaminski, T. What would a message-oriented programming language look like? <https://www.tedinski.com/2018/11/20/message-oriented-programming.html>, 2018. Last Access October 11, 2019.
97. [97] Kay, A. C. The Early History of Smalltalk. In The Second ACM SIGPLAN Conference on History of Programming Languages (New York, NY, USA, 1993), HOPL-II, ACM, pp. 69–95. event-place: Cambridge, Massachusetts, USA.

## REFERENCES 193

98. [98] Kermack, W. O., and McKendrick, A. G. A Contribution to the Mathematical Theory of Epidemics. *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* 115, 772 (Aug. 1927), 700–721.
99. [99] Kirman, A. *Complex Economics: Individual and Collective Rationality*. Routledge, London ; New York, NY, July 2010.
100. [100] Kiselyov, O. Typed Tagless Final Interpreters. In *Generic and Indexed Programming: International Spring School, SSGIP 2010, Oxford, UK, March 22-26, 2010, Revised Lectures*, J. Gibbons, Ed., Lecture Notes in Computer Science. Springer Berlin Heidelberg, Berlin, Heidelberg, 2012, pp. 130–174.
101. [101] kqr, C. On Competing with C Using Haskell. <https://two-wrongs.com/on-competing-with-c-using-haskell>, June 2017. Last Access October 11, 2019.
102. [102] Lamport, L. Time, Clocks, and the Ordering of Events in a Distributed System. *Commun. ACM* 21, 7 (July 1978), 558–565.
103. [103] LeBaron, B. Zero Intelligence Traders: Gode and Sun-  
der. <http://people.brandeis.edu/~blebaron/classes/agentfin/GodeSunder.html>, 2016.  
Last Access October 11, 2019.
104. [104] [libraries@haskell.org](mailto:libraries@haskell.org). array library. <http://hackage.haskell.org/package/array>, 2019. Last Access October 11, 2019.
105. [105] [libraries@haskell.org](mailto:libraries@haskell.org). containers library. <http://hackage.haskell.org/package/containers>, 2019. Last Access October 11, 2019.
106. [106] Lipovaca, M. *Learn You a Haskell for Great Good!: A Beginner's Guide*. No Starch Press, Apr. 2011. Google-Books-ID: QesxXj ecD0C.
107. [107] Lippmeier, B. gloss library. <http://hackage.haskell.org/package/gloss>, 2019. Last Access October 11, 2019.
108. [108] Lysenko, M., and D'Souza, R. M. A Framework for Megascale Agent Based Model Simulations on Graphics Processing Units. *Journal of Artificial Societies and Social Simulation* 11, 4 (2008), 10.
109. [109] Macal, C. M. To Agent-based Simulation from System Dynamics. In *Proceedings of the Winter Simulation Conference (Baltimore, Maryland, 2010)*, WSC '10, Winter Simulation Conference, pp. 371–382.
110. [110] Macal, C. M. Everything you need to know about agent-based modelling and simulation. *Journal of Simulation* 10, 2 (May 2016), 144–156.
111. [111] MacLennan, B. J. *Functional Programming: Practice and Theory*. Addison-Wesley, Jan. 1990. Google-Books-ID: JqhQAAAAMAAJ.

## REFERENCES 194

[112]

[113]

[114]

[115]

[116] [117]

[118] [119]

[120]

[121] [122]

[123]

Maguire, S. Freer Monads, More Better Programs. <https://reasonablypolymorphic.com/blog/freer-monads/>, Feb. 2019. Last Access October 11, 2019.

Maguire, S. Freer Monads: Too Fast, Too Free. <https://reasonablypolymorphic.com/blog/too-fast-too-free/>, Feb. 2019. Last Access October 11, 2019.

Maguire, S. Freer, yet too costly Higher-order Effects. <https://reasonablypolymorphic.com/blog/freer-yet-too-costly/>, Mar. 2019. Last Access October 11, 2019.

Mainland, G. Haskell beats c using generalized stream fusion.  
<https://www.semanticscholar.org/paper/Haskell-Beats-C-Using-Generalized-Stream->

Fusion-Mainland/ 0ccaa4e306398ef7225e49b01cc5e0c16c94aac7, 2013. Last Access October 11, 2019.

Marlow, S. Parallel and Concurrent Programming in Haskell. O'Reilly, 2013. Google-Books-ID: k0W6AQACAAJ.

Marlow, S., Newton, R., and Peyton Jones, S. A Monad for Deterministic Parallelism. In Proceedings of the 4th ACM Symposium on Haskell (New York, NY, USA, 2011), Haskell '11, ACM, pp. 71–82. event-place: Tokyo, Japan.

McMillan, K. L. Symbolic Model Checking. Kluwer Academic Publishers, Norwell, MA, USA, 1993.

Meyer, R. Event-Driven Multi-agent Simulation. In Multi-Agent-Based Simulation XV (May 2014), Lecture Notes in Computer Science, Springer, Cham, pp. 3–16.

Michaelson, G. An Introduction to Functional Programming Through Lambda Calculus. Courier Corporation, 2011. Google-Books-ID: gKvw-PtvsSjsC.

Milner, R. Communicating and Mobile Systems: The Pi Calculus. Cambridge University Press, May 1999. Google-Books-ID: k2tfQgAACAAJ.

Moggi, E. Computational Lambda-calculus and Monads. In Proceedings of the Fourth Annual Symposium on Logic in Computer Science (Piscataway, NJ, USA, 1989), IEEE Press, pp. 14–23.

Nilsson, H., Courtney, A., and Peterson, J. Functional Reactive Programming, Continued. In Proceedings of the 2002 ACM SIGPLAN Workshop on Haskell (New York, NY, USA, 2002), Haskell '02, ACM, pp. 51–64.

## REFERENCES 195

[124]

[125]

[126] [127] [128]

[129]

[130] [131]

[132]

[133]

[134] [135]

North, M. J., Collier, N. T., Ozik, J., Tatara, E. R., Macal, C. M., Bragen, M., and Sydelko, P. Complex adaptive systems modeling with Repast Simphony. *Complex Adaptive Systems Modeling* 1, 1 (Mar. 2013), 3.

North, M. J., and Macal, C. M. *Managing Business Complexity: Discovering Strategic Solutions with Agent-Based Modeling and Simulation*. Oxford University Press, USA, Mar. 2007. Google-Books-ID: gRAT- DAAAQBAJ.

Odell, J. Objects and Agents Compared. *Journal of Object Technology* 1, 1 (May 2002), 41–53.

Okasaki, C. *Purely Functional Data Structures*. Cambridge University Press, New York, NY, USA, 1999.

Onggo, B. S. S., and Karatas, M. Test-driven simulation modelling: A case study using agent-based maritime search-operation simulation. *European Journal of Operational Research* 254 (2016), 517–531.

Ormerod, P., and Rosewell, B. Validation and Verification of Agent-Based Models in the Social Sciences. In *Epistemological Aspects of Computer Simulation in the Social Sciences*, Lecture Notes in Computer Science. Springer, Berlin, Heidelberg, Oct. 2006, pp. 130–140.

O'Sullivan, B., Goerzen, J., and Stewart, D. *Real World Haskell*, 1st ed. O'Reilly Media, Inc., 2008.

Paterson, R. A New Notation for Arrows. In *Proceedings of the Sixth ACM SIGPLAN International Conference on Functional Programming* (New York, NY, USA, 2001), ICFP '01, ACM, pp. 229–240.

Payne, D., Elkink, J., Friel, N., Grund, T., Hochstrasser, T., Lucas, P., and Ottewill, A., Eds. *Social Simulation for a Digital Society: Applications and Innovations in Computational Social Science*. Springer Proceedings in Complexity. Springer International Publishing, 2019.

Perez, I. Back to the Future: Time Travel in FRP. In *Proceedings of the 10th ACM SIGPLAN International Symposium on Haskell* (New York, NY, USA, 2017), Haskell 2017, ACM, pp. 105–116.

Perez, I. Extensible and Robust Functional Reactive Programming. Doctoral Thesis, University Of Nottingham, Nottingham, Oct. 2017.

Perez, I., Baerenz, M., and Nilsson, H. Functional Reactive Programming, Refactored. In *Proceedings of the 9th International Symposium on Haskell* (New York, NY, USA, 2016), Haskell 2016, ACM, pp. 33–44.

## REFERENCES 196

[136] [137] [138]

[139]

[140] [141]

[142]

[143] [144]

[145]

[146]

[147]

Perez, I., and M., B. duani library. <http://hackage.haskell.org/package/dunai>, 2019. Last Access October 11, 2019.

Perez, I., and Nilsson, H. Testing and Debugging Functional Reactive Programming. Proc. ACM Program. Lang. 1, ICFP (Aug. 2017), 2:1–2:27.

Perfumo, C., Soñmez, N., Stipic, S., Unsal, O., Cristal, A., Har- ris, T., and Valero, M. The Limits of Software Transactional Memory (STM): Dissecting Haskell STM Applications on a Many-core Environment. In Proceedings of the 5th Conference on Computing Frontiers (New York, NY, USA, 2008), CF ’08, ACM, pp. 67–78.

Polhill, J. G., Izquierdo, L. R., and Gotts, N. M. The Ghost in the Model (and Other Effects of Floating Point Arithmetic). Journal of Artificial Societies and Social Simulation 8, 1 (2005), 1.

Popper, K. R. The Logic of Scientific Discovery. Psychology Press, 2002. Google-Books-ID: Yq6xeupNStMC.

Porter, D. E. Industrial Dynamics. Jay Forrester. M.I.T. Press, Cam- bridge, Mass.; Wiley, New York, 1961. xv + 464 pp. Illus. \$18. Science 135, 3502 (Feb. 1962), 426–427.

Richiardi, M. Agent-based Computational Economics. A Short Intro- duction. LABORatorio R. Revelli Working Papers Series 69, LABORato- rio R. Revelli, Centre for Employment Studies, 2007.

Rivas, E., and Jaskelioff, M. Notions of Computation as Monoids. arXiv:1406.4823 [cs, math] (May 2014). arXiv: 1406.4823.

Robinson, S. Simulation: The Practice of Model Development and Use. Macmillan Education UK, Sept. 2014. Google-Books-ID: Dtn0oAEACAAJ.

Runciman, C., Naylor, M., and Lindblad, F. Smallcheck and Lazy Smallcheck: Automatic Exhaustive Testing for Small Values. In Proceed- ings of the First ACM SIGPLAN Symposium on Haskell (New York, NY, USA, 2008), Haskell ’08, ACM, pp. 37–48.

Savaglio, C., Fortino, G., Ganzha, M., Paprzycki, M., Baćdicač, C., and Ivanović, M. Agent-Based Computing in the Internet of Things: A Survey. In Intelligent Distributed Computing XI, M. Ivanović, C. Baćdicač, J. Dix, Z. Jovanović, M. Malgeri, and M. Savić, Eds., Studies in Computational Intelligence. Springer International Publishing, Cham, 2018, pp. 307–320.

Schelling, T. Dynamic models of segregation. *Journal of Mathematical Sociology* 1 (1971).

## REFERENCES 197

[148]

[149]

[150]

[151] [152] [153]

[154]

[155]

[156]

[157] [158] [159]

Schneider, O., Dutchyn, C., and Osgood, N. Towards Frabjous: A Two-level System for Functional Reactive Agent-based Epidemic Simulation. In Proceedings of the 2Nd ACM SIGHIT International Health Informatics Symposium (New York, NY, USA, 2012), IHIS '12, ACM, pp. 785–790.

Sculthorpe, N., and Nilsson, H. Safe Functional Reactive Programming Through Dependent Types. In Proceedings of the 14th ACM SIGPLAN International Conference on Functional Programming (New York, NY, USA, 2009), ICFP '09, ACM, pp. 23–34.

Shavit, N., and Touitou, D. Software Transactional Memory. In Proceedings of the Fourteenth Annual ACM Symposium on Principles of Distributed Computing (New York, NY, USA, 1995), PODC '95, ACM, pp. 204–213.

Sher, G. I. Agent-Based Modeling Using Erlang Eliminating The Conceptual Gap Between The Programming Language & ABM. 2013.

Siebers, P.-O., and Aickelin, U. Introduction to Multi-Agent Simulation. arXiv:0803.3905 [cs] (Mar. 2008). arXiv: 0803.3905.

Sorokin, D. Aivika 3: Creating a Simulation Library based on Functional Programming. <https://pdfs.semanticscholar.org/8dbd/cd2f4423dad78a37e6896496f7c6f95f929d.pdf>, 2015. Last Access October 11, 2019.

Steinhart, E. Theological Implications of the Simulation Argument. *Ars Disputandi: The Online Journal for Philosophy of Religion* 10 (2010), 23–37.

Stewart, D. Haskell as fast as C: working at a high altitude for low level performance. <https://donsbot.wordpress.com/2008/06/04/haskell-as-fast-as-c-working-at-a-high-altitude-for-low-level-performance/>, Apr. 2008. Last Access October 11, 2019.

Stolarek, J. Haskell as fast as C: A case study. <http://lambda.jstolarek.com/2013/04/haskell-as-fast-as-c-a-case-study/>, Apr. 2013. Last Access October 11, 2019.

Sulzmann, M., and Lam, E. Specifying and Controlling Agents in Haskell. Tech. rep., 2007.

Suryanarayanan, V., Theodoropoulos, G., and Lees, M. PDES- MAS : distributed simulation of multi-agent systems.

Sweeney, T. The Next Mainstream Programming Language: A Game Developer's Perspective. In Conference Record of the 33rd ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (New York, NY, USA, 2006), POPL '06, ACM, pp. 269–269.

## REFERENCES 198

[160]

[161] [162]

[163]

[164]

[165]

[166]

[167]

[168]

[169] [170]

[171]

Tesfatsion, L. Agent-Based Computational Economics: A Constructive Approach to Economic Theory. *Handbook of Computational Economics*, Elsevier, 2006.

Tesfatsion, L. Agent-based Computational Economics (ACE) - Growing Economies from the Bottom Up. Tech. rep., May 2017.

Thaler, J. Repository of agent-based SIR implementation in Haskell.  
<https://github.com/thalerjonathan/haskell-sir>, May 2019. Last Access October 11, 2019.

Thaler, J. Repository of STM implementations of the agent- based SIR model in Haskell.  
<https://github.com/thalerjonathan/ haskell-stm-sir>, Oct. 2019. Last Access October 11, 2019.

Thaler, J. Repository of STM implementations of the Sug- arscape model in Haskell.  
<https://github.com/thalerjonathan/ haskell-stm-sugarscape>, Oct. 2019. Last Access October 11, 2019.

Thaler, J. Repository of Sugarscape implementation in Haskell. <https://github.com/thalerjonathan/haskell-sugarscape>, May 2019. Last Access October 11, 2019.

Thaler, J. Repository of the Gode and Sunder Zero Intelligence traders in Haskell.  
<https://github.com/thalerjonathan/zerointelligence>, Mar. 2019. Last Access October 11, 2019.

Thaler, J., Altenkirch, T., and Siebers, P.-O. Pure Functional Epidemics: An Agent-Based Approach. In Proceedings of the 30th Symposium on Implementation and Application of Functional Languages (New York, NY, USA, 2018), IFL 2018, ACM, pp. 1–12. event-place: Lowell, MA, USA.

Thaler, J., and Siebers, P.-O. The Art Of Iterating: Update- Strategies in Agent-Based. D. Payne, J. Elkink, N. Friel, T. Grund, T. Hochstrasser, P. Lucas, and A. Ottewill, Eds., Springer Proceedings in Complexity, Springer International Publishing.

Thaler, J., and Siebers, P.-O. The agents new cloth? Towards Pure Functional Programming in ABS. Submitted to Summer Simulation 2019.

Thaler, J., and Siebers, P.-O. Show Me Your Properties! The Potential Of Property-Based Testing In Agent-Based Simulation. To appear in Proceedings of Summer Simulation 2019.

Thaler, J., and Siebers, P.-O. Specification Testing of Agent-Based Simulation using Property-Based Testing. Autonomous Agents and Multi- Agent Systems Under Review, Under Review (Aug. 2019), 15.

## REFERENCES 199

[172]

[173] [174]

[175]

[176]

[177]

[178]

[179]

[180] [181]

[182]

Thaler, J., and Siebers, P.-O. A Tale Of Lock-Free Agents: Towards Software Transactional Memory in parallel Agent-Based Simulation. *Complex Adaptive Systems Modeling* Under Review, Submitted (Nov. 2019), 25.

Thompson, S. Type Theory and Functional Programming. Addison Wesley Longman Publishing Co., Inc., Redwood City, CA, USA, 1991.

Turing, A. M. On Computable Numbers, with an Application to the Entscheidungsproblem. *Proceedings of the London Mathematical Society* s2-42, 1 (1937), 230–265.

Uustalu, T., and Vene, V. The Essence of Dataflow Programming. In *Central European Functional Programming School* (2006), Z. Horváth, Ed., *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, pp. 135–167.

Varela, C., Abalde, C., Castro, L., and Gulías, J. On Modelling Agent Systems with Erlang. In *Proceedings of the 2004 ACM SIGPLAN Workshop on Erlang* (New York, NY, USA, 2004), ERLANG '04, ACM, pp. 65–70.

Vendrov, I., Dutchyn, C., and Osgood, N. D. Frabjous A Declarative Domain-Specific Language for Agent-Based Modeling. In *Social Computing, Behavioral-Cultural Modeling and Prediction*, W. G. Kennedy, N. Agarwal, and S. J. Yang, Eds., no. 8393 in *Lecture Notes in Computer Science*. Springer International Publishing, Apr. 2014, pp. 385–392.

Wadler, P. The Essence of Functional Programming. In *Proceedings of the 19th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages* (New York, NY, USA, 1992), POPL '92, ACM, pp. 1–14.

Wadler, P. Monads for Functional Programming. In *Advanced Functional Programming*, First International Spring School on Advanced Functional Programming Techniques-Tutorial Text (London, UK, UK, 1995), Springer-Verlag, pp. 24–52.

Wadler, P. How to Declare an Imperative. *ACM Comput. Surv.* 29, 3 (Sept. 1997), 240–263.

Wald, A. Sequential Tests of Statistical Hypotheses. In *Breakthroughs in Statistics: Foundations and Basic Theory*, S. Kotz and N. L. Johnson, Eds., *Springer Series in Statistics*. Springer New York, New York, NY, 1992, pp. 256–298.

Wasserman, L. pqueue library. <http://hackage.haskell.org/package/pqueue>, 2019. Last Access October 11, 2019.

## REFERENCES 200

[183]

[184] [185] [186]

[187] [188]

[189] [190]

Weaver, I. Replicating Sugarscape in NetLogo. <https://www2.le.ac.uk/departments/interdisciplinary-science/research/replicating-sugarscape>, Oct. 2009. Last Access October 11, 2019.

Weiss, G. Multiagent Systems. MIT Press, Mar. 2013. Google-Books-ID: WY36AQAAQBAJ.

wiki, c. Definitions For Oo. <http://wiki.c2.com/?DefinitionsForOo>, 2014. Last Access October 11, 2019.

Wilensky, U., and Rand, W. An Introduction to Agent-Based Modeling: Modeling Natural, Social, and Engineered Complex Systems with NETLogo. MIT Press, 2015.

Wilhite, A. Economic Activity on Fixed Networks. Handbook of Computational Economics, Elsevier, 2006.

Winograd-Cort, D., and Hudak, P. Wormholes: Introducing Effects to FRP. In Proceedings of the 2012 Haskell Symposium (New York, NY, USA, 2012), Haskell '12, ACM, pp. 91–104.

Wooldridge, M. An Introduction to MultiAgent Systems, 2nd ed. Wiley Publishing, 2009.

Zeigler, B. P., Praehofer, H., and Kim, T. G. Theory of Modeling and Simulation: Integrating Discrete Event and Continuous Complex Dynamic Systems. Academic Press, Jan. 2000. Google-Books-ID: REzmY-OQmHuQC.

## Appendices

### 201

#### Appendix A

##### Validating Sugarscape in Haskell

In this chapter we look at how property-based testing can be made of use to verify the exploratory Sugarscape model [48] as introduced in Chapter 2.1.2. Whereas in the chapters on testing the explanatory SIR model we had an analytical solution, the fundamental difference in the exploratory Sugarscape model is that none such analytical

solutions exist. This raises the question, which properties we can actually test in such a model.


The answer lies in the very nature of exploratory models, they exist to explore and understand phenomena of the real world. Researchers come up with a model to explain the phenomena and (hopefully) with a few questions and hypotheses about the emergent properties. The actual simulation is then used to test and refine the hypotheses. Indeed, descriptions, assumptions and hypotheses of varying formal degree abound in the Sugarscape model. Examples are: the carrying capacity becomes stable after 100 steps; when agents trade with each other, after 1000 steps the standard deviation of trading prices is less than 0.05; when there are cultures, after 2700 steps either one culture dominates the other or both are equally present.

We show how to use property-based testing to formalise and check such hypotheses. For this purpose we undertook a full verification of our implementation [165] from Chapter 2.1.2. We validated it against the book [48] and a NetLogo implementation [183]<sup>1</sup>.

#### A.1 Property-based hypothesis testing

The property we test for is whether the emergent property / hypothesis under test is stable under replicated runs or not. To put it more technical, we use

<sup>1</sup>Lending didn't properly work in their NetLogo code and that they didn't implement Combat.

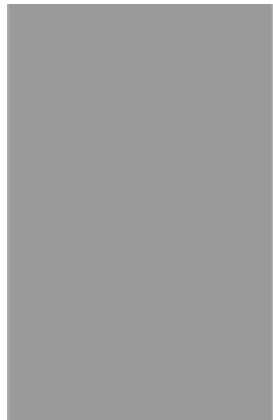

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 203

QuickCheck to run multiple replications with the same configuration but with different random-number streams and require that all tests pass. During the verification process we have derived and implemented property tests for the following hypotheses:

1. Disease dynamics where all agents recover - when disease are turned on, if the number of initial diseases is 10, then the population is able to rid itself completely from all disease within 100 ticks.
2. Disease dynamics where a minority recovers - when disease are turned on, if the number of initial diseases is 25, the population is not able to rid itself completely from all diseases within 1,000 ticks.
3. Trading dynamics - when trading is enabled, the trading prices stabilise after 1,000 ticks with the standard deviation of the prices having dropped below 0.05.
4. Cultural dynamics - when having two cultures, red and blue, after 2,700 ticks, either the red or the blue culture dominates or both are equally strong. If they dominate they make up 95% of all agents, if they are equally strong they are both within 45% - 55%.
5. Inheritance Gini coefficient - when agents reproduce and can die of age then inheritance of their wealth leads to an unequal wealth distribution measured using the Gini Coefficient averaging at 0.7.
6. Carrying capacity - when agents don't mate nor can die from age, due to the environment, there is an average maximum carrying capacity of agents the environment can sustain. The capacity should be reached after 100 ticks and should be stable from then on.
7. Terracing - when resources regrow immediately, after a few steps the simulation becomes static. Agents will stay on their terraces and will not move any more because they have found the best spot due to their behaviour. About 45% will be on terraces and 95% - 100% are static, not moving any more.

The hypotheses and their validation is described more in-depth in the section A.2 below.

#### A.1.1 Implementation

To start with, we implement a custom data generator to produce output from a Sugarscape simulation. The generator takes the number of ticks and the scenario with which to run the simulation and returns a list of outputs, one for each tick.

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 204

```
sugarscapeUntil :: Int -- ^ Number of ticks to run -> SugarScapeScenario -- ^ Scenario to
run

-> Gen [SimStepOut] -- ^ Output of each step sugarscapeUntil ticks params = do
  -- create a random-number generator

  g <- genStdGen
  -- initialise the simulation state with the given random-number generator -- and the
  scenario
  let simState = initSimulationRng g params
  -- run the simulation with the given state for number of ticks
  return (simulateUntil ticks simState)
```

Using this generator, we can very conveniently produce Sugarscape data within a QuickCheck Property. Depending on the problem, we can generate only a single run or

multiple replications, in case the hypothesis is assuming averages. To see its use, we show the implementation of the Disease Dynamics (1) hypothesis.

```
prop_disease_allrecover :: Property
prop_disease_allrecover = property (do
    -- after 100 ticks...

    let ticks = 100
    -- ... given Animation V-1 parameter configuration ...
    let params = mkParamsAnimationV_1
    -- ... from 1 sugarscape simulation ...
    aos <- last <*> (sugarscapeUntil ticks params)
    -- ... counting all infected agents ...
    let infected = length (filter (==False)) map (null . sugObsDiseases . snd) aos -- ... should
    result in all agents to be recovered
    return (cover 100 (infected == 0) "Diseases all recover" True)
```

From the implementation it becomes clear, that this hypothesis states that the property has to hold for all replications. The Inheritance Gini Coefficient (5) hypothesis on the other hand assumes that the Gini Coefficient averages at 0.7. We cannot average over replicated runs of the same property thus we generate multiple replications of the Sugarscape data within the property and employ a two-sided t-test with a 95% confidence to test the hypothesis:

```
prop_gini :: Int -- ^ Number of replications -> Double -- ^ Confidence of the t-test ->
Property
```

```
prop_gini repls confidence = property (do
    -- after 1000 ticks...
    let ticks = 1000
    -- ... the gini coefficient should average at 0.7 ... let expGini = 0.7

    -- ... given the Figure III-7 parameter configuration ...

    let params = mkParamsFigureIII_7
    -- ... from 100 replications ...
    gini <- vectorOf repls (genGiniCoeff ticks params)
    -- on a two-tailed t-test with given confidence
    return (tTestSamples TwoTail expGini (1 - confidence) gini)
```

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 205 A.1.2 Running the tests

As already pointed out in Part 9, QuickCheck by default runs up to 100 test cases of a property and if all evaluate to True the property test succeeds. On the other hand, QuickCheck will stop at the first test case which evaluates to False and marks the whole property test as failed, no matter how many test cases got through already. For this reason we have used cover with an expected percentage of 100, meaning that we expect all tests to fall into the coverage class. This allows us to emulate failure with QuickCheck reporting the actual percentage of passed test cases.

Due to the duration even 1,000 ticks can take to compute, to get a first estimate of our hypotheses tests within reasonable time, we reduce the number of maximum successful replications required to 10 and when doing t-tests 10 replications are run there as well.

#### SugarScape Tests

Disease Dynamics All Recover: OK (29.25s)  
+++ OK, passed 10 tests (100% Diseases all recover).  
Disease Dynamics Minority Recover: OK (536.00s)  
+++ OK, passed 10 tests (100% Diseases no recover).  
Trading Dynamics: OK (149.33s)  
+++ OK, passed 10 tests (70% Prices std less than 5.0e-2).  
Only 70% Prices std less than 5.0e-2, but expected 100%  
Cultural Dynamics: OK (996.84s)  
+++ OK, passed 10 tests (50% Cultures dominate or equal).  
Only 50% Cultures dominate or equal, but expected 100%  
Carrying Capacity: OK (988.20s)  
+++ OK, passed 10 tests (90% Carrying capacity averages at 204.0).  
Only 90% Carrying capacity averages at 204.0, but expected 100%  
Terracing: OK (280.59s)  
+++ OK, passed 10 tests (80% Terracing is happening).  
Only 80% Terracing is happening, but expected 100%  
Inheritance Gini: OK (7232.59s)  
+++ OK, passed 0 tests (0% Gini coefficient averages at 0.7).  
Only 0% Gini coefficient averages at 0.7, but expected 100%

How to deal with the failure of hypotheses is obviously highly model specific. A first approach is to increase the number of replications to run to 100 to get a more robust estimate of the failure rate. If the failure rate stays within reasonable ranges then one can arguably assume that the hypothesis is valid for sufficiently enough cases. On the other hand, if the failure rate escalates, then

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 206

it is reasonable to deem the hypothesis invalid and refine it or even abandon it altogether.

With the exception of the Gini coefficient, we accept the failure rate of the hypotheses we presented here and deem them sufficiently valid for the task at hand. In case of the Gini coefficient, none of the replication was successful, which makes it obvious that it does not average at 0.7. Thus the hypothesis as stated in the book does not hold and is invalid. One way to deal with it would be to simply delete it. Another, more constructive approach, is to keep it but require all replications to fail by marking it with `expectFailure` instead of `property`. In this way an invalid hypothesis is marked explicitly and acts as documentation and also as regression test.

#### A.2 Hypotheses and test cases

In this section we briefly describe the process of validating our Sugarscape implementation against the specification of the Sugarscape book [48] and the work of [183].

### A.2.1 Terracing

Our implementation reproduces the terracing phenomenon as described in the book and as can be seen in the NetLogo implementation as well. We implemented a property test in which we measure the closeness of agents to the ridge: counting the number of same-level sugar cells around them and if there is at least one lower then they are at the edge. If a certain percentage is at the edge then we accept terracing. The question is just how much, which we estimated from tests and resulted in 45%. Also, in the terracing animation the agents actually never move which is because sugar immediately grows back thus there is no incentive for an agent to actually move after it has moved to the nearest largest cite in can see. Therefore we test that the coordinates of the agents after 50 steps are the same for the remaining steps.

### A.2.2 Carrying capacity

Our simulation reached a steady state (variance < 4 after 100 steps) with a mean around 182. Epstein reported a carrying capacity of 224 (page 30) and the NetLogo implementations' [183] carrying capacity fluctuates around 205 which both are significantly higher than ours. Something was definitely wrong - the carrying capacity has to be around 200 (we trust in this case the NetLogo implementation and deem 224 an outlier).

After inspection of the NetLogo model we realised that we implicitly assumed that the metabolism range is continuously uniformly randomized between 1 and 4 but this seemed not what the original authors intended: in the NetLogo model there were a few agents surviving on sugar level 1 which was never the case in ours as the probability of drawing a metabolism of exactly 1 is practically zero

## APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 207

when drawing from a continuous range. We thus changed our implementation to draw a discrete value as the metabolism.

This partly solved the problem, the carrying capacity was now around 204 which is much better than 182 but still a far cry from 210 or even 224. After adjusting the order in which agents apply the Sugarscape rules, by looking at the code of the NetLogo implementation, we arrived at a comparable carrying capacity of the NetLogo implementation: agents first make their move and harvest sugar and only after this the agents metabolism is applied (and ageing in subsequent experiments).

For regression tests we implemented a property test which tests that the carrying capacity of 100 simulation runs lies within a 95% confidence interval of a 210 mean. These values are quite reasonable to assume, when looking at the NetLogo implementation - again we deem the reported carrying capacity of 224 in the book to be an outlier / part of other details we don't know.

One lesson learned is that even such seemingly minor things like continuous vs. discrete or order of actions an agent makes, can have substantial impact on the dynamics of a simulation.

### A.2.3 Wealth distribution

By visual comparison we validated that the wealth distribution (page 32-37) becomes strongly skewed with a histogram showing a fat tail, power-law distribution where very few agents are very rich and most of the agents are quite poor. We compute the skewness and kurtosis of the distribution which is around a skewness of 1.5, clearly indicating a right skewed distribution and a kurtosis which is around 2.0 which clearly indicates the 1st histogram of Animation II-3 on page 34. Also we compute the Gini coefficient and it varies between 0.47 and 0.5 - this is accordance with Animation II-4 on page 38 which shows a gini-coefficient which stabilises around 0.5 after. We implemented a regression- test testing skewness, kurtosis and gini coefficients of 100 runs to be within a 95% confidence interval of a two-sided t-test using an expected skewness of 1.5, kurtosis of 2.0 and gini coefficient of 0.48.

### A.2.4 Migration

With the information provided by [183] we could replicate the waves as visible in the NetLogo implementation as well. Also we propose that a vision of 10 is not enough yet and shall be increased to 15 which makes the waves very prominent and keeps them up for much longer - agent waves are travelling back and forth between both Sugarscape peaks. We have not implemented a regression test for this property as we couldn't come up with a reasonable straightforward approach to implement it.

### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 208 A.2.5 Pollution and diffusion

With the information provided by [183] we could replicate the pollution behaviour as visible in the NetLogo implementation as well. We have not implemented a regression test for this property as we couldn't come up with a reasonable straightforward approach to implement it.

### A.2.6 Mating

We could not replicate Figure III-1 - our dynamics first raised and then plunged to about 100 agents and go then on to recover and fluctuate around 300. This findings are in accordance with [183], where they report similar findings - also when running their NetLogo code we find the dynamics to be qualitatively the same.

Also at first we weren't able to reproduce the cycles of population sizes. Then we realised that our agent behaviour was not correct: agents which died from age or metabolism could still engage in mating before actually dying - fixing this to the behaviour, that agents which died from age or metabolism will not engage in mating solved that and produces the same swings as in [183]. Although our bug might be obvious, the lack of specification of the order of the application of the rules is an issue in the SugarScape book.

### A.2.7 Inheritance

We couldn't replicate the findings of the Sugarscape book regarding the Gini coefficient with inheritance. The authors report that they reach a gini coefficient of 0.7 and above in Animation III-4. Our Gini coefficient fluctuated around 0.35. Compared to the same

configuration but without inheritance (Animation III-1) which reached a Gini coefficient of about 0.21, this is indeed a substantial increase - also with inheritance we reach a larger number of agents of around 1,000 as compared to around 300 without inheritance. The Sugarscape book compares this to chapter II, Animation II-4 for which they report a Gini coefficient of around 0.5 which we could reproduce as well. The question remains, why it is lower (lower inequality) with inheritance?

The baseline is that this shows that inheritance indeed has an influence on the inequality in a population. Thus we deemed that our results are qualitatively the same as the make the same point. Still there must be some mechanisms going on behind the scenes which are unspecified in the original Sugarscape.

#### A.2.8 Cultural dynamics

We could replicate the cultural dynamics of Animation III-6 / Figure III-8: after 2700 steps either one culture (red / blue) dominates both hills or each hill is dominated by a different culture. We wrote a test for it in which we run the simulation for 2,700 steps and then check if either culture dominates with a ratio of 95% or if they are equal dominant with 45%. Because always a few

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 209

agents stay stationary on sugarlevel 1 (they have a metabolism of 1 and can't see far enough to move towards the hills, thus stay always on same spot because no improvement and grow back to 1 after 1 step), there are a few agents which never participate in the cultural process and thus no complete convergence can happen. This is in accordance with [183].

#### A.2.9 Combat

Unfortunately [183] didn't implement combat, so we couldn't compare it to their dynamics. Also, we weren't able to replicate the dynamics found in the Sugarscape book: the two tribes always formed a clear battlefield where some agents engage in combat, for example when one single agent strays too far from its tribe and comes into vision of the other tribe it will be killed almost always immediately. This is because crossing the sugar valley is costly: this agent won't harvest as much as the agents staying on their hill thus will be less wealthy and thus easier killed off. Also retaliation is not possible without any of its own tribe anywhere near.

We didn't see a single run where an agent of an opposite tribe "invaded" the other tribe's hill and ran havoc killing off the entire tribe. We don't see how this can happen: the two tribes start in opposite corners and quickly occupy the respective sugar hills. So both tribes are acting on average the same and also because of the number of agents no single agent can gather extreme amounts of wealth - the wealth should rise in both tribes equally on average. Thus it is very unlikely that a super-wealthy agent emerges, which makes the transition to the other side and starts killing off agents at large. First: a super-wealthy agent is unlikely to emerge, second making the transition to the other side is costly and also low probability, third the other tribe is quite wealthy as well having harvested for the same time the sugar hill, thus it might be that the agent might kill a few

but the closer it gets to the center of the tribe the less like is a kill due to retaliation avoidance - the agent will simply get killed by others.

Also it is unclear in case of AnimationIII-11 if the R rule also applies to agents which get killed in combat. Nothing in the book makes this clear and we left it untouched so that agents who only die from age (original R rule) are replaced. This will lead to a near extinction of the whole population quite quickly as agents kill each other off until 1 single agent is left which will never get killed in combat because there are no other agents who could kill it - instead it will enter an infinite die and reborn cycle thanks to the R rule.

#### A.2.10 Spice

The book specifies for AnimationIV-1 a vision between 1-10 and a metabolism between 1-5. The last one seems to be quite strange because the maximum sugar / spice an agent can find is 4 which means that agents with metabolism of either 5 will die no matter what they do because the can never harvest enough to satisfy their metabolism. When running our implementation with this configuration the number of agents quickly drops from 400 to 105 and continues to slowly

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 210

degrade below 90 after around 1000 steps. The implementation of [183] used a slightly different configuration for AnimationIV-1, where they set vision to 1-6 and metabolism to 1-4. Their dynamics stabilise to 97 agents after around 500+ steps. When we use the same configuration as theirs, we produce the same dynamics. Also it is worth noting that our visual output is strikingly similar to both the book AnimationIV-1 and [183].

#### A.2.11 Trading

For trading we had a look at the NetLogo implementation of [183]: there an agent engages in trading with its neighbours over multiple rounds until either MRSs cross over or no trade has happened anymore. Because [183] were able to exactly replicate the dynamics of the trading time series we assume that their implementation is correct. We think that the fact that an agent interact with its neighbours over multiple rounds is made not very clear in the book. The only hint is found on page 102: "This process is repeated until no further gains from trades are possible." which is not very clear and does not specify exactly what is going on: does the agent engage with all neighbours again? is the ordering random? Another hint is found on page 105 where trading is to be stopped after MRS crossover to prevent an infinite loop. Unfortunately this is missing in the Agent trade rule T on page 105. Additional information on this is found in footnote 23 on page 107. Further on page 107: "If exchange of the commodities will not cause the agents' MRSs to cross over then the transaction occurs, the agents recompute their MRSs, and bargaining begins anew.". This is probably the clearest hint that trading could occur over multiple rounds.

We still managed to exactly replicate the trading dynamics as shown in the book in Figure IV-3, Figure IV-4 and Figure IV-5. The book is also pretty specific on the dynamics of the trading prices standard deviation: on page 109 the authors specify that at t=1000 the standard deviation will have always fallen below 0.05 (Figure IV-5), thus

we implemented a property test which tests for exactly that property. Unfortunately we didn't reach the same magnitude of the trading volume where ours is much lower around 50 but it is equally erratic, so we attribute these differences to other missing specifications or different measurements because the price dynamics match that well already so we can safely assume that our trading implementation is correct.

According to the book, Carrying Capacity (Animation II-2) is increased by Trade (page 111/112). To check this it is important to compare it not against AnimationII-2 but a variation of the configuration for it where spice is enabled, otherwise the results are not comparable because carrying capacity changes substantially when spice is on the environment and trade turned off. We could replicate the findings of the book: the carrying capacity increases slightly when trading is turned on. Also does the average vision decrease and the average metabolism increase. This makes perfect sense: trading allows genetically weaker agents to survive which results in a slightly higher carrying capacity but shows a weaker genetic performance of the population.

According to the book, increasing the agent vision leads to a faster conver-

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 211

gence towards the (near) equilibrium price (page 117/118/119, Figure IV-8 and Figure IV-9). We could replicate this behaviour as well.

According to the book, when enabling R rule and giving agents a finite life span between 60 and 100 this will lead to price dispersion: the trading prices will not converge around the equilibrium and the standard deviation will fluctuate wildly (page 120, Figure IV-10 and Figure IV-11). We could replicate this behaviour as well.

The Gini coefficient should be higher when trading is enabled (page 122, Figure IV-13) - We could replicate this behaviour.

Finite lives with sexual reproduction lead to prices which don't converge (page 123, Figure IV-14). We could reproduce this as well but it was important to set the parameters to reasonable values: increasing number of agents from 200 to 400, metabolism to 1-4 and vision to 1-6, most important the initial endowments back to 5-25 (both sugar and spice) otherwise hardly any mating would happen because the agents need too much wealth to engage (only fertile when have gathered more than initial endowment). What was kind of interesting is that in this scenario the trading volume of sugar is substantially higher than the spice volume - about 3 times as high.

From this part, we didn't implement: Effect of Culturally Varying Preferences, page 124 - 126, Externalities and Price Disequilibrium: The effect of Pollution, page 126 - 118, On The Evolution of Foresight page 129 / 130.

#### A.2.12 Diseases

We were able to exactly replicate the behaviour of Animation V-1 and Animation V-2: in the first case the population rids itself of all diseases (maximum 10) which happens pretty quickly, in less than 100 ticks. In the second case the population fails to do so because of the much larger number of diseases (25) in circulation. We used the same

parameters as in the book. The authors of [183] could only replicate the first animation exactly and the second was only deemed "good". Their implementation differs slightly from ours: In their case a disease can be passed to an agent who is immune to it - this is not possible in ours. In their case if an agent has already the disease, the transmitting agent selects a new disease, the other agent has not yet - this is not the case in our implementation and we think this is unreasonable to follow: it would require too much information and is also unrealistic. We wrote regression tests which check for animation V-1 that after 100 ticks there are no more infected agents and for animation V-2 that after 1000 ticks there are still infected agents left and they dominate: there are more infected than recovered agents.

### A.3 Discussion

In this appendix we showed how to use QuickCheck to formalise and check hypotheses about an exploratory agent-based model, in which no ground truth exists. Due to ABS stochastic nature in general it became obvious that to get

#### APPENDIX A. VALIDATING SUGARSCAPE IN HASKELL 212

a good measure of a hypotheses validity we need to emulate failure using the cover function of QuickCheck. This allowed us to show that the hypotheses we have presented are sufficiently valid for the task at hand and can indeed be used for expressing and formalising emergent properties of the model and also as regression tests within a TDD cycle.

### Appendix B

#### Pure functional System Dynamics

In this appendix we develop a pure functional, correct-by-construction implementation of the SIR System Dynamics (SD) simulation.

##### B.1 Deriving the implementation

Computing the dynamics of an SD model happens by taking the integrals as shown in Chapter 11.3 and integrating over time. So conceptually we treat the SD model as a continuous function which is defined over time between 0 and infinity which outputs the values of each stock at each point in time. In the case of the SIR model we have three stocks: Susceptible, Infected and Recovered. Thus we start our implementation by defining the output of the SD function: for each time step we have the values of the three stocks:

```
type SIRStep = (Time, Double, Double, Double)
```

Next, we use a signal function to define the top-level function of the SIR SD simulation. It has no input, because an SD system is only defined by its own terms and parameters without external input and has as output the SIRStep.

```
sir :: SF () SIRStep
```

An SD model is fundamentally built on feedback, where the values at time  $t$  depend on the previous step. Thus, we introduce feedback in which we feed the last step into the next step. Yampa provides the `loopPre :: c → SF (a, c) (b, c) → SF a b` function for that. It takes an initial value  $c$  and a feedback signal function which receives the input  $a$  and the previous (or initial) value of the feedback  $c$  and has to return the output  $b$  and the new feedback value  $c$ . `loopPre` then returns simply a signal function from  $a$  to  $b$  with the feedback happening transparent in the feedback signal function. The initial

213

APPENDIX B. PURE FUNCTIONAL SYSTEM DYNAMICS 214 feedback value is the initial state of the SD model at  $t = 0$ . Further, we define

the type of the feedback signal function.

```
sir = loopPre (0, initSus, initInf, initRec) sirFeedback
where
  initSus = populationSize - infectedCount
  initInf = infectedCount
  initRec = 0
sirFeedback :: SF ((), SIRStep) (SIRStep, SIRStep)
```

The next step is to implement the feedback signal function. As input we get  $(a, c)$  where  $a$  is the empty tuple  $()$  because an SD simulation has no input, and  $c$  is the fed back `SIRStep` from the previous (initial) step. With this we have all relevant data so we can implement the feedback function. We first match on the tuple inputs and construct a signal function using proc:

```
sirFeedback = proc (., (., s, i, _)) -> do
```

Now we define the flows which are infection rate and recovery rate. The formulas for both of them can be seen in the differential equations of Chapter 11.3. This directly translates into Haskell code:

```
infectionRate = (i * beta * s * gamma) / populationSize
recoveryRate = i / delta
```

Next we need to compute the values of the three stocks, following the integral formulas of Chapter 11.3. For this we need the integral function of Yampa which integrates over a numerical input using the rectangle rule. Adding initial values can be achieved with the `^<<` operator of arrowized programming. This directly translates into Haskell code:

```
s' <- (initSus+) ^<< integral -< (-infectionRate)
i' <- (initInf+) ^<< integral -< (infectionRate - recoveryRate)
r' <- (initRec+) ^<< integral -< recoveryRate
```

We also need the current time of the simulation. For this we use Yampa's time function:

```
t <- time -< 0
```

Now we only need to return the output and the feedback value. Both types

are the same thus we simply duplicate the tuple:

```
returnA -< dupe (t, s', i', r')
dupe :: a -> (a, a)
```

**dupe** a = (a, a)

We want to run the SD model for a given time with a given  $\Delta t$  by running

the sir signal function.

```
runSD :: Time -> DTime -> [SIRStep]
runSD t dt = embed sir (0, steps)
```

where

```
steps = replicate (floor (t / dt)) (dt, Nothing)
```

APPENDIX B. PURE FUNCTIONAL SYSTEM DYNAMICS 215

$\Delta t$  1.0

0.5

0.1 1e-2 1e-3 AnyLogic

Susceptibles Infected Recovered

Max Infected 419.07 @ t = 51 399.53 @ t = 47.5 384.71 @ t = 44.7 381.48 @ t = 43.97  
381.16 @ t = 43.9 381.132 @ t = 44

17.52	26.87	955.61
23.24	25.63	951.12
27.56	24.27	948.17
28.52	24.11	947.36
28.62	24.08	947.30

28.625

24.081

947.294

Table B.1: Comparison of the SD dynamics generated by the Haskell implementation with varying  $\Delta t$ . Ran until t = 100 with a population Size N = 1,000, contact rate  $\beta = 1$ , infection probability  $\gamma = 0.05$ , illness duration  $\delta = 15$  and 5 initially 1 infected agent.

## B.2 Results

Although we have translated our model specifications directly into code we still need to validate the dynamics and test the system for its numerical behaviour under varying  $\Delta t$ . This is necessary because numerical integration, which happens in the integral function, can be susceptible to instability and errors. Yampa implements the simple rectangle rule of numerical integration which requires very small  $\Delta t$  to keep the errors minimal and arrive at sufficiently good results.

We have run the simulation with varying  $\Delta t$  to show what difference varying

$\Delta t$  can have on the simulation dynamics. We ran the simulations until  $t = 100$

with a population Size  $N = 1,000$ , contact rate  $\beta = 1$ , infection probability 5

$\gamma = 0.05$ , illness duration  $\delta = 15$  and initially 1 infected agent. For comparison we looked at the final values at  $t = 100$  of the susceptible, infected and recovered stocks. Also, we compare the time and the value when the infected stock reaches its maximum. The values are reported in the Table B.1.

As additional validation we added the results of an SD simulation in Any-Logic Personal Learning Edition 8.3.1, which is reported in the last row in the Table B.1. Also we provided a visualisation of the AnyLogic simulation dynamics in Figure B.1a. By comparing the results in Table B.1 and the dynamics in Figure B.1a to B.1b we can conclude that we arrive at the same dynamics, validating the correctness of our simulation also against an existing, well known and established SD simulation software.

## B.3 Discussion

We claim that our implementation is correct-by-construction because the code is the model specification, we have closed the gap between the specification and its implementation. Also we can guarantee that no non-deterministic influences can happen in this implementation due to the strong static type system of Haskell. This guarantees that repeated runs of the simulation will always result

## APPENDIX B. PURE FUNCTIONAL SYSTEM DYNAMICS 216

(a) System Dynamics simulation of SIR compartment model in AnyLogic Personal Learning Edition 8.3.1. Population Size  $N = 1,000$ , contact rate  $\beta = 1$ , infection

5


probability  $\gamma = 0.05$ , illness duration  $\delta = 15$  with initially 1 infected agent. Simulation run until  $t = 100$ .

(b) Dynamics of the SIR compartment model following this implementation. Population Size  $N = 1,000$ , contact rate  $\beta = 1$ , infection probability  $\gamma = 0.05$ , illness

5

duration  $\delta = 15$  with initially 1 infected agent. Simulation run until  $t = 150$ . Plot generated from data by this Haskell implementation using Octave.

Figure B.1: Visual comparison of the SIR SD dynamics generated by AnyLogic and the implementation in Haskell.

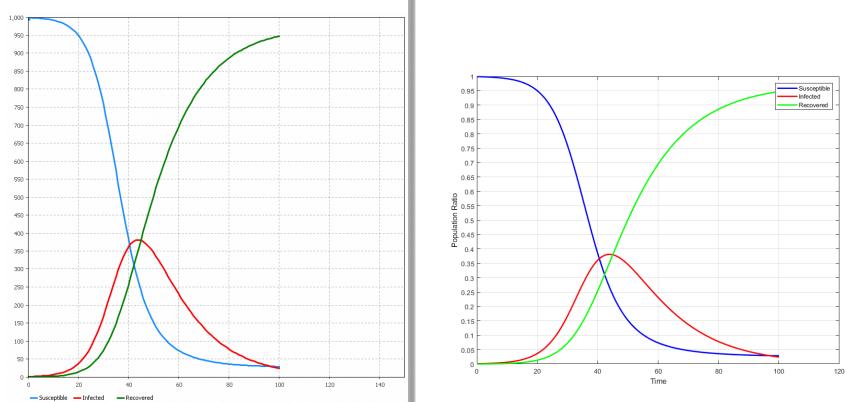

## APPENDIX B. PURE FUNCTIONAL SYSTEM DYNAMICS 217

in the exact same dynamics given the same initial parameters, something of fundamental importance in SD, which is deterministic.

Further, we showed the influence of different  $\Delta t$  and validated our implementation against the industry-strength SD simulation software AnyLogic Personal Learning Edition 8.3.1 where we could match our results with the one of AnyLogic, proving the correctness of our system also on the dynamics level.

Obviously the numerical behaviour depends on the integral function which uses the rectangle rule. We showed that for the SIR model and small enough  $\Delta t$ , the rectangle rule works well enough. Still it might be of benefit if we provide more sophisticated numerical integration like Runge-Kutta methods. We leave this for further research.

The key strength of existing System Dynamic simulation software is their visual representation which allows non-programmers to 'draw' SD models and simulate them. We believe that one can auto-generate Haskell code using our approach to implement SD from such diagrams but leave this for further research.

Also we are very well aware that due to the vast amount of visual simulation software available for SD, there is no need for implementing such simulations directly in code. Still we hope that our pure functional approach with FRP might spark an interest in approaching the implementation of SD from a new perspective, which might lead to pure functional backends of visual simulation software, giving them more confidence in their correctness.

#### APPENDIX B. PURE FUNCTIONAL SYSTEM DYNAMICS 218 B.4 Full Implementation

```

populationSize :: Double
populationSize = 1000
infectedCount :: Double
infectedCount = 1
-- contact rate
beta :: Double
beta = 5
-- infectivity
gamma :: Double
gamma = 0.05
-- illness duration
delta :: Double
delta = 15
type SIRStep = (Time, Double, Double, Double)
sir :: SF () SIRStep
sir = loopPre (0, initSus, initInf, initRec) sirFeedback

```

where

```

initSus = populationSize - infectedCount
initInf = infectedCount
initRec = 0
sirFeedback :: SF ((), SIRStep) ([SIRStep, SIRStep])
sirFeedback = proc (, (, s, i, )) -> do
  let infectionRate = (i * beta * s * gamma) / populationSize
      recoveryRate = i / delta
  dupe a = (a, a)

  t <- time -< ()
  s' <- (initSus+) ^<< integral -< (-infectionRate)
  i' <- (initInf+) ^<< integral -< (infectionRate - recoveryRate)
  r' <- (initRec+) ^<< integral -< recoveryRate
  returnA -< dupe (t, s', i', r')
  dupe :: a -> (a, a)

dupe a = (a, a)

runSD :: Time -> DTime -> [SIRStep]
runSD t dt = embed sir ((), steps)

```

where

```
steps = replicate (floor (t / dt)) (dt, Nothing)
```