


EXP 1:


QUESTIONS 5 / 5 completed
Search Comparisor
SEARCH COMPARISON COUNT
An airport check-in system scans a passenger list to find a given PNR number. Write a program that performs linear search on an unsorted array of N integers and counts the number of comparisons made to find a target value. (1) Read N and the
PROGRAM EDITOR
C
Run
Save
#include <stdio.h>
int main() {
int n, target, i, comparisons = 0, foundIndex = -1;
scanf("%d", &n);
int arr[n];
for (i = 0; i < n; i++) {
scanf("%d", &arr[i]);
}
scanf("%d", &target);
for (i = 0; i < n; i++) {
comparisons++;
if (arr[i] == target) {
foundIndex = i;
break;
}
}
INPUT
6
45 12 78 34 90 23
34


EXP 2:


QUESTIONS 5 / 5 completed
Nested Loop Op C
NESTED LOOP OP COUNT
A warehouse robot checks every pair of shelves in an n x n grid for a safety violation. Write a program that, given n, simulates the nested-loop pair-check (two loops from 0 to n-1) and counts the total number of pair checks performed, then classifies the
PROGRAM EDITOR
C
Run
Save
#include <stdio.h>
int main() {
int n;
long long count = 0;
scanf("%d", &n);
for (int i = 0; i < n; i++) {
for (int j = 0; j < n; j++) {
count++;
}
}
printf("Total operations: %lld\n", count);
printf("Growth order: O(n^2)\n");
return 0;
}
INPUT
5

EXP 3:

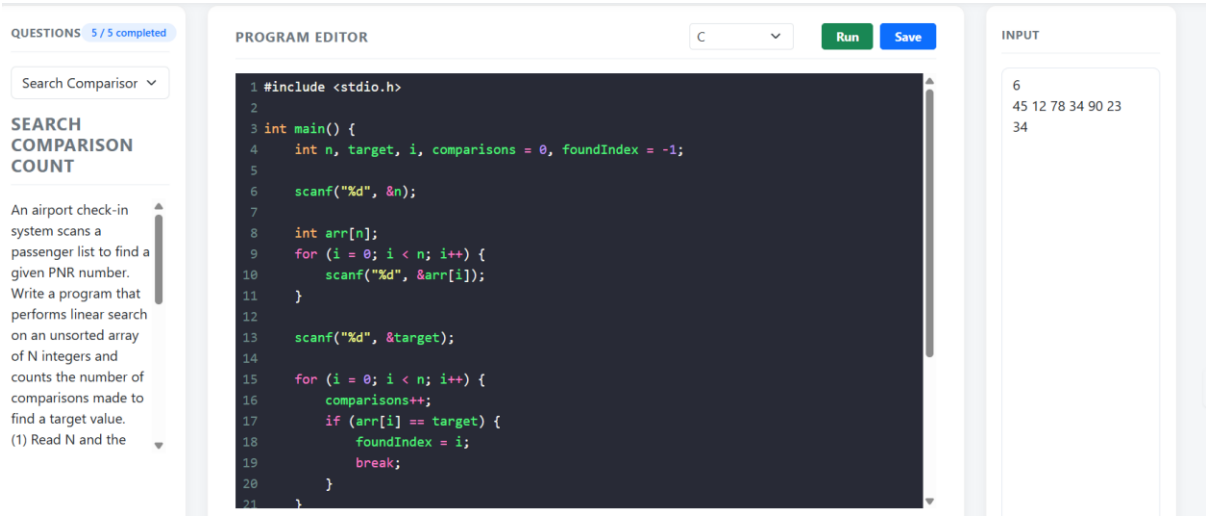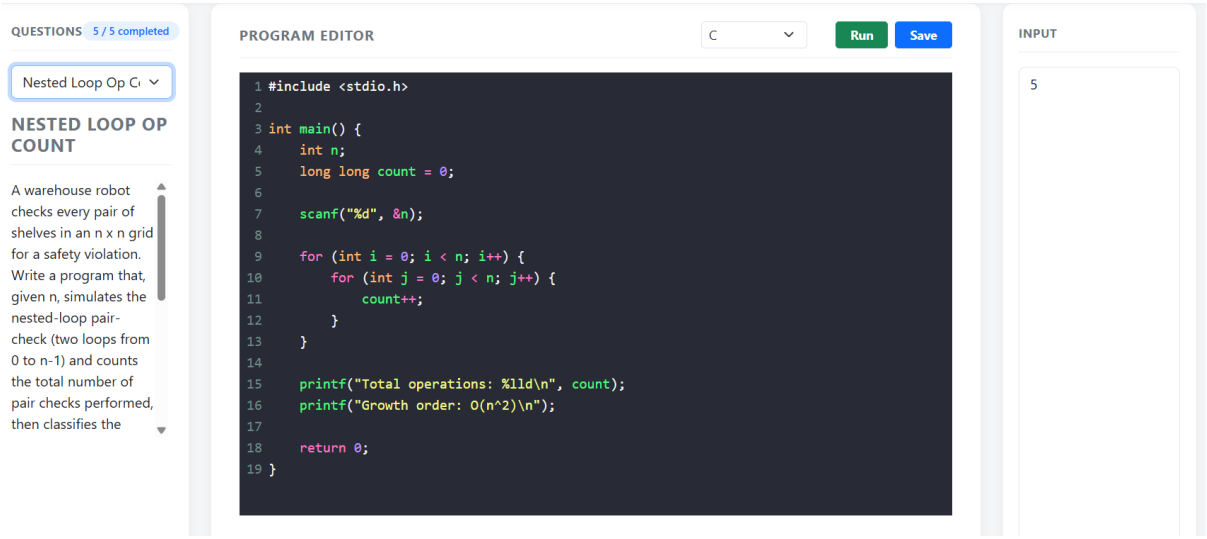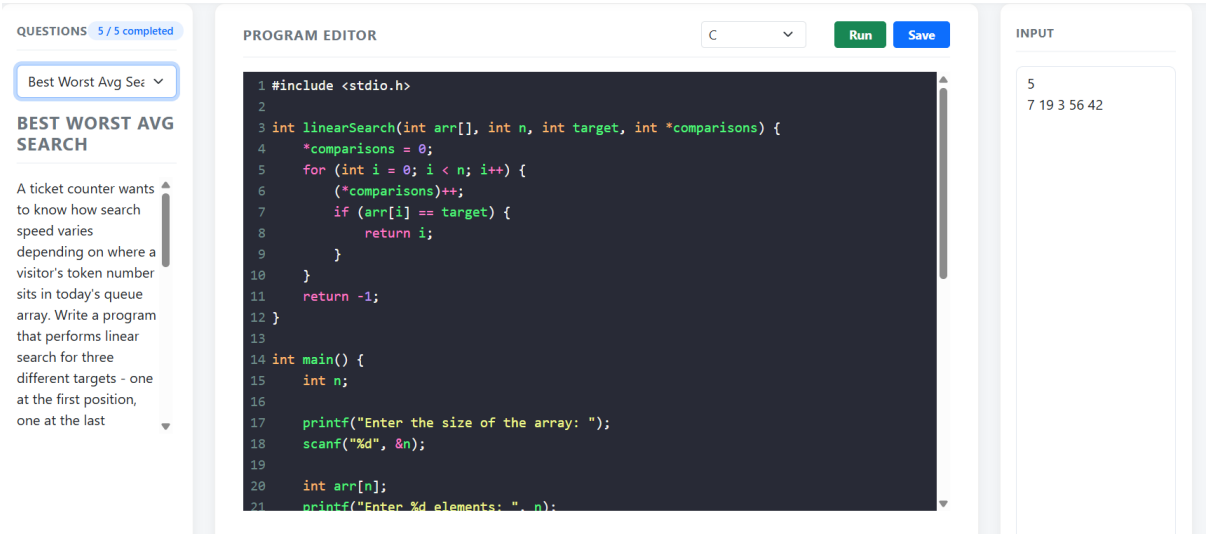

EXP 4:

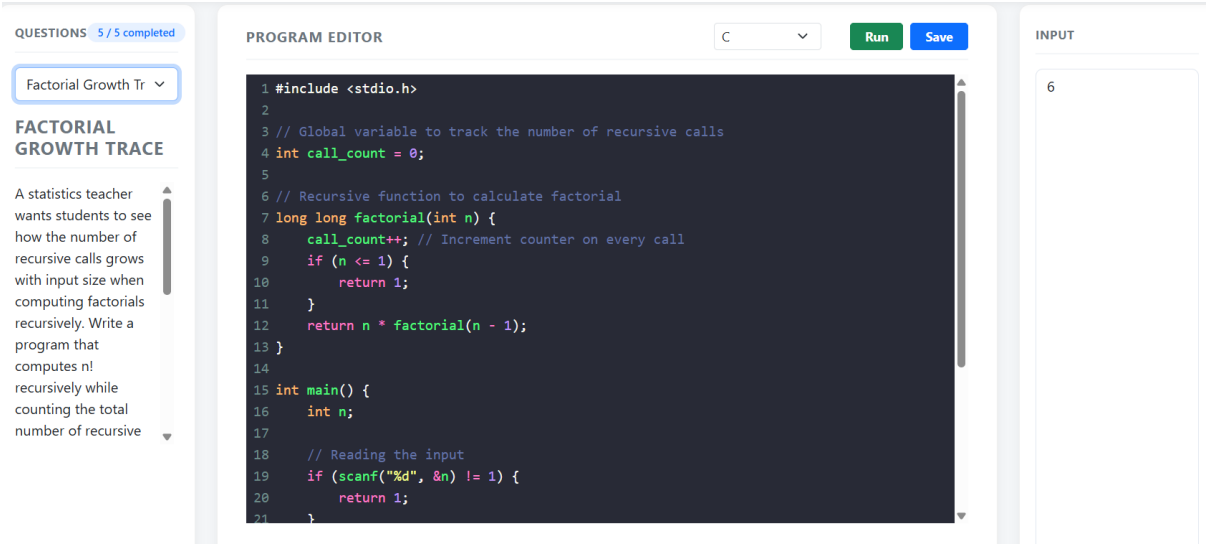

EXP 5:

