

NAME : THAMARASELVI S

REG NO : 192511042

COURSE : DESIGN AND ANALYSIS OF ALGORITHMS

CODE : CSA 0617

TOPIC 1 : INTRODUCTION

1. Given an array of strings words, return the first palindromic string in the array. If there is no such string, return an empty string "". A string is palindromic if it reads the same forward and backward.

Example 1:

Input: words = ["abc", "car", "ada", "racecar", "cool"]

Output: "ada"

Explanation: The first string that is palindromic is "ada".

Note that "racecar" is also palindromic, but it is not the first.

Example 2:

Input: words = ["notapalindrome", "racecar"]

Output: "racecar"

Explanation: The first and only string that is palindromic is "racecar".

```
1 words = ["abc", "car", "ada", "racecar", "cool"]
2
3 for word in words:
4     if word == word[::-1]:
5         print(word)
6         break
7 else:
8     print("")
```

ada

...Program finished with exit code 0
Press ENTER to exit console.

2.You are given two integer arrays nums1 and nums2 of sizes n and m, respectively. Calculate the following values: answer1 : the number of indices i such that nums1[i] exists in nums2. answer2 : the number of indices i such that nums2[i] exists in nums1 Return [answer1,answer2].

Example 1:

Input: nums1 = [2,3,2], nums2 = [1,2]

Output: [2,1]

Explanation:

Example 2:

Input: nums1 = [4,3,2,3,1], nums2 = [2,2,5,2,3,6]

Output: [3,4]

Explanation:

The elements at indices 1, 2, and 3 in nums1 exist in nums2 as well. So answer1 is 3.

The elements at indices 0, 1, 3, and 4 in nums2 exist in nums1. So answer2 is 4.

```
1 nums1 = [2, 3, 2]
2 nums2 = [1, 2]
3
4 answer1 = 0
5 answer2 = 0
6
7 for x in nums1:
8     if x in nums2:
9         answer1 += 1
10
11 for x in nums2:
12     if x in nums1:
13         answer2 += 1
14
15 print([answer1, answer2])
```

input

[2, 1]

...Program finished with exit code 0
Press ENTER to exit console.

3. You are given a 0-indexed integer array `nums`. The distinct count of a subarray of `nums` is defined as: Let `nums[i..j]` be a subarray of `nums` consisting of all the indices from `i` to `j` such that $0 \leq i \leq j < \text{nums.length}$. Then the number of distinct values in `nums[i..j]` is called the distinct count of `nums[i..j]`. Return the sum of the squares of distinct counts of all subarrays of `nums`. A subarray is a contiguous non-empty sequence of elements within an array.

Example 1:

Input: `nums = [1,2,1]`

Output: 15

Explanation: Six possible subarrays are:

[1]: 1 distinct value

[2]: 1 distinct value

[1]: 1 distinct value

[1,2]: 2 distinct values

[2,1]: 2 distinct values

[1,2,1]: 2 distinct values

The sum of the squares of the distinct counts in all subarrays is equal to $1^2 + 1^2 + 1^2 + 2^2 + 2^2 + 2^2 = 15$.

Example 2:

Input: nums = [1,1]

Output: 3

Explanation: Three possible subarrays are:

[1]: 1 distinct value

[1]: 1 distinct value

[1,1]: 1 distinct value

The sum of the squares of the distinct counts in all subarrays is equal to $1^2 + 1^2 + 1^2 = 3$.

```
1  nums = [1, 2, 1]
2  total = 0
3
4  for i in range(len(nums)):
5      s = set()
6      for j in range(i, len(nums)):
7          s.add(nums[j])
8          total += len(s) * len(s)
9
10 print(total)
```

15

...Program finished with exit code 0
Press ENTER to exit console.

4. Given a 0-indexed integer array `nums` of length `n` and an integer `k`, return *the number of pairs* (i, j) *where* $0 \leq i < j < n$, *such that* `nums[i] == nums[j]` *and* $(i * j)$ *is divisible by* `k`.

Example 1:

Input: `nums = [3,1,2,2,2,1,3]`, `k = 2`

Output: 4

Explanation:

There are 4 pairs that meet all the requirements:

- `nums[0] == nums[6]`, and $0 * 6 == 0$, which is divisible by 2.
- `nums[2] == nums[3]`, and $2 * 3 == 6$, which is divisible by 2.

- `nums[2] == nums[4]`, and $2 * 4 == 8$, which is divisible by 2.
- `nums[3] == nums[4]`, and $3 * 4 == 12$, which is divisible by 2.


Example 2:

Input: `nums = [1,2,3,4]`, `k = 1`

Output: 0

Explanation: Since no value in `nums` is repeated, there are no pairs (i,j) that meet all the requirements.

```
1 nums = [3, 1, 2, 2, 2, 1, 3]
2 k = 2
3 count = 0
4
5 for i in range(len(nums)):
6     for j in range(i + 1, len(nums)):
7         if nums[i] == nums[j] and (i * j) % k == 0:
8             count += 1
9
10 print(count)
```

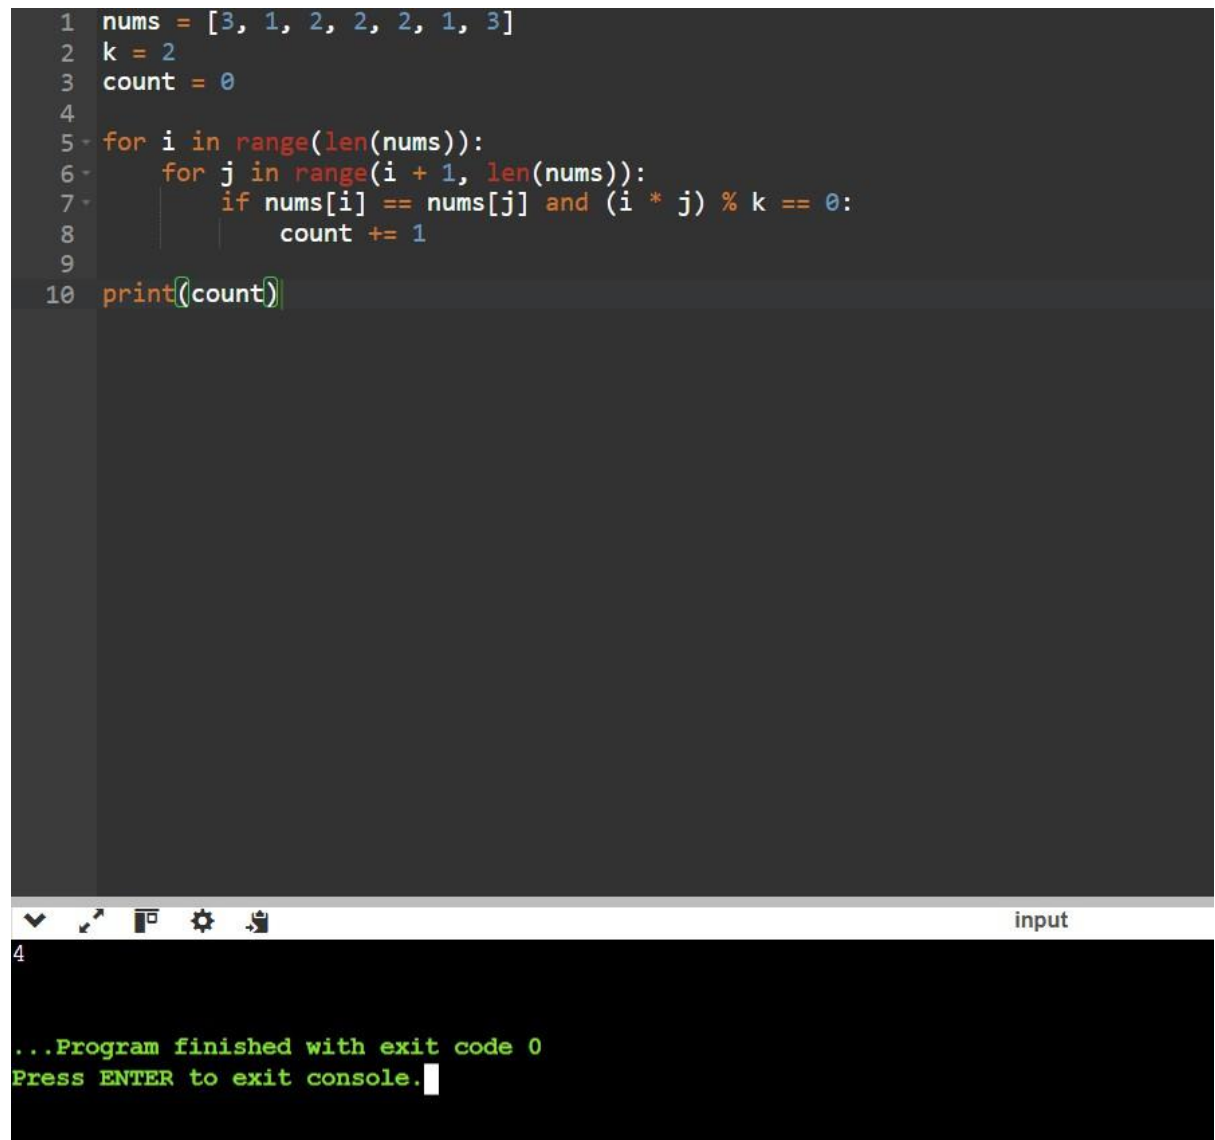

4

...Program finished with exit code 0
Press ENTER to exit console.

5. Write a program FOR THE BELOW TEST CASES with least time complexity

Test Cases: -

Input: {1, 2, 3, 4, 5} Expected Output: 5

Input: {7, 7, 7, 7, 7} Expected Output: 7

Input: {-10, 2, 3, -4, 5} Expected Output: 5

```
1  nums = [1, 2, 3, 4, 5]
2
3  maximum = nums[0]
4
5  for x in nums:
6      if x > maximum:
7          maximum = x
8
9  print(maximum)
```

5

...Program finished with exit code 0
Press ENTER to exit console.

6. You have an algorithm that process a list of numbers. It firsts sorts the list using an efficient sorting algorithm and then finds the maximum element in sorted list. Write the code for the same.

Test Cases

1. Empty List

1. Input: []

2. Expected Output: None or an appropriate message indicating that the list is empty.

2. Single Element List

1. Input: [5]
2. Expected Output: 5
3. All Elements are the Same
 1. Input: [3, 3, 3, 3, 3]
 2. Expected Output: 3

```
1 nums = [3, 1, 5, 2, 4]
2
3 nums.sort()
4
5 print(nums[-1])
```



```
5
...Program finished with exit code 0
Press ENTER to exit console.
```

7. Write a program that takes an input list of n numbers and creates a new list containing only the unique elements from the original list. What is the space complexity of the algorithm?

Test Cases

Some Duplicate Elements

Input: [3, 7, 3, 5, 2, 5, 9, 2]

Expected Output: [3, 7, 5, 2, 9] (Order may vary based on the algorithm used)

Negative and Positive Numbers

Input: [-1, 2, -1, 3, 2, -2]

Expected Output: [-1, 2, 3, -2] (Order may vary)

List with Large Numbers

Input: [1000000, 999999, 1000000]

Expected Output: [1000000, 999999]

```
1 nums = [3, 7, 3, 5, 2, 5, 9, 2]
2
3 unique = list(set(nums))
4
5 print(unique)
```

input

```
[2, 3, 5, 7, 9]


...Program finished with exit code 0
Press ENTER to exit console.
```

8. Sort an array of integers using the bubble sort technique. Analyze its time complexity using Big-O notation. Write the code

```

1  nums = [5, 2, 8, 1, 3]
2
3  n = len(nums)
4
5  for i in range(n):
6      for j in range(0, n-i-1):
7          if nums[j] > nums[j+1]:
8              nums[j], nums[j+1] = nums[j+1], nums[j]
9
10 print(nums)
11

```

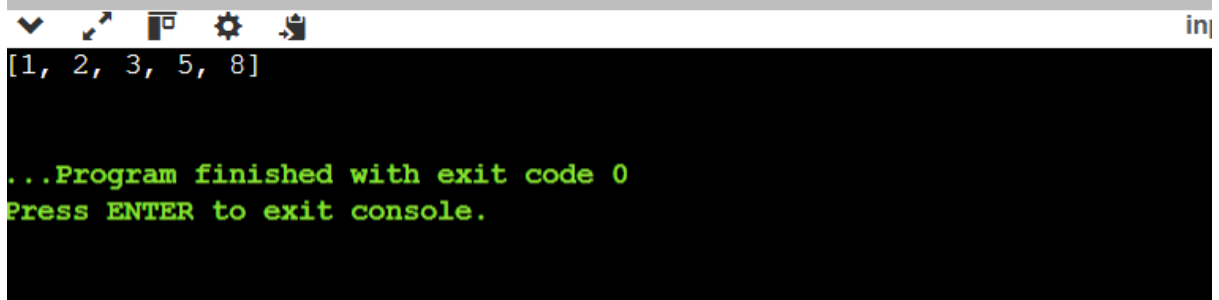

```

[1, 2, 3, 5, 8]

...Program finished with exit code 0
Press ENTER to exit console.

```

9. Checks if a given number x exists in a sorted array arr using binary search. Analyze its time complexity using Big-O notation.

Test Case:

Example $X = \{ 3, 4, 6, -9, 10, 8, 9, 30 \}$ KEY=10

Output: Element 10 is found at position 5

Example $X = \{ 3, 4, 6, -9, 10, 8, 9, 30 \}$ KEY=100

Output : Element 100 is not found

```
1 arr = [3, 4, 6, 8, 9, 10, 30]
2 key = 10
3
4 low = 0
5 high = len(arr) - 1
6 found = False
7
8 while low <= high:
9     mid = (low + high) // 2
10
11     if arr[mid] == key:
12         print("Element", key, "is found at position", mid)
13         found = True
14         break
15     elif arr[mid] < key:
16         low = mid + 1
17     else:
18         high = mid - 1
19
20 if not found:
21     print("Element", key, "is not found")
```

input

Element 10 is found at position 5

...Program finished with exit code 0
Press ENTER to exit console.

10. Given an array of integers `nums`, sort the array in ascending order and return it. You must solve the problem without using any built-in functions in $O(n \log(n))$ time complexity and with the smallest space complexity possible.

```
1 def merge_sort(arr):
2     if len(arr) <= 1:
3         return arr
4
5     mid = len(arr) // 2
6
7     left = merge_sort(arr[:mid])
8     right = merge_sort(arr[mid:])
9
10    result = []
11    i = 0
12    j = 0
13
14    while i < len(left) and j < len(right):
15        if left[i] < right[j]:
16            result.append(left[i])
17            i += 1
18        else:
19            result.append(right[j])
20            j += 1
21
22    result += left[i:]
23    result += right[j:]
24
25    return result
26
27
28 nums = [5, 2, 8, 1, 3]
29
30 print(merge_sort(nums))
```

✓ ↗ 📄 ⚙️ 🗑️

[1, 2, 3, 5, 8]

...Program finished with exit code 0
Press ENTER to exit console.

11. Given an $m \times n$ grid and a ball at a starting cell, find the number of ways to move the ball out of the grid boundary in exactly N steps.

Example:

- Input: $m=2, n=2, N=2, i=0, j=0$ • Output: 6
- Input: $m=1, n=3, N=3, i=0, j=1$ • Output: 12

```

1 def move(m, n, N, i, j):
2     dp = [[0] * n for _ in range(m)]
3     dp[i][j] = 1
4     ans = 0
5
6     for step in range(N):
7         new = [[0] * n for _ in range(m)]
8
9         for r in range(m):
10            for c in range(n):
11                if dp[r][c] > 0:
12                    if r == 0:
13                        ans += dp[r][c]
14                    else:
15                        new[r-1][c] += dp[r][c]
16
17                    if r == m-1:
18                        ans += dp[r][c]
19                    else:
20                        new[r+1][c] += dp[r][c]
21
22                    if c == 0:
23                        ans += dp[r][c]
24                    else:
25                        new[r][c-1] += dp[r][c]
26
27                    if c == n-1:
28                        ans += dp[r][c]
29                    else:
30                        new[r][c+1] += dp[r][c]

```

input

6

...Program finished with exit code 0
Press ENTER to exit console.

12. You are a professional robber planning to rob houses along a street. Each house has a certain amount of money stashed. All houses at this place are arranged in a circle. That means the first house is the neighbor of the last one. Meanwhile, adjacent houses have security systems connected, and it will automatically contact the police if two adjacent houses were broken into on the same night.

Examples:

Input : nums = [2, 3, 2]

Output : The maximum money you can rob without alerting the police is 3(robbing house 1).

(ii) Input : nums = [1, 2, 3, 1]

Output : The maximum money you can rob without alerting the

police is 4 (robbing house 1 and house 3).

```
1 def rob(nums):
2     if len(nums) == 1:
3         return nums[0]
4
5     def helper(arr):
6         a = 0
7         b = 0
8
9         for money in arr:
10            c = max(b, a + money)
11            a = b
12            b = c
13
14        return b
15
16    return max(helper(nums[:-1]), helper(nums[1:]))
17
18
19 nums = [1, 2, 3, 1]
20
21 print(rob(nums))
```

4

...Program finished with exit code 0
Press ENTER to exit console.

13. You are climbing a staircase. It takes n steps to reach the top. Each time you can either climb 1 or 2 steps. In how many distinct ways can you climb to the top?

Examples:

Input: $n=4$ Output: 5

Input: $n=3$ Output: 3

```
1 n = 4
2
3 a = 1
4 b = 1
5
6 for i in range(n):
7     a, b = b, a + b
8
9 print(a)
```

5

...Program finished with exit code 0
Press ENTER to exit console.

14. A robot is located at the top-left corner of a $m \times n$ grid. The robot can only move either down or right at any point in time. The robot is trying to reach the bottom-right corner of the grid. How many possible unique paths are there?

Examples:

Input: $m=7, n=3$ Output: 28

Input: $m=3, n=2$ Output: 3

```
1 m = 7
2 n = 3
3
4 dp = [[1] * n for _ in range(m)]
5
6 for i in range(1, m):
7     for j in range(1, n):
8         dp[i][j] = dp[i-1][j] + dp[i][j-1]
9
10 print(dp[m-1][n-1])
```

28

...Program finished with exit code 0
Press ENTER to exit console.

15. In a string S of lowercase letters, these letters form consecutive groups of the same character. For example, a string like $s = \text{"abbxxxxzyy"}$ has the groups "a", "bb", "xxxx", "z", and "yy". A group is identified by an interval $[\text{start}, \text{end}]$, where start and end denote the start and end indices (inclusive) of the group. In the above example, "xxxx" has the interval $[3, 6]$. A group is considered large if it has 3 or more characters. Return the intervals of every large group sorted in increasing order by start index.

Example 1:

Input: s = "abbxxxxzzy"

Output: [[3,6]]

Explanation: "xxxx" is the only large group with start index 3 and end index 6.

Example 2:

Input: s = "abc"

Output: []

Explanation: We have groups "a", "b", and "c", none of which are large groups.

```

1 s = "abbxxxzzy"
2 result = []
3
4 i = 0
5
6 while i < len(s):
7     j = i
8
9     while j < len(s) and s[j] == s[i]:
10         j += 1
11
12     if j - i >= 3:
13         result.append([i, j-1])
14
15     i = j
16
17 print(result)

```



15. "The Game of Life, also known simply as Life, is a cellular automaton devised by the British mathematician John Horton Conway in 1970." The board is made up of an $m \times n$ grid of cells, where each cell has an initial state: live (represented by a 1) or dead (represented by a 0). Each cell interacts with its eight neighbors (horizontal, vertical, diagonal) using the following four rules

Any live cell with fewer than two live neighbors dies as if caused by under-population.

Any live cell with two or three live neighbors lives on to the next generation.

Any live cell with more than three live neighbors dies, as if by over-population.

Any dead cell with exactly three live neighbors becomes a live cell, as if by reproduction.

The next state is created by applying the above rules simultaneously to every cell in the current state, where births and deaths occur simultaneously. Given the current state of the $m \times n$ grid board, return *the next state*.

Example 1:

0	1	0		0	0	0
0	0	1		1	0	1
1	1	1	⇒	0	1	1
0	0	0		0	1	0

Input: board = [[0,1,0],[0,0,1],[1,1,1],[0,0,0]]

Output: [[0,0,0],[1,0,1],[0,1,1],[0,1,0]]

Example 2:

1	1		1	1
1	0	⇒	1	1

Input: board = [[1,1],[1,0]]

Output: [[1,1],[1,1]]

```

1 board = [
2     [0, 1, 0],
3     [0, 0, 1],
4     [1, 1, 1],
5     [0, 0, 0]
6 ]
7
8 m = len(board)
9 n = len(board[0])
10
11 new = [[0] * n for _ in range(m)]
12
13 for i in range(m):
14     for j in range(n):
15         count = 0
16
17         for x in range(i-1, i+2):
18             for y in range(j-1, j+2):
19                 if 0 <= x < m and 0 <= y < n:
20                     if (x != i or y != j) and board[x][y] == 1:
21                         count += 1
22
23                 if board[i][j] == 1:
24                     if count == 2 or count == 3:
25                         new[i][j] = 1
26                 else:
27                     if count == 3:
28                         new[i][j] = 1
29
30 print(new)

```

input


```

[[0, 0, 0], [1, 0, 1], [0, 1, 1], [0, 1, 0]]

```

...Program finished with exit code 0
Press ENTER to exit console.

16. We stack glasses in a pyramid, where the first row has 1 glass, the second row has 2 glasses, and so on until the 100th row. Each glass holds one cup of champagne. Then, some champagne is poured into the first glass at the top. When the topmost glass is full, any excess liquid poured will fall equally to the glass immediately to the left and right of it. When those glasses become full, any excess champagne will fall equally to the left and right of those glasses, and so on. (A glass at the bottom row has its excess champagne fall on the floor.) For example, after one cup of champagne is poured, the top most glass is full. After two cups of champagne are poured, the two glasses on the second row are half full. After three cups of champagne are poured, those two cups become full - there are 3 full glasses total now. After four cups of champagne are poured, the third row has the middle glass half full, and the two outside glasses are a quarter full, as pictured below.



Now after pouring some non-negative integer cups of champagne, return how full the j^{th} glass in the i^{th} row is (both i and j are 0-indexed.)

Example 1:

Input: poured = 1, query_row = 1, query_glass = 1

Output: 0.00000

Explanation: We poured 1 cup of champagne to the top glass of the tower (which is indexed as (0, 0)). There will be no excess liquid so all the glasses under the top glass will remain empty.

Example 2:

Input: poured = 2, query_row = 1, query_glass = 1

Output: 0.50000

Explanation: We poured 2 cups of champagne to the top glass of the tower (which is indexed as (0, 0)). There is one cup of excess liquid. The glass indexed as (1, 0) and the glass indexed as (1, 1) will share the excess liquid equally, and each will get half cup of champagne.

```
1 poured = 2
2 query_row = 1
3 query_glass = 1
4
5 dp = [[0] * 100 for _ in range(100)]
6
7 dp[0][0] = poured
8
9 for i in range(99):
10     for j in range(i + 1):
11         if dp[i][j] > 1:
12             extra = (dp[i][j] - 1) / 2
13             dp[i+1][j] += extra
14             dp[i+1][j+1] += extra
15
16 answer = min(1, dp[query_row][query_glass])
17
18 print(answer)
```

0.5

...Program finished with exit code 0
Press ENTER to exit console.