



C PROGRAMMING:SEQUENTIAL ALLOCATION

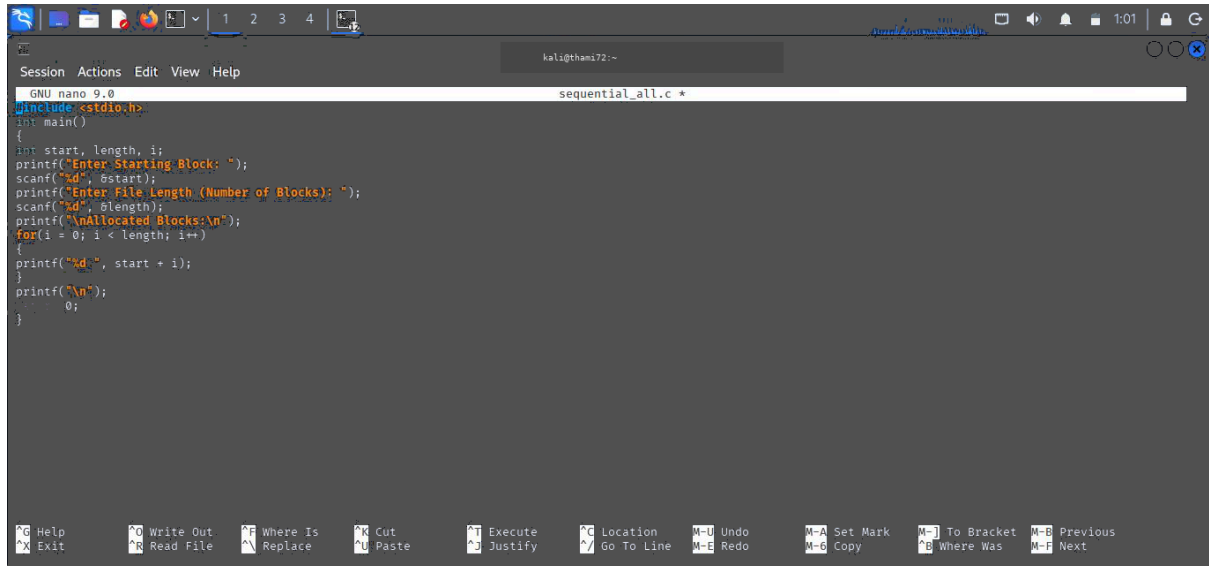

```
GNU nano 9.0 sequential_all.c *
#include <stdio.h>
int main()
{
    int start, length, i;
    printf("Enter Starting Block: ");
    scanf("%d", &start);
    printf("Enter File Length (Number of Blocks): ");
    scanf("%d", &length);
    printf("\nAllocated Blocks:\n");
    for(i = 0; i < length; i++)
    {
        printf("%d-", start + i);
    }
    printf("\n");
    return 0;
}
```


OUTPUT :

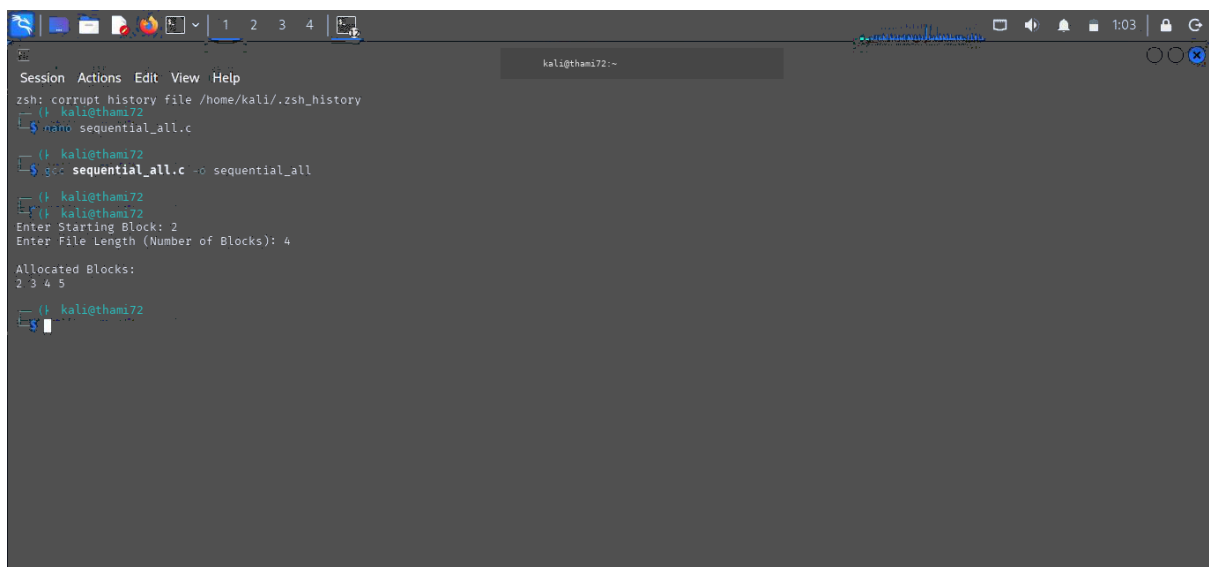

```
kali@thami72:~$ nano sequential_all.c
kali@thami72:~$ gcc sequential_all.c -o sequential_all
kali@thami72:~$ ./sequential_all
Enter Starting Block: 2
Enter File Length (Number of Blocks): 4


Allocated Blocks:
2 3 4 5
kali@thami72:~$
```

SHELL PROGRAMMING :SEQUENTIAL ALLOCATION

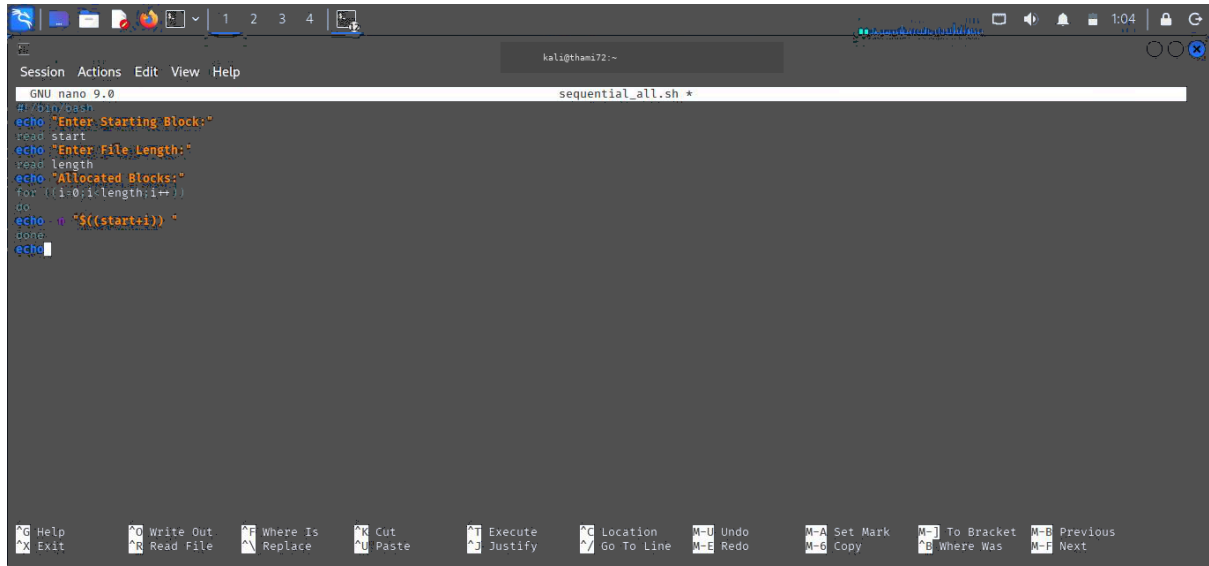

```
GNU nano 9.0 sequential_all.sh *
#!/bin/bash
echo "Enter Starting Block:"
read start
echo "Enter File Length:"
read length
echo "Allocated Blocks:"
for ((i=0;i<length;i++))
do
echo -n "${start+i}) "
done
echo
```

OUTPUT :

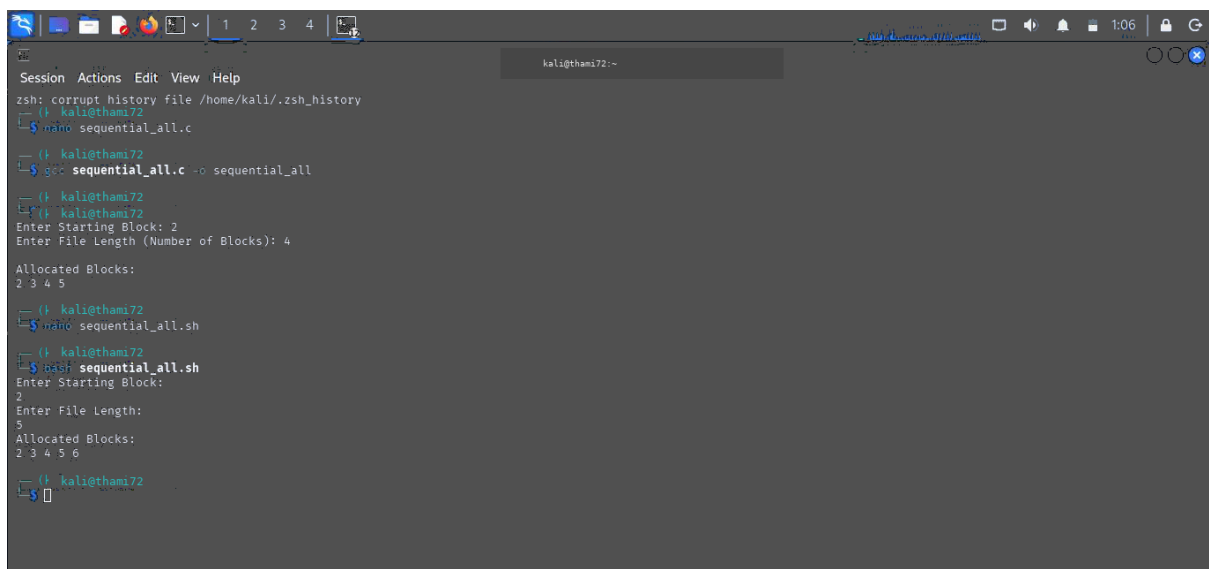


```
zsh: corrupt history file /home/kali/.zsh_history
kali@thami72:~$ nano sequential_all.c
kali@thami72:~$ gcc sequential_all.c -o sequential_all
kali@thami72:~$ ./sequential_all
Enter Starting Block: 2
Enter File Length (Number of Blocks): 4

Allocated Blocks:
2 3 4 5

kali@thami72:~$ nano sequential_all.sh
kali@thami72:~$ bash sequential_all.sh
Enter Starting Block:
2
Enter File Length:
5
Allocated Blocks:
2 3 4 5 6


kali@thami72:~$
```

C PROGRAMMING : INDEXED ALLOCATION

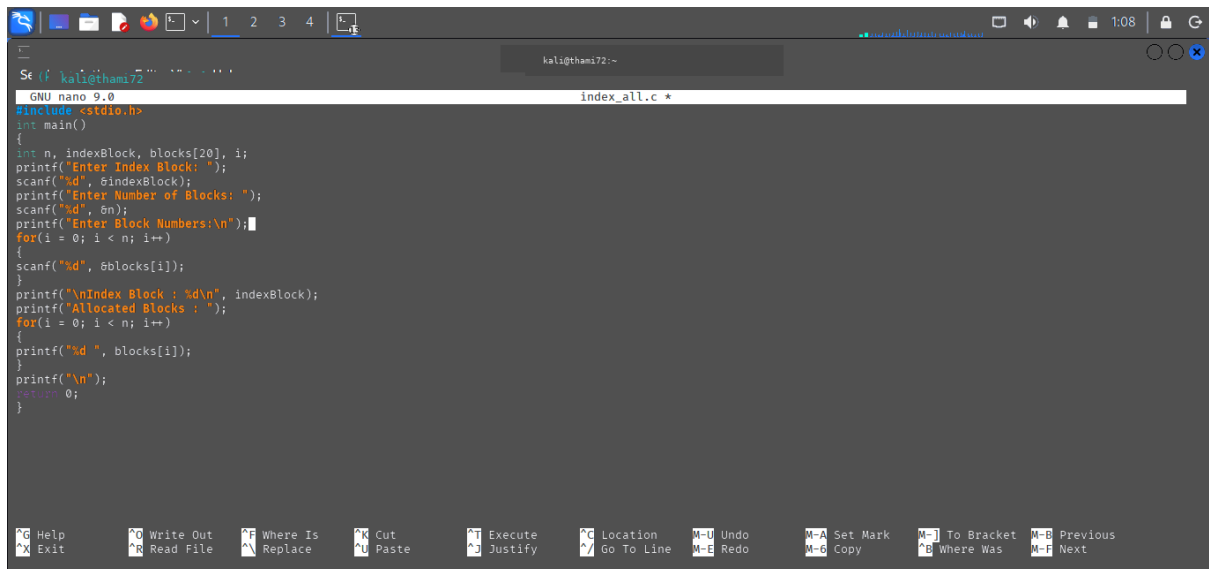

```
GNU nano 9.0 index_all.c *
#include <stdio.h>
int main()
{
    int n, indexBlock, blocks[20], i;
    printf("Enter Index Block: ");
    scanf("%d", &indexBlock);
    printf("Enter Number of Blocks: ");
    scanf("%d", &n);
    printf("Enter Block Numbers:\n");
    for(i = 0; i < n; i++)
    {
        scanf("%d", &blocks[i]);
    }
    printf("\nIndex Block : %d\n", indexBlock);
    printf("Allocated Blocks : ");
    for(i = 0; i < n; i++)
    {
        printf("%d ", blocks[i]);
    }
    printf("\n");
    return 0;
}
```


OUTPUT :

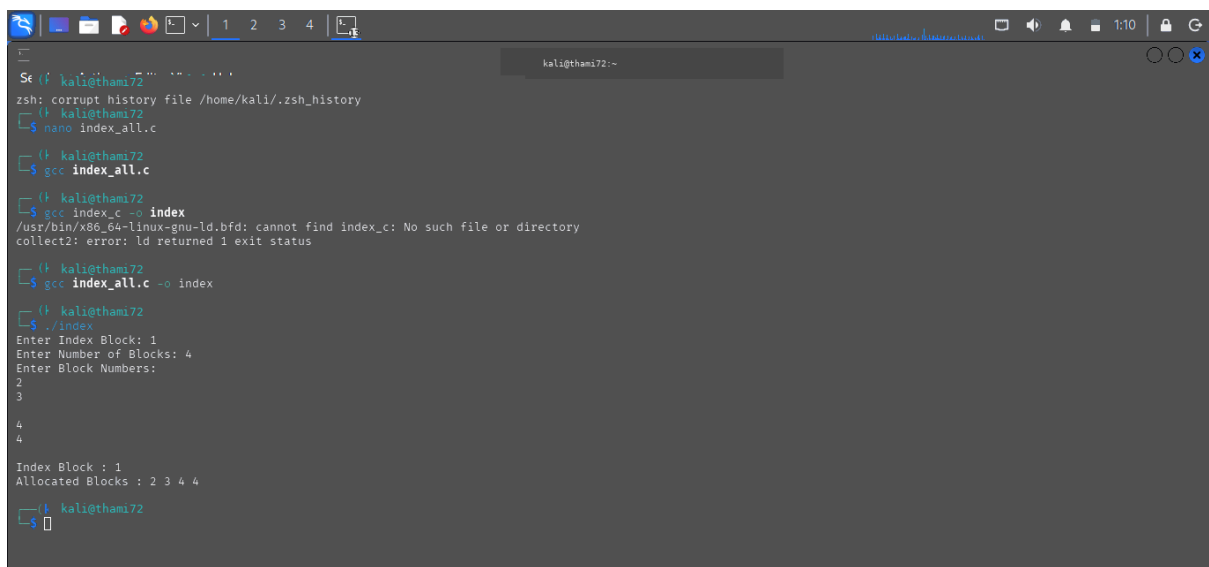

```
zsh: corrupt history file /home/kali/.zsh_history
kali@kali:~$ nano index_all.c
kali@kali:~$ gcc index_all.c
kali@kali:~$ gcc index.c -o index
/usr/bin/x86_64-linux-gnu-ld.bfd: cannot find index.c: No such file or directory
collect2: error: ld returned 1 exit status
kali@kali:~$ gcc index_all.c -o index
kali@kali:~$ ./index
Enter Index Block: 1
Enter Number of Blocks: 4
Enter Block Numbers:
2
3
4
4


Index Block : 1
Allocated Blocks : 2 3 4 4
kali@kali:~$
```

SHELL PROGRAMMING : INDEX ALLOCATION

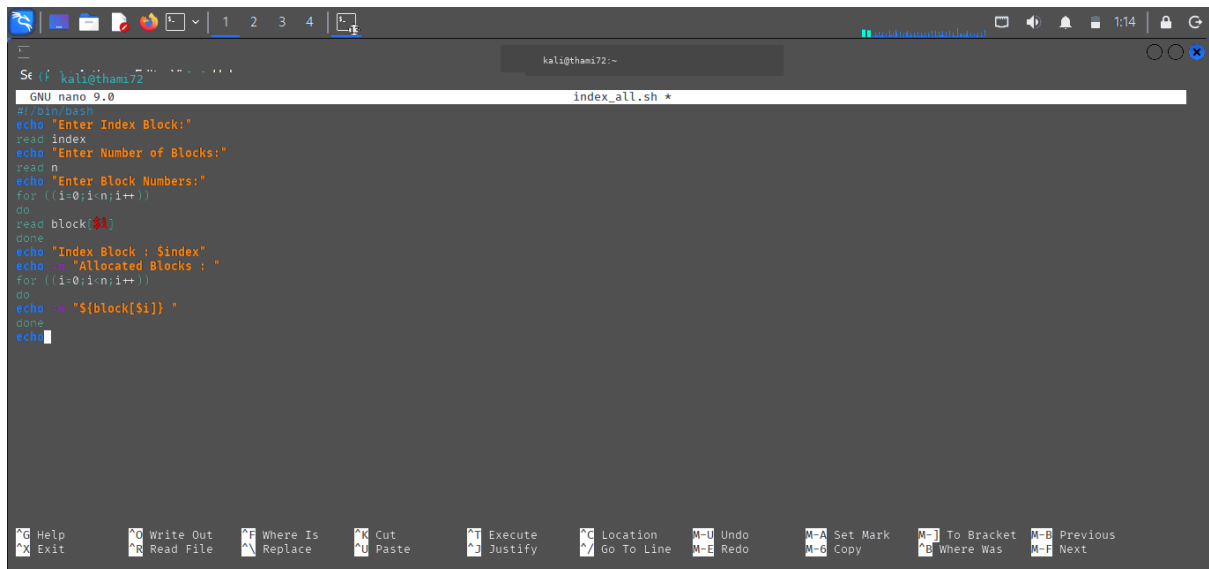

```
Se (f kali@thami72 ~)
GNU nano 9.0 index_all.sh
#!/bin/bash
echo "Enter Index Block:"
read index
echo "Enter Number of Blocks:"
read n
echo "Enter Block Numbers:"
for ((i=0;i<n;i++))
do
read block[$i]
done
echo "Index Block : $index"
echo -n "Allocated Blocks : "
for ((i=0;i<n;i++))
do
echo -n "${block[$i]} "
done
echo
```

OUTPUT :

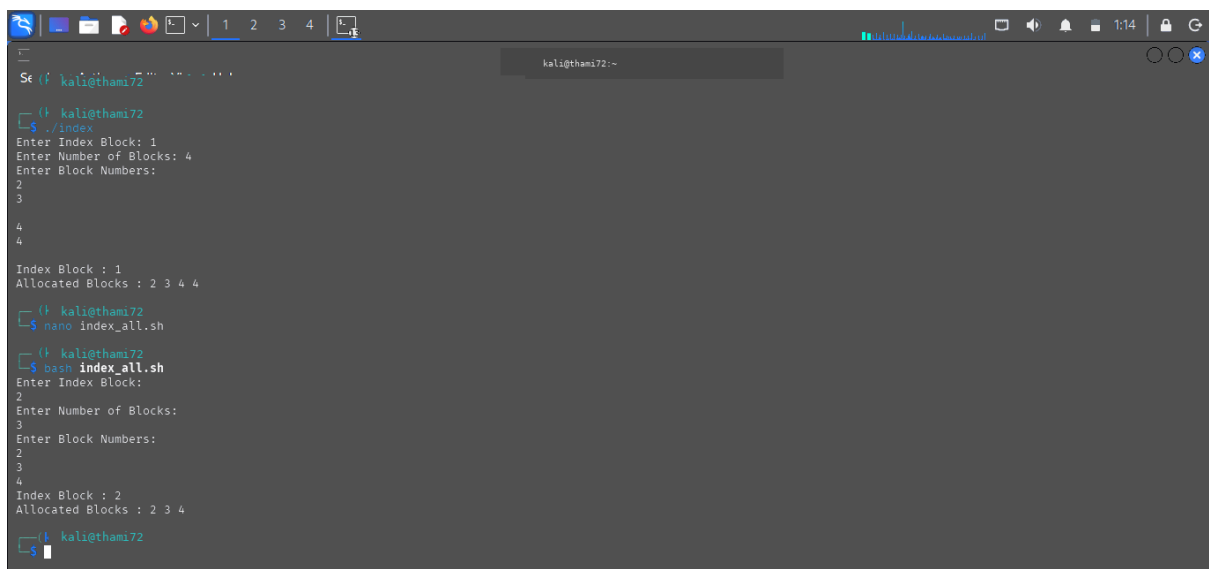


```
kali@thami72:~$ ./index
Enter Index Block: 1
Enter Number of Blocks: 4
Enter Block Numbers:
2
3
4
4
Index Block : 1
Allocated Blocks : 2 3 4 4

kali@thami72:~$ nano index_all.sh

kali@thami72:~$ bash index_all.sh
Enter Index Block:
2
Enter Number of Blocks:
3
Enter Block Numbers:
2
3
4
Index Block : 2
Allocated Blocks : 2 3 4


kali@thami72:~$
```

C PROGRAMMING : LINKED_ALLOCATION

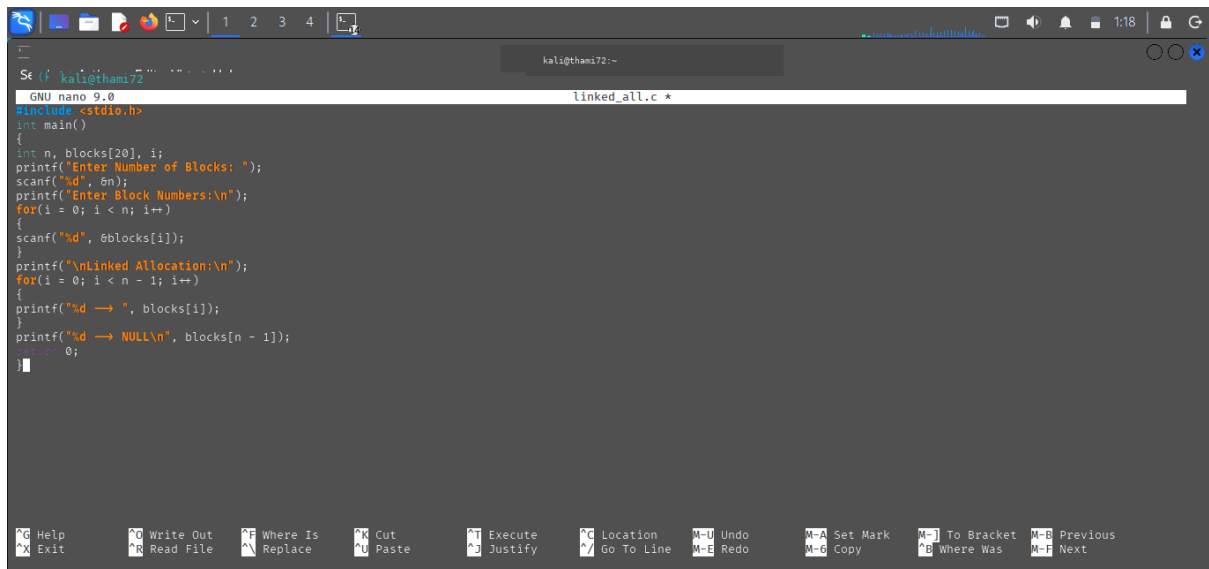

```
GNU nano 9.0 linked_all.c *
#include <stdio.h>
int main()
{
    int n, blocks[20], i;
    printf("Enter Number of Blocks: ");
    scanf("%d", &n);
    printf("Enter Block Numbers:\n");
    for(i = 0; i < n; i++)
    {
        scanf("%d", &blocks[i]);
    }
    printf("\nLinked Allocation:\n");
    for(i = 0; i < n - 1; i++)
    {
        printf("%d -> ", blocks[i]);
    }
    printf("%d -> NULL\n", blocks[n - 1]);
    return 0;
}
```


OUTPUT :

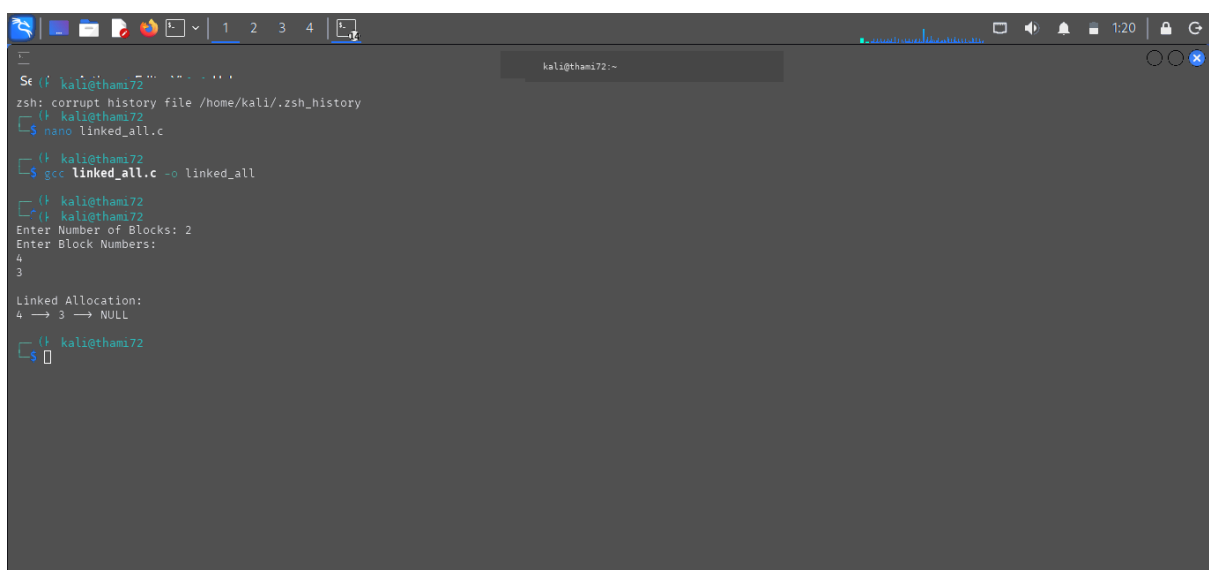

```
Se (f kali@thami72 ~)
zsh: corrupt history file /home/kali/.zsh_history
kali@thami72 ~
$ nano linked_all.c
kali@thami72 ~
$ gcc linked_all.c -o linked_all
kali@thami72 ~
$ ./linked_all
Enter Number of Blocks: 2
Enter Block Numbers:
4
3


Linked Allocation:
4 -> 3 -> NULL
kali@thami72 ~
$
```

SHELL PROGRAMMING : LINKED ALLOCATION

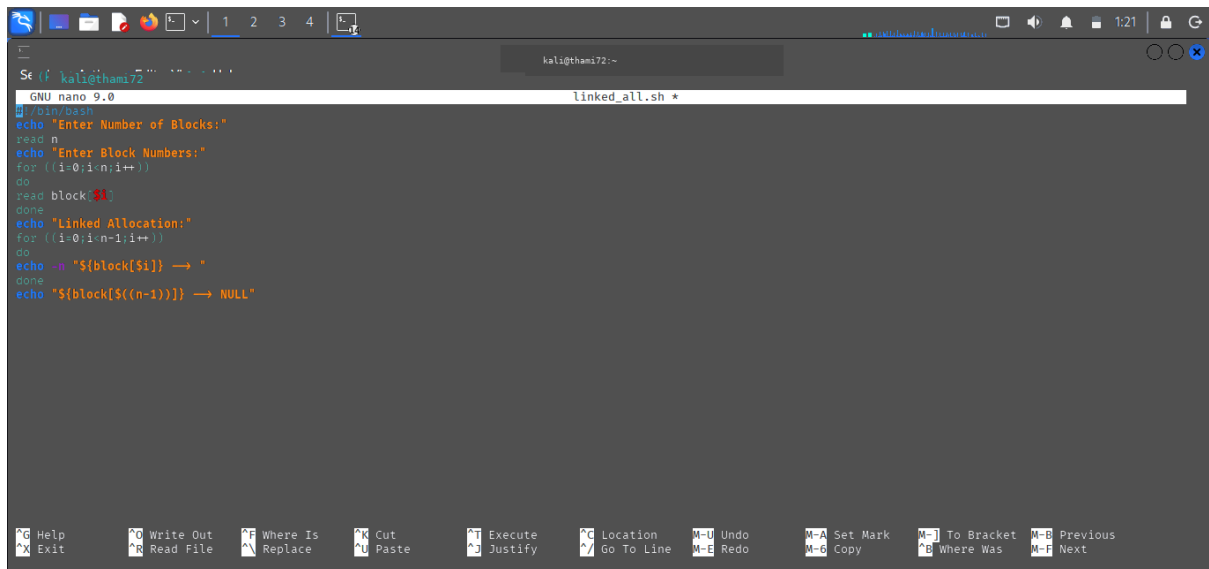

```
GNU nano 9.0 linked_all.sh *
#!/bin/bash
echo "Enter Number of Blocks:"
read n
echo "Enter Block Numbers:"
for ((i=0;i<n;i++))
do
    read block[i]
done
echo "Linked Allocation:"
for ((i=0;i<n-1;i++))
do
    echo -n "${block[i]} → "
done
echo "${block[n-1]} → NULL"
```

OUTPUT :

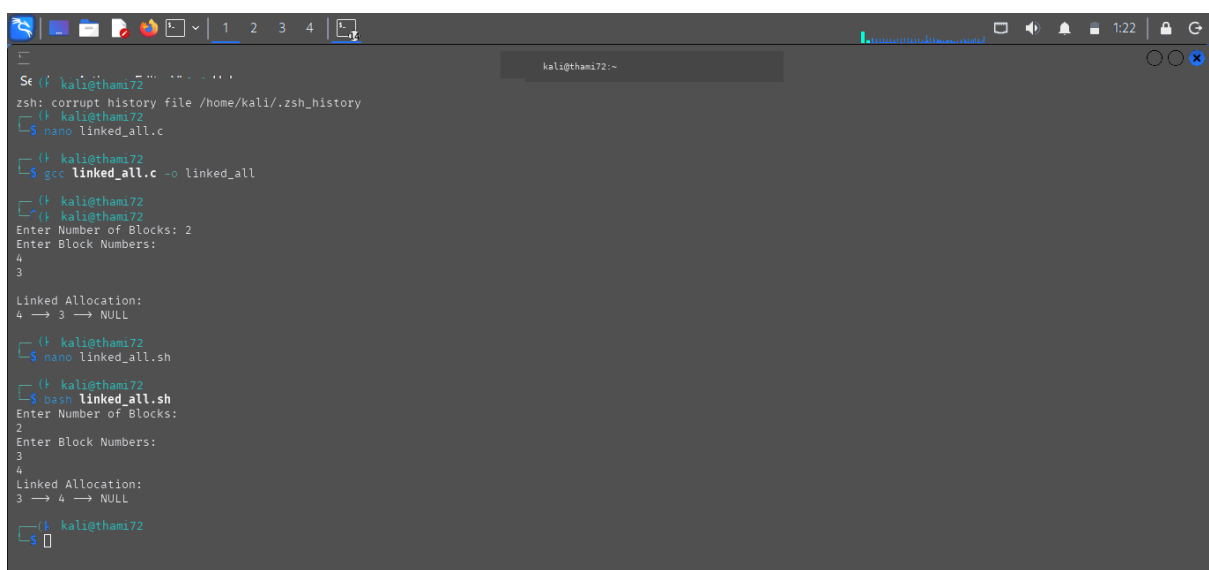

```
Se (f kali@thami72
zsh: corrupt history file /home/kali/.zsh_history
kali@thami72 ~
$ nano linked_all.c
kali@thami72 ~
$ gcc linked_all.c -o linked_all
kali@thami72 ~
$ ./linked_all
Enter Number of Blocks: 2
Enter Block Numbers:
4
3
Linked Allocation:
4 → 3 → NULL
kali@thami72 ~
$ nano linked_all.sh
kali@thami72 ~
$ dash linked_all.sh
Enter Number of Blocks:
2
Enter Block Numbers:
3
4
Linked Allocation:
3 → 4 → NULL
kali@thami72 ~
$
```