



C PROGRAMMING : IPC

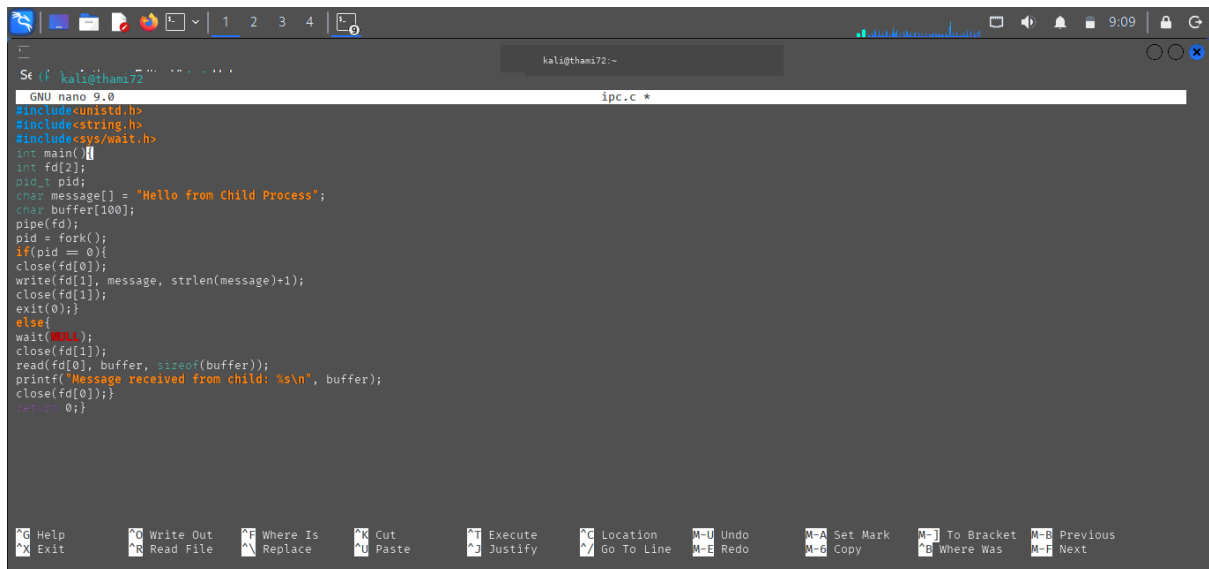

```
GNU nano 9.0 ipc.c *
#include<unistd.h>
#include<string.h>
#include<sys/wait.h>


int main()
{
    int fd[2];
    pid_t pid;
    char message[] = "Hello from Child Process";
    char buffer[100];
    pipe(fd);
    pid = fork();
    if(pid == 0){
        close(fd[0]);
        write(fd[1], message, strlen(message)+1);
        close(fd[1]);
        exit(0);
    }
    else{
        wait(NULL);
        close(fd[1]);
        read(fd[0], buffer, sizeof(buffer));
        printf("Message received from child: %s\n", buffer);
        close(fd[0]);
        return 0;
    }
}
```

OUTPUT :

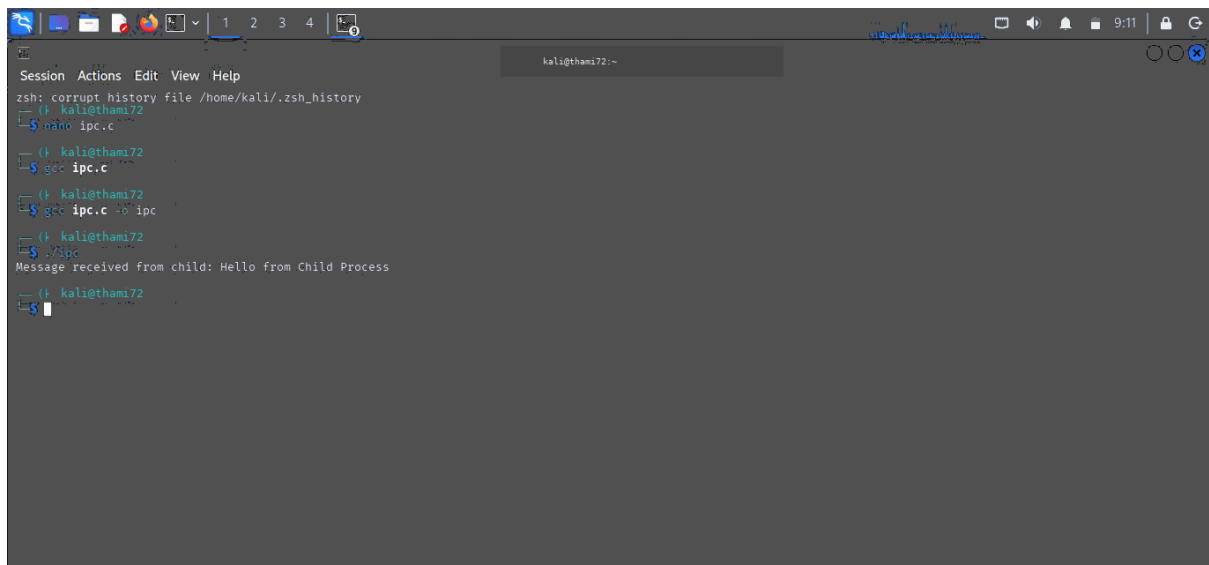


```
Session Actions Edit View Help
zsh: corrupt history file /home/kali/.zsh_history
kali@thami72:~$ nano ipc.c
kali@thami72:~$ gcc ipc.c
kali@thami72:~$ gcc ipc.c -o ipc
kali@thami72:~$ ./ipc
Message received from child: Hello from Child Process
kali@thami72:~$
```

SHELL PROGRAMMING :IPC

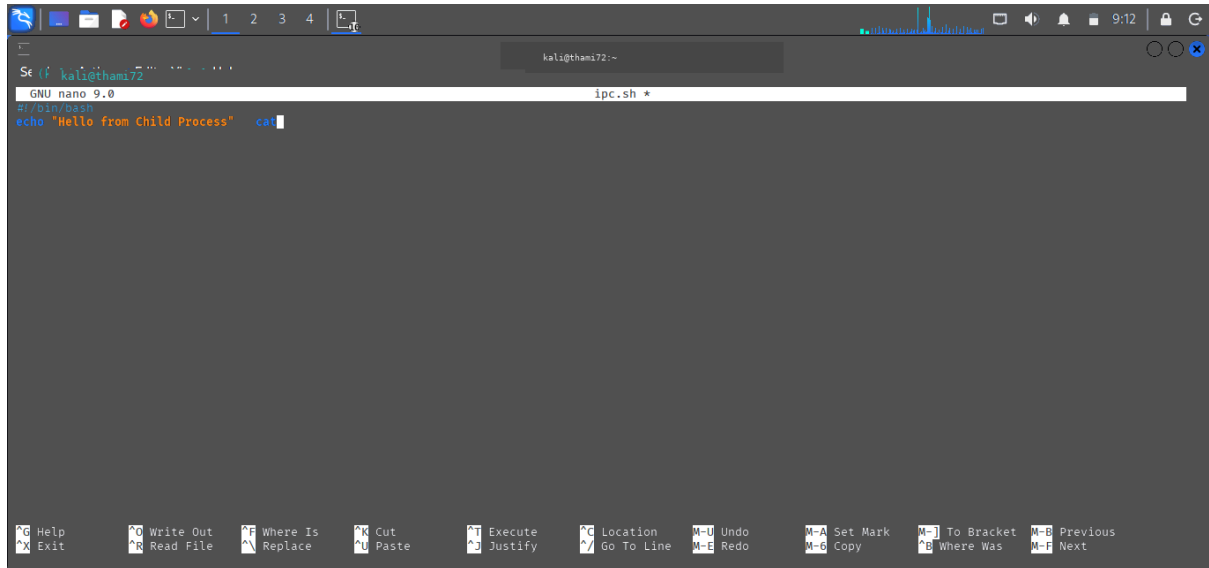

```
Se (f kali@thami72 ...
GNU nano 9.0 ipc.sh *
#!/bin/bash
echo "Hello from Child Process" cat
```

OUTPUT :

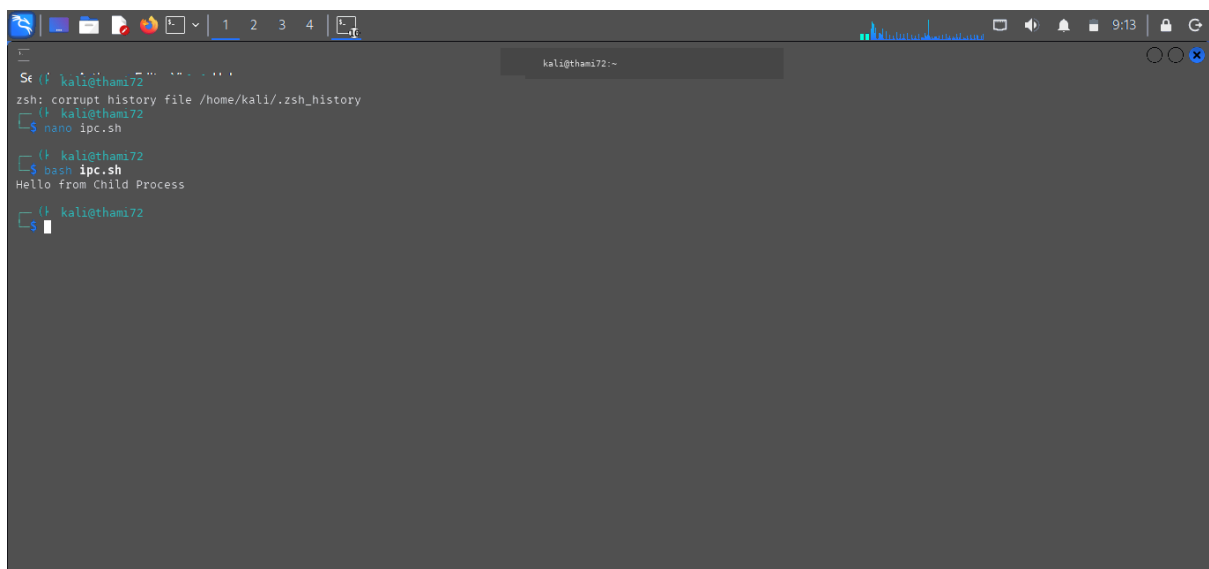

```
Se (f kali@thami72 ...
zsh: corrupt history file /home/kali/.zsh_history
kali@thami72 ~
└─$ nano ipc.sh
└─$ bash ipc.sh
Hello from Child Process
└─$
```