

## Dupme Server Instruction

1. Open command prompt or terminal to the location of the Server folder (folder: DupmeSonata) then type ' **npm run server** '


```
C:\Users\Pluem>cd "Desktop\Now Working\Netcentric\DupmeSonata"  
C:\Users\Pluem\Desktop\Now Working\Netcentric\DupmeSonata>npm run server
```

2. After the initiating the server, the server user interface (server.html on browser) will automatically pop up.

Note:

- Since server.html use localhost and PORT number to connect, the number of current socket connection are including the server.
- Since server.html connect the socket using localhost, it cannot be open on the client side.
- If you manually open server.html on the folder after initiate, it will redirect toward client user interface.

(WARNING!!! Closing the browser will terminate the server)

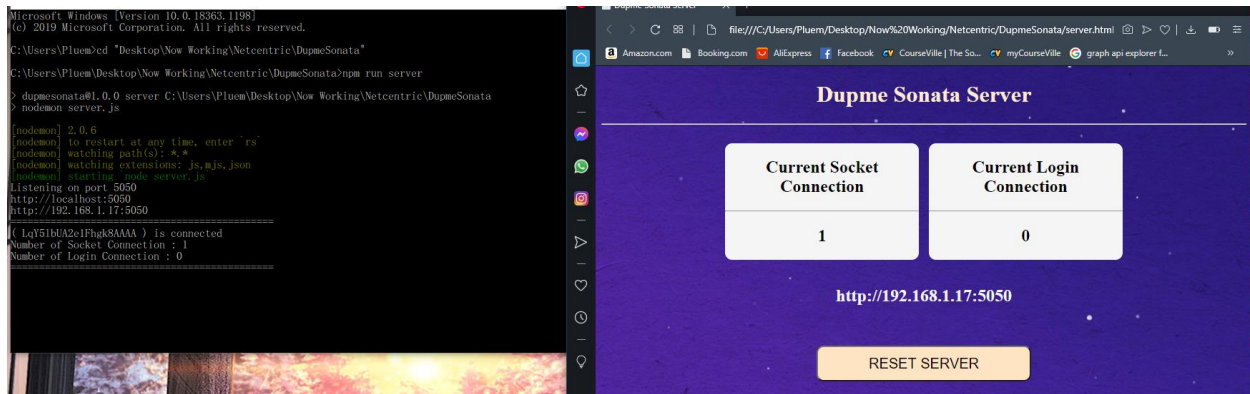

3. The client can connect using the url from command line or the server user interface.

(WARNING!!! The server and client must connect the same network and server must set the network profile to private)

