


ธนร 68116523

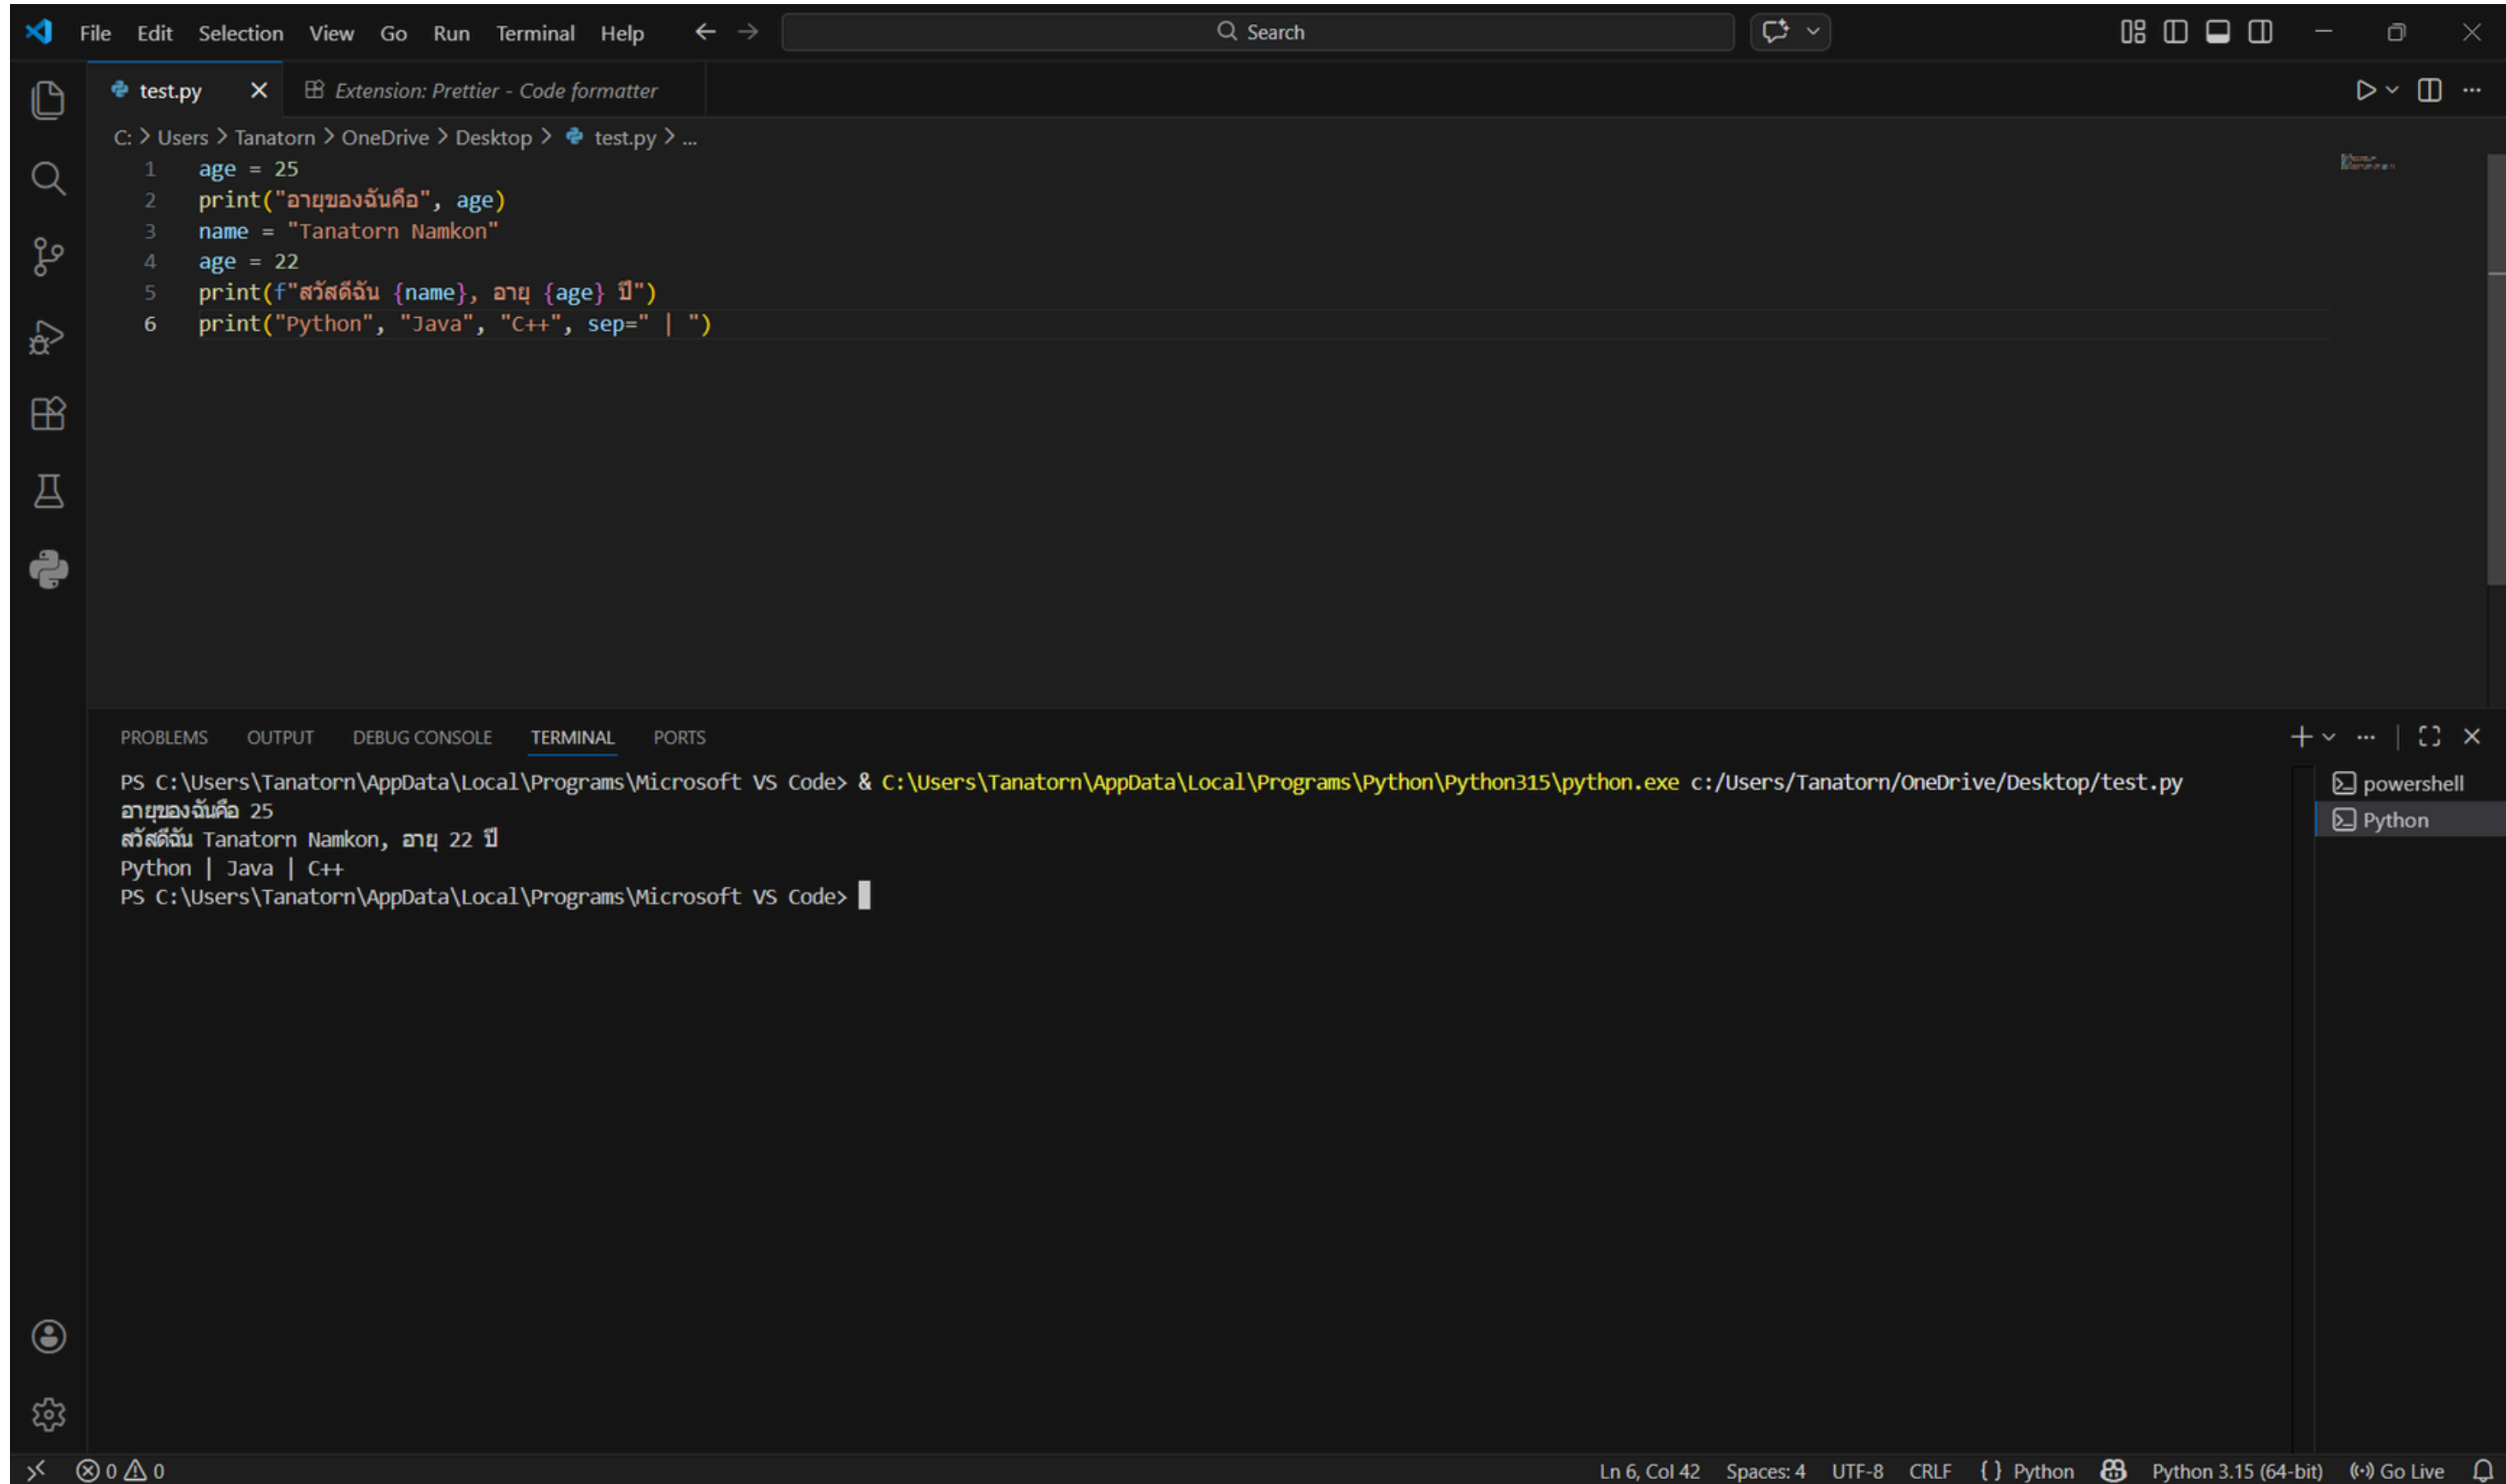

The image shows a screenshot of the Visual Studio Code (VS Code) editor interface. The main editor window displays a Python file named `test.py` with the following code:

```
1 age = 25
2 print("อายุของฉันคือ", age)
3 name = "Tanatorn Namkon"
4 age = 22
5 print(f"สวัสดีฉัน {name}, อายุ {age} ปี")
6 print("Python", "Java", "C++", sep=" | ")
```

The file explorer on the left shows the file `test.py` and the extension `Extension: Prettier - Code formatter`. The terminal at the bottom shows the command to run the script:

```
PS C:\Users\Tanatorn\AppData\Local\Programs\Microsoft VS Code> & C:\Users\Tanatorn\AppData\Local\Programs\Python\Python315\python.exe c:/Users/Tanatorn/OneDrive/Desktop/test.py
```

The output of the script is displayed in the terminal:

```
อายุของฉันคือ 25
สวัสดีฉัน Tanatorn Namkon, อายุ 22 ปี
Python | Java | C++
```

The terminal also shows the prompt `PS C:\Users\Tanatorn\AppData\Local\Programs\Microsoft VS Code>` with a cursor.

The status bar at the bottom indicates the current file is `Ln 6, Col 42`, with `Spaces: 4`, `UTF-8` encoding, `CRLF` line endings, and the Python 3.15 (64-bit) interpreter is selected.