


# NLP Programming Tutorial 1 - Unigram Language Models

Graham Neubig  
Nara Institute of Science and Technology (NAIST)

# Language Model Basics


# Why Language Models?

- We have an English speech recognition system, which answer is better?

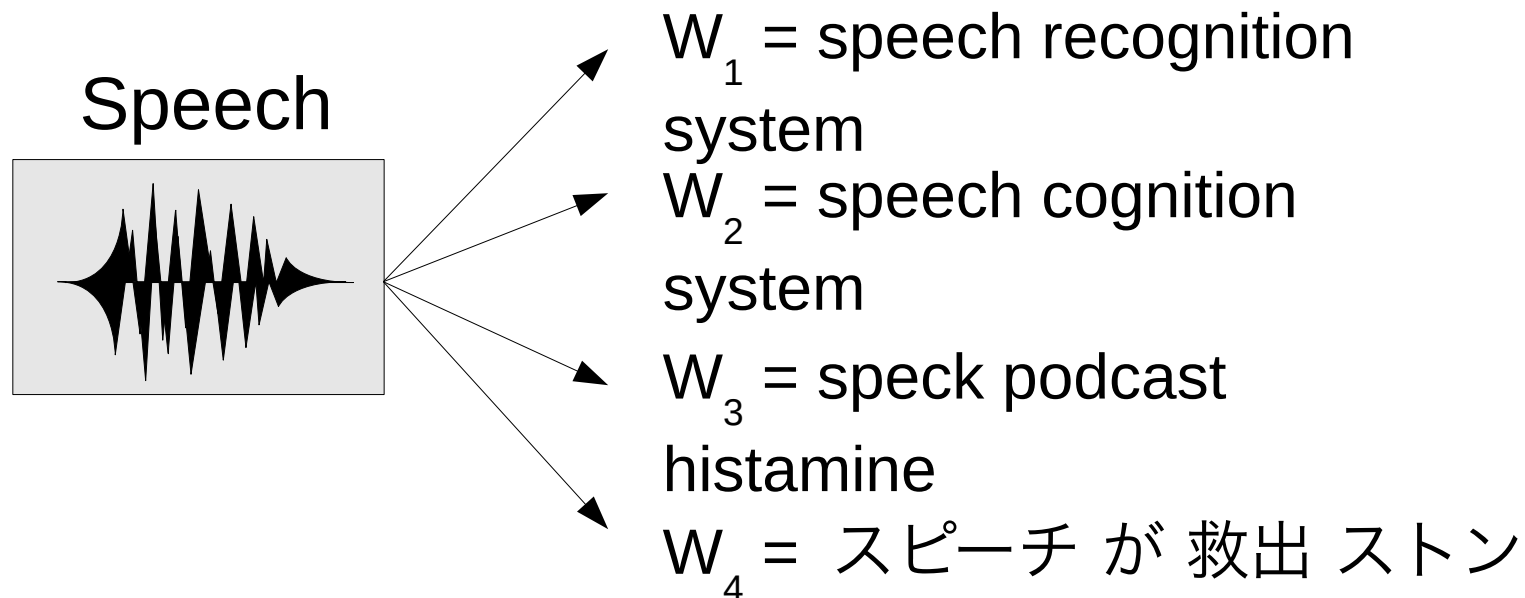

# Why Language Models?

- We have an English speech recognition system, which answer is better?

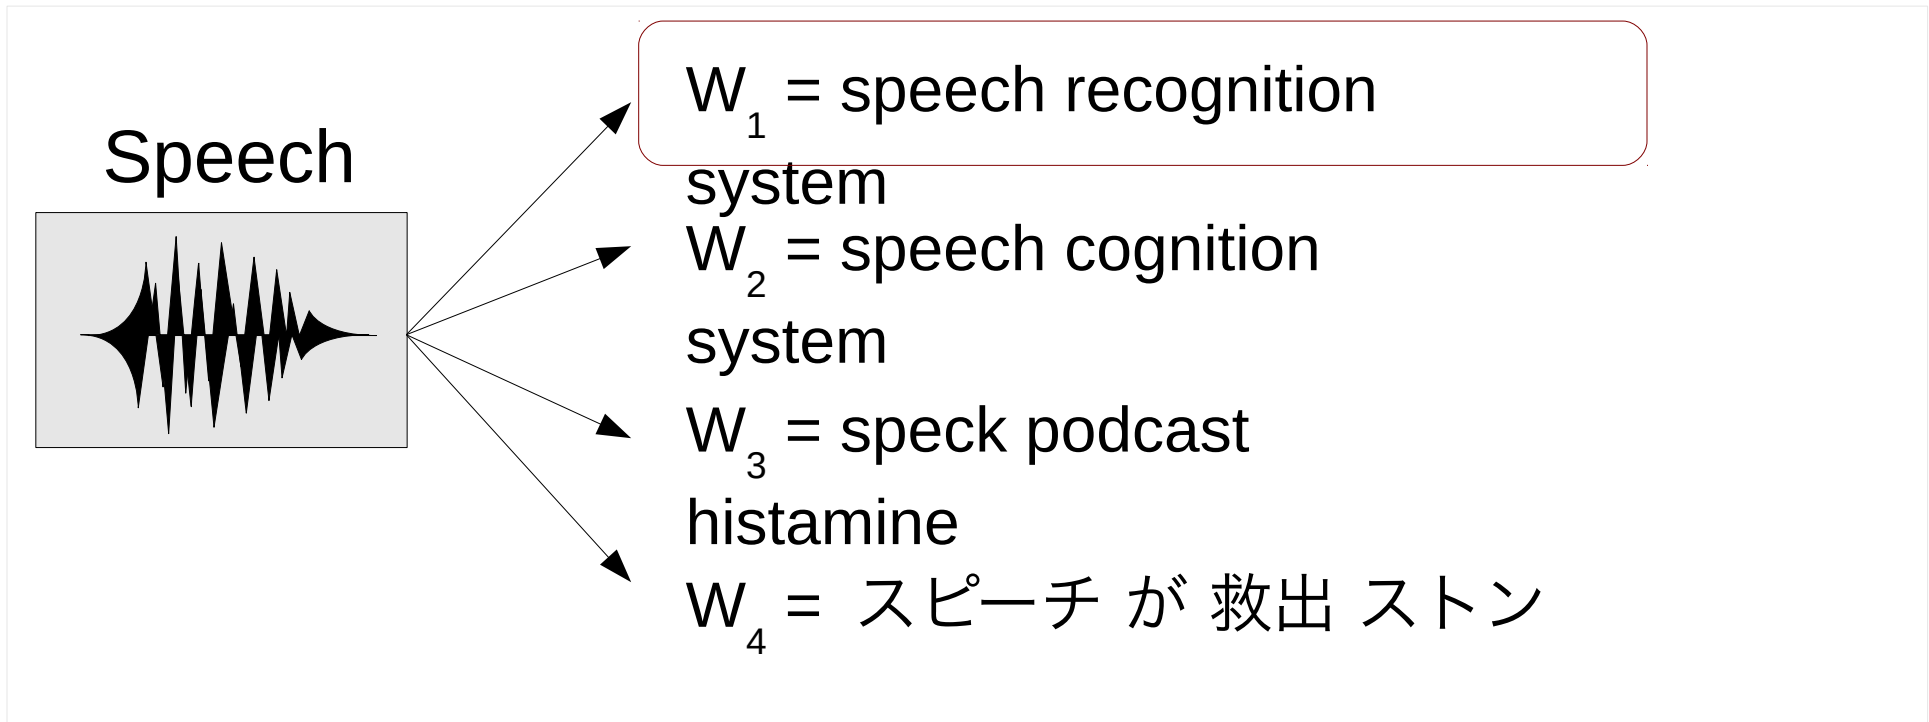

- Language models tell us the answer!

# Probabilistic Language Models

- Language models assign a probability to each sentence

$W_1$  = speech recognition  
system

$$P(W_1) = 4.021 * 10^{-3}$$

$W_2$  = speech cognition  
system

$$P(W_2) = 8.932 * 10^{-4}$$

$W_3$  = speck podcast  
histamine

$$P(W_3) = 2.432 * 10^{-7}$$

$W_4$  = スピーチ が 救出 ストン

$$P(W_4) = 9.124 * 10^{-23}$$

- We want  $P(W_1) > P(W_2) > P(W_3) > P(W_4)$ 
  - (or  $P(W_4) > P(W_1), P(W_2), P(W_3)$  for Japanese?)

# Calculating Sentence Probabilities

- We want the probability of

$W$  = speech recognition system

- Represent this mathematically as:

$$P(|W| = 3, w_1 = \text{"speech"}, w_2 = \text{"recognition"}, w_3 = \text{"system"})$$

# Calculating Sentence Probabilities

- We want the probability of

$W$  = speech recognition system

- Represent this mathematically as (using chain rule):

$$P(|W| = 3, w_1 = \text{"speech"}, w_2 = \text{"recognition"}, w_3 = \text{"system"}) =$$

$$P(w_1 = \text{"speech"} \mid w_0 = \text{"<s>"})$$

$$* P(w_2 = \text{"recognition"} \mid w_0 = \text{"<s>"}, w_1 = \text{"speech"})$$

$$* P(w_3 = \text{"system"} \mid w_0 = \text{"<s>"}, w_1 = \text{"speech"}, w_2 = \text{"recognition"})$$

$$* P(w_4 = \text{"</s>"} \mid w_0 = \text{"<s>"}, w_1 = \text{"speech"}, w_2 = \text{"recognition"}, w_3 = \text{"system"})$$

NOTE:

sentence start <s> and end </s> symbol

NOTE:

$$P(w_0 = \text{"<s>"}) = 1$$

# Incremental Computation

- Previous equation can be written:

$$P(W) = \prod_{i=1}^{|W|+1} P(w_i | w_0 \dots w_{i-1})$$

- How do we decide probability?

$$P(w_i | w_0 \dots w_{i-1})$$



# Maximum Likelihood Estimation

- Calculate word strings in corpus, take fraction

$$P(w_i | w_1 \dots w_{i-1}) = \frac{c(w_1 \dots w_i)}{c(w_1 \dots w_{i-1})}$$

i live in osaka . </s>

i am a graduate student . </s>

my school is in nara . </s>

$$P(\text{live} \mid \langle s \rangle i) = c(\langle s \rangle i \text{ live}) / c(\langle s \rangle i) = 1 / 2 = 0.5$$

$$P(\text{am} \mid \langle s \rangle i) = c(\langle s \rangle i \text{ am}) / c(\langle s \rangle i) = 1 / 2 = 0.5$$

# Problem With Full Estimation

- Weak when counts are low:

Training:

i live in osaka . </s>  
i am a graduate student . </s>  
my school is in nara . </s>

Test:

<s> i live in nara . </s>



$$P(\text{nara} | \text{<s> i live in}) = 0/1 = 0$$



$$P(W = \text{<s> i live in nara . </s>}) = 0$$

# Unigram Model

- Do not use history:

$$P(w_i | w_1 \dots w_{i-1}) \approx P(w_i) = \frac{c(w_i)}{\sum_{\tilde{w}} c(\tilde{w})}$$

i live in osaka . </s>

i am a graduate student . </s>

my school is in nara . </s>

$$P(\text{nara}) = 1/20 = 0.05$$

$$P(i) = 2/20 = 0.1$$

$$P(</s>) = 3/20 = 0.15$$

$$P(W=i \text{ live in nara . } </s>) =$$

$$0.1 * 0.05 * 0.1 * 0.05 * 0.15 * 0.15 = 5.625 * 10^{-7}$$

# Be Careful of Integers!

- Divide two integers, you get an integer (rounded down)

```
first_int = 1
second_int = 2
```

```
print(first_int/second_int)
```

```
$ ./my-program.py
0
```

- Convert one integer to a float, and you will be OK

```
print(float(first_int)/second_int)
```

```
$ ./my-program.py
0.5
```

# What about Unknown Words?!

- Simple ML estimation doesn't work

i live in osaka . </s>	$P(\text{nara}) = 1/20 = 0.05$
i am a graduate student . </s>	$\rightarrow P(i) = 2/20 = 0.1$
my school is in nara . </s>	$P(\text{kyoto}) = 0/20 = 0$

- Often, unknown words are ignored (ASR)
- Better way to solve
  - Save some probability for unknown words ( $\lambda_{\text{unk}} = 1 - \lambda_1$ )
  - Guess total vocabulary size (N), including unknowns

$$P(w_i) = \lambda_1 P_{ML}(w_i) + (1 - \lambda_1) \frac{1}{N}$$

# Unknown Word Example

- Total vocabulary size:  $N=10^6$
- Unknown word probability:  $\lambda_{\text{unk}}=0.05$  ( $\lambda_1 = 0.95$ )

$$P(w_i) = \lambda_1 P_{ML}(w_i) + (1 - \lambda_1) \frac{1}{N}$$

$$P(\text{nara}) = 0.95 * 0.05 + 0.05 * (1/10^6) = 0.047500005$$

$$P(\text{i}) = 0.95 * 0.10 + 0.05 * (1/10^6) = 0.095000005$$

$$P(\text{kyoto}) = 0.95 * 0.00 + 0.05 * (1/10^6) = 0.000000005$$

# Evaluating Language Models

# Experimental Setup

- Use training and test sets

## Training Data

i live in osaka  
i am a graduate student  
my school is in nara  
...

Train  
Model

Model

Test  
Model

## Testing Data

i live in nara  
i am a student  
i have lots of homework  
...

## Model Accuracy

Likelihood  
Log Likelihood  
Entropy  
Perplexity



# Likelihood

- Likelihood is the probability of some observed data (the test set  $W_{test}$ ), given the model  $M$

$$P(W_{test}|M) = \prod_{w \in W_{test}} P(w|M)$$

i live in nara

i am a student

my classes are hard

$$\begin{aligned} P(w="i live in nara"|M) &= 2.52 \times 10^{-21} \\ &\times \\ P(w="i am a student"|M) &= 3.48 \times 10^{-19} \\ &\times \\ P(w="my classes are hard"|M) &= 2.15 \times 10^{-34} \\ &= \\ &1.89 \times 10^{-73} \end{aligned}$$

# Log Likelihood

- Likelihood uses **very small numbers**=underflow
- Taking the log resolves this problem

$$\log P(W_{test}|M) = \sum_{w \in W_{test}} \log P(w|M)$$

i live in nara

i am a student

my classes are hard

$$\begin{aligned} \log P(w="i live in nara"|M) &= -20.58 \\ &+ \\ \log P(w="i am a student"|M) &= -18.45 \\ &+ \\ \log P(w="my classes are hard"|M) &= -33.67 \\ &= \\ &-72.60 \end{aligned}$$

# Calculating Logs

- Python's math package has a function for logs

```
import math
```

```
print(math.log(100))          # ln(100)
print(math.log(100, 10))     # log10(100)
```

```
$ ./my-program.py
4.60517018599
2.0
```

# Entropy

- Entropy  $H$  is average negative  $\log_2$  likelihood per word

$$H(W_{test} | M) = \frac{1}{|W_{test}|} \left( \sum_{w \in W_{test}} -\log_2 P(w | M) \right)$$

i live in nara  
i am a student  
my classes are hard

$$\begin{aligned} \log_2 P(w="i \text{ live in nara"}|M) &= 68.43 \\ \log_2 P(w="i \text{ am a student"}|M) &= 61.32 \\ \log_2 P(w="my \text{ classes are hard"}|M) &= 111.84 \\ \hline \# \text{ of words} &= 12 \\ &= 20.13 \end{aligned}$$

\* note, we can also count  $\langle /s \rangle$  in # of words (in which case it is 15)<sup>20</sup>

# Perplexity

- Equal to two to the power of per-word entropy

$$PPL = 2^H$$

- (Mainly because it makes more impressive numbers)
- For uniform distributions, equal to the size of vocabulary

$$V = 5 \quad H = -\log_2 \frac{1}{5} \quad PPL = 2^H = 2^{-\log_2 \frac{1}{5}} = 2^{\log_2 5} = 5$$

# Coverage

- The percentage of known words in the corpus

a bird a cat a dog a </s>

“dog” is an unknown word

Coverage:  $7/8$  \*

\* often omit the sentence-final symbol  $\rightarrow 6/7$

# Exercise

# Exercise

- Write two programs
  - train-unigram: Creates a unigram model
  - test-unigram: Reads a unigram model and calculates entropy and coverage for the test set
- Test them test/01-train-input.txt test/01-test-input.txt
- Train the model on data/wiki-en-train.word
- Calculate entropy and coverage on data/wiki-en-test.word
- Report your scores next week



# train-unigram Pseudo-Code

create a **map** *counts*

create a **variable** *total\_count* = 0

**for each** *line* **in** the *training\_file*

**split** *line* into an array of *words*

**append** “</s>” to the end of *words*

**for each** *word* **in** *words*

**add** 1 to *counts[word]*

**add** 1 to *total\_count*

**open** the *model\_file* for writing

**for each** *word, count* **in** *counts*

*probability* = *counts[word]/total\_count*

**print** *word, probability* **to** *model\_file*

# test-unigram Pseudo-Code

$\lambda_1 = 0.95$ ,  $\lambda_{\text{unk}} = 1 - \lambda_1$ ,  $V = 1000000$ ,  $W = 0$ ,  $H = 0$

## Load Model

```
create a map probabilities
for each line in model_file
    split line into w and P
    set probabilities[w] = P
```

## Test and Print

```
for each line in test_file
    split line into an array of words
    append "</s>" to the end of words
    for each w in words
        add 1 to W
        set  $P = \lambda_{\text{unk}} / V$ 
        if probabilities[w] exists
            set  $P += \lambda_1 * \text{probabilities}[w]$ 
        else
            add 1 to unk
            add  $-\log_2 P$  to H
```

```
print "entropy = " +  $H/W$ 
print "coverage = " +  $(W - \text{unk})/W$ 
```

Thank You!