
01 Layer-aware conditioning

timestep + source + target

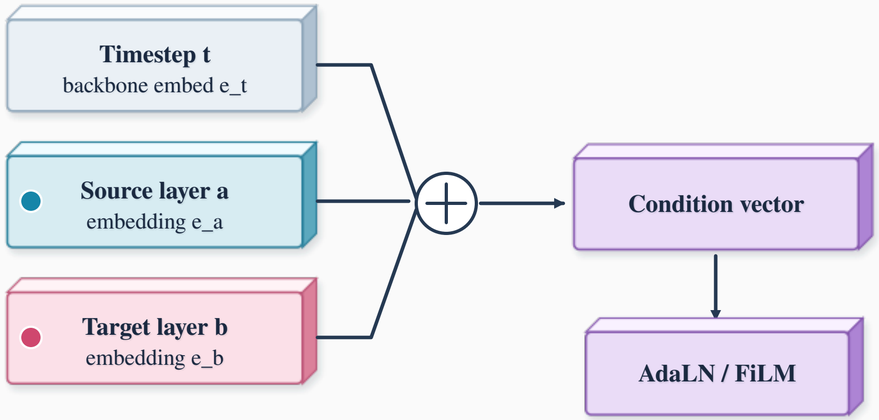


Depth-conditioned vector modulates all predictor blocks

Target-layer activation is a stop-gradient reference


02 Conditioned spatial block

ConvNeXt + periodic attention

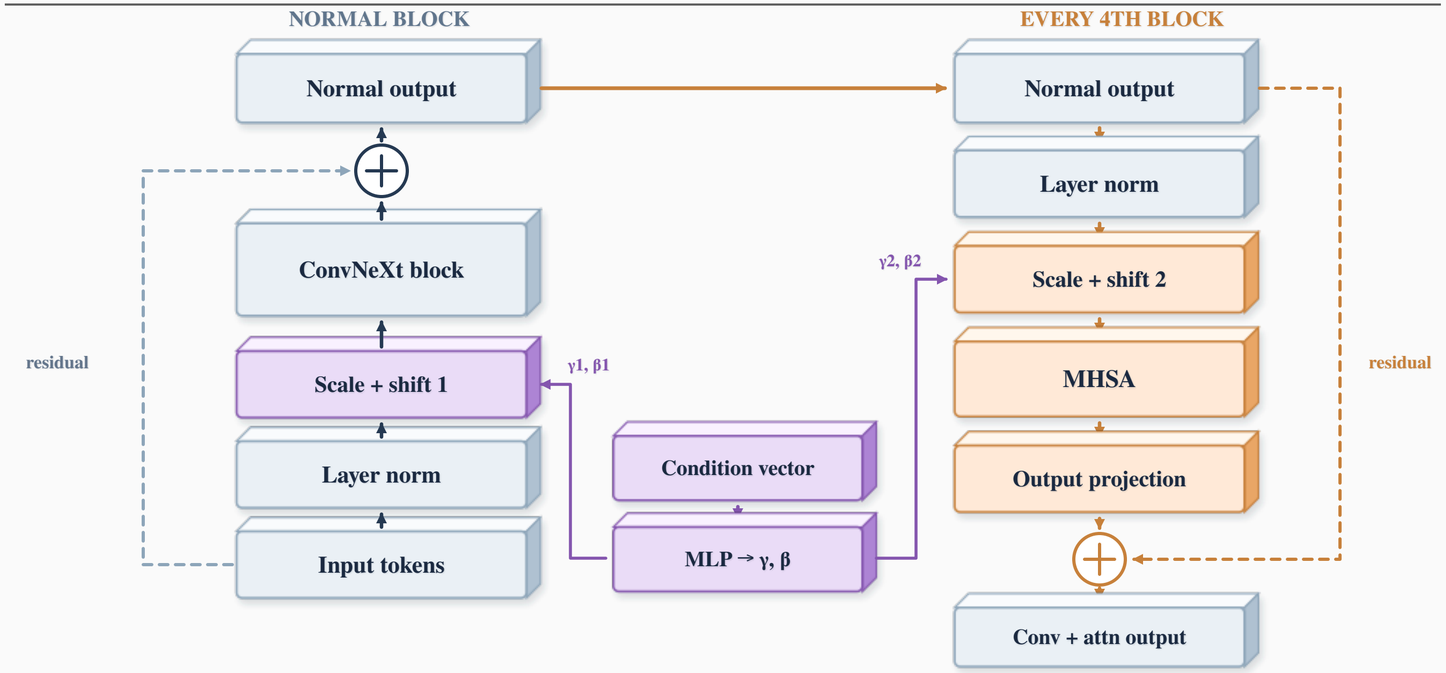

03 LARA predictor data path

SiT-B/2 · 16 × 16 tokens

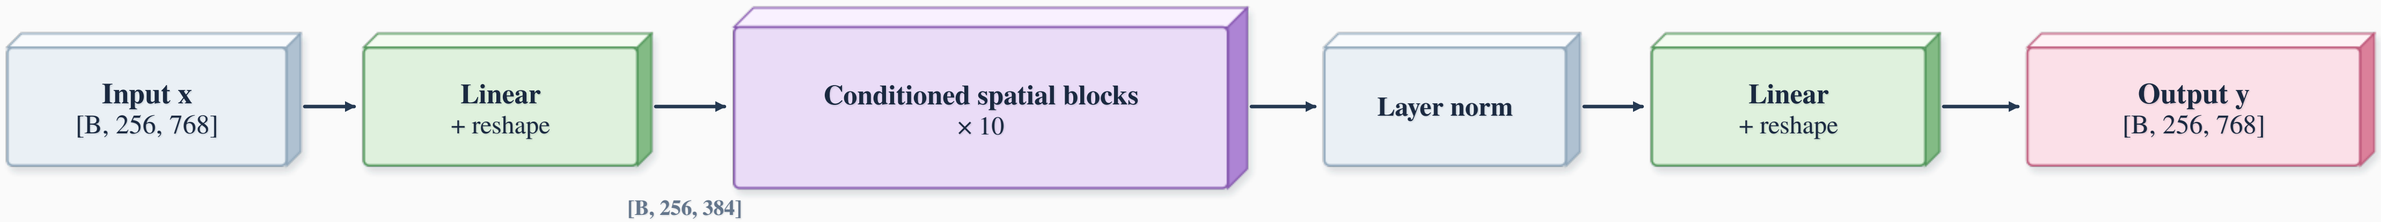

Attention after blocks 4 and 8

same vector injected at each block

Shared predictor Gψ maps source tokens to target-layer coordinates