

WEB


Tên: Lê Thanh Tú

MSSV: 1560655


-----//-----//-----

Chỉnh sửa file config:

SELINUX=disabled -> reboot

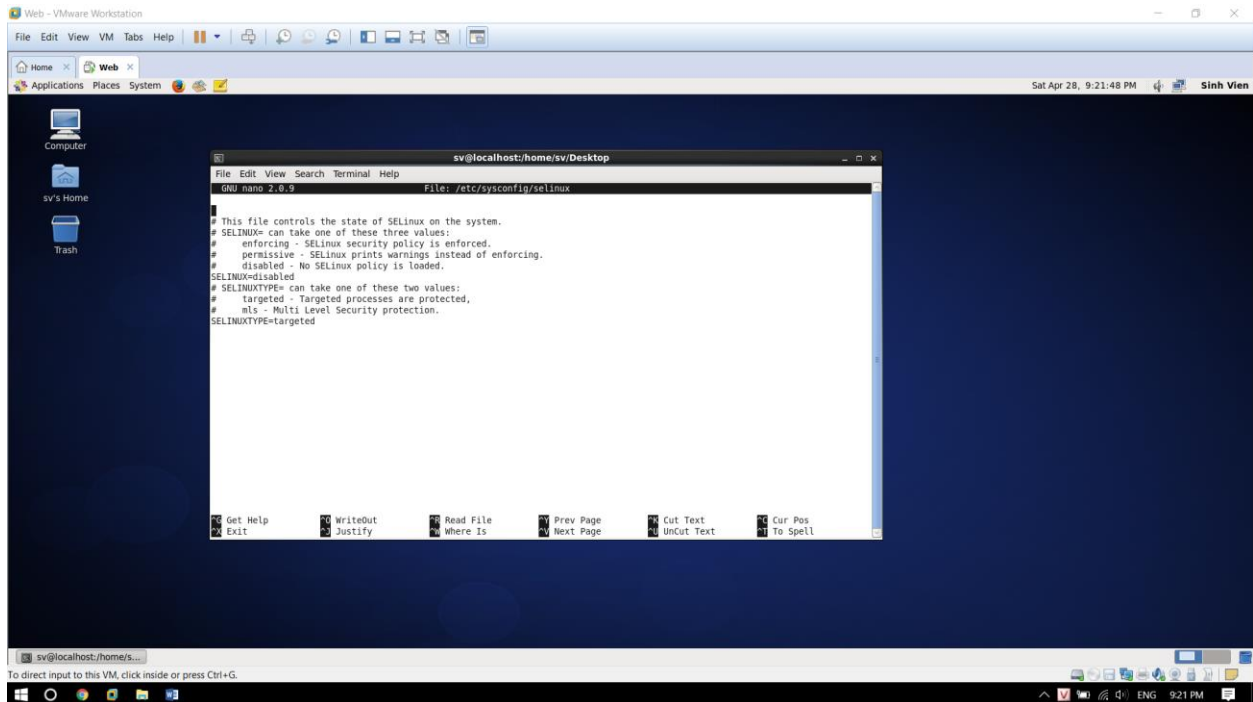


Mở file /etc/hosts

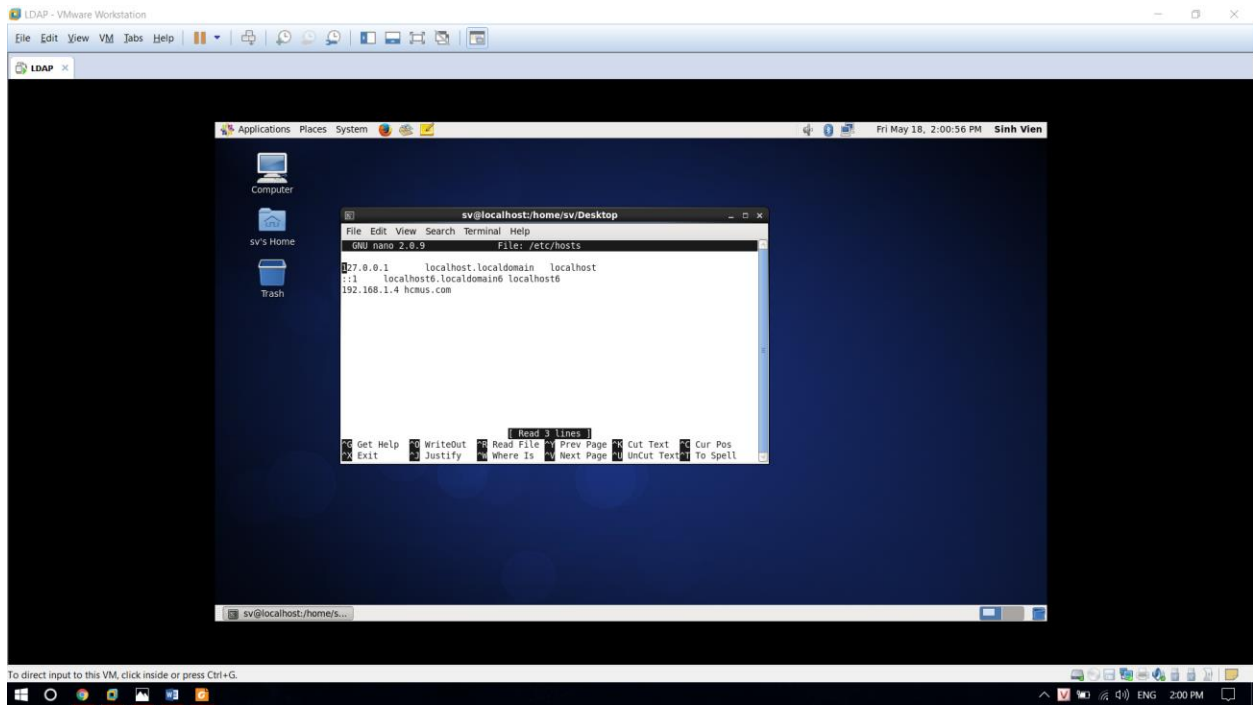



Cài đặt các gói openldap.

Tạo password cho LDAP admin

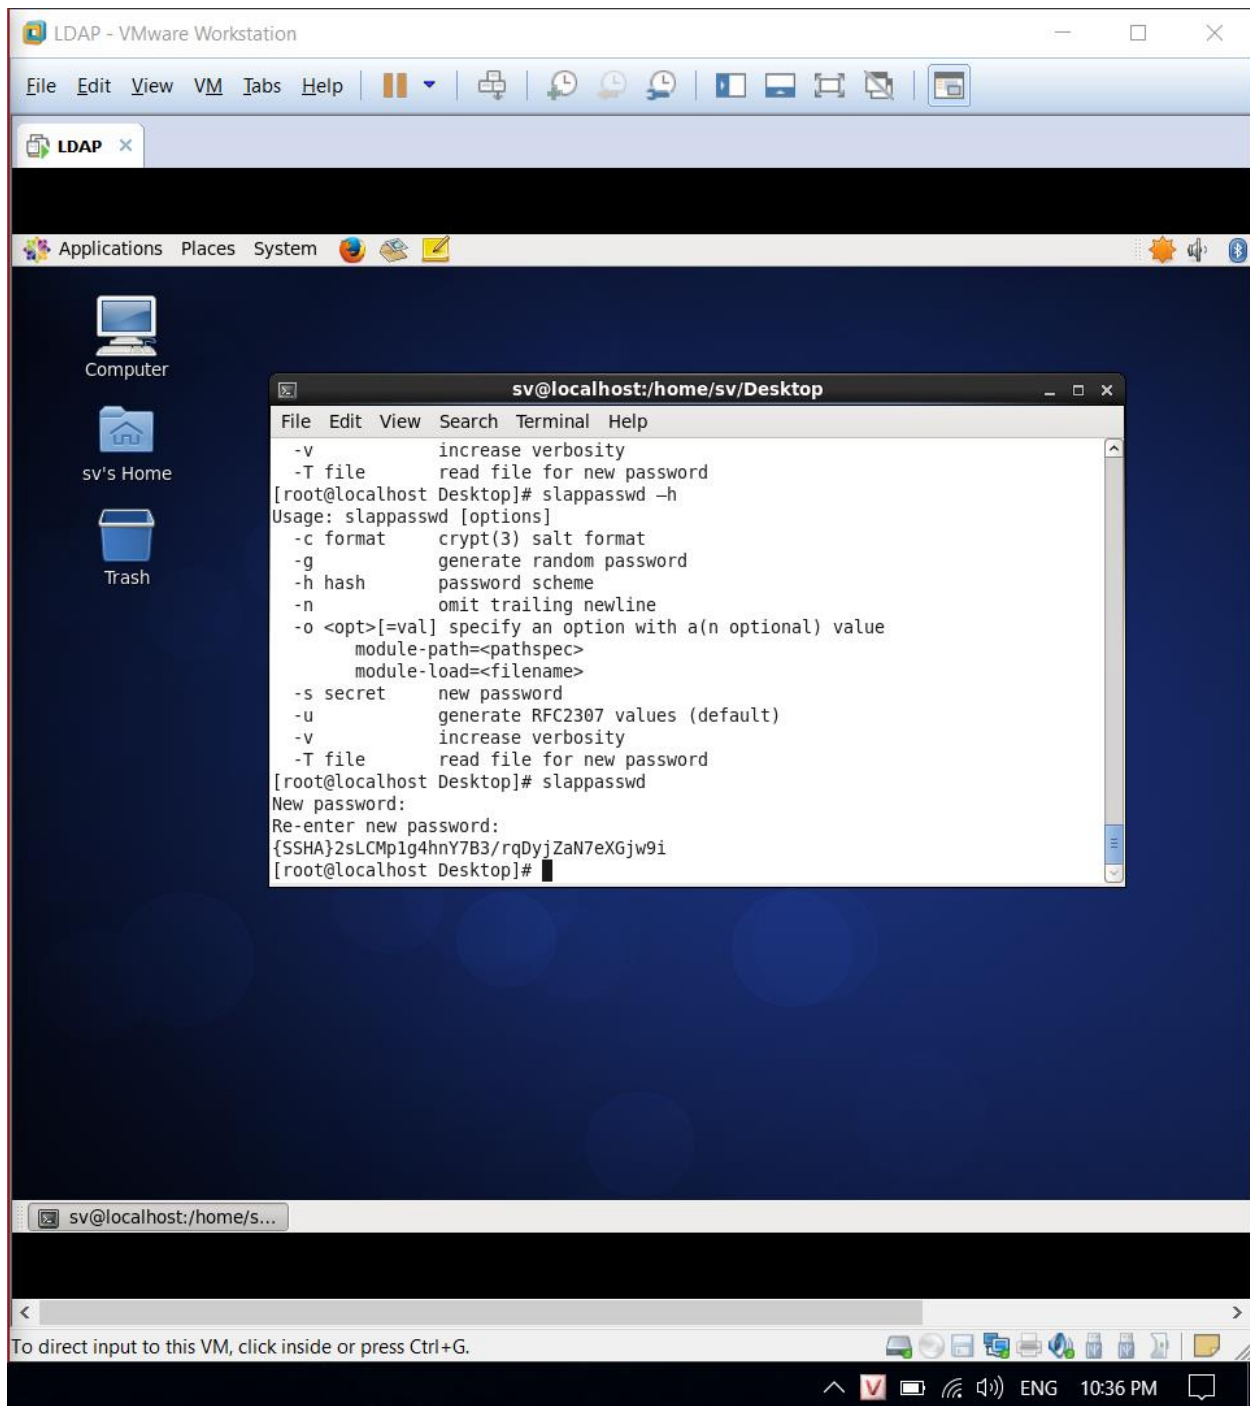

Chỉnh sửa file

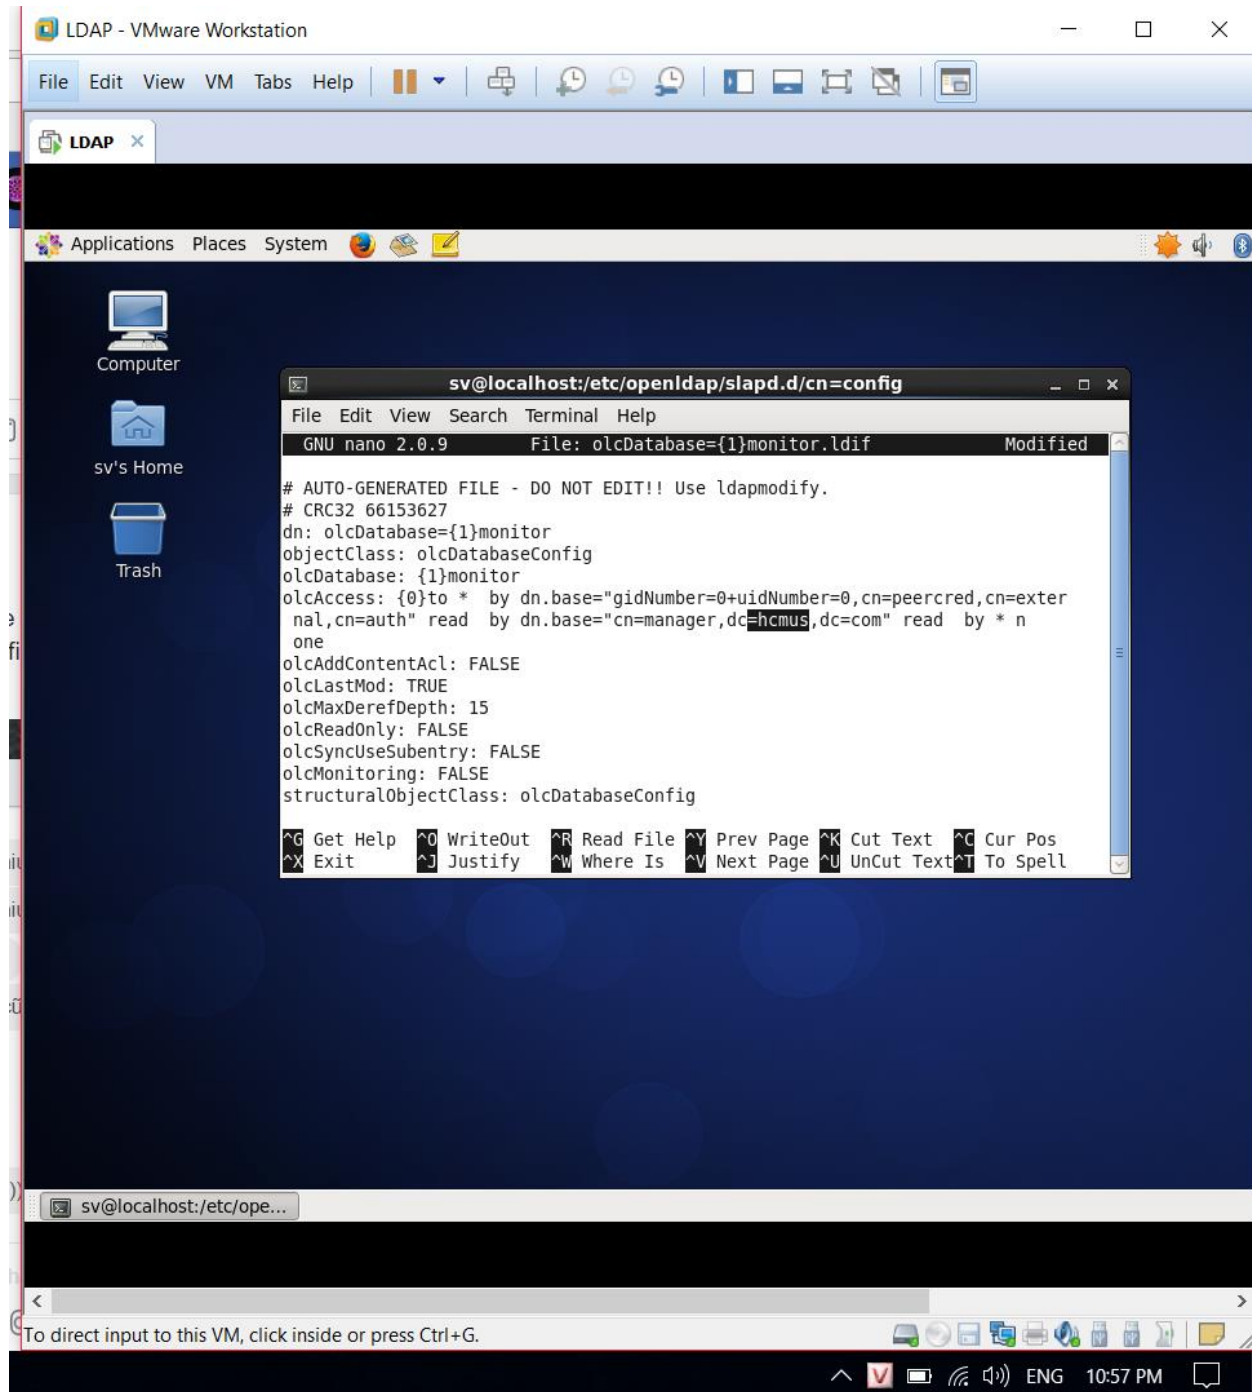


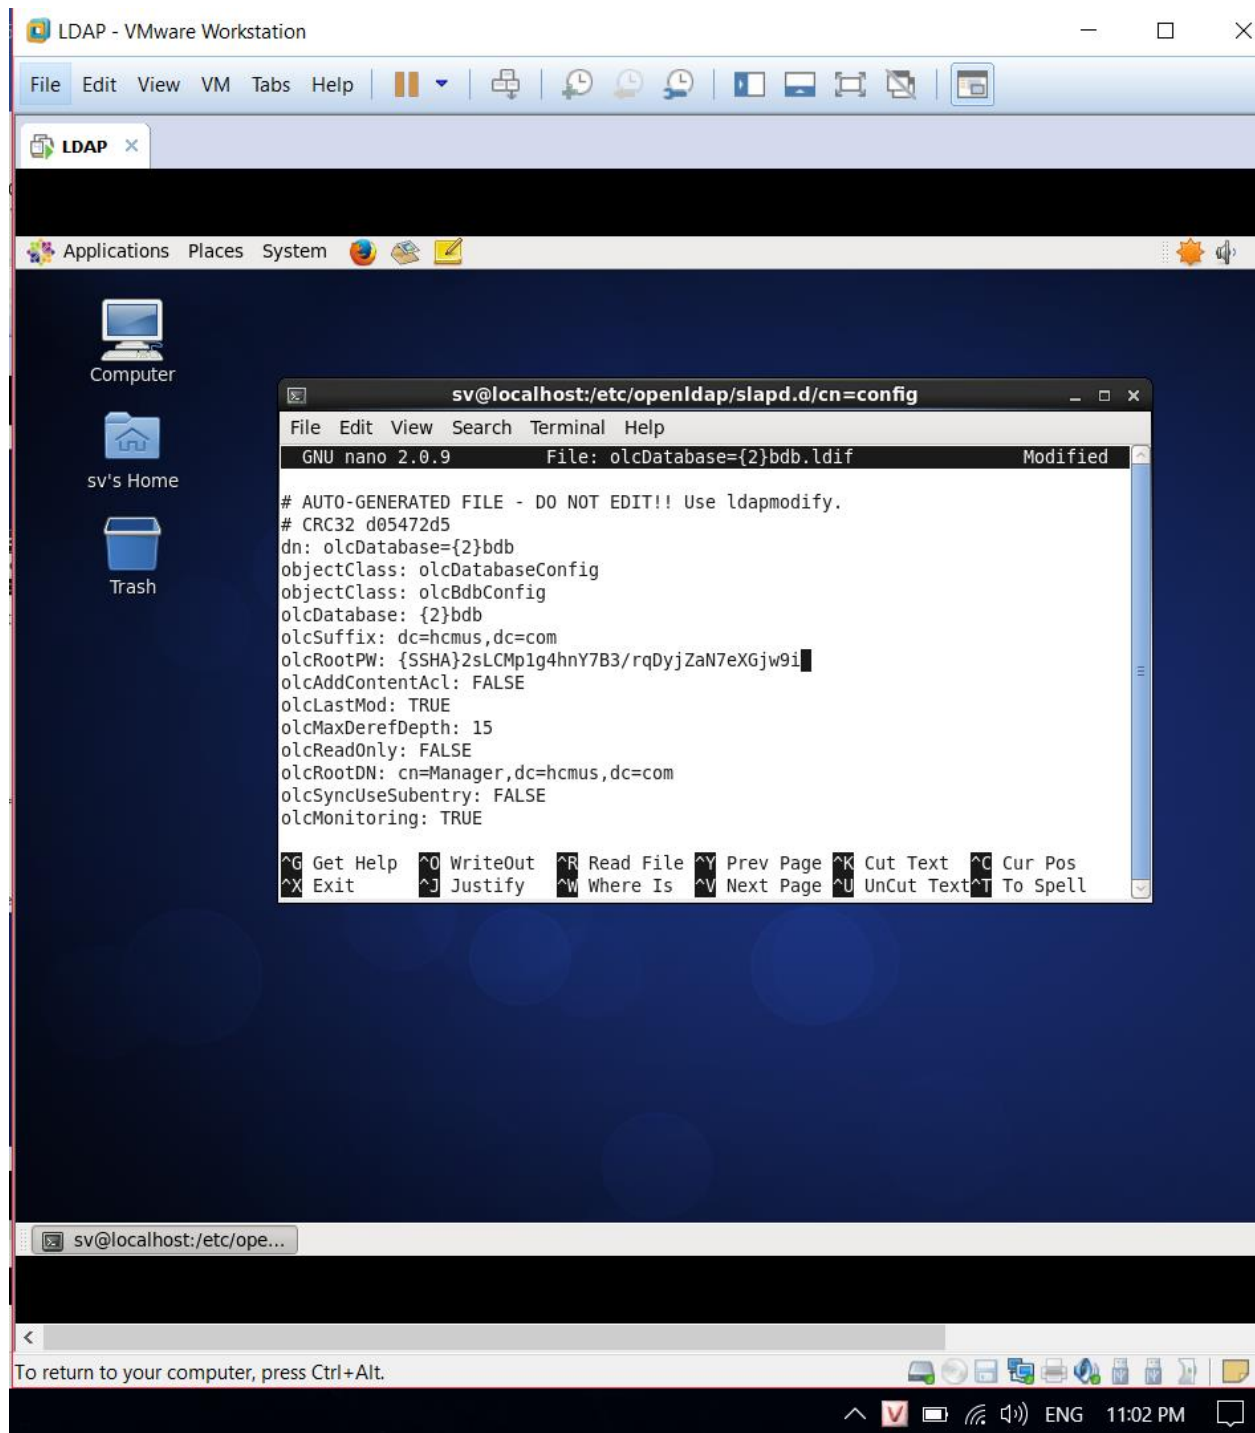


Khởi động lại dịch vụ.

Vào thư mục:


Tạo file hcmus.ldif

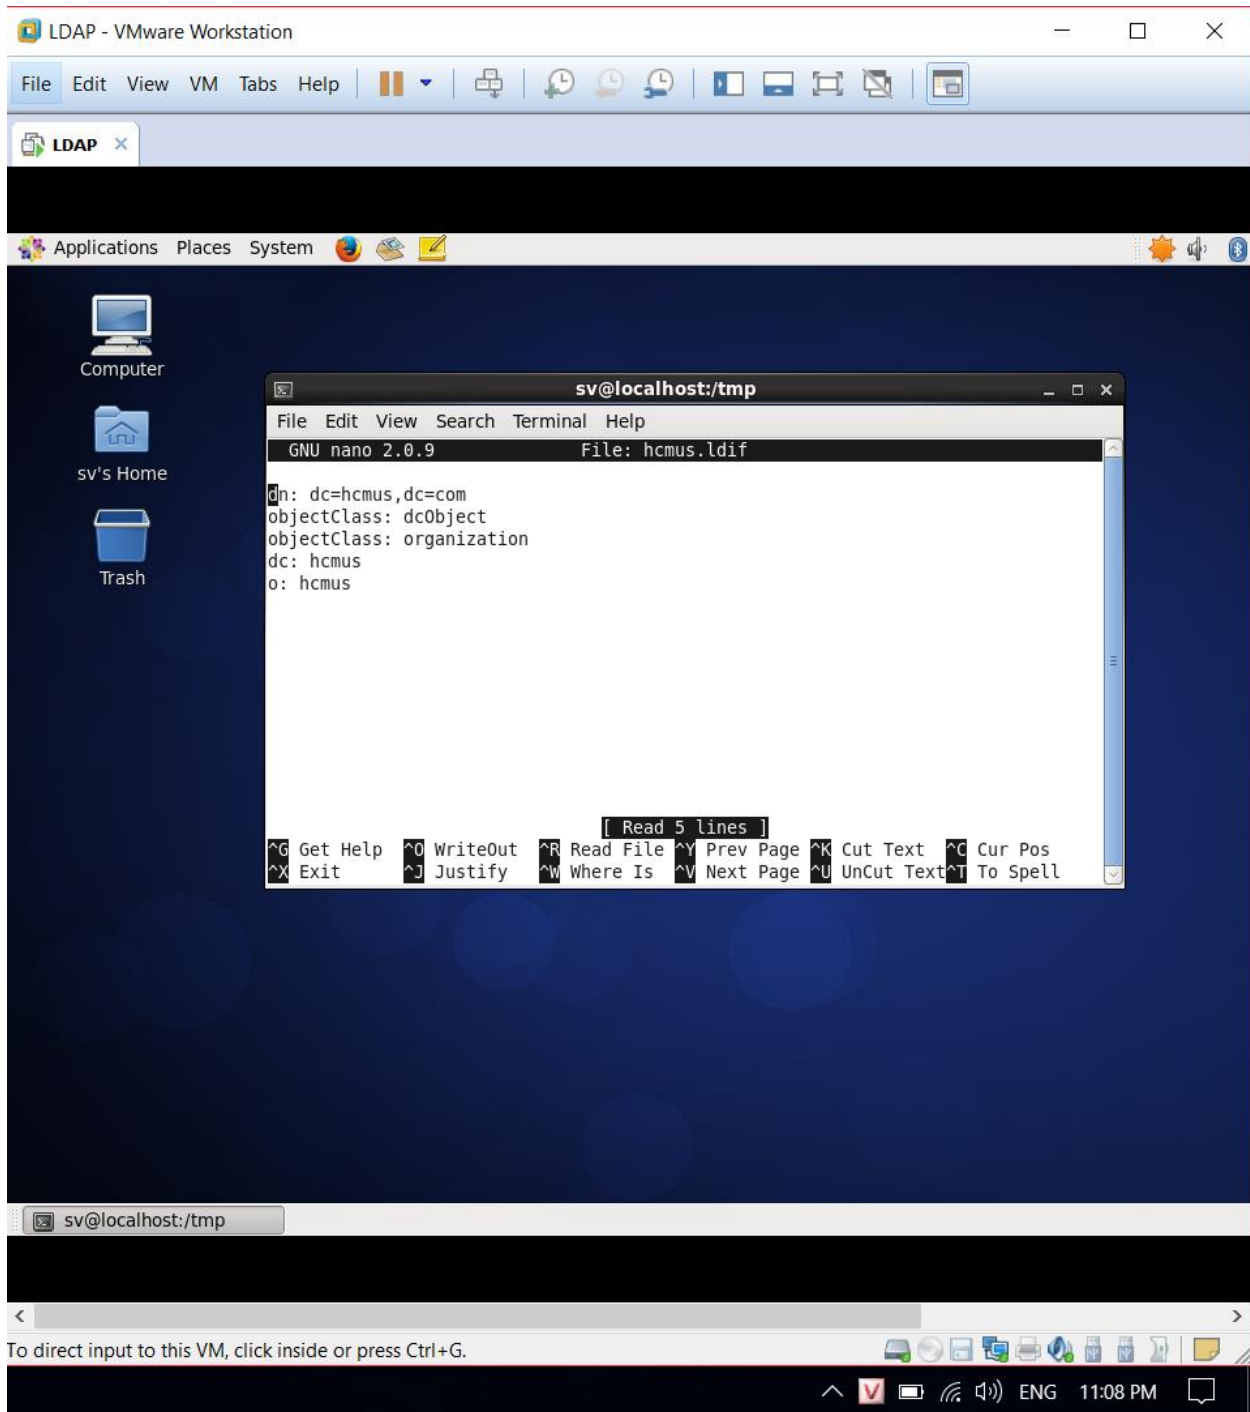


Users.ldif

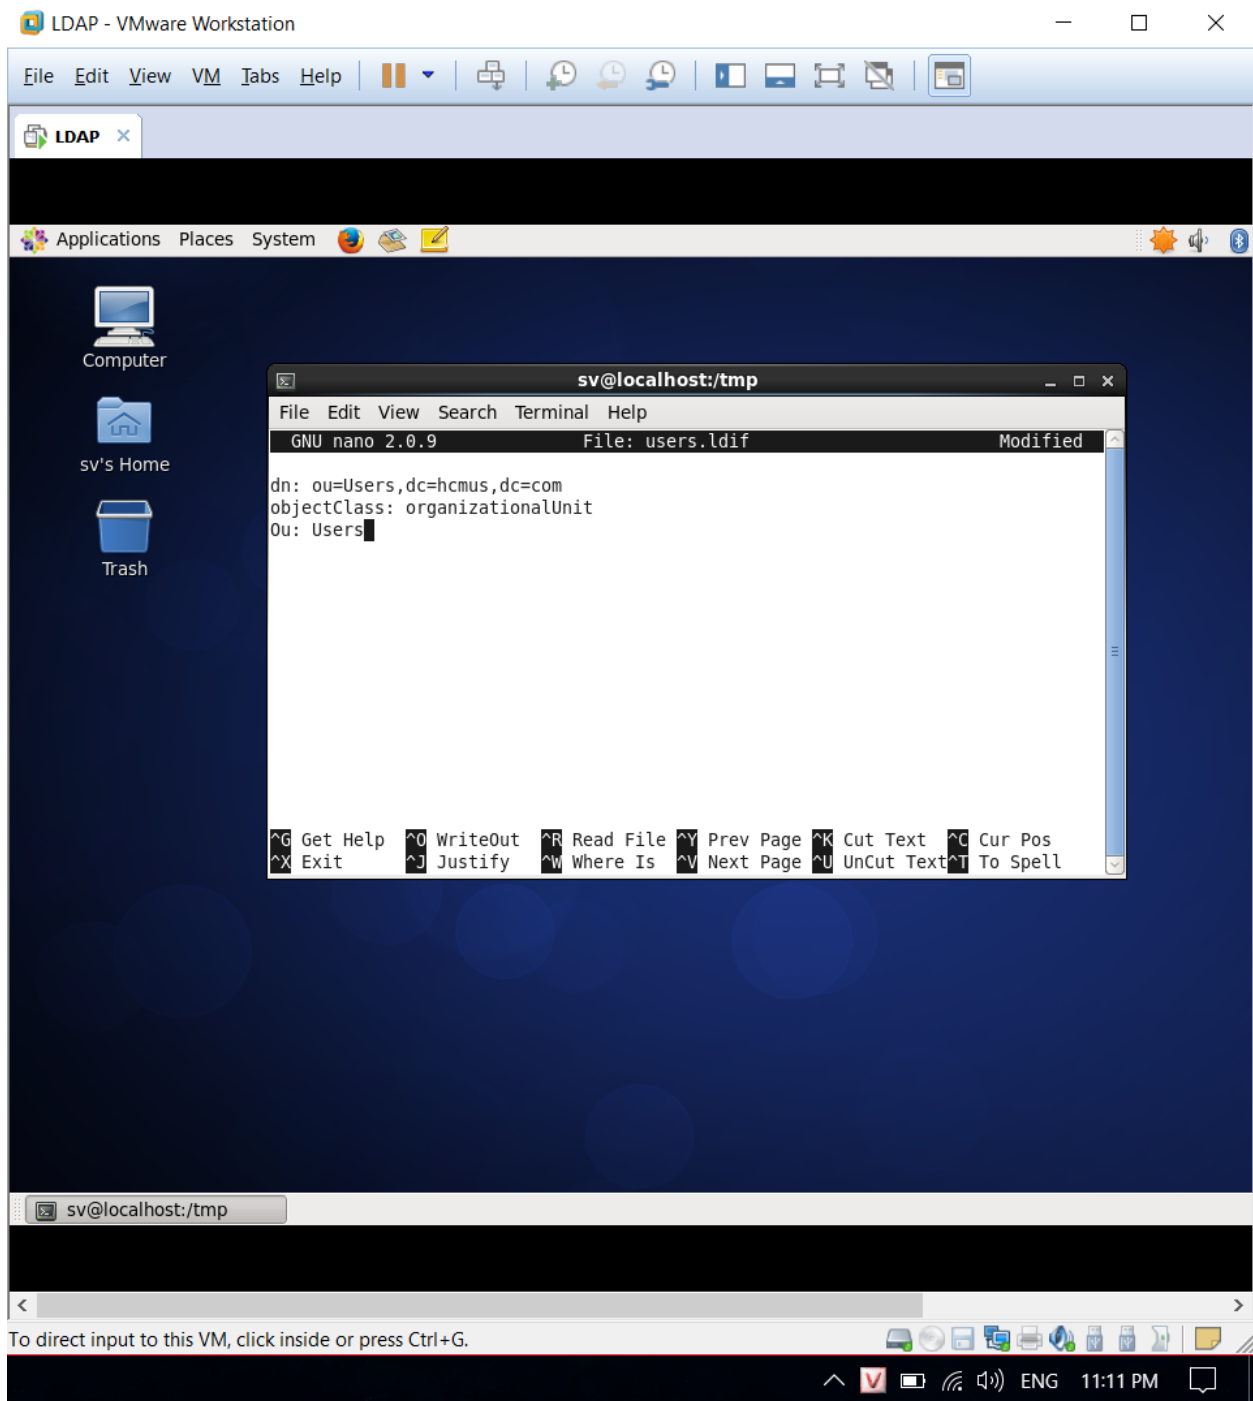

Sv.ldif

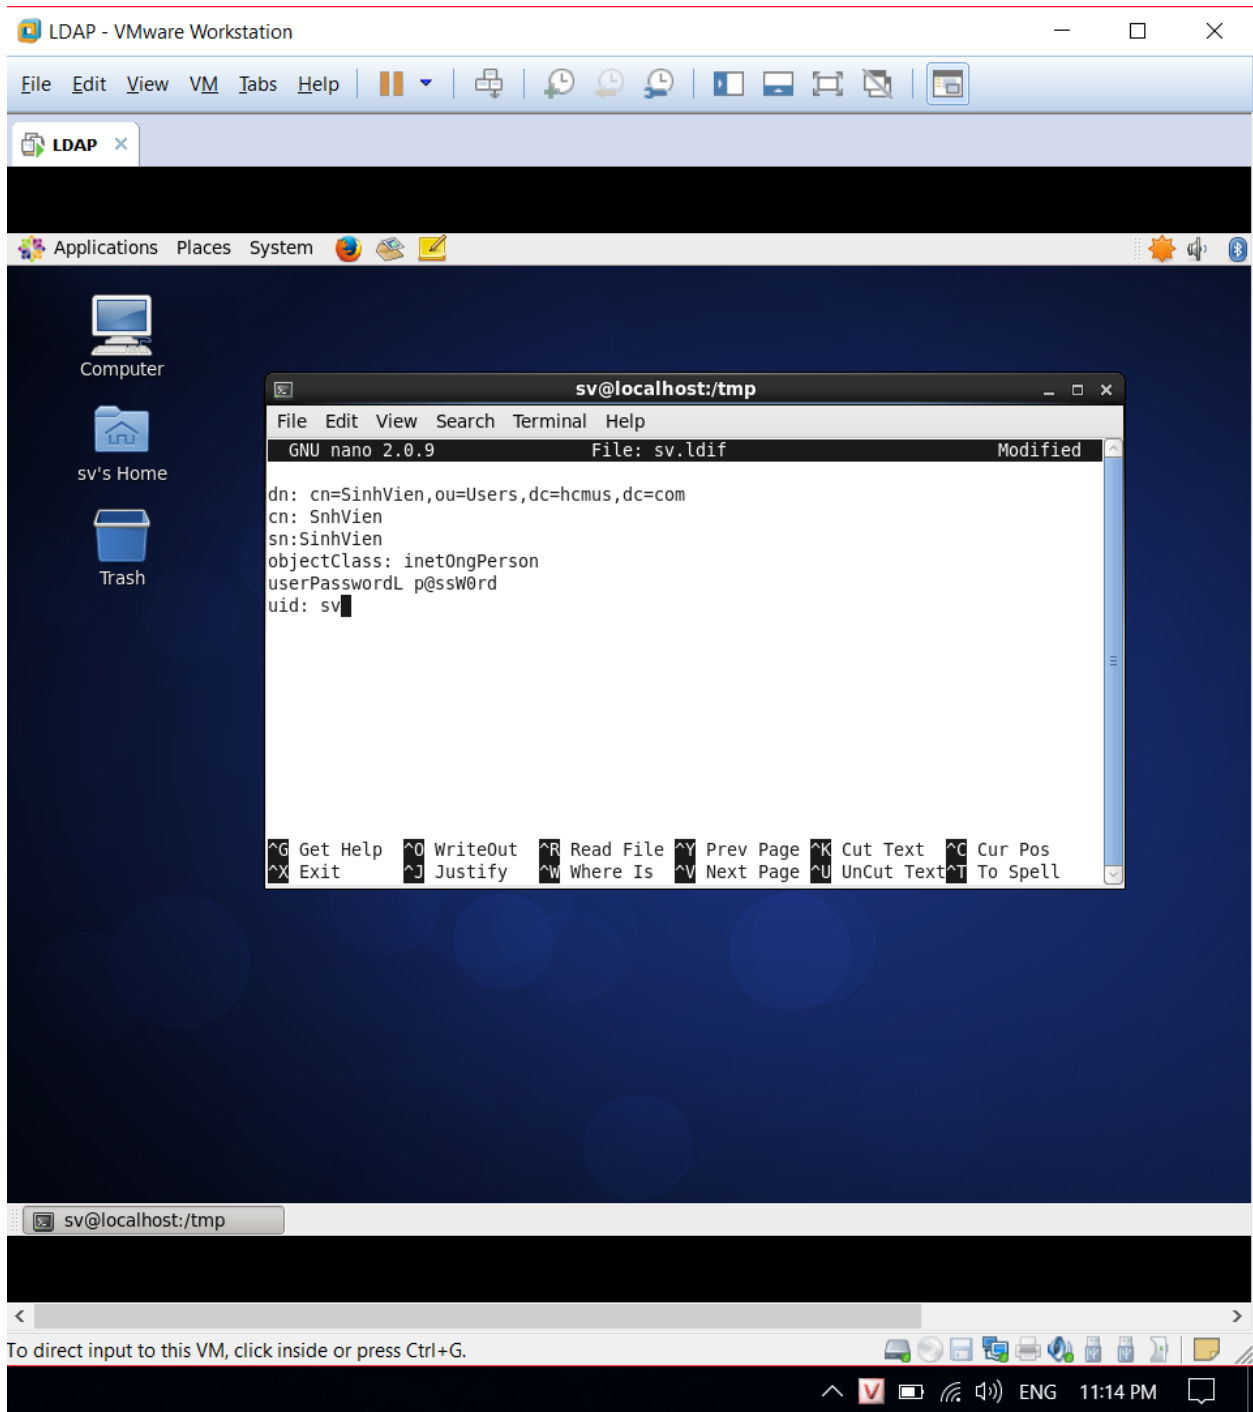

Import

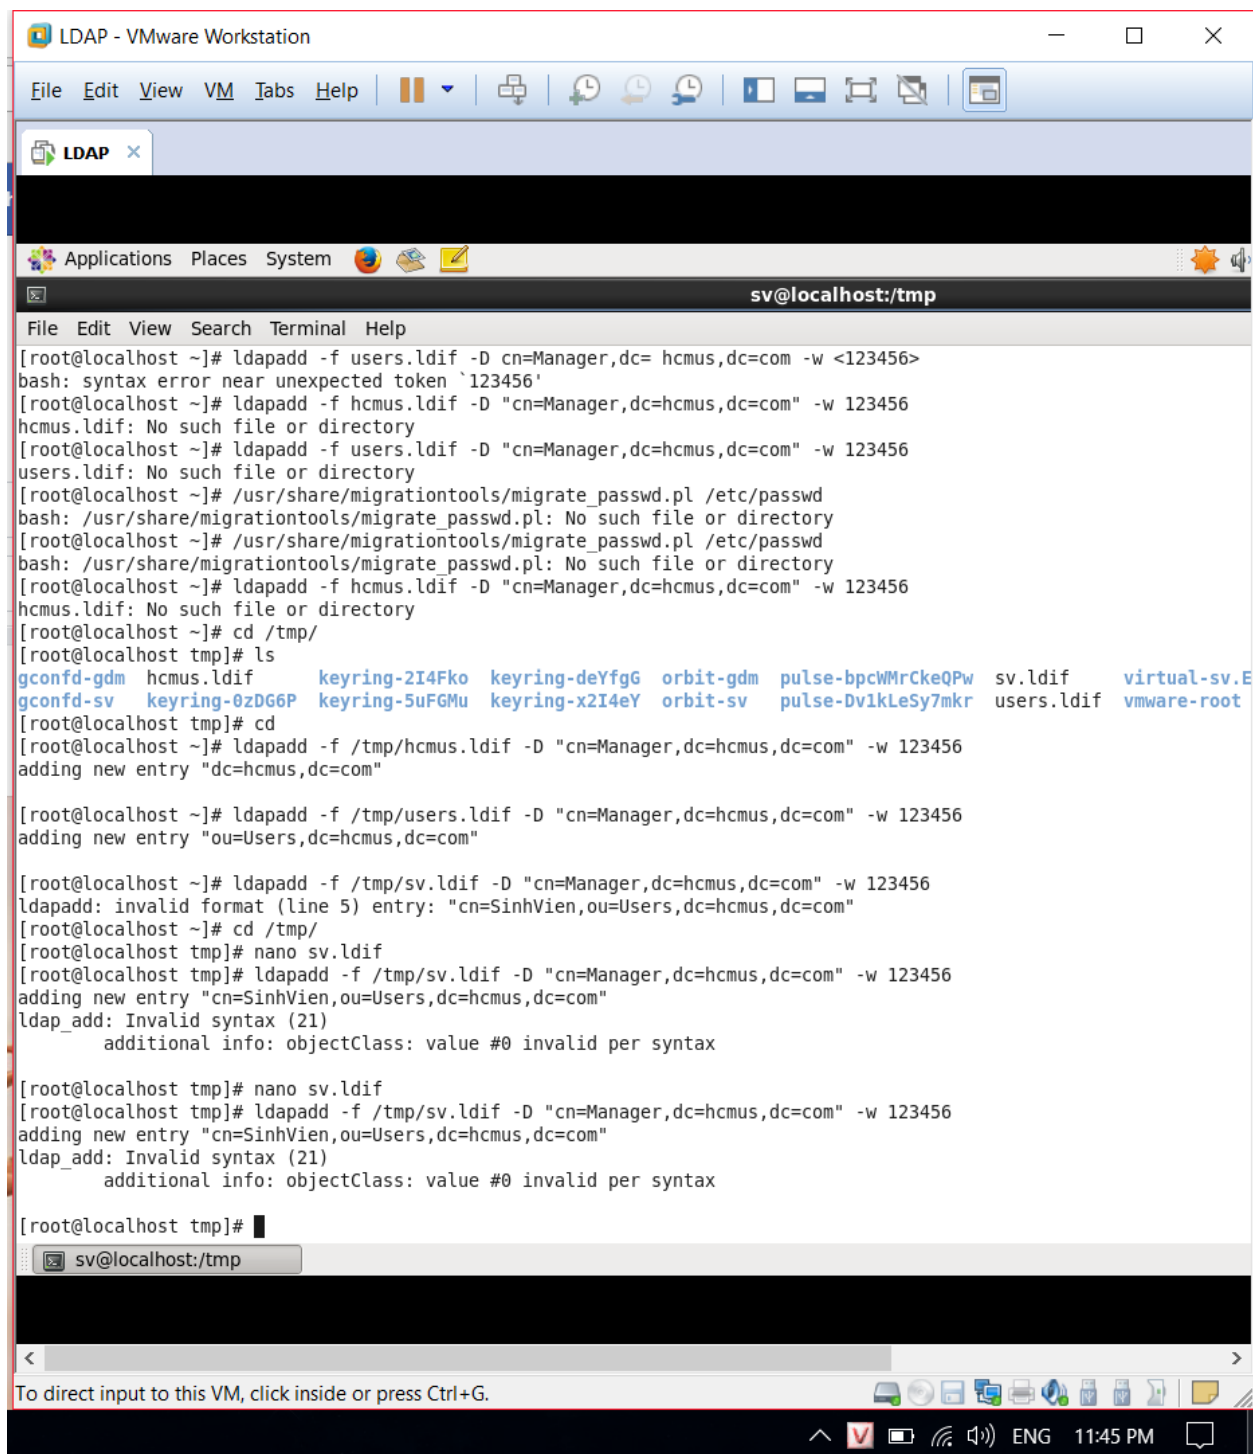

```
LDAP - VMware Workstation
File Edit View VM Tabs Help
LDAP
Applications Places System
sv@localhost:/tmp
File Edit View Search Terminal Help
[root@localhost ~]# ldapadd -f users.ldif -D cn=Manager,dc= hcmus,dc=com -w <123456>
bash: syntax error near unexpected token `123456'
[root@localhost ~]# ldapadd -f hcmus.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
hcmus.ldif: No such file or directory
[root@localhost ~]# ldapadd -f users.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
users.ldif: No such file or directory
[root@localhost ~]# /usr/share/migrationtools/migrate_passwd.pl /etc/passwd
bash: /usr/share/migrationtools/migrate_passwd.pl: No such file or directory
[root@localhost ~]# /usr/share/migrationtools/migrate_passwd.pl /etc/passwd
bash: /usr/share/migrationtools/migrate_passwd.pl: No such file or directory
[root@localhost ~]# ldapadd -f hcmus.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
hcmus.ldif: No such file or directory
[root@localhost ~]# cd /tmp/
[root@localhost tmp]# ls
gconfd-gdm  hcmus.ldif      keyring-2I4Fko  keyring-deYfgG  orbit-gdm  pulse-bpcWMrCkeQPw  sv.ldif      virtual-sv.E
gconfd-sv   keyring-0zDG6P  keyring-5uFGMu  keyring-x2I4eY  orbit-sv   pulse-Dv1kLeSy7mkr  users.ldif   vmware-root
[root@localhost tmp]# cd
[root@localhost ~]# ldapadd -f /tmp/hcmus.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
adding new entry "dc=hcmus,dc=com"

[root@localhost ~]# ldapadd -f /tmp/users.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
adding new entry "ou=Users,dc=hcmus,dc=com"

[root@localhost ~]# ldapadd -f /tmp/sv.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
ldapadd: invalid format (line 5) entry: "cn=SinhVien,ou=Users,dc=hcmus,dc=com"
[root@localhost ~]# cd /tmp/
[root@localhost tmp]# nano sv.ldif
[root@localhost tmp]# ldapadd -f /tmp/sv.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
adding new entry "cn=SinhVien,ou=Users,dc=hcmus,dc=com"
ldap_add: Invalid syntax (21)
        additional info: objectClass: value #0 invalid per syntax

[root@localhost tmp]# nano sv.ldif
[root@localhost tmp]# ldapadd -f /tmp/sv.ldif -D "cn=Manager,dc=hcmus,dc=com" -w 123456
adding new entry "cn=SinhVien,ou=Users,dc=hcmus,dc=com"
ldap_add: Invalid syntax (21)
        additional info: objectClass: value #0 invalid per syntax

[root@localhost tmp]#
sv@localhost:/tmp
To direct input to this VM, click inside or press Ctrl+G.
ENG 11:45 PM
```

Cấu hình tại Client

Cài đặt openldap-clients và nss-pam-ldapd

authconfig-tui - (c) 1999-2005 Red Hat, Inc.

Authentication Configuration

User Information	Authentication
<input type="checkbox"/> Cache Information	<input type="checkbox"/> Use MD5 Passwords
<input checked="" type="checkbox"/> Use LDAP	<input type="checkbox"/> Use Shadow Passwords
<input type="checkbox"/> Use NIS	<input checked="" type="checkbox"/> Use LDAP Authentication
<input type="checkbox"/> Use IPAv2	<input type="checkbox"/> Use Kerberos
<input type="checkbox"/> Use Winbind	<input type="checkbox"/> Use Fingerprint reader
	<input type="checkbox"/> Use Winbind Authentication
	<input type="checkbox"/> Local authorization is sufficient

Cancel

Next

<Tab>/<Alt-Tab> between elements | <Space> selects | <F12> next screen