

Log Analysis Report

ADMIN

Production • Last 24 hours

Report Date

05 Jun 2026, 10:45 UTC

Generated At

05 Jun 2026, 10:45 UTC

Role: ADMIN | Env: Production

Services (All Services — Admin Access)

Service	Errors	Warnings	Req Approved	Req Rejected	Users Added
gateway-service	33	0	0	0	0
logservice	3	27	0	0	0
service-management-service	0	6	0	0	0
asset-management-service	0	0	0	0	0

System Health Overview

462	36	33	343	WARNING
Total Logs	Errors	Warnings	Info	Overall Status

Key Insights

■ High Error Rate

Error rate is 7.8% (36/462 logs) — exceeds the 5% critical threshold. Immediate investigation required.

■ Dominant Error Pattern

'Database connection failed' accounts for 11% of all errors (4 occurrences). Resolving this single error type would eliminate the majority of error volume.

■ Cross-Service Impact


2 service(s) are currently reporting errors or warnings. Review the service dependency graph for potential cascading failures.

Top Errors (by Frequency)

#	Error Message	Service	Category	Count	% of Total
1	Database connection failed	gateway-service	Infrastructure	4	11.1%
2	Null pointer	gateway-service	Application	4	11.1%

3	Failed to initialize Elasticsearch index tem...	logservice	External	3	8.3%
4	[9c5f70e0-486] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
5	[cfc75553-487] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
6	[b8b4a8ff-488] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
7	[7c6ec539-489] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
8	[acf0f987-490] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
9	[f09209c9-491] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%
10	[7e41e17c-492] 500 Server Error for HTTP GE...	gateway-service	Application	1	2.8%

■ Analysis Visualisations

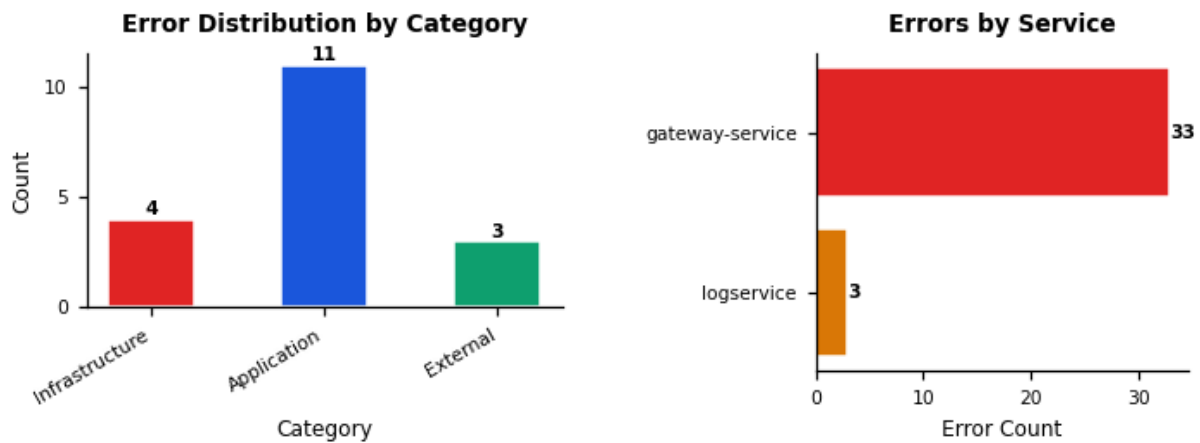

Recommendations & Fixes

HIGH

1. Database connection failed [\[gateway-service\]](#) (4 occurrences)

Why it happened: The service cannot open a TCP connection to a downstream dependency. Common causes: crashed downstream service, wrong hostname/port in config, or a blocked firewall / NetworkPolicy rule.

How to fix:

- 1 Verify the target is reachable from the pod: `nc -zv <host> <port>`
.
- 2 Confirm env vars / ConfigMaps for host and port are correct in the failing service Deployment.
.
- 3 Check Kubernetes NetworkPolicy and cloud security groups for ingress/egress rules between affected namespaces.
.
- 4 Inspect connection pool settings (max-size, timeout, idle-eviction) — an exhausted pool presents identically to an unreachable host.
.
- 5 Restart the downstream dependency if crashed and confirm it passes its readiness probe before re-routing traffic.
.

HIGH

2. Null pointer [\[gateway-service\]](#) (4 occurrences)

Why it happened: `NullPointerException` or missing expected value — an object was accessed before being initialised, or optional data was assumed to be present.

How to fix:

- 1 Locate the full stack trace in the logs to identify the exact class and line.
.
- 2 Add null checks or use `Optional<>` / `Optional.ofNullable()` before dereferencing the object.
.
- 3 Add input validation at the API / service boundary so null values are rejected early with a descriptive error.
.
- 4 Write a unit test reproducing the null condition to prevent regression.
.

HIGH

3. Failed to initialize Elasticsearch index template 'app-logs-templ' [logservice] (3 occurrences)

Why it happened: Elasticsearch cluster error. Common causes: shard allocation failure, JVM heap pressure > 85%, or an index mapping conflict.

How to fix:

- 1 Check cluster health: GET /_cluster/health — red = data loss risk, yellow = replica unassigned.
.
- 2 Identify unassigned shards: GET /_cat/shards?h=index,shard,state,unassigned.reason&s;=state
.
- 3 Check JVM heap: GET /_nodes/stats/jvm — if heap > 85%, increase node memory or reduce index count.
.
- 4 Look for mapping conflicts: GET /<index>/_mapping and compare field types across index versions.
.
- 5 If disk is full, add nodes or delete old indices via an ILM policy.
.

MEDIUM

4. [9c5f70e0-486] 500 Server Error for HTTP GET "/api/logs?from=202 [gateway-service] (1 occurrences)

Why it happened: Application-level error — exact root cause requires log inspection to identify the originating module.

How to fix:

- 1 Search for the full stack trace of '[9c5f70e0-486] 500 Server Error for HTTP GET "/api/log' in the log management system.
.
- 2 Identify the service, class, and method that originates this error.
.
- 3 Determine if the error is transient (add retry with exponential back-off) or deterministic (fix the root cause directly).
.
- 4 Add a targeted alert rule so future occurrences are flagged immediately.
.

MEDIUM

5. [cfc75553-487] 500 Server Error for HTTP GET "/api/logs?from=202 [gateway-service] (1 occurrences)

Why it happened: Application-level error — exact root cause requires log inspection to identify the originating module.

How to fix:

- 1 Search for the full stack trace of '[cfc75553-487] 500 Server Error for HTTP GET "/api/log' in the log management system.
.
- 2 Identify the service, class, and method that originates this error.
.
- 3 Determine if the error is transient (add retry with exponential back-off) or deterministic (fix the root cause directly).
.
- 4 Add a targeted alert rule so future occurrences are flagged immediately.
.

LOW

6. Operational Recommendation

How to fix:

- 1 Inspect recent gateway-service deploys, dependencies, and retries if its error count keeps rising.
.

LOW

7. Operational Recommendation

How to fix:

- 1 Correlate the top error message with infrastructure changes and upstream service failures.
.