

Tata CLiQ E-Commerce Database Management System


PAYMENT DETAILS MANAGEMENT

1.Database Design:

1.1 Payment Table Attributes

Attribute	Data Type	Constraint
Payment_ID	NUMBER(5)	Primary Key
Order_ID	NUMBER(5)	Foreign Key
Payment_Date	DATE	—
Payment_Method	VARCHAR2(30)	—
Amount	NUMBER(10,2)	—
Payment_Status	VARCHAR2(20)	—
Transaction_ID	VARCHAR2(50)	UNIQUE

2. Table Relationships

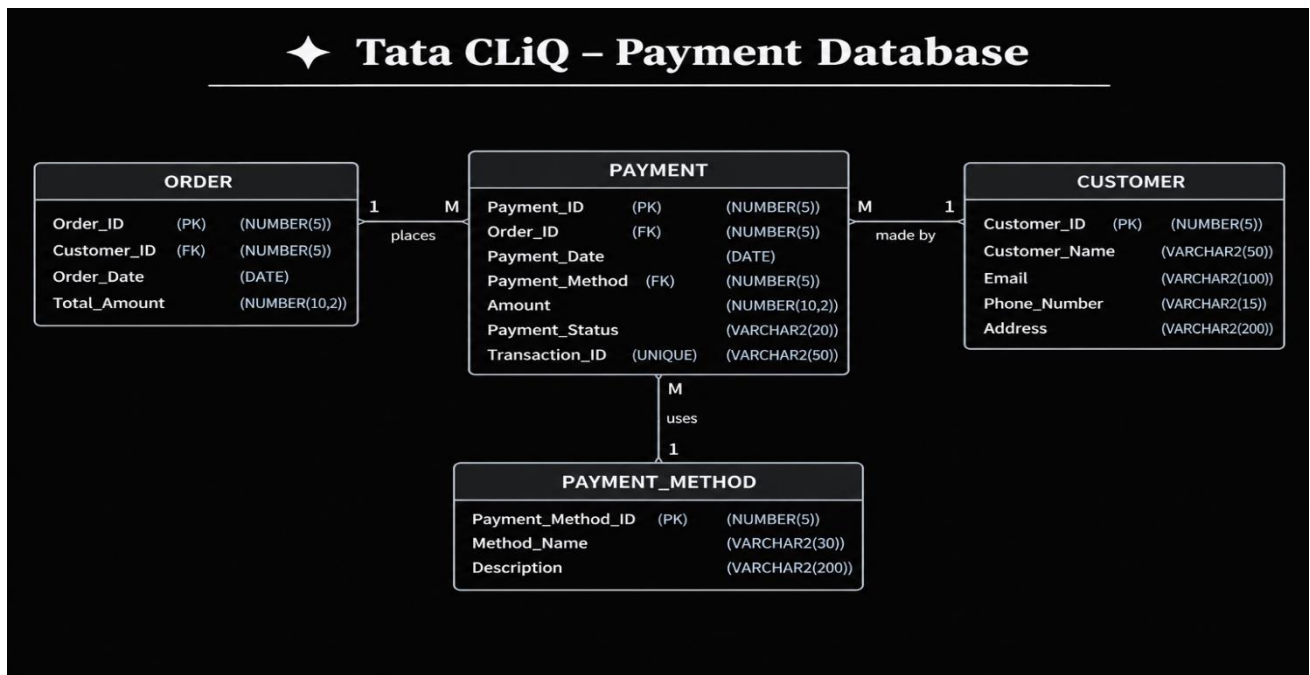

3. Table Creation

```
SQL> CREATE TABLE Payment (  
  2     Payment_ID NUMBER(5),  
  3     Order_ID NUMBER(5),  
  4     Payment_Date DATE,  
  5     Payment_Method VARCHAR2(20),  
  6     Amount NUMBER(10,2),  
  7     Payment_Status VARCHAR2(20),  
  8     Transaction_ID VARCHAR2(30)  
  9 );
```

Table created.

4. Payment Data Insertion

```
SQL> INSERT INTO Payment VALUES  
  2  (1, 1001, TO_DATE('20-09-2026','DD-MM-YYYY'), 'UPI', 2500, 'Success', 'TXN10001');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Payment VALUES  
  2  (2, 1002, TO_DATE('21-09-2026','DD-MM-YYYY'), 'Credit Card', 1800, 'Success', 'TXN10002');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Payment VALUES  
  2  (3, 1003, TO_DATE('22-09-2026','DD-MM-YYYY'), 'Debit Card', 3200, 'Success', 'TXN10003');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Payment VALUES  
  2  (4, 1004, TO_DATE('23-09-2026','DD-MM-YYYY'), 'Cash on Delivery', 1500, 'Pending', 'TXN10004');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Payment VALUES  
  2  (5, 1005, TO_DATE('24-09-2026','DD-MM-YYYY'), 'UPI', 4200, 'Success', 'TXN10005');  
  
1 row created.  
  
SQL>  
SQL> COMMIT;  
  
Commit complete.
```

5. Manage Payment Transactions

5.1 Display Successful payments

```
SQL> SELECT *
2 FROM Payment
3 WHERE Payment_Status = 'Success';
```

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
PAYMENT_STATUS		TRANSACTION_ID		
1	1001	20-SEP-26	UPI	2500
Success		TXN10001		
2	1002	21-SEP-26	Credit Card	1800
Success		TXN10002		
3	1003	22-SEP-26	Debit Card	3200
Success		TXN10003		

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
PAYMENT_STATUS		TRANSACTION_ID		
5	1005	24-SEP-26	UPI	4200
Success		TXN10005		
1	1001	20-SEP-26	UPI	2500
Success		TXN10001		
2	1002	21-SEP-26	Credit Card	1800
Success		TXN10002		

5.2 Display Failed Payments

```
SQL> SELECT *
2 FROM Payment
3 WHERE Payment_Status = 'Failed';
```

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
PAYMENT_STATUS		TRANSACTION_ID		
3	1003	22-SEP-26	Debit Card	3200
Failed		TXN10003		

6. Modify Payment Status

```
SQL> UPDATE Payment
  2 SET Payment_Status = 'Success'
  3 WHERE Payment_ID = 4;
```

3 rows updated.

```
SQL>
```

```
SQL> COMMIT;
```

Commit complete.

```
SQL>
```

```
SQL> SELECT * FROM Payment
  2 WHERE Payment_ID = 4;
```

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
PAYMENT_STATUS	TRANSACTION_ID			
Success	4	1004 23-SEP-26	Cash on Delivery TXN10004	1500
Success	4	1004 23-SEP-26	Cash on Delivery TXN10004	1500
Success	4	1004 23-SEP-26	Cash on Delivery TXN10004	1500

7. Analyze Payment Methods

```
SQL> SELECT *
  2 FROM Payment
  3 WHERE Payment_Status = 'Failed';
```

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
PAYMENT_STATUS	TRANSACTION_ID			
Failed	3	1003 22-SEP-26	Debit Card TXN10003	3200

```
SQL> SELECT Payment_Status, COUNT(*) AS Total_Payments
2 FROM Payment
3 GROUP BY Payment_Status;
```

PAYMENT_STATUS	TOTAL_PAYMENTS
Success	14
Failed	1

8. Payment Transaction Report

```
SQL> SELECT
2 Payment_ID,
3 Order_ID,
4 Payment_Date,
5 Payment_Method,
6 Amount,
7 Payment_Status,
8 Transaction_ID
9 FROM Payment
10 ORDER BY Payment_Date;
```

PAYMENT_ID	ORDER_ID	PAYMENT_D	PAYMENT_METHOD	AMOUNT
Success	1	1001 20-SEP-26	UPI	2500
		TXN10001		
Success	1	1001 20-SEP-26	UPI	2500
		TXN10001		
Success	1	1001 20-SEP-26	UPI	2500
		TXN10001		