

Unless stated otherwise, **you are not allowed to use** built-in Python functions apart from `len` (for arrays). Also, unless stated otherwise, no other data structures can be used apart from arrays. In particular, you cannot use built-in list operations for appending to a list.

You can use subarray-creating constructs like `A[lo:hi]`.

You can use helper functions.

If you find a specific part too challenging, remember you can **move on and come back** to it later – try not to get stuck.

Question 1

This question is about algorithms on integers and on arrays.

- a) Write a Python function

```
def allEqual(x,y,z)
```

which takes as inputs three integers and returns `True` if they are all equal, and `False` otherwise.

[3 marks]

- b) Write a Python function

```
def tri(x,y,z)
```

which takes as inputs three integers and returns `True` if the sum of any two of them is greater or equal to the remaining one, and `False` otherwise. For example, `tri(3,5,3)` should return `True`, as $3+5 \geq 3$, $3+3 \geq 5$ and $5+3 \geq 3$. On the other hand, `tri(3,5,1)` should return `False`, as $3+1$ is smaller than 5.

[4 marks]

- c) Write a Python function

```
def isSuperSorted(A)
```

which takes as input an array of integers `A` and returns `True` if each element of the array is greater or equal than the square of the element before it, and `False` otherwise. For example, `isSuperSorted([1,2,4,17])` should return `True` ($1*1 \leq 2$, $2*2 \leq 4$, $4*4 \leq 17$), while `isSuperSorted([1,4,2,17])` should return `False`, and `isSuperSorted([1,2,4,10])` should also return `False` ($4*4 = 16 > 10$).

[4 marks]

- d) Write a Python function

```
def summify(A)
```

that takes as input an array `A` and returns a new array with the same length as `A` that contains all initial sums of elements of `A`, that is the result should be:

```
[A[0], A[0]+A[1], A[0]+A[1]+A[2], ..., A[0]+A[1]+...+A[len(A)-1]]
```

For example, `summify([1,21,4,10])` should return `[1,22,26,36]`.

[5 marks]

e) Using recursion, write a Python function

```
def applyI(f,x,i)
```

that applies i -many times f to x . For example, `applyI(f,42,5)` should compute and return the result of `f(f(f(f(f(42)))))`.

Note that `applyI(f,x,0)` should simply return x .

[4 marks]

f) Using recursion, write a Python function

```
def fold(A, m, f)
```

which takes as input an array of integers A , an integer m , and a function f that takes as input two integers and returns an integer. The function `fold` should apply f to m and $A[0]$, then apply f to the result of the latter and $A[1]$, and so on, and return the final result. Note that `fold([],m,f)` should return m .

For example, `fold([10,20,30,40],5,f)` should return:

```
f(f(f(f(f(5,10),20),30),40)
```

[5 marks]

Question 2

This question is about array lists.

a) Consider array lists, implemented using array and count. What is the worst-case time complexity, in terms of big- Θ , of each of these operations:

- i. add an element in the array list (if no resizing is required) :
- ii. search for an element in the array list :
- iii. remove an element from the array list :
- iv. add an element in the array list (when resizing is required)

Notes: Express the time complexity with respect to the size n of the array list (i.e. the number of elements that it contains). Assume the array list is not sorted. You do not need to justify you answers.

[4 marks]

b) Explain in your own words, and in 2-3 sentences, what is the purpose of the resizing function in an array list implementation that uses array and count.

[2 marks]

The next 4 sub-questions ask you to write functions for the `ArrayList` class.

c) Write a function

```
def removeAll(self, A)
```

that removes from the array list (the one represented by `self`) all the elements of the array A .

[2 marks]

d) Write a function

```
def isEmpty(self)
```

that returns `True` if the size of the array list is less than half the size of its internal array, and otherwise `False`.

[3 marks]

- e) In the same way that we resize-up our internal array when it gets too full, we can also resize it down when it is too empty. Write a function

```
def _resizeDown(self)
```

that uses the function `isTooEmpty` defined above to check if the size of the array list is less than half than that of its internal array and, if so, it resizes the internal array down to half its original size. Otherwise, the array list is left as it is.

Notes: The order of the elements in the array list should remain the same, and no elements should be lost.

[4 marks]

- f) Write a function

```
def duplicate(self)
```

that changes the array list by adding after each element a copy of itself. For example, if the array list `ls` is `[2,4,1,5,1,4]`, then `ls.duplicate()` should change it to `[2,2,4,4,1,1,5,5,1,1,4,4]`.

[4 marks]

- g) Now consider an implementation of array lists that stores integers and uses array and count, and where the array is kept sorted in increasing order.

In the space below, explain what is the best worst-case time complexity, in terms of big- Θ , that we can achieve for each of these operations:

- add an element in the array list (if no resizing is required)
- search for an element in the array list
- remove an element from the array list

Notes: Express the time complexity with respect to the size n of the array list (i.e. the number of elements that it contains).

[6 marks]

Question 3

This question is about linked lists and trees.

```
class Node:
```

```
    def __init__(self, d, n):
        self.data = d
        self.next = n
```

In the first two sub-questions we consider linked lists which are sequences of connected nodes, taken from the class above.

- a) You are asked to solve the following pointer game. Start from this initial configuration:

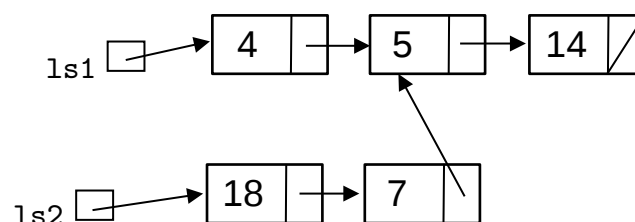


Figure 1: initial pointer configuration

Perform the following sequences of operations and draw the final configuration in each case. Each time you should start from the configuration in Figure 1 above.

i. `ls2.next = ls2.next.next`

ii. `ptr = ls2`
`while ptr != None:`
 `ptr.data = 42`
 `ptr = ptr.next`

iii. `ptr = ls1`
`while ptr.next != None:`
 `ptr = ptr.next`
`ptr.next = Node(42,ls2)`

[6 marks]

- b) This sub-question is about binary search trees. Draw the binary search tree we obtain if we start from the empty tree and add consecutively the numbers:

40, 6, 12, 45, 0, 54, 0, 42, 13, 44, 99, 4

[4 marks]

- c) Starting each time from the binary search tree you constructed in part c, and using the remove functions that we saw in the lectures, remove from the tree the nodes containing the following numbers and draw the new binary search tree we obtain:

- i. 4
ii. 42
iii. 40

[4 marks]

- d) This sub-question is about heaps. Draw the heap we obtain if we start from the empty heap and add consecutively the numbers:

4, 6, 12, 45, 0, 54, 0, 42, 13, 44, 99, 4

[4 marks]

- e) Write a function

```
def third(A)
```

that takes as input an array `A` of integers that represents a heap and returns the third largest element in `A`. For example, if the three largest elements in `A` are 42, 30 and 27, it should return 27. If `A` has length less than 3, `third(A)` should return `None`.

[4 marks]

- f) This sub-question is about linked lists. Write a Python function

```
def filter(ls, t)
```

that takes as input a linked list `ls` (i.e. an object of the class `Node`), and a test function `t`, i.e. such that `t(d)` returns a boolean for any value `d` in the list. The `filter` function returns a new list that contains all elements `d` of `ls` that pass the test, i.e. such that `t(d)` is `True`. The original list `ls` should not be changed.

For example, if `ls` is `[4, 42, 3, 2, 1]`, and `even` is the function:

```
def even(d):
```

```
    if d%2 == 0: return True
    return False
```

then `filter(ls,even)` should return a new linked list `[4, 42, 2]`.
On the other hand, `filter([3, 5],even)` should return `None`.

[5 marks]

Appendix: ArrayList code

```
class ArrayList:
    def __init__(self):
        self.inArray = [0 for i in range(10)]
        self.count = 0

    def get(self, i):
        return self.inArray[i]

    def set(self, i, e):
        self.inArray[i] = e

    def length(self):
        return self.count

    def append(self, e):
        self.inArray[self.count] = e
        self.count += 1
        if len(self.inArray) == self.count:
            self._resizeUp()

    def insert(self, i, e):
        for j in range(self.count,i,-1):
            self.inArray[j] = self.inArray[j-1]
        self.inArray[i] = e
        self.count += 1
        if len(self.inArray) == self.count:
            self._resizeUp()

    def remove(self, i):
        self.count -= 1
        val = self.inArray[i]
        for j in range(i,self.count):
            self.inArray[j] = self.inArray[j+1]
        return val

    def _resizeUp(self):
        newArray = [0 for i in range(2*len(self.inArray))]
        for j in range(len(self.inArray)):
            newArray[j] = self.inArray[j]
        self.inArray = newArray
```