

THIS IS MY SQL PROJECT

pizza sales

THIS PROJECT ANALYZES PIZZA SALES DATA USING SQL QUERIES TO IDENTIFY SALES TRENDS,SELLING PIZZAS,REVENUE AND CUSTOMER PREFERENCES


TABLES USED:

PIZZAS
ORDERS
ORDERS_DETAILS
PIZZA_TYPES


MAIN CONCEPTS:

SELECT
WHERE
GROUP BY
ORDER BY
JOIN
AGGREGATE FUNCTIONS

– RETRIEVE THE TOTAL NO OF ORDERS PLACED

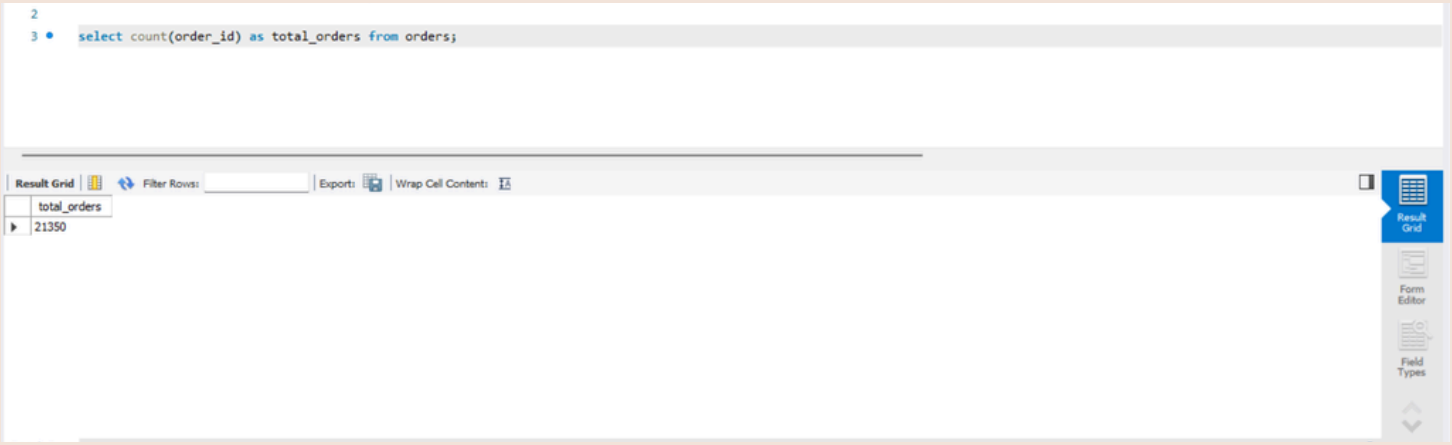

--CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES

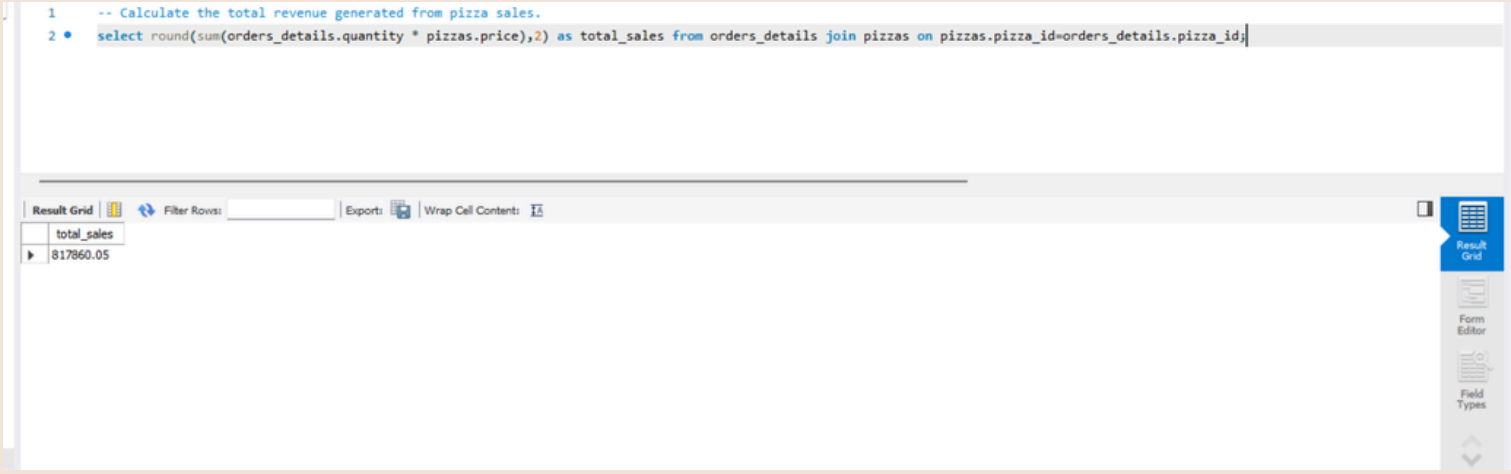

– IDENTIFY THE HIGHEST PRICED PIZZA

```
-- Identify the highest-priced pizza.
select pizza_types.name,pizzas.price from pizza_types join pizzas on pizza_types.pizza_type_id=pizzas.pizza_type_id order by pizzas.price desc limit 1;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: | Fetch rows:

name	price
The Greek Pizza	35.95

– IDENTIFY THE MOST COMMON PIZZA SIZE USED

```
-- Identify the most common pizza size ordered.


select pizzas.size,count(orders_details.order_details_id)as order_count from pizzas join orders_details on pizzas.pizza_id=orders_details.pizza_id group by pizzas.size
order by order_count desc;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28

Result 1 | Read Only

– LIST THE TOP 5 MOST ORDERSED PIZZA TYPES WITH THEIR QUANTITIES

```sql
-- list the top 5 most ordered pizza types along with their quantities.
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: | Fetch rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

Result 3 | Read Only

– JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED

```sql
-- Join the necessary tables to find the total quantity of each pizza category ordered.
select pizza_types.category,sum(orders_details.quantity) as quantity from pizza_types join pizzas
on pizza_types.pizza_type_id=pizzas.pizza_type_id join orders_details on orders_details.pizza_id=pizzas.pizza_id group by pizza_types.category order by quantity desc;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

– DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY

```
1    -- Determine the distribution of orders by hour of the day.
2 •  select hour(order_time), count(order_id) from orders group by hour(order_time);
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

hour(order_time)	count(order_id)
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336
18	2399
19	2009
20	1642
21	1198
22	663

– JOIN RELEVANT TABLES TO FIND THE CATEGORY WISE DISTRIBUTION OF PIZZAS

```
1    -- Join relevant tables to find the category-wise distribution of pizzas.
2 •  select category,count(name) from pizza_types group by category ;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

– GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY

```sql
-- Group the orders by date and calculate the average number of pizzas ordered per day
SELECT
    round(AVG(quantity),0)
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) as quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

round(AVG(quantity),0)
138

– DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES ON REVENUE

```sql
-- Determine the top 3 most ordered pizza types based on revenue.

select pizza_types.name,
sum(orders_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.name order by revenue desc limit 3;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: | Fetch rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

– CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE

```sql
-- Calculate the percentage contribution of each pizza type to total revenue.
SELECT
    pizza_types.category,
    round((SUM(orders_details.quantity * pizzas.price) / (select round(sum(orders_details.quantity * pizzas.price),2) as total_sales from orders_details
    join pizzas on pizzas.pizza_id=orders_details.pizza_id) )*100 ,2) as revenue from pizza_types join
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

category	revenue
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

– ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME

```sql
-- Analyze the cumulative revenue generated over time.
select order_date,sum(revenue) over (order by order_date) as cum_revenue from
(SELECT
    orders.order_date,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
    orders_details
        JOIN
    pizzas ON orders_details.pizza_id = pizzas.pizza_id
        JOIN
    orders ON orders.order_id = orders_details.order_id
GROUP BY orders.order_date) as sales;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

order_date	cum_revenue
2015-01-01	2713.850000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55

Result 2 | Read Only

CONCLUSION :

SQL HELPED ANALYZE PIZZASALES EFFICIENTLY AND IDENTIFY CUSTOMER PREFERENCE , HELPING IMPROVE BUSINESS DECISION

