Application Programming Interface
Send API Document
(API Version: 3.1)

CONFIDENTIAL

Prabhu Money Transfer Private Limited

Flat No. 207, 2nd Floor, Akashdeep Building, 26 A
Barakhamba Road, Connaught Place, New Delhi-110001, India
Phone: +91-11-47084942 /11-47084042 /11-43550035 /11-43553135
E-Mail: info@prabhumoneytransfer.co.in
Web: www. prabhumoneytransfer.co.in

NOTICE

Confidentiality

The material contained within this document is proprietary and confidential. It is the property of Prabhu Money Transfer Private Limited (PrabhuINDIA), and not be disclosed except for the purpose of integration or on behalf of PrabhuINDIA. Based upon the extent of the information provided, individuals with access to this information required to sign a nondisclosure agreement.

Intellectual Property Rights

The contents of this document remain the intellectual property of Prabhu Money Transfer Private Limited (PrabhuINDIA). Unauthorized reproduction, photocopying to any other party, in whole or in part, without the expressed written consent of PrabhuINDIA is prohibited.

Trademarks

All trademarks mentioned herein are the property of PrabhuINDIA.

CONFIDENTIAL

Document Revision History

Date	Create By	API Version	Change Summary
September 2020	Kapil Acharya	2.0.0	Compliance Update
September 2020	Kapil Acharya	2.0.1	Update (Fields Added)
15 November 2022	Kamal Panthi	3.0	Review Document - Added Fields - Introduce New Process Flow
07 December 2022	Kamal Panthi	3.1	Update Process Flow with RBL Page information

CONFIDENTIAL

Table of Contents

1. Introduction 5
   1.1 Introduction 5
   1.2 Requirements 5
   1.3 Request API URL (Test Environment) 5
2. Payment Type 6
3. Transactions Status 6
4. Process Flow 7
5. Cash Pay Location List 11
6. Account Pay Bank Branch List 13
7. Validate Bank Account 15
8. Get Service Charge 16
9. Get Service Charge by Collection 18
10. Get Static Data 20
11. Get State District 21
12. Get Customer by Mobile 23
13. Send OTP 27
14. Create Customer 29
15. Upload Customer Document 32
16. Unverified Customers 34
17. Create Receiver 35
18. Send Transaction 37
19. Verify Transaction 41
20. Search Transaction 42
21. Unverified Transactions 44
22. Compliance Transactions 45
23. Cancel Transaction 46
24. Get Balance 48

Appendix A – Response Code 49

CONFIDENTIAL

1. Introduction

1.1 Introduction

Prabhu Money Transfer Private Limited (PrabhuINDIA), has developed an online Application Programming Interfaces (API) for partners that would initiate transactions to be paid in PrabhuINDIA payout network. These API interfaces interact as a agent of PrabhuINDIA system in real time. The Send API will enable Send Partners to send information needed for PrabhuINDIA system to process and accept the transaction to be payout at the specified payout location with specified Payment type. The Send API will provide other methods, such as Get-Service Charge, Cash Pay Location List, Account Pay Bank Branch List, Send Transactions, Cancel Transactions, Verify Transactions, Unverified Transactions, and Search Transactions to enable the partner to better manage and provide before or after-sale service to their customer.

This document focused on the Send API and it will describe what the interface is designed to do and how it can be used. It also contains technical information to provide a general flow procedure for the Send Partner.

1.2 Requirements

To provide a Web Services interface (API) for Send Partners, which allows Send Partners to request services online, following are few pre-conditions:

- ✓ Partner must have an internet connection at their server
- ✓ Partner needs to be registered on the PrabhuINDIA system
- ✓ Partner will need to provide a public static IP address to PrabhuINDIA
- ✓ Partners will be provided with the necessary login credentials upon confirming the above requirement
- ✓ PrabhuINDIA will provide a Test Environment to the Partner and test all possible cases before going LIVE
- ✓ Partner will be going through a certification process before PrabhuINDIA will allow the partner to transact on the production system.

1.3 Request API URL (Test Environment)

https://sandbox.prabhuindia.com/Api/Send.svc?wsdl

CONFIDENTIAL

2. Payment Type

We do have following payment type as of now. Payment type shall be updated as per requirements of PrabhuIndia:

Cash Payment:

If you are sending transactions to pick up Cash with Beneficiary Name & Valid Identity

Account Deposit:

If you are sending transactions to deposit into the Account of Any Banks with beneficiary Name, Bank Name, Branch Name and Account Number

3. Transactions Status

PrabhuINDIA is having below transactions status, Operation team will help you to understand thoroughly:

a. **Compliance> Hold**
Once the transaction is initiated, the first Status showing is compliance and Txn Status is showing as Hold. Hold means the transaction is not yet verified by the partner.

b. **Compliance> Approved**
Once the transaction verified by the partner then the Txn status will be approved with the status Compliance. All the transactions generated will hit on Suspect hold List for sanction check. It will be changed to post after the verification of the transaction from compliance.

c. **Payment Hold**
Payment Hold means the settlement balance is due from the partners.

d. **Unpaid**
This status is come after posting the transaction from the Compliance status and before the Post status. It means processing the transaction from Compliance to Post.

e. **Post**
The second status is post. After the verification of the transaction from the compliance, then it will show as a post status. The Post stands for ready to collect or ready to deposit in the Pay-out system.

f. **Paid**
Once the payment collected in pay-out side then the transaction status will change to Paid. Paid stands for collected by receiver or deposited into receiver's account.

CONFIDENTIAL

g. Cancelled

If sender request for cancellation the transaction within 15 days, then it will cancel with OTP verification and refund the collected amount to the sender with Cancelled Status. Cancelled stands for the refund of the amount at the sender's side within 15 days.

h. Unclaimed

If the Beneficiary did not collect the payment within 15 days, then the status will be changed to Unclaimed. Once the status changes from Post to Unclaimed then the beneficiary could not collect the payment from Nepal. Remitter can claim the refund in India from sending agent. Only the principal amount will be refunded to Remitter.

i. Refunded

If the sender requests a refund of the amount of the transaction after 15 days, then it will cancel with OTP verification and refund the sent amount to the sender with Refunded Status. Refunded stands for the refund of the amount at the sender's side after 15 days. Only the principal amount (without service charge) will be refunded.

4. Process Flow

Step 1

Call **GetCustomerByMobile**

……..

Case 1: If Customer not found

Initiate **SendOTP** with Operation tagged **CreateCustomer**
Initiate **CreateCustomer**
[**ProcessID** and OTP given by sender should matched]

Once the above process complete and **eKYCStatus** is **Unverified** then follow below of **Token based eKYC API (JSON Based)** to complete the customer onboarding.

Case 1.1: (eKYC Registration)

**Separate Documents & Credentials shall share accordingly*

Base URL: https://ekyc.prabhuindia.com/test/v1

- Token Generate: /auth/generatetoken [endpoint]
- eKYC Initiate: /customer/ekycinitiate [endpoint]

[Here Partner must display redirected URL (*RBL Page) where teller will type customer details and submit as below]

CONFIDENTIAL

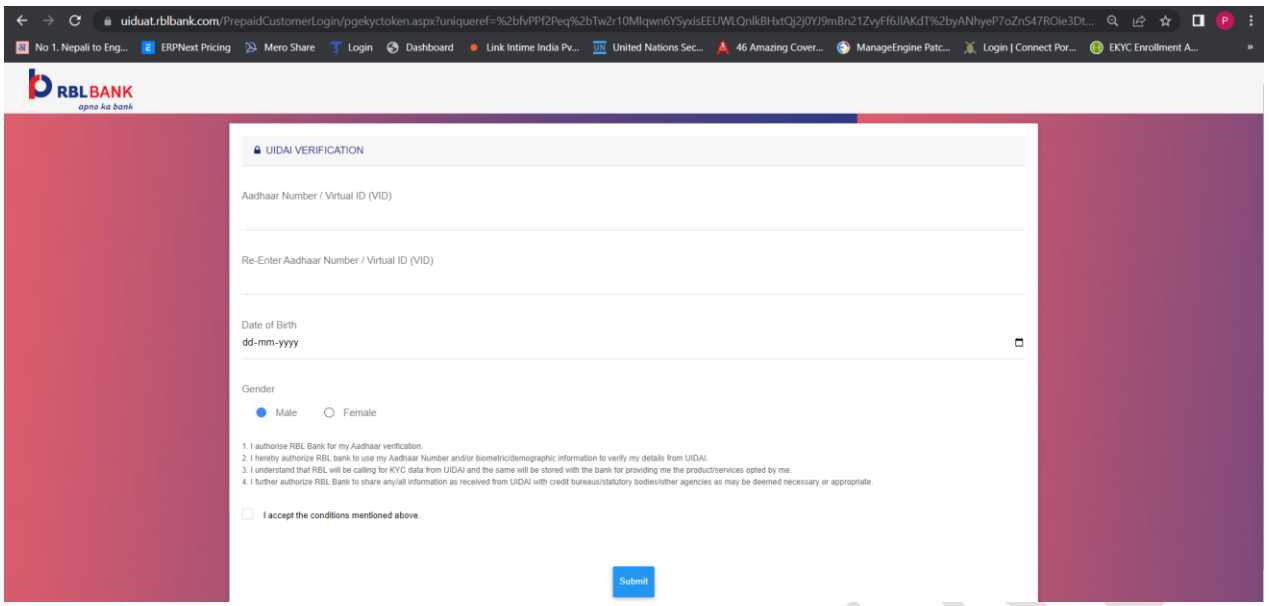

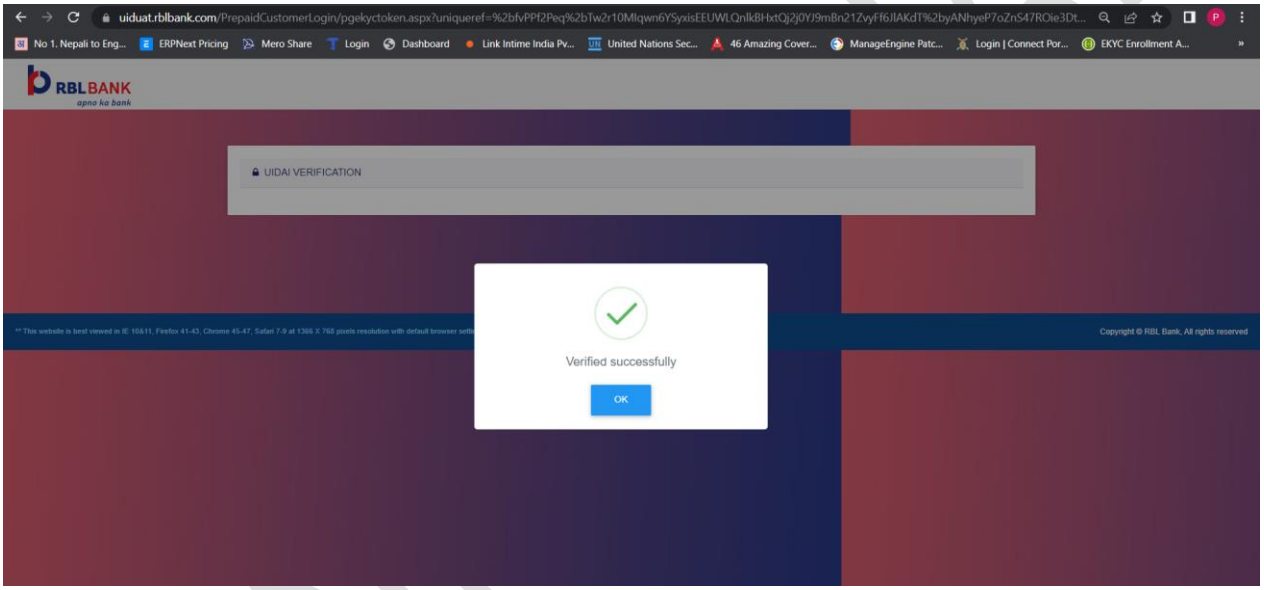

Partner needs to provide the landing page (static URL) which is required to redirect after the E-KYC enrolment initiation from the partner's end. For Status of said customer done on RBL Bank, call below API.

- ekycuniquerefstatus: /customer/ekycuniquerefstatus [endpoint]

If Success: Go to Next API
If Failed: Call ekycinitiate API with new PartnerUniqueRefNo

[Reference Video]

- eKYC Enrolment: /customer/ekycenrollment [endpoint]
- On boarding: /customer/customeronboarding [endpoint]

Case 2: If Customer found but eKYC not done (**EKYCStatus** will be Unverified)

Follow the **Case 1.1 (eKYC registration)**

Case 3: If Customer found but **EKYCStatus** is **Success** and **OnboardingStatus** is **Pending**
[Call the **CustomerOnboarding** API from **Token based eKYC API (JSON Based)**]

Case 4: If Customer found with **EKYCStatus** is **Success** and **OnboardingStatus** also **Success**
[Goto Step 2]

…….
Go to Step 2
…….

Step 2: Create Receiver with Mode of Payment

If the receiver is already there in response of **GetCustomerByMobile** then no need to add again.

Case 1: Cash Payment:
Initiate **CreateReceiver**
[Go Step 3]

Case 2: Account Deposit
Call **AcPayBankBranchList** Take **BankDetails**
Initiate **CreateReceiver**
[Go Step 3]

Step 3:

- ✓ Check Customer Compliance; whether can send transactions or not Check respective receiver details with available Payment types
- ✓ Get Customer confirmation; along with receiver details and payment type

Go to Step 4
[Else to go Step 1 or step 2 based on the case]

Step 4:
Initiate **GetServiceCharge** or **GetServiceChargeByCollection**
[Grab the required calculation and go to Step 5]

Step 5:
Initiate **SendOTP** with Operation tagged **SendTransaction**
Initiate **SendTransaction**
[**ProcessID** and OTP given by sender should be matched. Go to Step 6]

Step 6:
Initiate **VerifyTransaction**
[Each Transaction, you need to verified (Like Checker/Maker)]

CONFIDENTIAL

Step 7:

Initiate **UnverifiedTransactions**
[This method shall give you list of unverified transactions list; which you need to verified by calling Verify Transaction]

Step 8:

Initiate **ComplianceTransactions**
[This method shall give you list of all the transactions which are in pending stage in PrabhuINDIA system due to Compliance. You can call this method and map to the respective sending agent to know the reason for the Pending. (This is carried out by PrabhuINDIA compliance team manually]

Step 9:

Initiate Search Transaction
Partners can view the status of the transaction by calling this method at any time
.....

Once transactions are released from Compliance, transactions are ready to PUSH to the partner system with payment status UNPAID
.....

Transactions with status POST means transactions are available for the payment
.....

After being paid, the status of the transactions will be updated PAID
.....

CONFIDENTIAL

5. Cash Pay Location List

This method will give you all the available branches for Cash Payment. Cash Payment will be anywhere payment either you specified branch or not; that does not matter.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:CashPayLocationList> <!--Optional:--> <tem:CashPayLocationListRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Country>?</rem:Country> <!--Optional:--> <rem:State>?</rem:State> <!--Optional:--> <rem:District>?</rem:District> <!--Optional:--> <rem:City>?</rem:City> <!--Optional:--> <rem:LocationName>?</rem:LocationName> </tem:CashPayLocationListRequest> </tem:CashPayLocationList> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <CashPayLocationListResponse xmlns="http://tempuri.org/"> <CashPayLocationListResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Locations> <a:Location> <a:LocationId i:nil="true"/> <a:LocationName>?</a:LocationName> <a:Country>?</a:Country> <a:Address>?</a:Address> <a:State/> <a:District/> <a:City/> <a:PhoneNumber/> </a:Location> </a:Locations> </CashPayLocationListResult> </CashPayLocationListResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	Data Type	Length	Description	O / M
UserName	String	20	Provided by Prabhu	M
Password	String	20	Provided by Prabhu	M
Country	String	100	Name of Country where the Remittance will be Paid (Payout Country)	M
State	String	100	Search Field for State to narrow Search	O
District	String	100	Search Field for District to Narrow Search	O
City	String	100	Search Field for City to Narrow Search	O
LocationName	String	200	Search Field for Payout Branch Name to Narrow Search	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
LocationId	Int		Payout Location ID	O
LocationName	String	200	Payout Location Name	O
Country	String	100	Payout Location Country	O
Address	String	500	Payout Location Address	O
State	String	100	Payout Location State	O
District	String	100	Payout Location District	O
City	String	100	Payout Location City	O
PhoneNumber	String	50	Phone number of Location	O

CONFIDENTIAL

6. Account Pay Bank Branch List

This method will give you all the available Bank List with Respective branches for available Account Deposit services.

Note: Partner should maintain this database in partner system and update partner database in idle time (weekly or monthly basis).

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:AcPayBankBranchList> <!--Optional:--> <tem:AcPayBankBranchListRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Country>?</rem:Country> <!--Optional:--> <rem:State>?</rem:State> <!--Optional:--> <rem:District>?</rem:District> <!--Optional:--> <rem:City>?</rem:City> <!--Optional:--> <rem:BankName>?</rem:BankName> <!--Optional:--> <rem:BranchName>?</rem:BranchName> </tem:AcPayBankBranchListRequest> </tem:AcPayBankBranchList> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <AcPayBankBranchListResponse xmlns="http://tempuri.org/"> <AcPayBankBranchListResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:BankBranches> <a:BankBranch> <a:BankBranchId>?</a:BankBranchId> <a:BankName>?</a:BankName> <a:BranchName>?</a:BranchName> <a:BranchCode>?</a:BranchCode> <a:RoutingCode/> <a:Country>?</a:Country> <a:Address>?</a:Address> <a:State/> <a:District>?</a:District> <a:City>?</a:City> <a:PhoneNumber/> </a:BankBranch> </a:BankBranches> </AcPayBankBranchListResult> </AcPayBankBranchListResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Country	String	100	Name of Country where the Remittance will be Paid (Payout Country)	M
State	String		Can get list available within state	O
District	String		Can get list available within District	O
City	String		Can get list available within City	O
BankName	String		Can get branch list of the Bank Name	O
BranchName	String		Can get branch name of respective bank	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
BankBranchId	Int		Mandatory for Account Deposit	O
BankName	String	200	Bank Name	O
BranchName	String	200	Bank Branch Name	O
BranchCode	String	50	Branch Code Assigned	O
State	String	100	State of Bank Location	O
RoutingCode	String	50	Routing Code of Bank Branch	O
Country	String	100	Country of Bank Location	O
Address	String	500	Address of Bank Location	O
State	String	100	State of Bank Location	O
District	String	100	District of Bank Location	O
City	String	100	City of Bank Location	O
PhoneNumber	String	50	Bank Branch Phone Number	O

CONFIDENTIAL

7. Validate Bank Account

Partners can verify the Account Number of Supported Banks by calling this method. With the help of this method; the Partner can check the bank Account Number before sending an actual transaction.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:ValidateBankAccount> <!--Optional:--> <tem:ValidateBankAccountRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:BankCode>?</rem:BankCode> <rem:AccountNumber>?</rem:AccountNumber> </tem:ValidateBankAccountRequest> </tem:ValidateBankAccount> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <ValidateBankAccountResponse xmlns="http://tempuri.org/"> <ValidateBankAccountResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:AccountNumber/> <a:AccountName/> </ValidateBankAccountResult> </ValidateBankAccountResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
BankCode	String	10	Bank SWIFT Code for supported bank Currently Supported for **Prabhu Bank Limited** only so please send this field as **PRVUNPKA**	M
AccountNumber	String	30	Bank Account Number in which sender want to send transaction	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
AccountNumber	String	30	This will be returned only if Query is success	M
AccountName	String	200	This should be the receiver Name while sending Transaction for the mentioned Account Number. This will be returned only if Query is Success.	M

CONFIDENTIAL

8. Get Service Charge

This method will give you service charge reply as per provided Payment Type. Service Charge will be added in your Sending Amount or Pay-out Amount and will get reply with Total Amount.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetServiceCharge> <!--Optional:--> <tem:GetServiceChargeRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Country>?</rem:Country> <rem:PaymentMode>?</rem:PaymentMode> <!--Optional:--> <rem:TransferAmount>?</rem:TransferAmount> <!--Optional:--> <rem:PayoutAmount>?</rem:PayoutAmount> <!--Optional:--> <rem:BankBranchId>?</rem:BankBranchId> <!--Optional:--> <rem:IsNewAccount>?</rem:IsNewAccount> </tem:GetServiceChargeRequest> </tem:GetServiceCharge> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <GetServiceChargeResponse xmlns="http://tempuri.org/"> <GetServiceChargeResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:CollectionAmount>?</a:CollectionAmount> <a:CollectionCurrency>?</a:CollectionCurrency> <a:ServiceCharge>?</a:ServiceCharge> <a:TransferAmount>?</a:TransferAmount> <a:ExchangeRate>?</a:ExchangeRate> <a:PayoutAmount>?</a:PayoutAmount> <a:PayoutCurrency>?</a:PayoutCurrency> </GetServiceChargeResult> </GetServiceChargeResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Country	String	100	Name of Country where the Remittance will be Paid (Payout Country)	M
PaymentMode	String	50	Possible Value **Cash Payment**, **Account Deposit,**	M
TransferAmount	Decimal		Transfer Amount will be Mandatory if Payout Amount not Provided	O
PayoutAmount	Decimal		Payout Amount will be Mandatory if Transfer Amountnot Provided	O
BankBranchId	Int		Get it from Method **AcPayBankBranchList**	O
IsNewAccount	char	1	This field Only Accept Blank or value 'y' if want to open new Account. This Service is only available for Selected Banks/Co-Operative at Nepal Only. Detail on this will be provided separately	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
CollectionAmount	Decimal		Value will only return on Success	O
CollectionCurrency	String	3	Response will be "INR" if sending from India. Only returned on Success	O
ServiceCharge	Decimal		Value will only return on Success	O
TransferAmount	Decimal		Value will only return on Success	O
ExchangeRate	Decimal		Value will be returned on Success on the basis of Sendand Payout Country	O
PayoutAmount	Decimal		Value will be returned on Success and Calculated asTransferAmount X ExchangeRate	O
PayoutCurrency	String	3	INR if Payout Country India, otherwise currency of PayoutCountry i.e., NPR if payout country Nepal.	O

CONFIDENTIAL

9. Get Service Charge by Collection

This method will give you Sending Amount, Service charge, Pay-out Amount reply as per provided Payment Type on the basis of collected amount.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetServiceChargeByCollection> <!--Optional:--> <tem:GetServiceChargeByCollectionRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Country>?</rem:Country> <rem:PaymentMode>?</rem:PaymentMode> <!--Optional:--> <rem:CollectionAmount>?</rem:CollectionAmount> <!--Optional:--> <rem:PayoutAmount>?</rem:PayoutAmount> <!--Optional:--> <rem:BankBranchId>?</rem:BankBranchId> <!--Optional:--> <rem:IsNewAccount>?</rem:IsNewAccount> </tem:GetServiceChargeByCollectionRequest> </tem:GetServiceChargeByCollection> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <GetServiceChargeByCollectionResponse xmlns="http://tempuri.org/">> <GetServiceChargeByCollectionResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:CollectionAmount>?</a:CollectionAmount> <a:CollectionCurrency>?</a:CollectionCurrency> <a:ServiceCharge>?</a:ServiceCharge> <a:TransferAmount>?</a:TransferAmount> <a:ExchangeRate>?</a:ExchangeRate> <a:PayoutAmount>?</a:PayoutAmount> <a:PayoutCurrency>?</a:PayoutCurrency> </GetServiceChargeByCollectionResult> </GetServiceChargeByCollectionResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Country	String	100	Name of Country where the Remittance will be Paid (PayoutCountry)	M
PaymentMode	String	50	Possible Value **Cash Payment**, **Account Deposit,**	M
CollectionAmount	Decimal		Collection Amount will be Mandatory if Payout Amount notProvided	O
PayoutAmount	Decimal		Payout Amount will be Mandatory if Transfer Amount not Provided	O
BankBranchId	Int		Get it from **AcPayBankBranchList**	O
IsNewAccount	char	1	This field Only Accept Blank or value 'y' if want to open new Account. This Service is only available for Selected Banks/Co-Operative at Nepal Only. Detail on this will be provided separately	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
CollectionAmount	Decimal		Value will only returned on Success	O
CollectionCurrency	String	3	Response will be "INR" if Sending From India. Only returned on Success	O
ServiceCharge	Decimal		Value will only returned on Success	O
TransferAmount	Decimal		Value will only returned on Success	O
ExchangeRate	Decimal		Value will be returned on Success on the basis of Sendand Payout Country	O
PayoutAmount	Decimal		Value will be returned on Success and Calculated asTransferAmount X ExchangeRate	O
PayoutCurrency	String	3	INR if Payout Country India, otherwise currency of PayoutCountry i.e. NPR if payout country Nepal	O

CONFIDENTIAL

10. Get Static Data

This method provides the value of specific field (Type) to be passed in different methods; while consuming PrabhuINDIA API. If other than given values are passed, then PrabhuINDIA shall reject the transactions.

Note: Partner should pass respective value as per type response and value should be updated in timely manner (Weekly/Monthly basic).

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetStaticData> <!--Optional:--> <tem:GetStaticDataRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Type>?</rem:Type> </tem:GetStaticDataRequest> </tem:GetStaticData> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <GetStaticDataResponse xmlns="http://tempuri.org/">> <GetStaticDataResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:DataList>?</a:DataList> </GetStaticDataResult> </GetStaticDataResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Type	String	100	**Type Value** Gender, IDType, Nationality, IncomeSource, Relationship, PaymentMode, RemittanceReason	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
DataList			Value will only returned on Success	O

CONFIDENTIAL

11. Get State District

This method provides the list of available State, District and State Code as per Country. Partner should map and send respective value while registering sender, registering receiver and sending transactions.

Type of Country

- India
- Nepal

Note: Details of India for registering Sender; while details of Nepal for registering receiver.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetStateDistrict> <!--Optional:--> <tem:GetStateDistrictRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Country>?</rem:Country> </tem:GetStateDistrictRequest> </tem:GetStateDistrict> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">\ <s:Body> <GetStateDistrictResponse xmlns="http://tempuri.org/">\ <GetStateDistrictResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">\ <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Data> <a:StateDistrict> <a:State>?</a:State> <a:District>?</a:District> <a:StateCode>?</a:StateCode> </a:StateDistrict> </a:Data> </GetStateDistrictResult> </GetStateDistrictResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Country	String	100	Possible Value: - India - Nepal	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
DataList			Value will only return on Success	O

CONFIDENTIAL

12. Get Customer by Mobile

This method is used to get the detail of the Existing Customer from PrabhuIndia System. If partner is willing to send transaction with the existing customer, then must call these methods to get the detail of customer and pass accordingly while sending transactions.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetCustomerByMobile> <!--Optional:--> <tem:GetCustomerByMobileRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:CustomerMobile>?</rem:CustomerMobile> </tem:GetCustomerByMobileRequest> </tem:GetCustomerByMobile> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <GetCustomerByMobileResponse xmlns="http://tempuri.org/"> <GetCustomerByMobileResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Customers> <a:Customer> </a:Customer> </a:Customers> </GetCustomerByMobileResult> </GetCustomerByMobileResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
CustomerMobile	Number		Customer registered Mobile Number	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Customers	String		Information of Customer, Receiver and Count	M

CONFIDENTIAL

Important information on GetCustomer

1. Customer Part (As response received from Get Customer by Mobile)


```
<a:Customer>
        <a:CustomerId>?</a:CustomerId>
        <a:Name>?</a:Name>
        <a:Gender>?</a:Gender>
        <a:Dob>?</a:Dob>
        <a:Address>?</a:Address>
        <a:Mobile xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
        <b:string>?</b:string>
        </a:Mobile>
        <a:City>?</a:City>
        <a:State>?</a:State>
        <a:District>?</a:District>
        <a:Nationality>?</a:Nationality>
        <a:Employer>?</a:Employer>
        <a:IncomeSource>?</a:IncomeSource>
        <a:Status>Unverified</a:Status>
        <a:Ids>
        <a:Id>
        <a:IdType>Nepalese Citizenship</a:IdType>
        <a:IdNumber>672041/4017</a:IdNumber>
        </a:Id>
        </a:Ids>

</a:Customer>
```


Status: Unverified [Only Verified Customer can send transactions]

CustomerId: This customer id along with other information should pass on **SendTransaction**

[This is required so that customer information passed from the partner system and PrabhuINDIA system are match accordingly otherwise transactions get failed]

Mobile: Same mobile number should pass on **SendTransaction**

IdType: Same Id Type should pass on **SendTransaction**

IdNumber: Same Id Number should pass on **SendTransaction**

CONFIDENTIAL

2. Transactions Count Part (As response received from Get Customer By Mobile or ID Number)

```
<a:TransactionCount>
        <a:Day>3</a:Day>
        <a:Month>5</a:Month>
        <a:Year>12</a:Year>
</a:TransactionCount>
```

This provides information about Indo Nepal Transactions compliance. Same sender must pass below conditions otherwise transactions get failed:

- Day: Three transactions in a day
- Month: Five transactions in a month
- Year: Twelve transactions in a year

3. Receiver Part (As response received from Get Customer By Mobile or ID Number)

```
<a:Receivers>
        <a:Receiver>
                <a:ReceiverId>?</a:ReceiverId>
                <a:Name>Receiver 1</a:Name>
                <a:Gender>?</a:Gender>
                <a:Relationship>?</a:Relationship>
                <a:Address>?</a:Address>
                <a:Mobile>?</a:Mobile>
                <a:PaymentMode>?</a:PaymentMode>
                <a:BankBranchId/>
                <a:BankName i:nil="true"/>
                <a:BankBranchName i:nil="true"/>
                <a:AcNumber i:nil="true"/>
        </a:Receiver>
        <a:Receiver>
                <a:ReceiverId>?</a:ReceiverId>
                <a:Name>Receiver 2</a:Name>
                <a:Gender>?</a:Gender>
                <a:Relationship>?</a:Relationship>
                <a:Address>?</a:Address>
                <a:Mobile>?</a:Mobile>
                <a:PaymentMode>?</a:PaymentMode>
                <a:BankBranchId>?</a:BankBranchId>
                <a:BankName>?</a:BankName>
                <a:BankBranchName>?</a:BankBranchName>
                <a:AcNumber>?</a:AcNumber>
        </a:Receiver>
</a:Receivers>
```

<u>Receiver details could be multiple because sender could send transactions to multiple receivers</u>

CONFIDENTIAL

ReceiverId: This **receiverid** along with other information should pass on **SendTransaction**

[This is required so that customer information passed from the partner system and PrabhuINDIA system are match accordingly otherwise transactions get failed]

PaymentMode: Same mobile number should pass on **SendTransaction**

[If the required receiver name & payment details are not available then need to add the receiver for respective Sender then choose the respective receiver details and pass on **SendTransaction**]

4. Customer Status

<a:Status>?</a:Status>

<a:EKYCStatus>?</a:EKYCStatus>

<a:OnboardingStatus>?</a:OnboardingStatus>

There is the following status received in response to **GetCustomer**.

- **Status**: It means the status of the particular customer created. It's Either '**Verified'** or '**Unverified'**.
- **EKYCStatus**: It shows whether E-KYC has been done or not for the customer. It's Either '**Verified'** or '**Pending'**. If pending then go for E-KYC API Based on JSON.
- **OnboardingStatus**: It shows whether Onboarding has been done or not for the customer. It's Either '**Verified'** or '**Pending'**. If pending then go for E-KYC API Based on JSON.

CONFIDENTIAL

13. Send OTP

This method is used to send One Time Password (OTP) to respective mobile number i.e., PrabhuINDIA shall sent OTP to mobile number as per operation and respective customer should pass OTP to teller; if it matched then only transactions will be success otherwise failed.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:SendOTP> <!--Optional:--> <tem:SendOTPRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Operation>?</rem:Operation> <rem:Mobile>?</rem:Mobile> <!--Optional:--> <rem:CustomerId>?</rem:CustomerId> <!--Optional:--> <rem:ReceiverId>?</rem:ReceiverId> <!--Optional:--> <rem:ReceiverName>?</rem:ReceiverName> <!--Optional:--> <rem:PinNo>?</rem:PinNo> <!--Optional:--> <rem:PaymentMode>?</rem:PaymentMode> <!--Optional:--> <rem:BankBranchId>?</rem:BankBranchId> <!--Optional:--> <rem:AccountNumber>?</rem:AccountNumber> <!--Optional:--> <rem:CustomerFullName>?</rem:CustomerFullName> <!--Optional:--> <rem:CustomerDOB>?</rem:CustomerDOB> <!--Optional:--> <rem:CustomerIdNumber>?</rem:CustomerIdNumber> <!--Optional:--> <rem:SendAmount>?</rem:SendAmount> </tem:SendOTPRequest> </tem:SendOTP> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <SendOTPResponse xmlns="http://tempuri.org/">> <SendOTPResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:ProcessId>?</a:ProcessId> </SendOTPResult> </SendOTPResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Operation	String		**Either Anyone as below** CreateCustomer, CreateReceiver, SendTransaction, CancelTransaction	M
Mobile	Number	10	Registered Mobile Number	M
CustomerId	Number		Required for: **CreateReceiver**, **SendTransaction**	O
ReceiverId	Number		Required for: **SendTransaction**	O
ReceiverName	String	50	Required for: **CreateReceiver**, **SendTransaction**	O
PinNo	Number	16	Required for: **CancelTransaction**	O
PaymentMode	String	50	As per **GetStaticData** Possible transaction type CashPayment, Account Deposit,	M
BankBranchId	Int	20	Get it from Method **AcPayBankBranchList** Required if **Payment Mode A/C Deposit**	O
AccountNumber	String	20	Bank Account Number Required if **Payment Mode A/C Deposit**	O
SendAmount	Number	5	Send Amount without Service Charge Required for **SendTransaction**	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
ProcessID	Decimal		Value will only returned on Success	O

Note: Grab ProcessID as per the operation and match it with OTP send to the respective mobile number via the respective method to complete the transactions.

CONFIDENTIAL

14. Create Customer

This method is used to registered customer; while doing customer registration need to verify OTP send to respective sender i.e., PrabhuINDIA shall send OTP to provided mobile number of Customer, respective customer shall provide OTP to the teller and OTP should match for the successful creation of the Customer.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:CreateCustomer> <!--Optional:--> <tem:CreateCustomerRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:Name>?</rem:Name> <rem:Gender>?</rem:Gender> <rem:Dob>?</rem:Dob> <rem:Address>?</rem:Address> <rem:Mobile>?</rem:Mobile> <rem:State>?</rem:State> <rem:District>?</rem:District> <rem:City>?</rem:City> <rem:Nationality>?</rem:Nationality> <!--Optional:--> <rem:Email>?</rem:Email> <rem:Employer>?</rem:Employer> <rem:IDType>?</rem:IDType> <rem:IDNumber>?</rem:IDNumber> <!--Optional:--> <rem:IDExpiryDate>?</rem:IDExpiryDate> <!--Optional:--> <rem:IDIssuedPlace>?</rem:IDIssuedPlace> <rem:IncomeSource>?</rem:IncomeSource> <rem:OTPProcessId>?</rem:OTPProcessId> <rem:OTP>?</rem:OTP> <!--Optional:--> <rem:CustomerType>?</rem:CustomerType> <!--Optional:--> <rem:SourceIncomeType>?</rem:SourceIncomeType>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <CreateCustomerResponse xmlns="http://tempuri.org/"> <CreateCustomerResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:CustomerId i:nil="true"/> </CreateCustomerResult> </CreateCustomerResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

XML Request	XML Response
<!--Optional:--> <rem:AnnualIncome>?</rem:AnnualIncome> <!—OptionalL--> <rem:CSPCode>?</rem:CSPCode> </tem:CreateCustomerRequest> </tem:CreateCustomer> </soapenv:Body> </soapenv:Envelope>	

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Name	String	100	Name of Remitter (Sender)	M
Gender	String	10	As per **GetStaticData**	M
Dob	String	10	Format YYYY-MM-DD	M
Address	String	500	Address of Remitter	M
Mobile	Number	10	Mobile Number of Sender	M
State	String	100	As per **GetStateDistrict**	M
District	String	100	As per **GetStateDistrict**	M
City	String	100	City part of Sender Address	M
Nationality	String	100	As per **GetStaticData**	M
Email	String	100		O
Employer	String	100	Name of Company Where Sender Works if Any	M
IDType	String	50	As per **GetStaticData**	M
IDNumber	String	20		M
IDExpiryDate	String	10	Format YYYY-MM-DD	O
IDIssuedPlace	String	50	Format YYYY-MM-DD	O
IncomeSource	String	200		M
OTPProcessId	String	200	Response As per **SendOTP**	M
OTP	Number	6	Collect from respective mobile number As per **SendOTP**	M
CustomerType	Number		Value from Onboarding Method of E-KYC API (*JSON Based*)	M
SourceIncomeType	Number		Value from Onboarding Method of E-KYC API (*JSON Based*)	M

CONFIDENTIAL

Request Field				
AnnualIncome	Number		Value from Onboarding Method of E-KYC API (*JSON Based*)	M
CSPCode	String		Agent Code or Branch Code	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
CustomerID	Number		CustomerID of registering Customer	M

CONFIDENTIAL

15. Upload Customer Document

This method is used to upload a Customer Identification Document i.e., an ID Scan copy for Compliance verification as required by Licensing authority. An image should be converted based on Base64 Conversation with the correct file name, and the extension & image should viewable in the PrabhuINDIA system.

Note: API shall provide a successful response with the wrong conversation too thus kindly verify from the PrabhuINDIA portal before going live, [i.e., if the image conversation could be wrong due to file name, space, special character, and extension).

This method is not mandatory after the Token-based eKYC API (*JSON Based*).

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:UploadCustomerDocument> <!--Optional:--> <tem:UploadCustomerDocumentRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:CustomerId>?</rem:CustomerId> <rem:FileName>?</rem:FileName> <rem:DocumentType>?</rem:DocumentType> <rem:IDType>?</rem:IDType> <rem:FileBase64>?</rem:FileBase64> </tem:UploadCustomerDocumentRequest> </tem:UploadCustomerDocument> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <UploadCustomerDocumentResponse xmlns="http://tempuri.org/"> <UploadCustomerDocumentResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> </UploadCustomerDocumentResult> </UploadCustomerDocumentResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
CustomerId	Number		As per **GetCustomer**	M
FileName	String	50	Accepted File Extension: .jpg / .gif / .png / .pdf Other shall be rejected	M
DocumentType	String	10	Accepted value must be ID Card Front / ID Card Back	M
IDType	String	50	As per **GetStaticData**	M
FileBase64	Data Stream	2 MB	Base64 Conversion of File data required to be uploaded	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M

CONFIDENTIAL

16. Unverified Customers

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:UnverifiedCustomers> <!--Optional:--> <tem:UnverifiedCustomersRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> </tem:UnverifiedCustomersRequest> </tem:UnverifiedCustomers> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <UnverifiedCustomersResponse xmlns="http://tempuri.org/">> <UnverifiedCustomersResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Customers>?</a:Customers> </UnverifiedCustomersResult> </UnverifiedCustomersResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Customers	String		List of Unverified Customers	O

CONFIDENTIAL

17. Create Receiver

This method is used to get the detail of the Existing Customer from the Prabhu System. If a partner is willing to send the transaction with the existing customer, then must call these methods to get the detail of the customer and pass accordingly while sending transactions.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:CreateReceiver> <!--Optional:--> <tem:CreateReceiverRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:CustomerId>?</rem:CustomerId> <rem:Name>?</rem:Name> <rem:Gender>?</rem:Gender> <rem:Mobile>?</rem:Mobile> <rem:Relationship>?</rem:Relationship> <rem:Address>?</rem:Address> <rem:PaymentMode>?</rem:PaymentMode> <!--Optional:--> <rem:BankBranchId>?</rem:BankBranchId> <!--Optional:--> <rem:AccountNumber>?</rem:AccountNumber> <rem:OTPProcessId>?</rem:OTPProcessId> <rem:OTP>?</rem:OTP> </tem:CreateReceiverRequest> </tem:CreateReceiver> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <CreateReceiverResponse xmlns="http://tempuri.org/"> <CreateReceiverResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:ReceiverId i:nil="true"/> </CreateReceiverResult> </CreateReceiverResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
CustomerId	Number		As per **GetCustomer**	M
Name	String	100	Name of Receiver	M
Gender	String	10	As per **GetStaticData**	M
Mobile	String	50	Mobile Number of Receiver	M
Relationship	String	50	As per **GetStaticData**	M
Address	String	500	Address of Receiver (Nepal)	M
PaymentMode	String	50	As per **GetStaticData**	M
BankBranchId	Int	20	Get it from Method **AcPayBankBranchList**	O
AccountNumber	String	20	Bank Account Number	O
OTPProcessId	String	200	Response As per **SendOTP**	O
OTP	Number	6	Collect from respective mobile number as per **SendOTP**	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Receiver ID	Number		If Success	M

CONFIDENTIAL

18. Send Transaction

As per Cash Pay Location List and Account Pay Bank Branch List, you can send transactions accordingly from this method.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:SendTransaction> <!--Optional:--> <tem:SendTransactionRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:CustomerId>?</rem:CustomerId> <rem:SenderName>?</rem:SenderName> <rem:SenderGender>?</rem:SenderGender> <rem:SenderDoB>?</rem:SenderDoB> <rem:SenderAddress>?</rem:SenderAddress> <!--Optional:--> <rem:SenderPhone>?</rem:SenderPhone> <rem:SenderMobile>?</rem:SenderMobile> <rem:SenderCity>?</rem:SenderCity> <rem:SenderDistrict>?</rem:SenderDistrict> <rem:SenderState>?</rem:SenderState> <rem:SenderNationality>?</rem:SenderNationality> <rem:Employer>?</rem:Employer> <rem:SenderIDType>?</rem:SenderIDType> <rem:SenderIDNumber>?</rem:SenderIDNumber> <!--Optional:--> <rem:SenderIDExpiryDate>?</rem:SenderIDExpiryDate> <!--Optional:--> <rem:SenderIDIssuedPlace>?</rem:SenderIDIssuedPlace> <rem:ReceiverId>?</rem:ReceiverId> <rem:ReceiverName>?</rem:ReceiverName> <rem:ReceiverGender>?</rem:ReceiverGender> <rem:ReceiverAddress>?</rem:ReceiverAddress> <rem:ReceiverMobile>?</rem:ReceiverMobile> <rem:ReceiverCity>?</rem:ReceiverCity> <rem:SendCountry>?</rem:SendCountry>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <SendTransactionResponse xmlns="http://tempuri.org/">> <SendTransactionResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:TrnsactionId i:nil="true"/> <a:PinNo i:nil="true"/> </SendTransactionResult> </SendTransactionResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

XML Request	XML Response
<rem:PayoutCountry>?</rem:PayoutCountry> <rem:PaymentMode>?</rem:PaymentMode> <rem:CollectedAmount>?</rem:CollectedAmount> <rem:ServiceCharge>?</rem:ServiceCharge> <rem:SendAmount>?</rem:SendAmount> <rem:SendCurrency>?</rem:SendCurrency> <rem:PayAmount>?</rem:PayAmount> <rem:PayCurrency>?</rem:PayCurrency> <rem:ExchangeRate>?</rem:ExchangeRate> <!--Optional:--> <rem:BankBranchId>?</rem:BankBranchId> <!--Optional:--> <rem:AccountNumber>?</rem:AccountNumber> <!--Optional:--> <rem:AccountType>?</rem:AccountType> <!--Optional:--> <rem:NewAccountRequest>?</rem:NewAccountRequest> <rem:PartnerPinNo>?</rem:PartnerPinNo> <rem:IncomeSource>?</rem:IncomeSource> <rem:RemittanceReason>?</rem:RemittanceReason> <rem:Relationship>?</rem:Relationship> <rem:CSPCode>?</rem:CSPCode> <rem:OTPProcessId>?</rem:OTPProcessId> <rem:OTP>?</rem:OTP> </tem:SendTransactionRequest> </tem:SendTransaction> </soapenv:Body> </soapenv:Envelope>	

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
CustomerId	int		As per GetCustomer	O
SenderName	String	100	As per GetCustomer)	M
SenderGender	String	10	As per GetStaticData	M
SenderDoB	String	10	As per GetCustomer	M
SenderAddress	String	500	As per GetCustomer	M
SenderPhone	String	50	As per GetCustomer	O
SenderMobile	String	50	As per GetCustomer	M
SenderCity	String	100	As per GetCustomer	M
SenderDistrict	String	100	As per GetStateDistrict	M
SenderState	String	100	As per GetStateDistrict	M
SenderNationality	String	100	As per GetStaticDate	M
Employer	String	100	As per GetCustomer	M
SenderIDType	String	50	As per GetStaticDate (Aadhaar Card)	M
SenderIDNumber	String	20	Aadhaar Number's last 4 digit	M
SenderIDExpiryDate	String	10	Format YYYY-MM-DD	O
SenderIDIssuedPlace	String	50		O
ReceiverID	Number		As per GetCustomer	M
ReceiverName	String	50	As per GetCustomer	M
ReceiverGender	String	10	As per GetCustomer	M
ReceiverAddress	String	200	As per GetCustomer	M
ReceiverMobile	Int	20	As per GetCustomer	M
ReceiverCity	String	100	As per Sender	M
SendCountry	String	5	It's Value will be Always India	M
PayoutCountry	String	5	It's value will be Always Nepal	M
PaymentMode	String	50	As per GetCustomer	M
CollectedAmount	Decimal		Total Amount Collected from Customer	M
ServiceCharge	Decimal		Service charge Received from GetServiceCharge Medhod	M
SendAmount	Decimal		Total Collected – Sevice charge	M
SendCurrency	String	3	Its Value always "INR"	M
PayAmount	Decimal		Amount Receivable at payout end	M
PayCurrency	String	3	Its Value always "NPR"	M
ExchangeRate	Decimal		Its Value always 1.60 for now	M

CONFIDENTIAL

Request Field				
BankBranchId	Int	4	Get it from Method AcPayBankBranchList	O
AccountNumber	String	22	Mandatory for Account Deposit	O
AccountType	String	20	Blank fo now	O
NewAccountRequest	String	1	This field Only Accept Blank or value 'y' if want to open new Account. This Service is only available for Selected Banks/Co- Operative at Nepal Only. Detail on this will be provided separately	O
PartnerPinNo	String	16	Unique Transaction Identifier on Partner System	M
IncomeSource	String	20	As per GetStaticData	M
RemittanceReason	String	20	As per GetStaticData	M
Relationship	String	20	As per GetCustomer	M
CSPCode	String	20	CSP Code provided; while enrolling into the PrabhuINDIA System	M
OTPProcessId	String	200	Response As per SendOTP	M
OTP	Number	6	Collect from respective mobile number Asper SendOTP	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	On Success 000, On Pending 777, For others refer to Appendix A	M
Message	String	200	- Success if Success, - Else Error Description	M
TrnsactionId	Int		When Transaction is Success, it will be Returned	O
PinNo	String	20	When Transaction is Success then onlyreturned.	O

CONFIDENTIAL

19. Verify Transaction

All the transactions need to approve from this menu to make available for the payment. As soon as transactions get success with Send Transactions method; need to verify/approve from verify transactions.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:VerifyTransaction> <!--Optional:--> <tem:VerifyTransactionRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:PinNo>?</rem:PinNo> </tem:VerifyTransactionRequest> </tem:VerifyTransaction> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <VerifyTransactionResponse xmlns="http://tempuri.org/"> <VerifyTransactionResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:PinNo>?</a:PinNo> </VerifyTransactionResult> </VerifyTransactionResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
PinNo	String	20	The Transactions which requesting for approval	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
PinNo	String	20	Provided PIN NUMBER	M

CONFIDENTIAL

20. Search Transaction

Partner will get transaction status by calling this method. With the help of this method; Partner can reconcile transactions in their own system too.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:SearchTransaction> <!--Optional:--> <tem:SearchTransactionRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <!--Optional:--> <rem:PinNo>?</rem:PinNo> <!--Optional:--> <rem:PartnerPinNo>?</rem:PartnerPinNo> <!--Optional:--> <rem:FromDate>?</rem:FromDate> <!--Optional:--> <rem:ToDate>?</rem:ToDate> </tem:SearchTransactionRequest> </tem:SearchTransaction> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <SearchTransactionResponse xmlns="http://tempuri.org/"> <SearchTransactionResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Transactions/> </SearchTransactionResult> </SearchTransactionResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
PinNo	String	20	The PinNo whose status to be known	O
PartnerPinNo	String	100	The PartnerPinNo whose status to be known	O
FromDate	String	10	ISO8601 Date Standard (yyyy-mm-ddThh:mi:ss.mmm)	O
ToDate	String	10	ISO8601 Date Standard (yyyy-mm-ddThh:mi:ss.mmm)	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
PinNo	String	20	Detail List of all returned transactions	O

Note: Please take the action as per the response received on the field called TxnStatus

(For more info refer to Table of Content - 4 Transactions Status)

CONFIDENTIAL

21. Unverified Transactions

Partners can view all hold/unapproved transactions from this menu.

Note: Transactions should be approved for payment.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:UnverifiedTransactions> <!--Optional:--> <tem:UnverifiedTransactionsRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> </tem:UnverifiedTransactionsRequest> </tem:UnverifiedTransactions> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <UnverifiedTransactionsResponse xmlns="http://tempuri.org/">> <UnverifiedTransactionsResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Transaction>?</a:Transaction> </a:Transactions> </UnverifiedTransactionsResult> </UnverifiedTransactionsResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Transactions	List		Detail List of all returned transactions	O

CONFIDENTIAL

22. Compliance Transactions

Partner can view all compliance hold transactions with reason/comment from this menu so that can automate the process from partner system too.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:ComplianceTransactions> <!--Optional:--> <tem:ComplianceTransactionsRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> </tem:ComplianceTransactionsRequest> </tem:ComplianceTransactions> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <ComplianceTransactionsResponse xmlns="http://tempuri.org/"> <ComplianceTransactionsResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Transactions>?</a:Transactions> </ComplianceTransactionsResult> </ComplianceTransactionsResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Transactions	List		Detail List of all returned transactions	O

CONFIDENTIAL

23. Cancel Transaction

Agent partners can cancel transactions with this method, but the status of transactions should be UNPAID or HOLD. Agent partner can cancel ONE transaction at a time.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:CancelTransaction> <!--Optional:--> <tem:CancelTransactionRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> <rem:PinNo>?</rem:PinNo> <rem:ReasonForCancellation>?</rem:ReasonForCancellation> <rem:OTPProcessId>?</rem:OTPProcessId> <rem:OTP>?</rem:OTP> </tem:CancelTransactionRequest> </tem:CancelTransaction> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">> <s:Body> <CancelTransactionResponse xmlns="http://tempuri.org/">> <CancelTransactionResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:PinNo/> </CancelTransactionResult> </CancelTransactionResponse> </s:Body> </s:Envelope>

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
PinNo	String	20	The Transactions PIN which is requesting for cancel	M
ReasonForCancellation	String	100	Reason of Cancellation	M
OTPProcessId	String	200	Response As per SendOTP	M
OTP	Number	6	Collect from respective mobile number As per SendOTP	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
PinNo	String	20	Provided PIN No if success	O

CONFIDENTIAL

24. Get Balance

This method is used to view partner balance accordingly.

XML Request	XML Response
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:tem="http://tempuri.org/" xmlns:rem="http://schemas.datacontract.org/2004/07/Remit.API"> <soapenv:Header/> <soapenv:Body> <tem:GetBalance> <!--Optional:--> <tem:GetBalanceRequest> <rem:UserName>?</rem:UserName> <rem:Password>?</rem:Password> </tem:GetBalanceRequest> </tem:GetBalance> </soapenv:Body> </soapenv:Envelope>	<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"> <s:Body> <GetBalanceResponse xmlns="http://tempuri.org/"> <GetBalanceResult xmlns:a="http://schemas.datacontract.org/2004/07/Remit.API" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"> <a:Code>?</a:Code> <a:Message>?</a:Message> <a:Balance>?</a:Balance> <a:AvailableLimit i:nil="true"/> </GetBalanceResult> </GetBalanceResponse> </s:Body> </s:Envelope>

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
UserName	String	20	Provided By Prabhu	M
Password	String	20	Provided By Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**O / M**
Code	String	3	- Success '*000*' - For others, check the Message	M
Message	String	200	- Success if Success, - Else Error Description	M
Balance	String		Available Balance of Partner (If Success)	M
AvailableLimit			If Success	O

CONFIDENTIAL

Appendix A – Response Code

Response Code **000** is SUCCESS

Response Code **777** is PENDING

Check **SearchTransaction** for Response Code **777**

All the other response codes are operation failed

[Please go through the message and display an exact message in the respective User Interface]

CONFIDENTIAL