IME FOREX

Web Service Interface Document
Indo Nepal Send API

Version 1.2

Table of Contents

1. List of Methods, declared in Web Service 1
2. Common Possible Response Codes 2
3. Data Dictionary (GetStaticData) 3
   3.1. Country List 4
   3.2. Country State List 6
   3.3. Country State District List 8
   3.4. District Municipality List 10
   3.5. Gender List 12
   3.6. Marital Status List 14
   3.7. Occupation List 16
   3.8. Source of Fund List 18
   3.9. Customer Identification Type List 20
   3.10. Issue Place List 22
   3.11. Relationship List 24
   3.12. Purpose of Remittance 26
   3.13. Transaction Cancel Reason 28
   3.14. Bank List 30
   3.15. Bank Branch List 32
   3.16. CSP RegistrationType List 34
   3.17. CSP Address Proof Type List 36
   3.18. CSP Business Type List 38
   3.19. CSP Document Type List 40
   3.20. Bank Account Type List 42
   3.21. CSP Device List 44
   3.22. CSP Connectivity Type List 46
   3.23. Owner Category List 48
   3.24. Owner Address Proof Type List 50
   3.25. Physically Handicapped List 52
   3.26. Alternate Occupation Type List 54
   3.27. Owner Id Type List 56
   3.28. Education Qualification List 58

3.29. Additional Course List 60
4. CSP Module 62
4.1. CSP Registration 63
4.2. CSP Document Upload 71
4.3. Check CSP 73
4.4. Balance Inquiry 76
5. Customer Module 78
5.1. Register Customer 78
5.2. Send OTP 83
5.3. Confirm Customer Registration 85
5.4. Check Customer 87
6. Transaction Creation 89
6.1. Exchange Rate and Service Charge 90
6.2. Send Transaction 92
6.3. Send OTP 94
6.4. Confirm Send Transaction 95
7. Modify Transaction 97
7.1. Transaction Inquiry 97
7.2. Send OTP 100
7.3. Modify Transaction 101
8. Cancel Transaction 104
8.1. Transaction Inquiry 104
8.2. Send OTP 104
8.3. Cancel Transaction 105
9. Reports 107
9.1. Reconcile Report 108
9.2. Statement of Account 111

Table of Figures

Figure 1: Methods Used in Web Service (API) 1
Figure 2: Methods used for CSP Module 62
Figure 3: Methods used for Customer Module 78
Figure 4: Methods used for Transaction Creation 89
Figure 5: Methods used for Transaction Modification 97
Figure 6: Methods used for Transaction Cancellation 104
Figure 7: Methods used for Reports 107

1. List of Methods, declared in Web Service

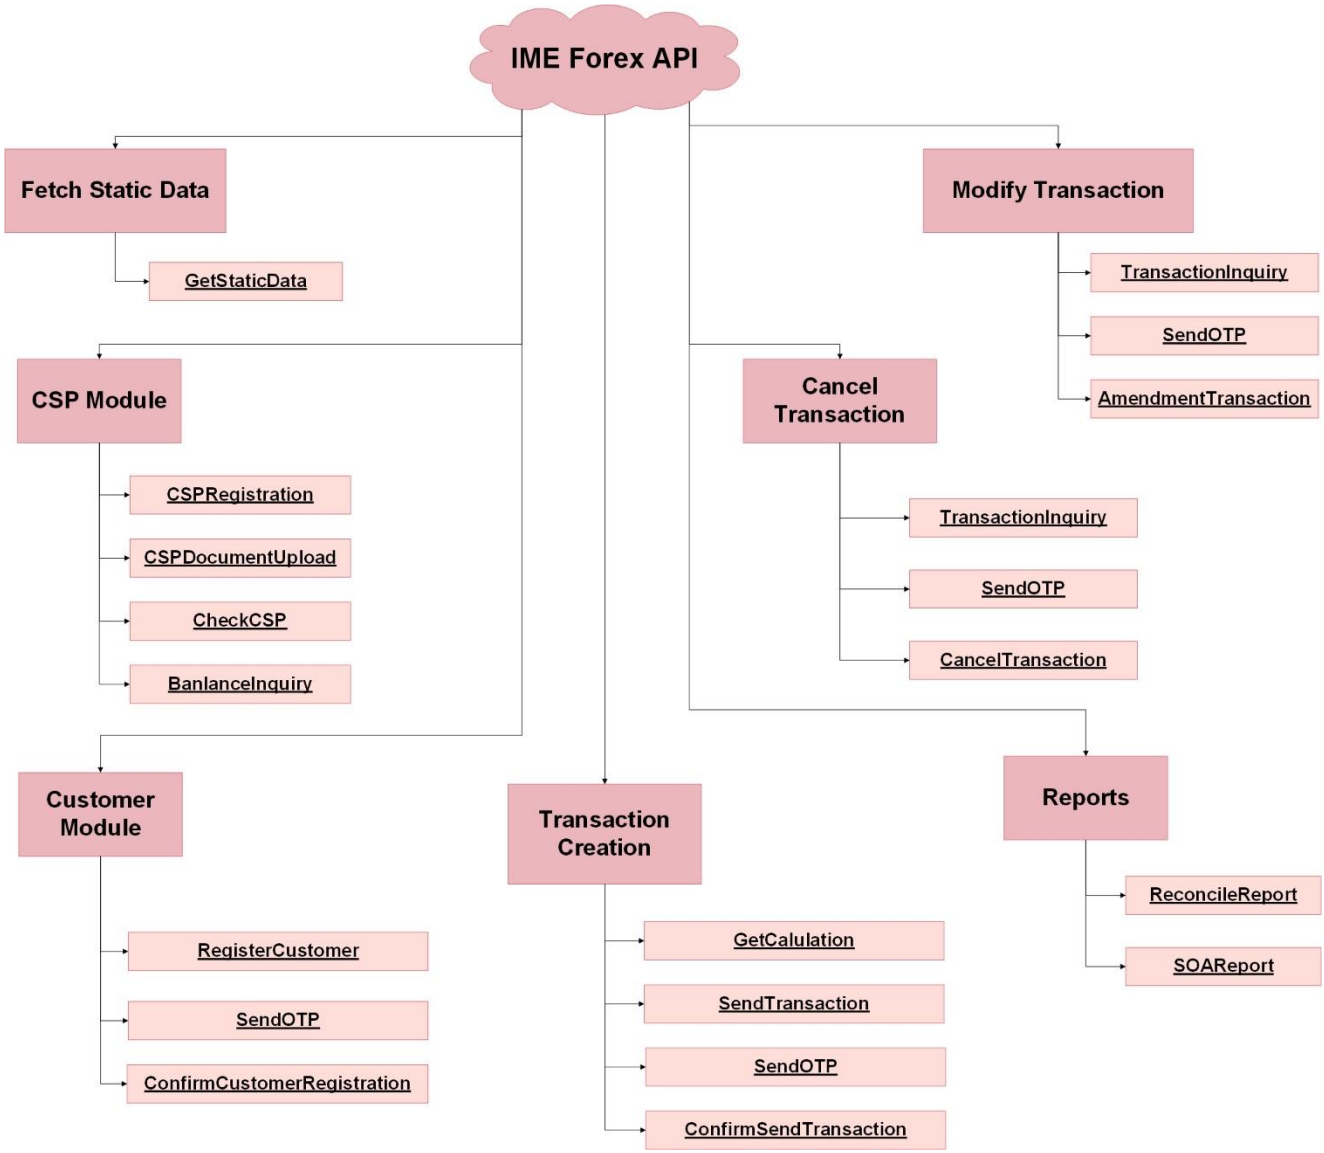

Figure 1: Methods Used in Web Service (API)

S.N.	Method Name	Description
1	**GetStaticData**	Get static data needed for other methods
2	**CSPRegistration**	Register the CSP
3	**CSPDocumentUpload**	Upload the CSP Documents
4	**CSPCheck**	Check the CSP status and its documents status
5	**BalanceInquiry**	Get available balance of agent
6	**CheckCustomer**	Verify the customer, whether customer is registered or not
7	**SendOTP**	Send OTP on customer number
8	**CustomerRegistration**	Register sending customer
9	**ConfirmCustomerRegistration**	Confirm **CreateCustomer** data with OTP verification
10	**GetCalculation**	Get the latest Exchange Rate and Service Charges
11	**SendTransaciton**	Creates a new transaction. Requires **ForexSessionID** from **GetCalculation** method
12	**ConfirmSendTransaction**	Confirm **SendTransaciton** data with OTP verification
13	**TransactionInquiry**	Inquiry the status of transaction performed by agent
14	**AmendmentTransaction**	Modify transaction performed by agent
15	**CancelTransaction**	Cancel transaction performed by agent
16	**ReconcileReport**	Get list of transactions performed by agent
17	**SOAReport**	Statement of Account report of Agent

2. Common Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
901	Technical Error
999	Internal Server Error

3. Data Dictionary (GetStaticData)

This method is using to get API internal Data Value.
Method Name: **GetStaticData**

Request Codes

S.N.	Type Code	Description (Static Data Name)
1	**WSST-CONV1**	Country List
2	**WSST-STTV1**	Country State List
3	**WSST-DISV1**	State District List
4	**WSST-MUNV1**	District Municipality List
5	**WSST-GDRV1**	Gender List
6	**WSST-MSSV1**	Marital Status List
7	**WSST-OCPV1**	Occupation List
8	**WSST-SOFV1**	Source of Fund List
9	**WSST-IDTV1**	Identification Type List
10	**WSST-POIV1**	Place of Issue List
11	**WSST-RELV1**	Relationship List
12	**WSST-PORV1**	Purpose of Remit List
13	**WSST-TCRV1**	Transaction Cancel Reason List
14	**WSST-BKLV1**	Bank List
15	**WSST-BBLV1**	Bank Branch List
16	**WSST-REGV1**	CSP Registration Type List
17	**WSST-ADPV1**	CSP Address Proof Type List
18	**WSST-BUSV1**	CSP BusinessType List
19	**WSST-ADOV1**	CSP Document Type List
20	**WSST-ACCV1**	Account Type List
21	**WSST-DEVV1**	Device List
22	**WSST-CTVV1**	Connectivity Type List
23	**WSST-CATV1**	Owner Category Type List
24	**WSST-OAPV1**	Owner Address Proof Type List
25	**WSST-PHCV1**	Physically Handicapped Type List
26	**WSST-AOCV1**	Alternate Occupation Type List
27	**WSST-OIDV1**	Owner Id Type List
28	**WSST-EDQV1**	Educational Qualification List
29	**WSST-ADCV1**	AdditionalCourse List

Possible Response Codes

Response Code	Response Message
0	SUCCESS
101	Login Failed
102	Need to change the password. Contact HO
203	Required Field
204	Bad Request (Invalid Input Value)
901	Technical Error
999	Internal Error

3.1. Country List

Provides available Country List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-CONV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Country Id
Value	Country Name

3.2. Country State List

Provides available Country State List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-STTV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	Country code, **NPL** – Nepal **IND** - India

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	State Id
Value	State Name

3.3. Country State District List

Provides available Country State District List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-DISV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	State ID of **India** or **Nepal**

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```


Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	District Id
Value	District Name

3.4. District Municipality List

Provides available Dristrict Municipality List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-MUNV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	District ID of **Nepal**

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Municipality Id
Value	Municipality Name

3.5. Gender List

Provides available Gender List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-GDRV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```


Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Gender Id
Value	Gender Name

3.6. Marital Status List

Provides available Marital Status List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-MSSV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```


Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Marital Status Id
Value	Marital Status Name

3.7. Occupation List

Provides available Occupation List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-OCPV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```


Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Occupation Id
Value	Occupation Name

3.8. Source of Fund List

Provides available Source of Fund List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-SOFV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Source of Fund Id
Value	Source of Fund Name

3.9. Customer Identification Type List

Provides available Customer Identification Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-IDTV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	Country code, **NPL** – Nepal **IND** - India

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	ID Type Id
Value	ID Type Name

3.10. Issue Place List

Provides available Issue Place List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-POIV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	Identification Type ID

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Issue Place Id
Value	Issue Place Name

3.11. Relationship List

Provides available Relationship List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-RELV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Relationship Id
Value	Relationship Name

3.12. Purpose of Remittance

Provides available Purpose of Remittance List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-PORV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Purpose of Remittance Id
Value	Purpose of Remittance Name

3.13. Transaction Cancel Reason

Provides available Transaction Cancel Reason List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-TCRV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Cancel Reason Id
Value	Cancel Reason Name

3.14. Bank List

Provides available Bank List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-BKLV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	Country code, **NPL** – Nepal **IND** - India

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Bank Id
Value	Bank Name

3.15. Bank Branch List

Provides available Bank Branch List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-BBLV1** Code that is used to fetch static data
ReferenceValue	String	Y	30	Bank ID

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Bank Branch ID
Value	Bank Branch Name

3.16. CSP RegistrationType List

Provides available CSP Registration Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-REGV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Registration Type Id
Value	Registration Type Name

3.17. CSP Address Proof Type List

Provides available CSP Address Proof Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-ADPV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```


Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	CSP Address Proof Type Id
Value	CSP Address Proof Type Name

3.18. CSP Business Type List

Provides available CSP Business Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-BUSV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Business Type Id
Value	Business Type Name

3.19. CSP Document Type List

Provides available CSP Document Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-ADOV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	CSP Document Type Id
Value	CSP Document Type Name

3.20. Bank Account Type List

Provides available Bank Account Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-ACCV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Bank Account Type Id
Value	Bank Account Type Name

3.21. Device Type List

Provides available CSP Device Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-DEVV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Device Type Id
Value	Device Type Name

3.22. Connectivity Type List

Provides available CSP Connectivity Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-CTVV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Connectivity Type Id
Value	Connectivity Type Name

3.23. Owner Category List

Provides available Owner Category List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-CATV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Owner Category Id
Value	Owner Category Name

3.24. Owner Address Proof Type List

Provides available Owner Address Proof Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-OAPV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Owner Address Proof Type Id
Value	Owner Address Proof Type Name

3.25. Physically Handicapped List

Provides available Physically Handicapped List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-PHCV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Physically Handicapped Id
Value	Physically Handicapped Name

3.26. Alternate Occupation Type List

Provides available Alternate Occupation Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-AOCV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Alternate Occupation Type Id
Value	Alternate Occupation Type Name

3.27. Owner Id Type List

Provides available Owner Id Type List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-OIDV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Owner Id Type Id
Value	Owner Id Type Name

3.28. Education Qualification List

Provides available Educational Qualification List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-EDQV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Educational Qualification Id
Value	Educational Qualification Name

3.29. Additional Course List

Provides available Additional List

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetStaticData>
         <ime:GetStaticDataRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:TypeCode>string</ime:TypeCode>
            <!--Optional:-->
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:GetStaticDataRequest>
      </ime:GetStaticData>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
TypeCode	String	Y	10	**WSST-ADCV1** Code that is used to fetch static data
ReferenceValue	String	N	30	Type Code reference value if needed

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetStaticDataResponse xmlns="IME">
         <GetStaticDataResult>
            <Response>
               <Code>stirng</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RequestedTypeCode>string</RequestedTypeCode>
            <DataList>
               <Data>
                  <Id>string</Id>
                  <Value>string</Value>
               </Data>
            </DataList>
         </GetStaticDataResult>
      </GetStaticDataResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RequestedTypeCode	Requested Type Code
Id	Additional Course Id
Value	Additional Course Name

4. CSP Module

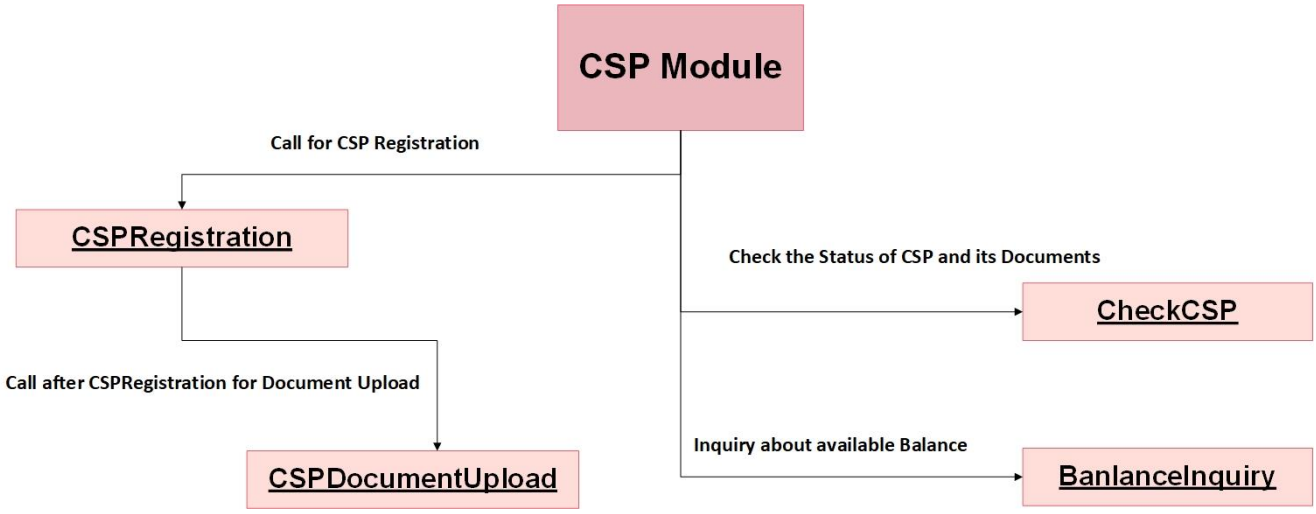

Figure 2: Methods used for CSP Module

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
603	Parameter Missing
604	Bad Request (Invalid Input Value)
605	Balance Details Not Found
901	Technical Error
999	Internal Server Error

4.1. CSP Registration

This method is using to Register the CSP under Agents/ Corporate.

Method Name: **CSPRegistration**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
  <soapenv:Header/>
  <soap:Body>
    <CSPRegistration>
      <CSPRegisterRequest>
        <Credentialss>
          <AccessCode>string</AccessCode>
          <UserName>string</UserName>
          <Password>string</Password>
          <PartnerBranchId>string</PartnerBranchId>
          <AgentSessionId>string</AgentSessionId>
        </Credentialss>
        <CompanyProfile>
          <PartnerCSPCode>string</PartnerCSPCode>
          <CSPName>string</CSPName>
          <RegistrationType>string</RegistrationType>
          <RegistrationNumber>string</RegistrationNumber>
          <BusinessType>string</BusinessType>
          <ContractExpiryDate>string</ContractExpiryDate>
          <ContractRenewalDate>string</ContractRenewalDate>
          <PANNumber>string</PANNumber>
        </CompanyProfile>
        <CompanyInfoDetails>
          <Country>string</Country>
          <State>string</State>
          <District>string</District>
          <City>string</City>
          <HouseNumber>string</HouseNumber>
          <RoadName>string</RoadName>
          <PINCode>string</PINCode>
          <AddressProofType>string</AddressProofType>
        </CompanyInfoDetails>
        <ContactPersonDetails>
          <ContactPersonName>string</ContactPersonName>
          <MobileNumber1>string</MobileNumber1>
          <MobileNumber2>string</MobileNumber2>
          <LandlineNumber>string</LandlineNumber>
          <Email>string</Email>
        </ContactPersonDetails>
        <BankDetails>
          <Bank>string</Bank>
          <AccountType>string</AccountType>
          <AccountNo>string</AccountNo>
          <IFSC>string</IFSC>
        </BankDetails>
        <BankDetails>
          <Bank>string</Bank>
          <AccountType>string</AccountType>
```

```
    <AccountNo>string</AccountNo>
    <IFSC>string</IFSC>
  </BankDetails>
  <DeviceConnectivityDetails>
    <Device>string</Device>
    <ConnectivityType>string</ConnectivityType>
    <Provider>string</Provider>
  </DeviceConnectivityDetails>
  <BusinessHourDetails>
    <StartTime>string</StartTime>
    <EndTime>string</EndTime>
    <HasWeekendOff>string</HasWeekendOff>
    <OffDay>string</OffDay>
  </BusinessHourDetails>
  <OwnerDetails>
    <OwnersInfoDetails>
      <OwnersName>string</OwnersName>
      <Gender>string</Gender>
      <DOB>string</DOB>
      <FatherName>string</FatherName>
      <SpouseName>string</SpouseName>
      <Category>string</Category>
      <PhysicallyHandicapped>string</PhysicallyHandicapped>
      <MobileNumber>string</MobileNumber>
      <ContactNumber>string</ContactNumber>
      <Email>string</Email>
      <AlternateOccupationType>string</AlternateOccupationType>
    </OwnersInfoDetails>
    <OwnerDocumentDetails>
      <PanCard>string</PanCard>
      <IdType>string</IdType>
      <IDTypeNumber>string</IDTypeNumber>
    </OwnerDocumentDetails>
    <OwnerAddressDetails>
      <Country>string</Country>
      <State>string</State>
      <District>string</District>
      <City>string</City>
      <HouseNumber>string</HouseNumber>
      <RoadName>string</RoadName>
      <PINCode>string</PINCode>
      <ResidentialAddressVillageCode>string</ResidentialAddressVillageCode>
      <AddressProofType>string</AddressProofType>
    </OwnerAddressDetails>
    <OwnerEducationDetails>
      <EducationalQualification>string</EducationalQualification>
      <AdditionalCourse>string</AdditionalCourse>
      <InstituteName>string</InstituteName>
      <DateofPassed>string</DateofPassed>
    </OwnerEducationDetails>
  </OwnerDetails>
  <OwnerDetails>
    <OwnersInfoDetails>
      <OwnersName>string</OwnersName>
      <Gender>string</Gender>
      <DOB>string</DOB>
      <FatherName>string</FatherName>
```

```
            <SpouseName>string</SpouseName>
            <Category>string</Category>
            <PhysicallyHandicapped>string</PhysicallyHandicapped>
            <MobileNumber>string</MobileNumber>
            <ContactNumber>string</ContactNumber>
            <Email>string</Email>
            <AlternateOccupationType>string</AlternateOccupationType>
          </OwnersInfoDetails>
          <OwnerDocumentDetails>
            <PanCard>string</PanCard>
            <IdType>string</IdType>
            <IDTypeNumber>string</IDTypeNumber>
          </OwnerDocumentDetails>
          <OwnerAddressDetails>
            <Country>string</Country>
            <State>string</State>
            <District>string</District>
            <City>string</City>
            <HouseNumber>string</HouseNumber>
            <RoadName>string</RoadName>
            <PINCode>string</PINCode>
            <ResidentialAddressVillageCode>string</ResidentialAddressVillageCode>
            <AddressProofType>string</AddressProofType>
          </OwnerAddressDetails>
          <OwnerEducationDetails>
            <EducationalQualification>string</EducationalQualification>
            <AdditionalCourse>string</AdditionalCourse>
            <InstituteName>string</InstituteName>
            <DateofPassed>string</DateofPassed>
          </OwnerEducationDetails>
        </OwnerDetails>
      </CSPRegisterRequest>
    </CSPRegistration>
  </soap:Body>
</soap:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
CompanyProfile				
PartnerCSPCode	String	Y	20	Unique CSP Code in Partner System
CSPName	String	Y	100	Name of CSP
RegistrationType	String	Y	10	Registration Type (Id received from **GetStaticData** method)
RegistrationNumber	String	Y	20	Registration Number
BusinessType	String	Y	10	Business Type (Id received from **GetStaticData** method)
ContractExpiryDate	Date	Y	20	Date of Contract Expiry. Format (YYYY/MM/DD)
ContractRenewalDate	Date	Y	20	Date of Contract Renewal. Format (YYYY/MM/DD)
PANNumber	String	Y	20	CSP PAN Number
CompanyInfoDetails				
Country	String	Y	10	Country (Id received from **GetStaticData** method)
State	String	Y	10	State according to Country (Id received from **GetStaticData** method)
District	String	Y	10	District according to State (Id received from **GetStaticData** method)
City	String	Y	100	City Name
HouseNumber	String	Y	20	House Number
RoadName	String	Y	200	Road Name
PINCode	String	Y	6	PIN Code
AddressProofType	String	Y	10	Address Proof Type (Id received from **GetStaticData** method)
ContactPersonDetails				
ContactPersonName	String	Y	250	Contact Person Name

MobileNumber1	String	Y	10	Mobile Number 1
MobileNumber2	String	N	10	Mobile Number 2
LandlineNumber	String	N	11	Landline Number
Email	String	Y	100	Contact Person Email
BankDetails – Bank Details of the CSP - Can have one or more banks				
Bank	String	Y	10	Bank Id (ID Generated from **GetStaticData** Method where Country is India)
AccountType	String	Y	10	Account Type (ID Generated from **GetStaticData** Method)
AccountNo	String	Y	30	Bank Account Number
IFSC	String	Y	30	Bank IFSC
DeviceConnectivityDetails				
Device	String	Y	10	Device (ID Generated from **GetStaticData** Method)
ConnectivityType	String	Y	10	Connectivity Type (ID Generated from **GetStaticData** Method)
Provider	String	Y	100	Internet Provider Name
BusinessHourDetails				
StartTime	Time	Y	10	Businees Start Time. Format (HH:mm:ss)
EndTime	Time	Y	10	Businees End Time. Format (HH:mm:ss)
HasWeekendOff	String	Y	1	Has off day or not (Input **Y** for Yes or **N** for No)
OffDay	String	N	10	Weekdays (ID Generated from **GetStaticData** Method) Mandatory if HasWeekendOff is **Y**
OwnerDetails – Owner details of a CSP - Can have one or more Owner				
OwnersName	String	Y	50	CSP Owner Name
Gender	String	Y	10	Owner Gender (Id received from **GetStaticData** method)
DOB	Date	Y	20	Date of Birth. Format (YYYY/MM/DD)
FatherName	String	Y	50	Father Name
SpouseName	String	N	50	Spouse Name
Category	String	N	10	Category (Id received from **GetStaticData** method)

PhysicallyHandicapped	String	N	10	Physically Handicapped (Id received from **GetStaticData** method)
MobileNumber	String	Y	10	Mobile Number
ContactNumber	String	N	11	Contact Number
Email	String	N	50	Owner Email
AlternateOccupationType	String	N	10	Alternate Occupation Type (Id received from **GetStaticData** method)
OwnerDocumentDetails				
PanCard	String	Y	20	Owner Pand Card Number
IdType	String	Y	10	Id Type (Id received from **GetStaticData** method)
IDTypeNumber	String	Y	50	Owner Id Type Number
OwnerAddressDetails				
Country	String	Y	10	Country (Id received from **GetStaticData** method)
State	String	Y	10	State according to Country (Id received from **GetStaticData** method)
District	String	Y	10	District according to State (Id received from **GetStaticData** method)
City	String	Y	50	City Name
HouseNumber	String	Y	20	House Number
RoadName	String	Y	50	Road Name
PINCode	String	Y	6	PIN Code
ResidentialAddressVillageCode	String	Y	10	Residential Address Village Code
AddressProofType	String	Y	10	Address Proof Type (Id received from **GetStaticData** method)
OwnerEducationDetails				
EducationalQualification	String	Y	10	Educational Qualification (Id received from **GetStaticData** method)
AdditionalCourse	String	Y	10	Additional Course (Id received from **GetStaticData** method)
InstituteName	String	Y	50	Name of Institute of Additional Course
DateofPassed	String	Y	50	Date of Passed in Year

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <soap:Body>
      <CSPRegistrationResponse xmlns="IME">
         <CSPRegisterResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <CompanyDetails>
               <CSPName>string</CSPName>
               <PartnerCSPCode>string</PartnerCSPCode>
               <Status>string</Status>
            </CompanyDetails>
            <AdditionalDetails>
               <OwnerDetails>
                  <OwnerDetailsInfo>
                     <OwnerId>string</OwnerId>
                     <OwnerName>string</OwnerName>
                  </OwnerDetailsInfo>
                  <OwnerDetailsInfo>
                     <OwnerId>string</OwnerId>
                     <OwnerName>string</OwnerName>
                  </OwnerDetailsInfo>
               </OwnerDetails>
               <BankDetails>
                  <BankDetailsInfo>
                     <BankId>string</BankId>
                     <BankName>string</BankName>
                  </BankDetailsInfo>
                  <BankDetailsInfo>
                     <BankId>string</BankId>
                     <BankName>string</BankName>
                  </BankDetailsInfo>
               </BankDetails>
               <DocumentDetails>
                  <DocumentDetailsInfo>
                     <DocumentType>string</DocumentType>
                     <Status>string</Status>
                     <ReferenceId>string</ReferenceId>
                     <IsRequired>string</IsRequired>
                  </DocumentDetailsInfo>
                  <DocumentDetailsInfo>
                     <DocumentType>string</DocumentType>
                     <Status>string</Status>
                     <ReferenceId>string</ReferenceId>
                     <IsRequired>string</IsRequired>
                  </DocumentDetailsInfo>
               </DocumentDetails>
            </AdditionalDetails>
         </CSPRegisterResponse>
      </CSPRegistrationResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
CompanyDetails	
CSPName	Name of CSP
PartnerCSPCode	Unique CSP Code in Partner System
Status	Active / Inactive Status of CSP
OwnerDetailsInfo - Oner or more Owner Details	
OwnerId	Ower Id in IME Forex System for Document Upload
OwnerName	Owner Name
BankDetailsInfo – One or more Bank Details	
BankId	Bank Id in IME Forex System for Document Upload
BankName	Bank Name
DocumentDetailsInfo – One or more Document Details	
DocumentType	Document Type Id for Document Upload. (Need to map Id with Id received from **GetStaticData** method)
Status	**True** – Document is uploaded (available) in IME Forex **False** – Document is not uploaded (available) in IME Forex, need to upload.
ReferenceId	Reference Id for document. **CSPCode** – If document is of CSP **BankId** – If document is of Bank Cancel Cheque **OwnerId** – If document is of Owners
IsRequired	**Yes** – For Mandatory **No** – For Optional

4.2. CSP Document Upload

This method is using to Upload the CSP Documents.

Method Name: **CSPDocumentUpload**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
  <soapenv:Header/>
  <soap:Body>
    <CSPDocumentUpload>
      <CSPDocumentUploadRequest>
        <Credentialss>
          <AccessCode>string</AccessCode>
          <UserName>string</UserName>
          <Password>string</Password>
          <PartnerBranchId>string</PartnerBranchId>
          <AgentSessionId>string</AgentSessionId>
        </Credentialss>
        <Documents>
          <DocumentType>string</DocumentType>
          <ReferenceId>string</ReferenceId>
          <DocumentData>string</DocumentData>
          <DocumentFormat>string</DocumentFormat>
        </Documents>
        <Documents>
          <DocumentType>string</DocumentType>
          <ReferenceId>string</ReferenceId>
          <DocumentData>string</DocumentData>
          <DocumentFormat>string</DocumentFormat>
        </Documents>
      </CSPDocumentUploadRequest>
    </CSPDocumentUpload>
  </soap:Body>
</soap:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
Documents – Can have one or more Documents				
DocumentType	String	Y	10	Document Type (Id received from **GetStaticData** method)
ReferenceId	String	Y	10	Document Refrerence Id. (ReferenceId received while registering the CSP (**CSPRegistration**) or received from **CheckCSP** method for that Document Type)
DocumentData	String	Y	2 MB	Document Data in Base64 String Format
DocumentFormat	String	Y	10	DocumentData format. Only support **pdf, jpg, jpeg, png (do not include dot (.))**

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <CSPDocumentUploadResponse xmlns="IME">
      <CSPDocumentUploadResponse>
        <Response>
          <Code>string</Code>
          <Message>string</Message>
          <AgentSessionId>string</AgentSessionId>
        </Response>
      </CSPDocumentUploadResponse>
    </CSPDocumentUploadResponse>
  </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent

4.3. Check CSP

This method is using to Check the CSP status and its documents status.

Method Name: **CheckCSP**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
  <soapenv:Header/>
  <soap:Body>
    <CheckCSP>
      <CheckCSPRequest>
        <Credentialss>
          <AccessCode>string</AccessCode>
          <UserName>string</UserName>
          <Password>string</Password>
          <PartnerBranchId>string</PartnerBranchId>
          <AgentSessionId>string</AgentSessionId>
        </Credentialss>
      </CheckCSPRequest>
    </CheckCSP>
  </soap:Body>
</soap:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <soap:Body>
      <CSPRegistrationResponse xmlns="IME">
         <CSPRegisterResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <CompanyDetails>
               <CSPName>string</CSPName>
               <PartnerCSPCode>string</PartnerCSPCode>
               <Status>string</Status>
            </CompanyDetails>
            <AdditionalDetails>
               <OwnerDetails>
                  <OwnerDetailsInfo>
                     <OwnerId>string</OwnerId>
                     <OwnerName>string</OwnerName>
                  </OwnerDetailsInfo>
                  <OwnerDetailsInfo>
                     <OwnerId>string</OwnerId>
                     <OwnerName>string</OwnerName>
                  </OwnerDetailsInfo>
               </OwnerDetails>
               <BankDetails>
                  <BankDetailsInfo>
                     <BankId>string</BankId>
                     <BankName>string</BankName>
                  </BankDetailsInfo>
                  <BankDetailsInfo>
                     <BankId>string</BankId>
                     <BankName>string</BankName>
                  </BankDetailsInfo>
               </BankDetails>
               <DocumentDetails>
                  <DocumentDetailsInfo>
                     <DocumentType>string</DocumentType>
                     <Status>string</Status>
                     <ReferenceId>string</ReferenceId>
                     <IsRequired>string</IsRequired>
                  </DocumentDetailsInfo>
                  <DocumentDetailsInfo>
                     <DocumentType>string</DocumentType>
                     <Status>string</Status>
                     <ReferenceId>string</ReferenceId>
                     <IsRequired>string</IsRequired>
                  </DocumentDetailsInfo>
               </DocumentDetails>
            </AdditionalDetails>
         </CSPRegisterResponse>
      </CSPRegistrationResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
CompanyDetails	
CSPName	Name of CSP
PartnerCSPCode	Unique CSP Code in Partner System
Status	Active / Inactive Status of CSP
OwnerDetailsInfo - Oner or more Owner Details	
OwnerId	Ower Id in IME Forex System for Document Upload
OwnerName	Owner Name
BankDetailsInfo – One or more Bank Details	
BankId	Bank Id in IME Forex System for Document Upload
BankName	Bank Name
DocumentDetailsInfo – One or more Document Details	
DocumentType	Document Type Id for Document Upload. (Need to map Id with Id received from **GetStaticData** method)
Status	**True** – Document is uploaded (available) in IME Forex **False** – Document is not uploaded (available) in IME Forex, need to upload.
ReferenceId	Reference Id for document. **CSPCode** – If document is of CSP **BankId** – If document is of Bank Cancel Cheque **OwnerId** – If document is of Owners
IsRequired	**Yes** – For Mandatory **No** – For Optional

4.4. Balance Inquiry

This method is using to get available balance of agent.

Method Name: **BalanceInquiry**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:BalanceInquiry>
         <ime:BalanceInquiryRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
         </ime:BalanceInquiryRequest>
      </ime:BalanceInquiry>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <BalanceInquiryResponse xmlns="IME">
         <BalanceInquiryResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <Balance>string</Balance>
         </BalanceInquiryResponse>
      </BalanceInquiryResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
Balance	Current Balance of Agent

5. Customer Module

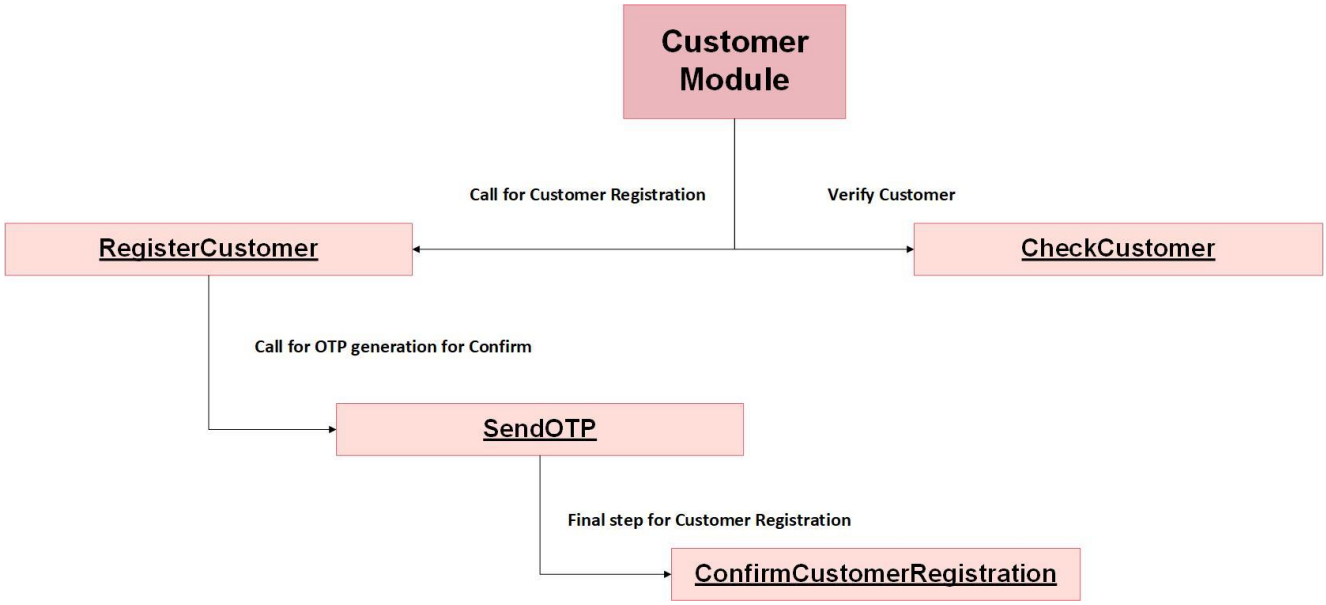

Figure 3: Methods used for Customer Module

5.1. Register Customer

This method is using to register the customer.

Method Name: **CustomerRegistration**

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
503	Parameter Missing
504	Bad Request (Invalid Input Value)
901	Technical Error
999	Internal Server Error

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:CustomerRegistration>
         <ime:RegisterCustomerRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:CustomerDetails>
               <ime:MobileNo>string</ime:MobileNo>
               <!--Optional:-->
               <ime:MembershipId>string</ime:MembershipId>
               <ime:FirstName>string</ime:FirstName>
               <!--Optional:-->
               <ime:MiddleName>string</ime:MiddleName>
               <ime:LastName>string</ime:LastName>
               <ime:Nationality>string</ime:Nationality>
               <ime:MaritalStatus>string</ime:MaritalStatus>
               <ime:DOB>date</ime:Dob>
               <ime:Gender>string</ime:Gender>
               <ime:FatherOrMotherName>string</ime:FatherOrMotherName>
               <!--Optional:-->
               <ime:Email>string</ime:Email>
               <ime:Occupation>string</ime:Occupation>
               <!--Optional:-->
               <ime:SourceOfFund>string</ime:SourceOfFund>
            </ime:CustomerDetails>
            <ime:PermanentAddresss>
               <ime:State>string</ime:State>
               <ime:District>string</ime:District>
               <!--Optional:-->
               <ime:Municipality>string</ime:Municipality>
               <ime:Address>string</ime:Address>
               <!--Optional:-->
               <ime:WardNo>string</ime:WardNo>
               <!--Optional:-->
               <ime:Tole>string</ime:Tole>
               <!--Optional:-->
               <ime:HouseNo>string</ime:HouseNo>
            </ime:PermanentAddresss>
            <ime:TemporaryAddress>
               <ime:State>string</ime:State>
               <ime:District>string</ime:District>
               <ime:Address>string</ime:Address>
               <!--Optional:-->
               <ime:PostalCode>string</ime:PostalCode>
               <!--Optional:-->
               <ime:HouseNo>string</ime:HouseNo>
            </ime:TemporaryAddress>
            <ime:IdentityDetails>
```

```
                <ime:IdType>string</ime:IdType>
                <ime:IdNo>string</ime:IdNo>
                <!--Optional:-->
                <ime:IdPlaceOfIssue>string</ime:IdPlaceOfIssue>
                <ime:IssueDate>date</ime:IssueDate>
                <!--Optional:-->
                <ime:ExpiryDate>date</ime:ExpiryDate>
                <!--Optional:-->
                <ime:IdNoCitizenship>string</ime:IdNoCitizenship>
                <!--Optional:-->
                <ime:IdIssuePlaceCitizenship>string</ime:IdIssuePlaceCitizenship>
                <!--Optional:-->
                <ime:IdIssueDateCitizenship>date</ime:IdIssueDateCitizenship>
                <!--Optional:-->
                <ime:PhotoData>string</ime:PhotoData>
                <!--Optional:-->
                <ime:PhotoDataType>string</ime:PhotoDataType>
                <ime:IdData>string</ime:IdData>
                <ime:IdDataType>string</ime:IdDataType>
            </ime:IdentityDetails>
        </ime:RegisterCustomerRequest>
      </ime:CustomerRegistration>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
Customer Details				
MobileNo	String	Y	15	Customer Mobile number
MembershipId	String	N	10	IME Forex Membership ID
FirstName	String	Y	20	Customer First Name
MiddleName	String	N	20	Customer Middle Name
LastName	String	Y	20	Customer Last Name
Nationality	String	Y	3	Customer Nationality (Id received from **GetStaticData** method)
MaritalStatus	String	Y	10	Customer Marital Status (Id received from **GetStaticData** method)
DOB	Date	Y	20	Date of Birth. Format (YYYY/MM/DD)
Gender	String	Y	10	Customer Gender (Id received from **GetStaticData** method)
FatherOrMotherName	String	Y	50	Either Customer Father or Mother Name
Email	String	N	30	Customer Email
Occupation	String	Y	10	Customer Occupation (Id received from **GetStaticData** method)
SourceOfFund	String	N	10	Source of Fund (Id received from **GetStaticData** method)
Permanent Address				
State	String	Y	10	State according to Nationality Country (Id received from **GetStaticData** method)
District	String	Y	10	District according to State (Id received from **GetStaticData** method)
Municipality	String	N	10	Municipality according to District, mandatory if Nationality is **NPL** (Id received from **GetStaticData** method)
Address	String	Y	50	Customer Permanent Address
WardNo	String	N	10	Customer Permanent Ward Number
HouseNo	String	N	20	Customer Permanent House Number
Temporary Address				
State	String	Y	10	Customer Temporary State of India (Id received from **GetStaticData** method)
District	String	Y	10	Customer Temporary District according to state (Id received from **GetStaticData** method)
Address	String	Y	50	Customer Temporary Address
PostalCode	String	N	20	Customer Temporary Postal Code
HouseNo	String	N	20	Customer Temporary House Number

Identity Details				
IdType	String	Y	10	Identity Type according to Nationality (Id received from **GetStaticData** method)
IdNo	String	Y	20	Identity Number of Customer
IDPlaceofIssue	String	N	10	Id Issue Place according to **IdType,** mandatory if Nationality is **NPL** (Id received from **GetStaticData** method)
IssueDate	Date	Y	20	Id Issue Date. Format (YYYY/MM/DD)
ExpiryDate	Date	N	20	Id Expiry Date, Mandatory on Identity having expiry date. Format (YYYY/MM/DD)
IdNoCitizenship	String	Mandatory if Nationality is **NPL** and **IdType** is not Citizenship	20	Nepalese Citizenship Number
IdIssuePlaceCitizenship	String		10	Nepal Id Issue Place (Id received from **GetStaticData** method)
IdIssueDateCitizenship	Date		20	Citizenship Date of Issue Format (YYYY/MM/DD)
PhotoData	String	N	500KB	Base64 String Format of Personal Photo
PhotoDataType	String	N	5	Data Format. Only support **pdf, jpg, jpeg, png**. Mandatory if PhotoData is not null.
IdData	String	Y	500KB	Image in Base64 String Format
IdDataType	String	Y	5	Id Data Format. Only support **pdf, jpg, jpeg, png (do not include dot (.))**

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <CustomerRegistrationResponse xmlns="IME">
         <CustomerRegistrationResult>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <CustomerToken>string</CustomerToken>
         </CustomerRegistrationResult>
      </CustomerRegistrationResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
CustomerToken	Unique customer token id for confirm customer registraion

5.2. Send OTP

This method is using to send the OTP to the sender mobile number with reference number collected from **SendTransaction** method.

Method Name: **SendOTP**

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
703	Parameter Missing
704	Bad Request (Invalid Input Value)
706	Sending OTP Very Quick/ OTP Limit Exceeded. Please check response message
708	Transaction with REF No not found for CT, ST, MT, CR module
901	Technical Error
999	Internal Server Error

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:SendOTP>
         <ime:SendOTPRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:Module>string</ime:Module>
            <ime:ReferenceValue>string</ime:ReferenceValue>
         </ime:SendOTPRequest>
      </ime:SendOTP>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
Module	String	Y	2	**CR** - Customer Registration **ST** - Send Transaction **MT** - Modify Transaction (Amendment Transaction) **CT** - Cancel Transaction
ReferenceValue	String	Y	20	-If Module is **CR**, then unique reference number generated by **CustomerRegister** method -If Module is **ST**, then unique reference number generated by **SendTransaction** method -If Module is **MT**, then unique reference number (ICN) generated by **ConfirmSendTransaction** method -If Module is **CT**, then unique reference number (ICN) generated by **ConfirmSendTransaction** method

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <SendOTPResponse xmlns="IME">
         <SendOTPResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <OTPToken>string</OTPToken>
         </SendOTPResponse>
      </SendOTPResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
OTPToken	Unique Token ID for OTP verification

5.3. Confirm Customer Registration

This method is using to confirm the customer registration by submitting customer token id generated from **CustomerRegistration** method, token id generated from **SendOTP** method and OTP sent to customer mobile number.

Method Name: **ConfirmCustomerRegistration**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:ConfirmCustomerRegistration>
         <ime:ConfirmCustomerRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:OTP>string</ime:OTP>
            <ime:CustomerToken>string</ime:CustomerToken>
            <ime:OTPToken>string</ime:OTPToken>
         </ime:ConfirmCustomerRequest>
      </ime:ConfirmCustomerRegistration>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
OTP	String	Y	6	One Time Password sent on customer mobile number
CustomerToken	String	Y	15	Unique customer token id generated by **CustomerRegistration** method
OTPToken	String	Y	100	Unique Token ID generated by **SendOTP** method

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <ConfirmCustomerRegistrationResponse xmlns="IME">
         <ConfirmCustomerRegistrationResult>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
         </ConfirmCustomerRegistrationResult>
      </ConfirmCustomerRegistrationResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent

5.4. Check Customer

This method is using to verify the customer, whether customer is registered or not.

Method Name: **CheckCustomer**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:CheckCustomer>
         <ime:CheckCustomerRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:MobileNo>string</ime:MobileNo>
         </ime:CheckCustomerRequest>
      </ime:CheckCustomer>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
MobileNo	String	Y	10	Customer Mobile Number

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <CheckCustomerResponse xmlns="IME">
         <CheckCustomerResponse>
            <RESPONSE>
               <Code>string</Code>
               <Message>string</Message>
            </RESPONSE>
            <Name>string</Name>
            <MobileNo>string</MobileNo>
            <AMLStatus>string</AMLStatus>
            <KYCStatus>string</KYCStatus>
            <RejectedReason>string</RejectedReason>
         </CheckCustomerResponse>
      </CheckCustomerResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
Name	Name of Customer
MobileNo	Mobile number of Customer
AMLStatus	**True** – Customer is eligible to send the Indo Nepal Transaction **False** – Customer is not eligible to send the Indo Nepal Transaction
KYCStatus	**Approved** – Customer KYC is fully approved by IME Forex **Pending** – Customer KYC is being verifying by IME Forex **Rejected** – Customer KYC is rejected by IME Forex
RejectedReason	If KYC Status is Rejected, will gives the rejected reason

6. Transaction Creation

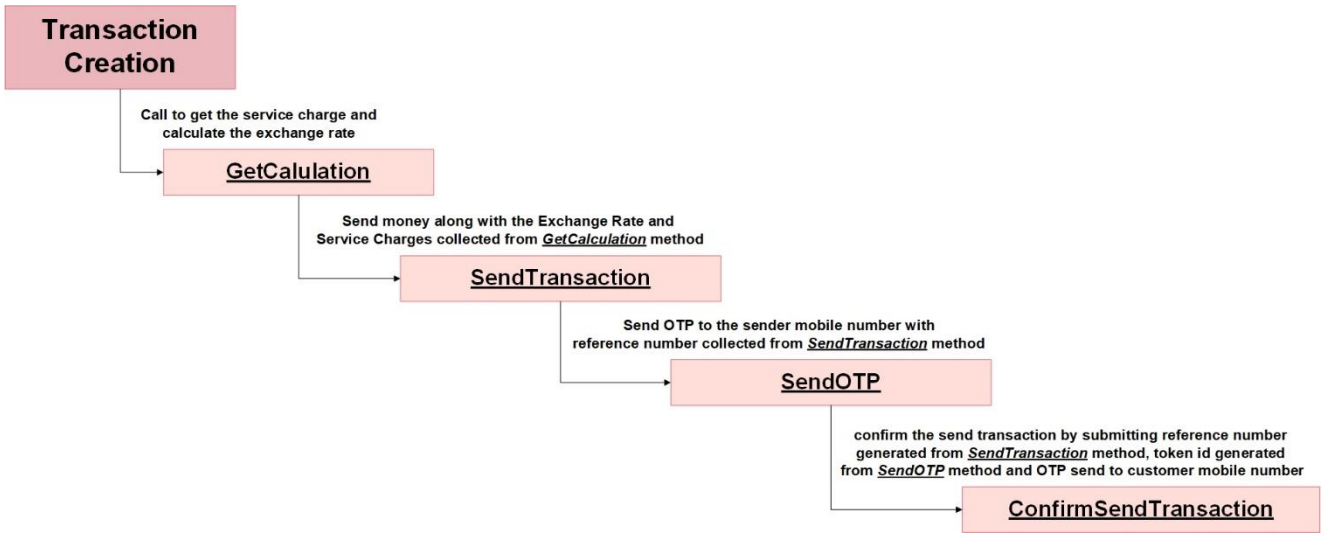

Figure 4: Methods used for Transaction Creation

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
103	Required Field
104	Bad Request (Invalid Input Value)
105	Setup Required
106	Limit/Balance Expired or Not Enough
107	Forex ID expired or Already Used
901	Technical Error
999	Internal Server Error

6.1. Exchange Rate and Service Charge

This method is using to get the service charge and calculate the exchange rate.

Method Name: **GetCalculation**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:GetCalculation>
         <ime:GetCalculationRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <!--Optional:-->
            <ime:PayoutAgentId>string</ime:PayoutAgentId>
            <ime:RemitAmount>string</ime:RemitAmount>
            <ime:PaymentType>string</ime:PaymentType>
            <ime:PayoutCountry>string</ime:PayoutCountry>
            <ime:CalcBy>string</ime:CalcBy>
         </ime:GetCalculationRequest>
      </ime:GetCalculation>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
PayoutAgentId	String	N	10	Payout Bank Id (Generated from **GetStaticData** Method). Mandatory if PaymentType = B
RemitAmount	String	Y	20	Amount whose service charge is to be calculated
PaymentType	String	Y	10	**C** – Cash Payment **B** – Bank Deposit
PayoutCountry	String	Y	15	**NPL** – Nepal
CalcBy	String	Y	3	**C** – Calculate by Sending Country Currency Collection Amount with service charge **P** – Calculate by Paying Country Currency Payout Amount

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <GetCalculationResponse xmlns="IME">
         <GetCalculationResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <ForexSessionId>string</ForexSessionId>
            <CollectAmount>string</CollectAmount>
            <ServiceCharge>string</ServiceCharge>
            <ExchangeRate>string</ExchangeRate>
            <PayoutAmount>string</PayoutAmount>
            <PayoutCurrency>string</PayoutCurrency>
         </GetCalculationResponse>
      </GetCalculationResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
ForexSessionId	Unique Session ID for Exchange Rate
CollectAmount	Total Amount to be collected from Customer including service charge
ServiceCharge	Service Charge in Collect Currency
ExchangeRate	Exchange Rate as of date
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency

6.2. Send Transaction

This method is using to Send money along with the Exchange Rate and Service Charges collected from **GetCalculation** method by agent.

Method Name: **SendTransaction**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:SendTransaction>
         <ime:SendTransactionRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:SenderDetails>
               <ime:SenderName>string</ime:SenderName>
               <ime:SenderMobileNo>string</ime:SenderMobileNo>
               <ime:Occupation>string</ime:Occupation>
            </ime:SenderDetails>
            <ime:ReceiverDetails>
               <ime:ReceiverName>string</ime:ReceiverName>
               <ime:ReceiverAddress>string</ime:ReceiverAddress>
               <ime:ReceiverGender>string</ime:ReceiverGender>
               <ime:ReceiverMobileNo>string</ime:ReceiverMobileNo>
               <!--Optional:-->
               <ime:ReceiverCity>string</ime:ReceiverCity>
               <ime:ReceiverCountry>string</ime:ReceiverCountry>
            </ime:ReceiverDetails>
            <ime:TransactionDetails>
               <ime:ForexSessionId>string</ime:ForexSessionId>
               <ime:AgentTxnRefId>string</ime:AgentTxnRefId>
               <ime:CollectAmount>string</ime:CollectAmount>
               <ime:PayoutAmount>string</ime:PayoutAmount>
               <ime:SourceOfFund>string</ime:SourceOfFund>
               <ime:Relationship>string</ime:Relationship>
               <ime:PurposeOfRemittance>string</ime:PurposeOfRemittance>
               <ime:PaymentType>string</ime:PaymentType>
               <!--Optional:-->
               <ime:BankId>string</ime:BankId>
               <!--Optional:-->
               <ime:BankBranchId>string</ime:BankBranchName>
               <!--Optional:-->
               <ime:BankAccountNumber>string</ime:BankAccountNumber>
               <ime:CalcBy>string</ime:CalcBy>
            </ime:TransactionDetails>
         </ime:SendTransactionRequest>
      </ime:SendTransaction>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
Sender Details				
SenderName	String	Y	100	Sender Full Name
SenderMobileNo	String	Y	15	Sender Mobile Number (Should be Registered Customer, use **CheckCustomer** method for verification)
Occupation	String	Y	10	Sender Occupation (ID received from GetStaticData method)
Receiver Details				
ReceiverName	String	Y	100	Receiver Full Name
ReceiverAddress	String	Y	100	Receiver Address
ReceiverGender	String	Y	15	Receiver Gender
ReceiverMobileNo	String	Y	15	Receiver Mobile Number
ReceiverCity	String	N	30	Receiver City
ReceiverCountry	String	Y	3	**Nepal** as Receiver Country
Transaction Details				
ForexSessionId	String	Y	10	Session ID for Exchange Rate, must be unique every time
AgentTxnRefId	String	Y	20	Unique Transaction ID of Agent to track the request and response
CollectAmount	String	Y	20	Amount to be collected from sender along with service charge
PayoutAmount	String	Y	20	Amount that receiver gets (In Payout Currency)
SourceOfFund	String	Y	10	Source of Fund (ID received from **GetStaticData** method)
Relationship	String	Y	10	Send Relationship with Receiver (ID received from **GetStaticData** method)
PurposeOfRemittance	String	Y	10	Propose of Remittance (ID received from **GetStaticData** method)
PaymentType	String	Y	3	**C** – Cash Payment **B** – Bank Deposit
BankId	String	Mandatory if Payment Type is Bank	10	Bank Id (ID Generated from **GetStaticData** Method)
BankBranchId	String		100	Bank Branch Id (ID Generated from **GetStaticData** Method)
BankAccountNumber	String		30	Beneficiary Bank Account Number
CalcBy	String	Y	3	**C** – Calculate by Sending Country Currency Collection Amount with service charge **P** – Calculate by Paying Country Currency Payout Amount

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <SendTransactionResponse xmlns="IME">
         <SendTransactionResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>sasg</AgentSessionId>
            </Response>
            <RefNo>string</RefNo>
            <ime:AgentTxnRefId>string</ime:AgentTxnRefId>
            <CollectAmount>string</CollectAmount>
            <ExchangeRate>string</ExchangeRate>
            <ServiceCharge>string</ServiceCharge>
            <PayoutAmount>string</PayoutAmount>
            <PayoutCurrency>string</PayoutCurrency>
         </SendTransactionResponse>
      </SendTransactionResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RefNo	Unique reference number for confirm transaction
AgentTxnRefId	Unique Transaction ID of Agent
CollectAmount	Total Amount to be collected from Customer including service charge
ServiceCharge	Service Charge in Collect Currency
ExchangeRate	Exchange Rate as of date
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency

6.3. Send OTP

This method is using to send the OTP to the sender mobile number with reference number collected from **SendTransaction** method.

Method Name: **SendOTP**

Note: Refer to Section 5.2.

6.4. Confirm Send Transaction

This method is using to confirm the send transaction by submitting reference number generated from **SendTransaction** method, token id generated from **SendOTP** method and OTP sent to customer mobile number.

Method Name: **ConfirmSendTrasaction**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:ConfirmSendTransaction>
         <ime:ConfirmSendTransactionRequest>
            <ime:Credentials>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentials>
            <ime:RefNo>string</ime:RefNo>
            <ime:OTPToken>sting</ime:OTPToken>
            <ime:OTP>string</ime:OTP>
         </ime:ConfirmSendTransactionRequest>
      </ime:ConfirmSendTransaction>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
RefNo	String	Y	20	Unique reference number generated by **SendTransaction** method
OTPToken	String	Y	100	Unique Token ID generated by **SendOTP** method
OTP	String	Y	6	One Time Password sent on sender mobile number

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <ConfirmSendTransactionResponse xmlns="IME">
         <ConfirmSendTransactionResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RefNo>string</RefNo>
            <ime:AgentTxnRefId>string</ime:AgentTxnRefId>
            <CollectAmount>string</CollectAmount>
            <ExchangeRate>string</ExchangeRate>
            <ServiceCharge>string</ServiceCharge>
            <PayoutAmount>string</PayoutAmount>
            <PayoutCurrency>string</PayoutCurrency>
         </ConfirmSendTransactionResponse>
      </ConfirmSendTransactionResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RefNo	Unique reference number (ICN), which beneficiary must provide at payout location for payment
AgentTxnRefId	Unique Transaction ID of Agent
CollectAmount	Total Amount to be collected from Customer including service charge
ServiceCharge	Service Charge in Collect Currency
ExchangeRate	Exchange Rate as of date
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency

7. Modify Transaction

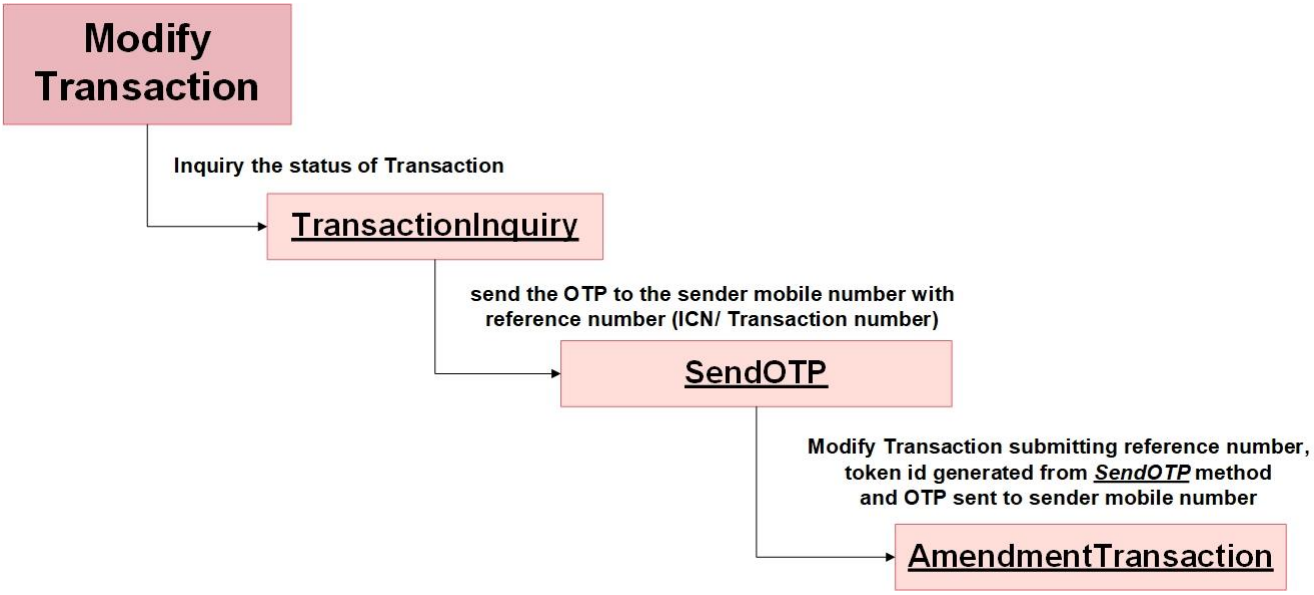

Figure 5: Methods used for Transaction Modification

7.1. Transaction Inquiry

This method is using to inquiry the status of transaction performed by agent.

Method Name: **TransactionInquiry**

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
103	Parameter Missing
104	Bad Request (Invalid Input Value)
108	Transaction Not Found of supplied RefNo
109	Unauthorized
901	Technical Error
999	Internal Server Error

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:TransactionInquiry>
         <ime:TransactionInquiryRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:RefNoType>string</ime:RefNoType>
            <ime:RefNo>sting</ime:RefNo>
         </ime:TransactionInquiryRequest>
      </ime:TransactionInquiry>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
RefNoType	String	Y	1	**1** – Search by IME Forex Reference Number Search (ICN) **2** – Search by Agent Transaction Reference Id
RefNo	String	Y	20	If **1** then, enter IME Forex Reference Number Search (ICN) If **2** then, enter Agent Transaction Reference Id

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <TransactionInquiryResponse xmlns="IME">
         <TransactionInquiryResponse>
            <Response>
              <Code>string</Code>
              <Message>string</Message>
              <AgentSessionId>string</AgentSessionId>
            </Response>
            <RefNo>string</RefNo>
            <SenderDetails>
              <SenderName>string</SenderName>
              <SenderGender>string</SenderGender>
              <SenderCountry>string</SenderCountry>
              <SenderAddress>string</SenderAddress>
              <SenderMobileNo>string</SenderMobileNo>
              <SenderIdType>string</SenderIdType>
              <SenderEmail/>
            </SenderDetails>
            <ReceiverDetails>
              <ReceiverName>string</ReceiverName>
              <ReceiverGender>string</ReceiverGender>
              <ReceiverCountry>string</ReceiverCountry>
              <ReceiverAddress>string</ReceiverAddress>
              <ReceiverMobileNo>string</ReceiverMobileNo>
              <ReceiverRelationWithSender>string</ReceiverRelationWithSender>
            </ReceiverDetails>
            <TransactionDetails>
              <TransferAmount>string</TransferAmount>
              <ServiceCharge>string</ServiceCharge>
              <CollectedAmount>string</CollectedAmount>
              <ExchangeRate>string</ExchangeRate>
              <PayoutAmount>string</PayoutAmount>
              <PayoutCurrency>string</PayoutCurrency>
              <SendingBranch>string</SendingBranch>
              <PaymentMethod>string</PaymentMethod>
              <PurposeOfRemit>string</PurposeOfRemit>
              <SourceOfFund>string</SourceOfFund>
              <TransactionDate>string</TransactionDate>
              <Status>string</Status>
              <StatusDate>string</StatusDate>
            </TransactionDetails>
         </TransactionInquiryResponse>
      </TransactionInquiryResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RefNo	Unique reference number (ICN), Transaction Id
Sender Details	
SenderName	Sender Name
SenderGender	Sender Gender
SenderCountry	Sender Country
SenderMobileNo	Sender Mobile Number
SenderIdType	Sender Id Type
SenderEmail	Sender Email Address
Receiver Details	
ReceiverName	Receiver Name
ReceiverGender	Receiver Gender
ReceiverCountry	Receiver Country
ReceiverAddress	Receiver Address
ReceiverMobileNo	Receiver Mobile Number
ReceiverRelationWithSender	Receiver Relationship with Sender
Transaction Details	
TransferAmount	Transfer Amount in sending currency without service charge
ServiceCharge	Transaction Service Charge
CollectedAmount	Total Amount to be collected from Customer including service charge
ExchangeRate	Exchange Rate as of date
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency
SendingBranch	Sending Agent Branch
PaymentMethod	Payment Method
PurposeOfRemit	Purpose of Remittance
SourceOfFund	Source of Fund
TransactionDate	Transaction Creation Date
Status	Transaction status
StatusDate	If Status is Cancel, then Cancel Date If Status is Paid, then Paid Date

7.2. Send OTP

This method is using to send the OTP to the sender mobile number with reference number (ICN/ Transaction number).

Method Name: **SendOTP**

Note: Refer to Section 5.2.

7.3. Modify Transaction

This method is using to modify transaction performed by agent.

Method Name: **AmendmentTransaction**

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
403	Parameter Missing
404	Bad Request (Invalid Input Value)
901	Technical Error
999	Internal Server Error

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:AmendmentTransaction>
         <ime:ModifyTxnRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:RefNo>string</ime:RefNo>
            <!--Optional:-->
            <ime:ReceiverName>string</ime:ReceiverName>
            <!--Optional:-->
            <ime:ReceiverGender>string</ime:ReceiverGender>
            <!--Optional:-->
            <ime:ReceiverAddress>string</ime:ReceiverAddress>
            <!--Optional:-->
            <ime:RelationWithSender>string</ime:RelationWithSender>
            <!--Optional:-->
            <ime:PurposeOfRemit>string</ime:PurposeOfRemit>
            <!--Optional:-->
            <ime:SoureOfFund>string</ime:SoureOfFund>
            <!--Optional:-->
            <ime:ReceiverMobileNo>string</ime:ReceiverMobileNo>
            <!--Optional:-->
            <ime:BankId></ime:BankId>
            <!--Optional:-->
            <ime:BankBranchId></ime:BankBranchId>
            <!--Optional:-->
            <ime:AccountNo>string</ime:AccountNo>
            <!--Optional:-->
            <ime:OTP>string</ime:OTP>
            <!--Optional:-->
```

```
            <ime:OTPToken>string</ime:OTPToken>
         </ime:ModifyTxnRequest>
      </ime:AmendmentTransaction>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
RefNo	String	Y	20	Unique reference number (ICN) / transaction number
ReceiverName	String	At least one parameter Mandatory	50	Receiver Full Name
ReceiverGender	String		10	Receiver Gender
ReceiverAddress	String		30	Receiver Address
RelationWithSender	String		10	Send Relationship with Receiver (ID received from GetStaticData method)
PurposeOfRemittance	String		10	Propose of Remittance (ID received from GetStaticData method)
SourceOfFund	String		10	Source of Fund (ID received from GetStaticData method)
ReceiverMobileNo	String		15	Receiver Mobile Number
BankId	String		100	Bank Id (ID Generated from **GetStaticData** Method)
BankBranchId	String		10	Bank Branch Id (ID Generated from **GetStaticData** Method)
AccountNo	String		20	Beneficiary Bank Account Number
OTP	String	Y	6	One Time Password sent on sender mobile number.
OTPToken	String	Y	100	Unique Token ID generated by **SendOTP** method

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <AmendmentTransactionResponse xmlns="http://tempuri.org/">
         <AmendmentTransactionResult>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
         </AmendmentTransactionResult>
      </AmendmentTransactionResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent

8. Cancel Transaction

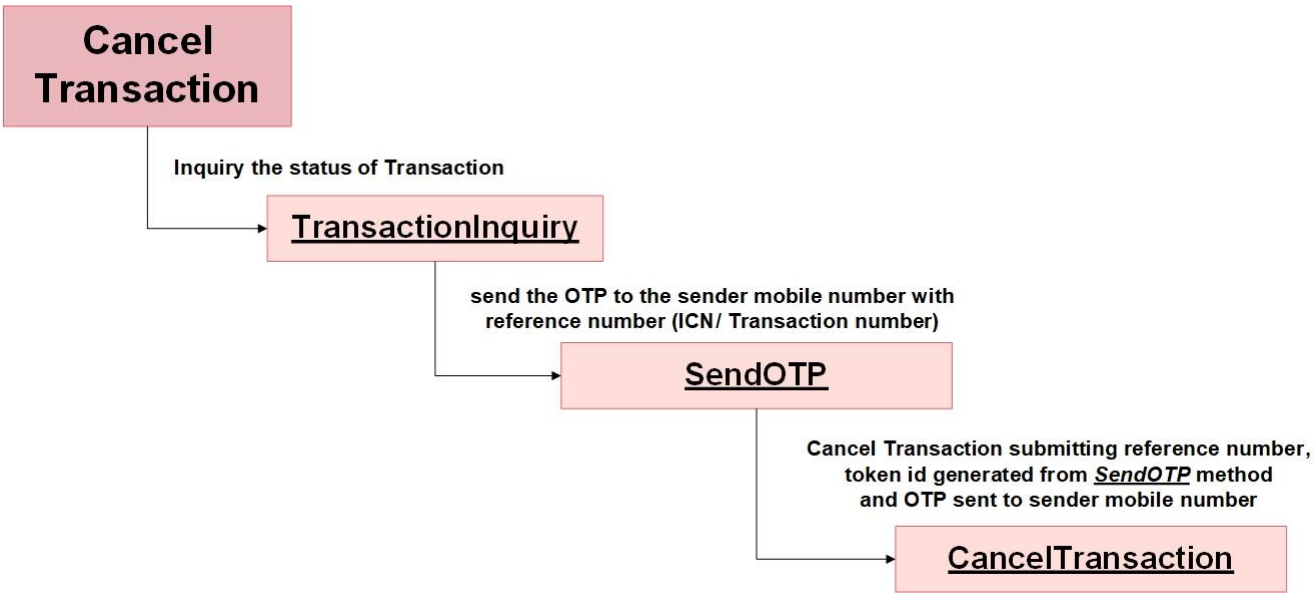

Figure 6: Methods used for Transaction Cancellation

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
303	Parameter Missing
304	Bad Request (Invalid Input Value)
901	Technical Error
999	Internal Server Error

8.1. Transaction Inquiry

This method is using to inquiry the status of transaction performed by agent.

Method Name: **TransactionInquiry**

Note: Refer to Section 7.1.

8.2. Send OTP

This method is using to send the OTP to the sender mobile number with reference number (ICN/ Transaction number).

Method Name: **SendOTP**

Note: Refer to Section 5.2.

8.3. Cancel Transaction

This method is using to modify transaction performed by agent.

Method Name: **CancelTransaction**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:CancelTransaction>
         <ime:CancelTxnRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:RefNo>string</ime:RefNo>
            <ime:CancelReason>string</ime:CancelReason>
            <ime:OTP>string</ime:OTP>
            <ime:OTPToken>string</ime:OTPToken>
         </ime:CancelTxnRequest>
      </ime:CancelTransaction>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
RefNo	String	Y	20	Unique reference number (ICN) / transaction number
CancelReason	String	Y	10	Transaction Cancel Reason (ID Generated from **GetStaticData** method)
OTP	String	Y	6	One Time Password sent on sender mobile number.
OTPToken	String	Y	100	Unique Token ID generated by **SendOTP** method

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <CancelTransactionResponse xmlns="http://tempuri.org/">
         <CancelTransactionResult>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <RefId>string</RefId>
            <CollectedAmount>string</CollectedAmount>
            <ExchangeRate>string</ExchangeRate>
            <ServiceCharge>string</ServiceCharge>
            <payoutAmount>string</payoutAmount>
            <PayoutCurrency>string</PayoutCurrency>
         </CancelTransactionResult>
      </CancelTransactionResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RefId	Unique reference number (ICN),
CollectedAmount	Total Amount to be collected from Customer including service charge
ExchangeRate	Exchange Rate as of date
ServiceCharge	Service Charge in Collect Currency
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency

9. Reports

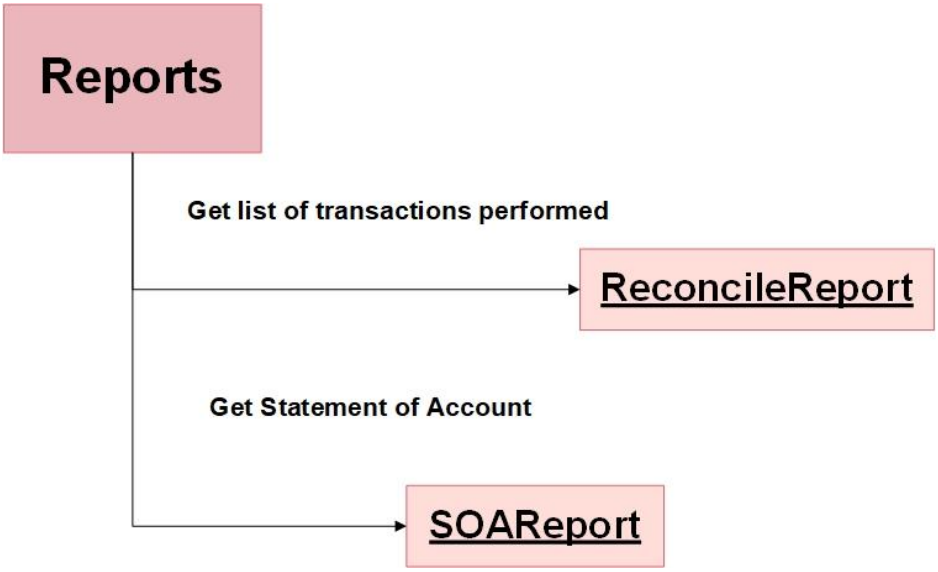

Figure 7: Methods used for Reports

Possible Response Codes

Response Code	Response Message
0	Success
101	Authentication Failed
102	Need to change Password. Contact HO
803	Parameter Missing
804	Bad Request (Invalid Input Value)
809	Report Record Not Found
901	Technical Error
999	Internal Server Error

9.1. Reconcile Report

This method is using to get list of transactions performed by agent.

Method Name: **ReconcileReport**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:ReconcileReport>
         <ime:ReconcileReportRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:ReportType>string</ime:ReportType>
            <ime:FromDate>Date</ime:FromDate>
            <ime:ToDate>Date</ime:ToDate>
         </ime:ReconcileReportRequest>
      </ime:ReconcileReport>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
ReportType	String	Y	1	**A** - All **S** - Sent Only **C** - Cancel Only
FromDate	Date	Y	20	Transaction From Date. Format (YYYY/MM/DD)
ToDate	Date	Y	20	Transaction To Date. Format (YYYY/MM/DD)

Response XML


```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <ReconcileReportResponse xmlns="IME">
         <ReconcileReportResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <ReconcileReportList>
               <ReconcileReportDetail>
                  <RefNo>string</RefNo>
                  <AgentTxnRefId>string</AgentTxnRefId>
                  <SenderDetails>
                     <SenderName>string</SenderName>
                  </SenderDetails>
                  <ReceiverDetails>
                     <ReceiverName>string</ReceiverName>
                     <ReceiverCountry>string</ReceiverCountry>
                  </ReceiverDetails>
                  <TransactionDetails>
                     <ServiceCharge>string</ServiceCharge>
                     <ServiceChargeCurrency>string</ServiceChargeCurrency>
                     <CollectedAmount>sting</CollectedAmount>
                     <CollectedAmountCurrency>string</CollectedAmountCurrency>
                     <PayoutAmount>string</PayoutAmount>
                     <PayoutCurrency>string</PayoutCurrency >
                     <SendingAgent>string</SendingAgent>
                     <SendingBranch>string</SendingBranch>
                     <TransactionDate>string</TransactionDate>
                     <Status>string</Status>
                     <PaidDate>string</>
                     <PayoutAgent>string</>
                     <CancelDate>string</>
                  </TransactionDetails>
               </ReconcileReportDetail>
            </ReconcileReportList>
         </ReconcileReportResponse>
      </ReconcileReportResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
RefNo	Unique reference number (ICN), Transaction Id
AgentTxnRefId	Unique reference number of Partner System passed during sending transaction
SenderName	Sender Name
ReceiverName	Receiver Name
ReceiverCountry	Receiver Country
ServiceCharge	Service Charge
ServiceChargeCurrency	Service Charge Currency
CollectedAmount	Collected Amount
CollectedAmountCurrency	Collection Amount Currency
PayoutAmount	Total Payout Amount to Payout Country
PayoutCurrency	Payout Currency
SendingAgent	Sending Agent
SendingBranch	Sending Agent Branch
TransactionDate	Transaction Creation Date
Status	Transaction status
PaidDate	Transaction Paid Date
PayoutAgent	Transaction paying Agent
CancelDate	Transaction Cancel Date

9.2. Statement of Account

This method is using to get Statement of Account of agent.

Method Name: **SOAReport**

Request XML

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ime="IME">
   <soapenv:Header/>
   <soapenv:Body>
      <ime:SOAReport>
         <ime:SOAReportRequest>
            <ime:Credentialss>
               <ime:AccessCode>string</ime:AccessCode>
               <ime:UserName>string</ime:UserName>
               <ime:Password>string</ime:Password>
               <ime:PartnerBranchId>string</ime:PartnerBranchId>
               <ime:AgentSessionId>string</ime:AgentSessionId>
            </ime:Credentialss>
            <ime:FromDate>Date</ime:FromDate>
            <ime:ToDate>Date</ime:ToDate>
         </ime:SOAReportRequest>
      </ime:SOAReport>
   </soapenv:Body>
</soapenv:Envelope>
```

Request Parameters

Parameter	Type	Mandatory	Length	Description
AccessCode	String	Y	10	Unique code assigned to Agent
UserName	String	Y	20	Username of Agent
Password	String	Y	20	Password of Agent
PartnerBranchId	String	Y	10	Unique Partner Branch Id or CSP Code of Partner
AgentSessionId	String	Y	30	Unique Session ID of Agent
FromDate	Date	Y	20	Transaction From Date. Format (YYYY/MM/DD)
ToDate	Date	Y	20	Transaction To Date. Format (YYYY/MM/DD)

Response XML

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
   <soap:Body>
      <SOAReportResponse xmlns="IME">
         <SOAReportResponse>
            <Response>
               <Code>string</Code>
               <Message>string</Message>
               <AgentSessionId>string</AgentSessionId>
            </Response>
            <SOAReportList>
               <SOAReportDetail>
                  <Date>string</Date>
                  <Particulars>string</Particulars>
                  <DR>string</DR>
                  <CR>string</CR>
                  <Balance>string</Balance>
                  <Indicator>string</Indicator>
                  <Narration>string</Narration>
               </SOAReportDetail>
            </SOAReportList>
         </SOAReportResponse>
      </SOAReportResponse>
   </soap:Body>
</soap:Envelope>
```

Response Parameters

Field	Description
Code	0 if Success otherwise error code
Message	Success/ Error Message
AgentSessionId	Unique Session ID of Agent
Date	Date
Particulars	Particulars to indicate the transactions.
DR	Debit Amount
CR	Credit Amount
Balance	Amount after DR or CR
Indicator	Amount Indicator, Debit (DR) or Credit (CR)
Narration	Remark for the transaction