MERN STACK

TRAINING TR-103 REPORT DAY 13

9 July 2026

Overview:

The thirteenth day of the MERN Stack training focused on JavaScript event handling and dynamic content manipulation. We learned how to use addEventListener() to attach events to HTML elements, event.preventDefault() to stop default browser actions, and textContent to read or update the text inside HTML elements. These concepts helped us understand how JavaScript creates interactive and responsive web pages.

Learning Objectives:

- Understand the `addEventListener()` method.
- Learn how to handle different JavaScript events.
- Understand the use of `event.preventDefault()`.
- Learn how to read and update text using `textContent`.
- Build interactive webpage features using event handling.

JAVASCRIPT

addEventListener()

The addEventListener() method is used to attach an event to an HTML element. It specifies what action should be performed when a particular event occurs.

Common Events:

- click
- submit
- change
- keydown
- mouseover

Features:

- Attaches events to HTML elements.
- Supports multiple event types.
- Keeps JavaScript code organized and reusable.

Syntax:

```
element.addEventListener(event, function);
```

event.preventDefault()

The preventDefault() method is used to stop the browser's default behavior for an event. It allows custom JavaScript code to run instead of the automatic browser action.

Common Uses:

- Prevent form submission.
- Stop link navigation.

Syntax:

```
event.preventDefault();
```

textContent

The textContent property is used to read or modify the text inside an HTML element. It handles only plain text and does not interpret HTML tags.

Features:

- Reads text from an element.
- Updates text dynamically.
- Safer for plain text than innerHTML.

Syntax:

```
element.textContent = "text";
```

TASK:

```
<body>
    <h1 align="center">FORM</h1>

    <form id="for">
        <p></p>

        <div style="margin-top: 100px;">
            <label>USERNAME :
                <input type="text" name="username" placeholder="Enter username">
            </label>
        </div>

        <div>
            <label>PASSWORD :
                <input type="password" name="password" placeholder="Enter password">
            </label>
        </div>

        <div>
            <button type="submit">Submit</button>
        </div>
    </form>

    <script>
        let form = document.getElementById("for");
        let p = document.getElementsByTagName("p")[0];

        form.addEventListener("submit", function (event) {
            event.preventDefault();


            let user = form.username.value;
            let pass = form.password.value;

            if (user.length < 6) {
                p.textContent = "Username must be atleast 6 characters long";
            } else {
                p.textContent = "Username is valid.";
            }

            console.log("Username:", user);
            console.log("Password:", pass);

            alert("Form Submitted Successfully!");
        });
    </script>
</body>
```

Output :

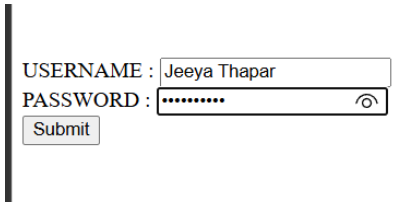

Conclusion:

By the end of Day 13, I learned how to handle events using addEventListener(), prevent default browser actions with event.preventDefault(), and dynamically update webpage content using textContent. These concepts strengthened my understanding of JavaScript interactivity and DOM manipulation.