MERN STACK

TRAINING TR-103 REPORT DAY 7

2 July 2026

Overview:

The seventh day of the MERN Stack training focused on CSS Display and Flexbox, which are used to control the layout and alignment of elements on a webpage. I learned different display properties, explored Flexbox concepts such as flex-direction, flex-wrap, gap, align-self, and order, and practiced arranging elements to create responsive and well-structured web page layouts.

Learning Objectives:

- Understand the CSS `display` property.
- Learn the basics of Flexbox.
- Explore different `flex-direction` values.
- Understand the use of `flex-wrap` and `gap`.
- Learn how `align-self` and `order` work.
- Create responsive webpage layouts using Flexbox.

CSS Display

The display property defines how an HTML element is displayed on a webpage. It controls the layout and behavior of elements.

Types of Display:

- inline – Displays the element on the same line.
- block – Starts the element on a new line and takes full width.
- inline-block – Displays the element inline while allowing width and height.
- flex – Creates a flexible container for arranging items.

CSS Flexbox

Flexbox is a CSS layout model used to arrange and align elements efficiently. It makes it easier to create responsive and flexible webpage layouts.

CSS flex-direction :

The flex-direction property defines the direction in which flex items are arranged.

Values:

- row – Arranges items from left to right.
- row-reverse – Arranges items from right to left.
- column – Arranges items from top to bottom.
- column-reverse – Arranges items from bottom to top.

CSS flex-wrap :

The flex-wrap property controls whether flex items stay on one line or move to the next line.

Values:

- nowrap – Keeps all items on one line.

- wrap – Moves items to the next line when needed.
- wrap-reverse – Wraps items in reverse order.

CSS gap :

The gap property creates space between flex items without using margins.

Advantages:

- Creates equal spacing between items.
- Makes layouts cleaner.
- Reduces the need for margins.

CSS align-self :

The align-self property is used to align an individual flex item differently from the other items in the same container.

Common values:

- flex-start
- center
- flex-end
- stretch
- baseline


CSS order :

The order property changes the visual order of flex items without changing the HTML code.

Features:

- Default value is 0.
- Lower values appear first.
- Higher values appear later.
- Useful for responsive layouts.

Task:

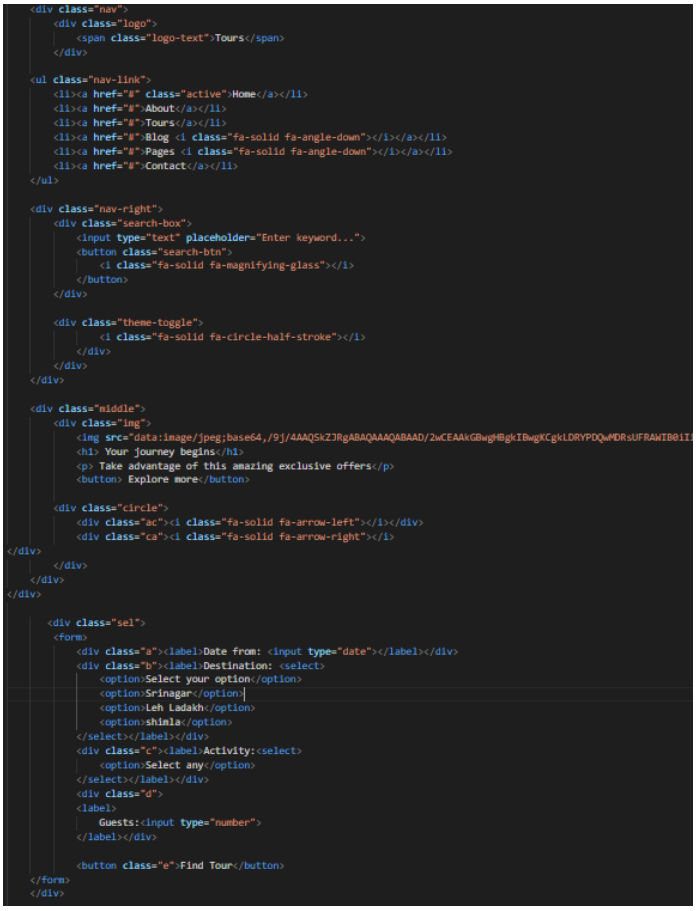

```
<div class="nav">
    <div class="logo">
        <span class="logo-text">Tours</span>
    </div>

    <ul class="nav-link">
        <li><a href="#" class="active">Home</a></li>
        <li><a href="#">About</a></li>
        <li><a href="#">Tours</a></li>
        <li><a href="#">Blog <i class="fa-solid fa-angle-down"></i></a></li>
        <li><a href="#">Pages <i class="fa-solid fa-angle-down"></i></a></li>
        <li><a href="#">Contact</a></li>
    </ul>

    <div class="nav-right">
        <div class="search-box">
            <input type="text" placeholder="Enter keyword...">
            <button class="search-btn">
                <i class="fa-solid fa-magnifying-glass"></i>
            </button>
        </div>

        <div class="theme-toggle">
                <i class="fa-solid fa-circle-half-stroke"></i>
            </div>
        </div>
    </div>

    <div class="middle">
        <div class="img">
            <img src="
            <h1> Your journey begins</h1>
            <p> Take advantage of this amazing exclusive offers</p>
            <button> Explore more</button>

        <div class="circle">
            <div class="ac"><i class="fa-solid fa-arrow-left"></i></div>
            <div class="ca"><i class="fa-solid fa-arrow-right"></i>
</div>
        </div>
    </div>
</div>

      <div class="sel">
        <form>
            <div class="a"><label>Date from: <input type="date"></label></div>
            <div class="b"><label>Destination: <select>
                <option>Select your option</option>
                <option>Srinagar</option>
                <option>Leh Ladakh</option>
                <option>shimla</option>
            </select></label></div>
            <div class="c"><label>Activity:<select>
                <option>Select any</option>
            </select></label></div>
            <div class="d">
            <label>
                Guests:<input type="number">
            </label></div>

            <button class="e">Find Tour</button>
    </form>
    </div>
```

Output:





About Us

Plan your trip with Tours

Lorem ipsum dolor, sit amet consectetur adipisicing elit. Rerum dicta atque voluptatibus est veritatis facere voluptates ipsum velit amet, deserunt excepturi ex quam ducimus voluptas totam perferendis repellendus. Quo ullam dolorum minima doloribus aliquam omnis delectus explicabo sed esse error?

- 2000+ Worldwide Guides
- 100% Trusted Agency
- 24+ years of experience
- 100% Travelers are happy

Booking Now

Featured Tours

Most Popular Tours



Dubai-Stunning Places

5th Avenue London

From **$69.9**

15days Explore more



Dubai-Stunning Places

5th Avenue London

From **$69.9**

15days Explore more



Dubai-Stunning Places

5th Avenue London

From **$69.9**

15days Explore more



Dubai-Stunning Places

5th Avenue London

From **$69.9**

15days Explore more



Conclusion:

By the end of Day 7, I gained a clear understanding of the CSS `display` property and Flexbox. I learned how to arrange, align, and organize webpage elements using Flexbox properties such as flex-direction, flex-wrap, gap, align-self, and order, helping me create responsive and well-structured web page layouts.