MERN STACK

TRAINING TR-103 REPORT DAY 8

3 July 2026

Overview:

Today I focused on enhancing the visual appearance of web pages using Font Awesome, Google Fonts, Icons, CSS Transformations, and CSS Transitions. I learned how to add icons and custom fonts to webpages, apply transformation effects, and create smooth animations using transitions. The practical session helped us build more attractive and interactive user interfaces.

Learning Objectives:

- Understand the use of Font Awesome icons.
- Learn how to use Google Fonts in webpages.
- Understand the importance of icons in web design.
- Learn different CSS transformation functions.
- Understand CSS transitions and hover effects.
- Create interactive and visually appealing web pages.

Font Awesome, CDN, Google Fonts, Icons, CSS Transformations & Transitions :

Font Awesome

Font Awesome is a popular icon library that provides scalable vector icons for websites. These icons can be easily customized using CSS and are widely used in buttons, navigation bars, and social media links.

Features:

- Provides scalable icons.
- Icons are added using class names.
- Icons can be resized, colored, and styled using CSS.

Google Fonts

Google Fonts is a free online library that provides a wide variety of fonts for websites. It improves the appearance and readability of web pages and can be added using a link or CSS import.

Advantages:

- Free to use.
- Improves website typography.
- Easy to integrate into webpages.

Icons in Web Design

Icons are visual symbols used to represent actions, objects, or ideas. They make websites easier to understand and improve the overall user experience.

Uses of Icons:

- Improve user experience.
- Make webpages more attractive.
- Represent actions and features clearly.

CSS Transformations

CSS transform is used to change the position, size, rotation, or shape of an element without affecting the page layout.

Common Transform Functions:

- **translate()** – Moves an element.
- **translateY()** – Moves an element vertically.
- **scale()** – Changes the size of an element.
- **scaleX()** – Changes the width.
- **scaleY()** – Changes the height.
- **skew()** – Tilts an element.
- **skewY()** – Tilts an element vertically.
- **rotate()** – Rotates an element.

CSS Transitions

CSS Transitions create smooth changes between property values over a specified time, making animations look more natural.

Transition Properties:

- **transition-property** – Specifies the property to animate.
- **transition-duration** – Sets the animation time.
- **transition-delay** – Delays the start of the animation.
- **transition-timing-function** – Controls the speed of the transition.


Hover Effect

The :hover pseudo-class applies styles when the mouse pointer is placed over an element. It is commonly used with transitions to create smooth effects.

Examples:


- Change button color.
- Increase element size.
- Apply smooth movement or animation.

Task:

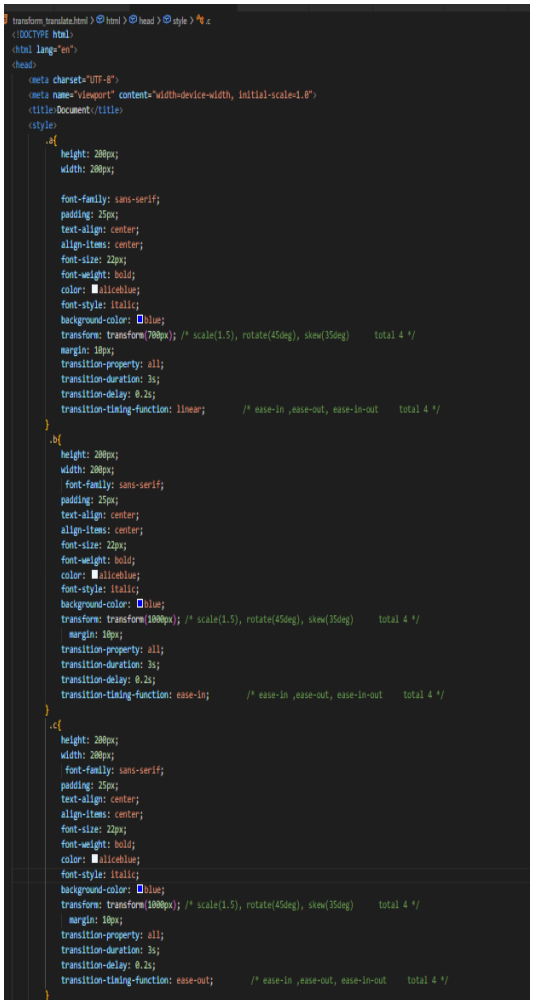

```
transform_translate.html > html > head > style > .c
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
    <style>
        .a{
            height: 200px;
            width: 200px;


            font-family: sans-serif;
            padding: 25px;
            text-align: center;
            align-items: center;
            font-size: 22px;
            font-weight: bold;
            color: aliceblue;
            font-style: italic;
            background-color: blue;
            transform: transform(700px); /* scale(1.5), rotate(45deg), skew(35deg)      total 4 */
            margin: 10px;
            transition-property: all;
            transition-duration: 3s;
            transition-delay: 0.2s;
            transition-timing-function: linear;        /* ease-in ,ease-out, ease-in-out     total 4 */
        }
        .b{
            height: 200px;
            width: 200px;
             font-family: sans-serif;
            padding: 25px;
            text-align: center;
            align-items: center;
            font-size: 22px;
            font-weight: bold;
            color: aliceblue;
            font-style: italic;
            background-color: blue;
            transform: transform(1000px); /* scale(1.5), rotate(45deg), skew(35deg)      total 4 */
              margin: 10px;
            transition-property: all;
            transition-duration: 3s;
            transition-delay: 0.2s;
            transition-timing-function: ease-in;        /* ease-in ,ease-out, ease-in-out     total 4 */
        }
        .c{
            height: 200px;
            width: 200px;
             font-family: sans-serif;
            padding: 25px;
            text-align: center;
            align-items: center;
            font-size: 22px;
            font-weight: bold;
            color: aliceblue;
            font-style: italic;
            background-color: blue;
            transform: transform(1000px); /* scale(1.5), rotate(45deg), skew(35deg)      total 4 */
              margin: 10px;
            transition-property: all;
            transition-duration: 3s;
            transition-delay: 0.2s;
            transition-timing-function: ease-out;        /* ease-in ,ease-out, ease-in-out     total 4 */
        }
```

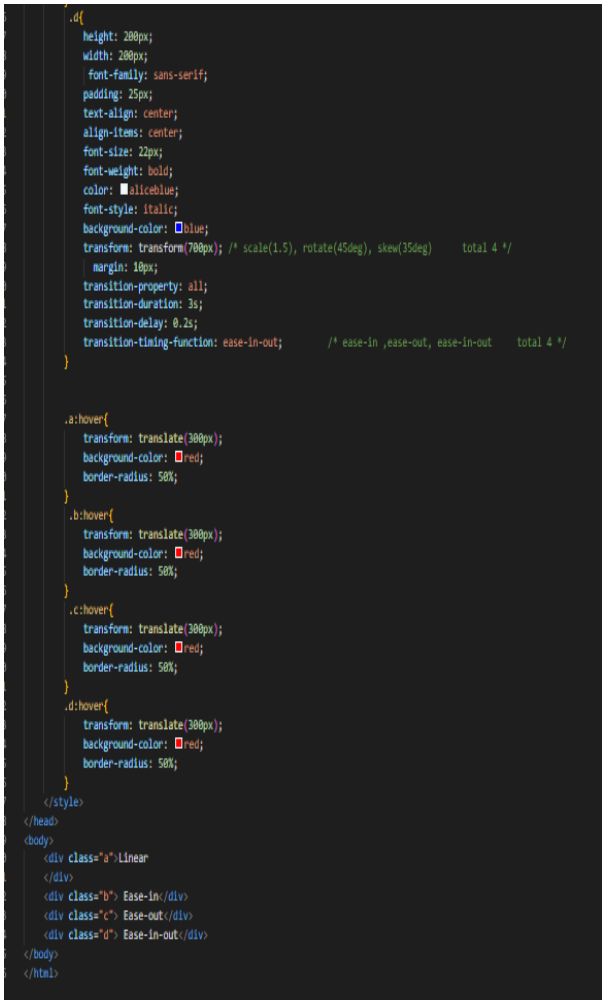

```
        .d{
            height: 200px;
            width: 200px;
             font-family: sans-serif;
            padding: 25px;
            text-align: center;
            align-items: center;
            font-size: 22px;
            font-weight: bold;
            color: aliceblue;
            font-style: italic;
            background-color: blue;
            transform: transform(700px); /* scale(1.5), rotate(45deg), skew(35deg)      total 4 */
              margin: 10px;
            transition-property: all;
            transition-duration: 3s;
            transition-delay: 0.2s;
            transition-timing-function: ease-in-out;        /* ease-in ,ease-out, ease-in-out     total 4 */
        }


        .a:hover{
            transform: translate(300px);
            background-color: red;
            border-radius: 50%;
        }
        .b:hover{
            transform: translate(300px);
            background-color: red;
            border-radius: 50%;
        }
        .c:hover{
            transform: translate(300px);
            background-color: red;
            border-radius: 50%;
        }
        .d:hover{
            transform: translate(300px);
            background-color: red;
            border-radius: 50%;
        }
    </style>
</head>
<body>
    <div class="a">Linear
    </div>
    <div class="b"> Ease-in</div>
    <div class="c"> Ease-out</div>
    <div class="d"> Ease-in-out</div>
</body>
</html>
```

Output:

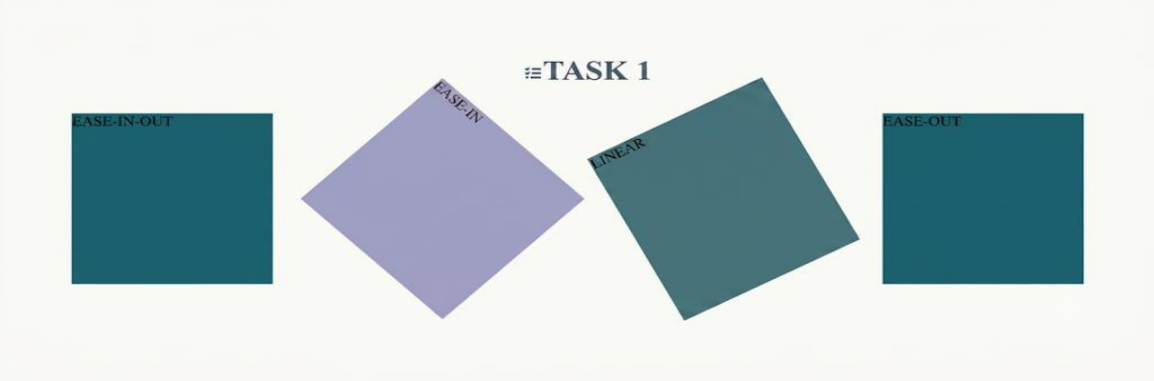



Conclusion:

By the end of Day 8, I learned how to enhance the appearance of web pages using Font Awesome, Google Fonts, and icons. I also understood how CSS transformations and transitions create smooth animations and interactive effects, helping me build more attractive and user-friendly websites.