```
In [1]: import numpy as np
        import pandas as pd
        import matplotlib.pyplot as plt
        import seaborn as sns
```

```
In [2]: df=pd.read_csv(r'C:\Users\user\Desktop\rainfall\BIHAR.csv')
        df
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
...	...	...	...	...	...	...	...	...	...	...	...	...	..
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns

In [3]:
```python
df=df.dropna()
df
```

Out[3]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
...	...	...	...	...	...	...	...	...	...	...	...	...	..
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns

In [4]:
```python
df.columns
```

Out[4]:
```
Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',
       'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',
       'Mar-May', 'Jun-Sep', 'Oct-Dec'],
      dtype='object')
```

In [5]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column       Non-Null Count   Dtype
---  ------       --------------   -----
 0   index        115 non-null     int64
 1   SUBDIVISION  115 non-null     object
 2   YEAR         115 non-null     int64
 3   JAN          115 non-null     float64
 4   FEB          115 non-null     float64
 5   MAR          115 non-null     float64
 6   APR          115 non-null     float64
 7   MAY          115 non-null     float64
 8   JUN          115 non-null     float64
 9   JUL          115 non-null     float64
 10  AUG          115 non-null     float64
 11  SEP          115 non-null     float64
 12  OCT          115 non-null     float64
 13  NOV          115 non-null     float64
 14  DEC          115 non-null     float64
 15  ANNUAL       115 non-null     float64
 16  Jan-Feb      115 non-null     float64
 17  Mar-May      115 non-null     float64
 18  Jun-Sep      115 non-null     float64
 19  Oct-Dec      115 non-null     float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.9+ KB
```

In [6]: `df.plot.line(subplots=True)`

Out[6]:
```
array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>], dtype=object)
```
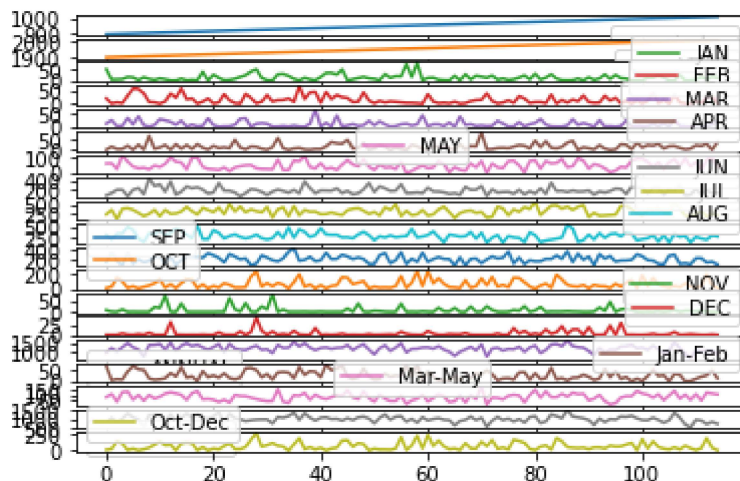
In [7]: `df.plot.line()`

Out[7]: `<AxesSubplot:>`
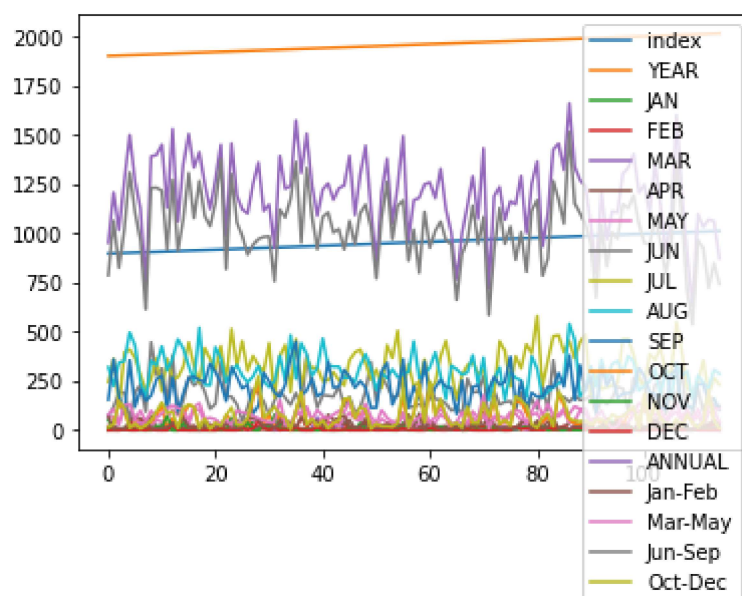
In [8]: `df.plot.bar()`

Out[8]: `<AxesSubplot:>`
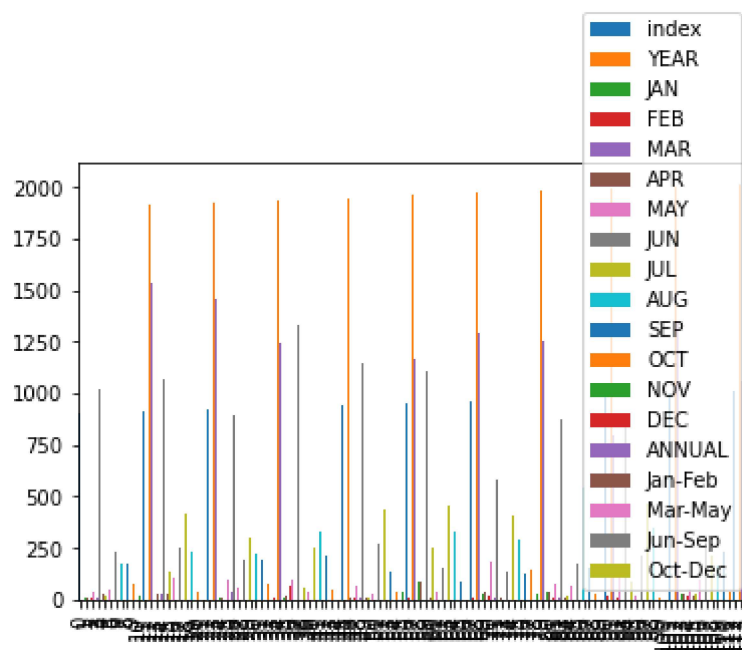
In [9]: `df.plot.hist()`

Out[9]: `<AxesSubplot:ylabel='Frequency'>`
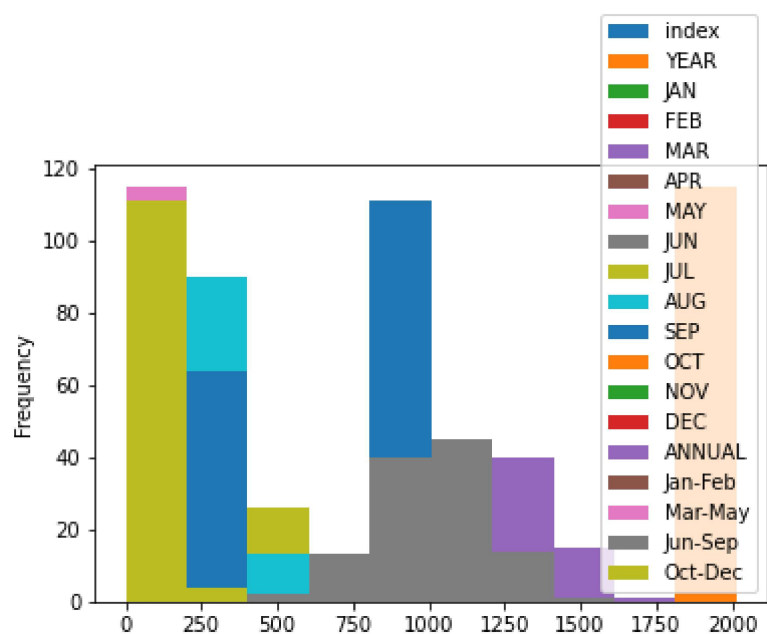
In [10]: `df.plot.area()`

Out[10]: `<AxesSubplot:>`
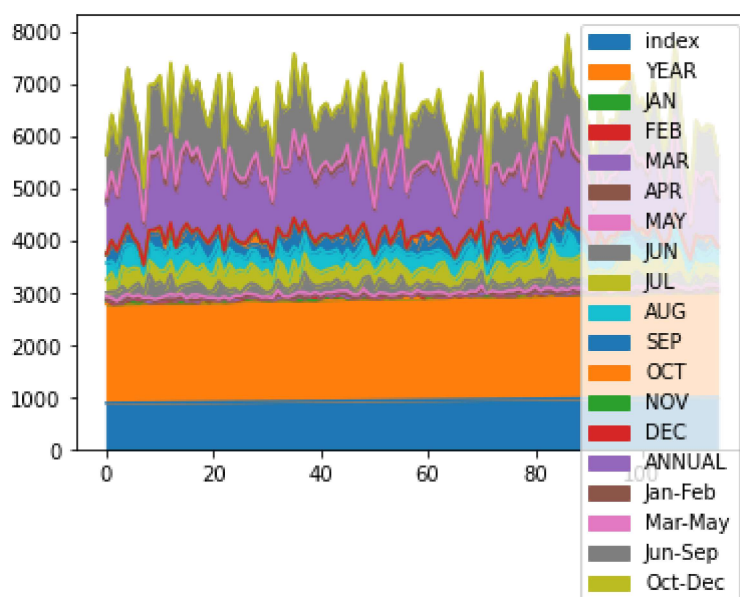
In [11]: `df.plot.box()`

Out[11]: `<AxesSubplot:>`
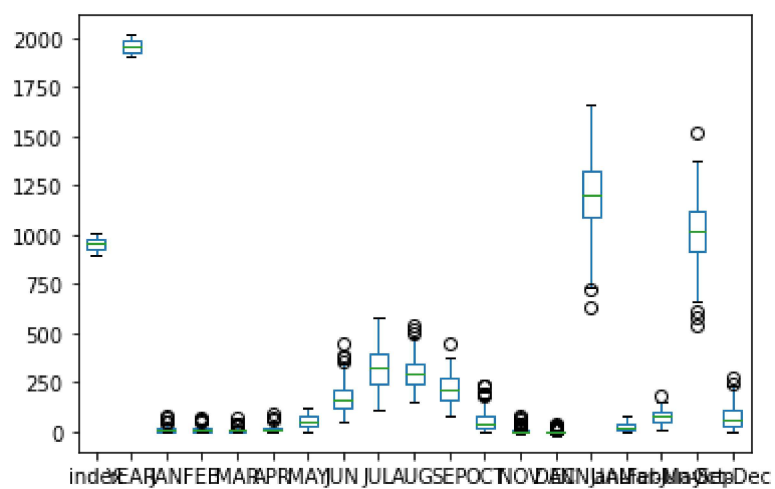
```
In [12]: df.plot.pie(y='ANNUAL')
```

Out[12]: <AxesSubplot:ylabel='ANNUAL'>
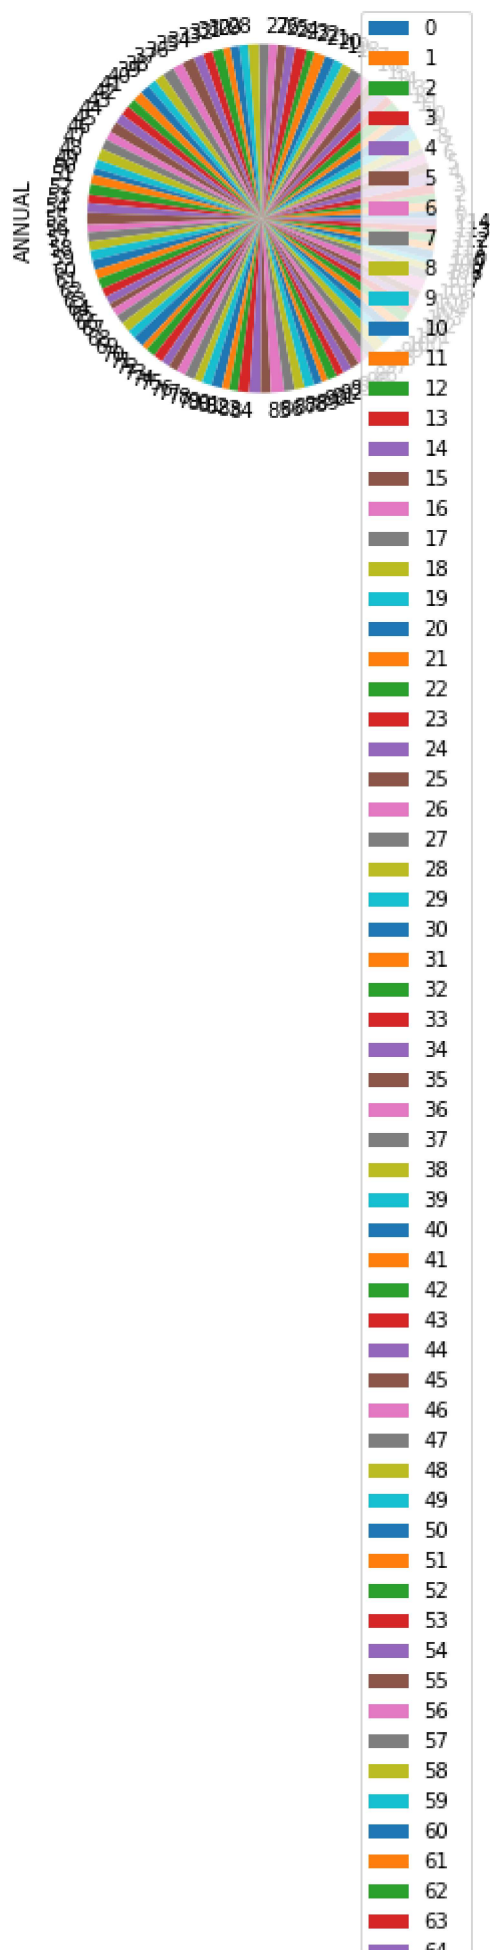
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114

In [13]: `df.plot.scatter(x='SEP',y='AUG')`

Out[13]: `<AxesSubplot:xlabel='SEP', ylabel='AUG'>`

In [14]: `df.describe()`

Out[14]:

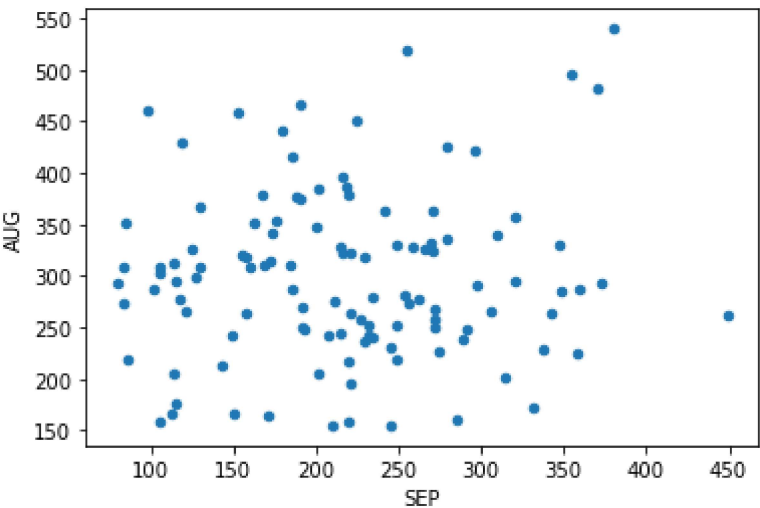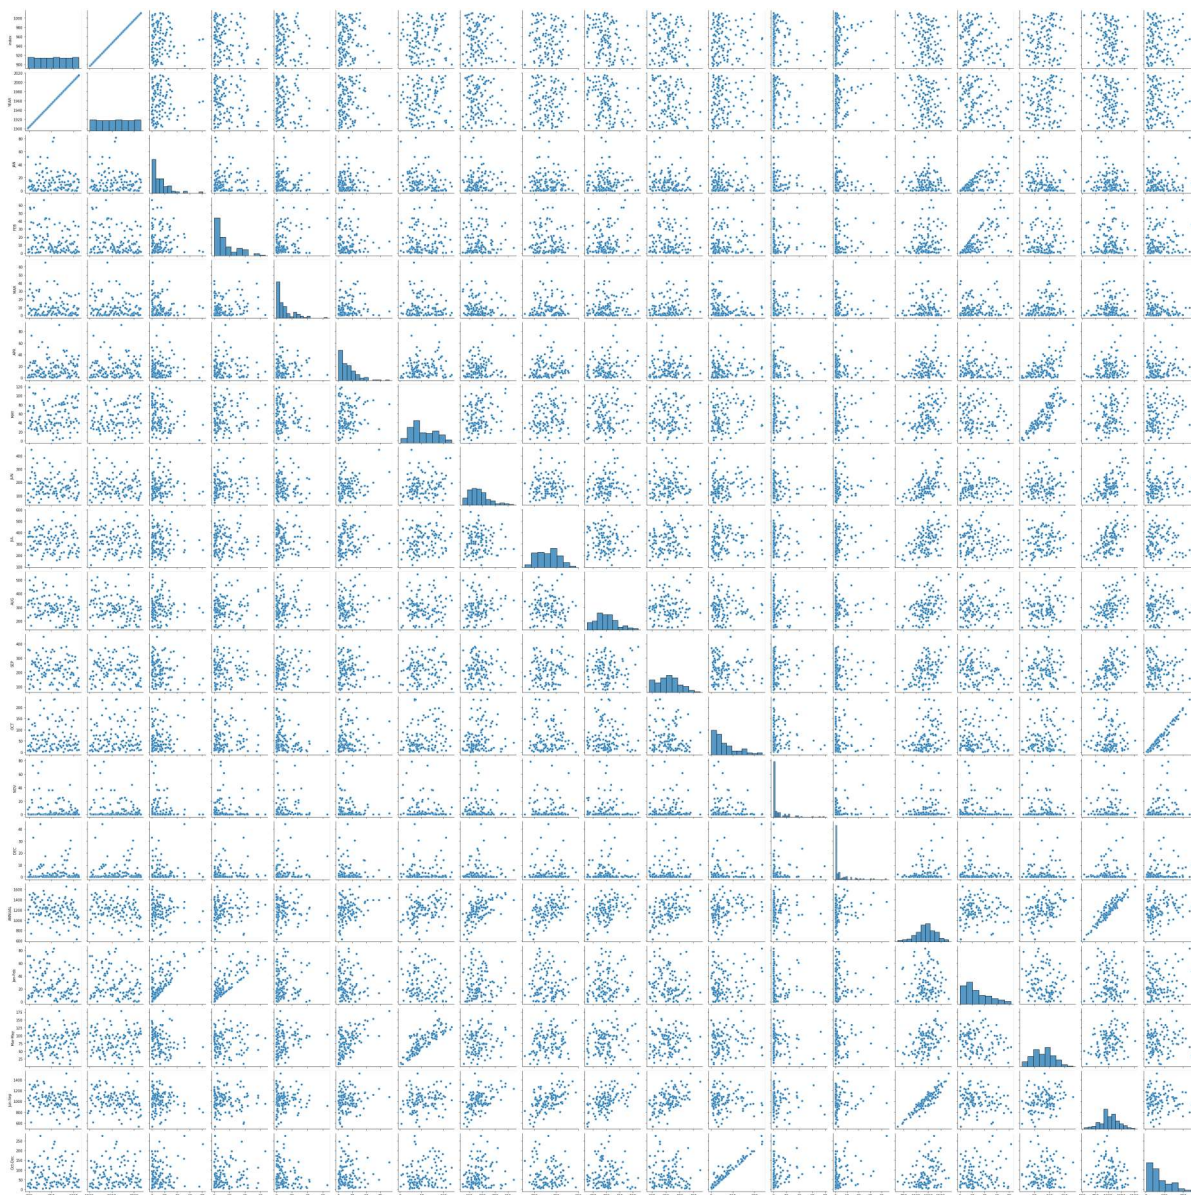|	index	YEAR	JAN	FEB	MAR	APR	MAY	11!
count	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	11!
mean	954.000000	1958.000000	13.386087	14.393913	10.124348	16.918261	53.081739	174
std	33.341666	33.341666	14.791960	15.075036	11.695340	15.978278	27.941714	76
min	897.000000	1901.000000	0.000000	0.000000	0.000000	0.100000	1.300000	48
25%	925.500000	1929.500000	2.350000	2.750000	1.800000	5.250000	31.550000	117
50%	954.000000	1958.000000	9.400000	8.400000	6.500000	12.600000	46.200000	16!
75%	982.500000	1986.500000	18.700000	21.400000	12.850000	24.500000	76.200000	21
max	1011.000000	2015.000000	81.200000	66.300000	65.500000	91.400000	118.700000	44(

In [15]: ```
sns.pairplot(df)
```

Out[15]: `<seaborn.axisgrid.PairGrid at 0x11d73851fd0>`

In [16]: `sns.distplot(df['AUG'])`

```
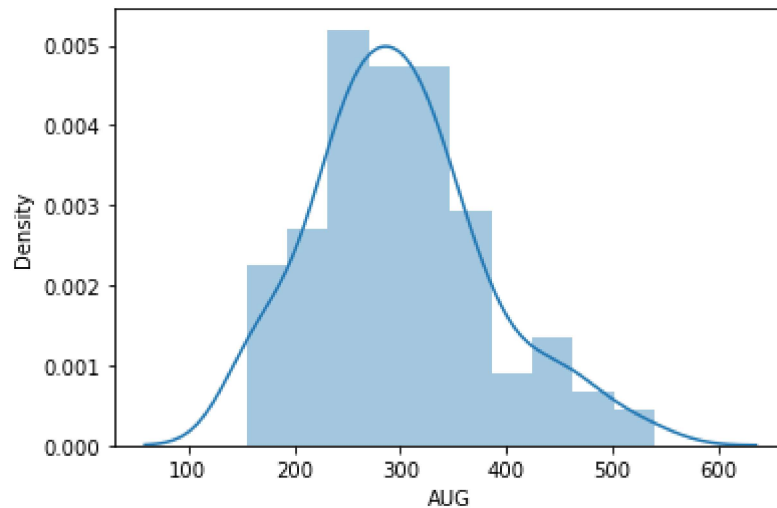C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: Fut
ureWarning: `distplot` is a deprecated function and will be removed in a futu
re version. Please adapt your code to use either `displot` (a figure-level fu
nction with similar flexibility) or `histplot` (an axes-level function for hi
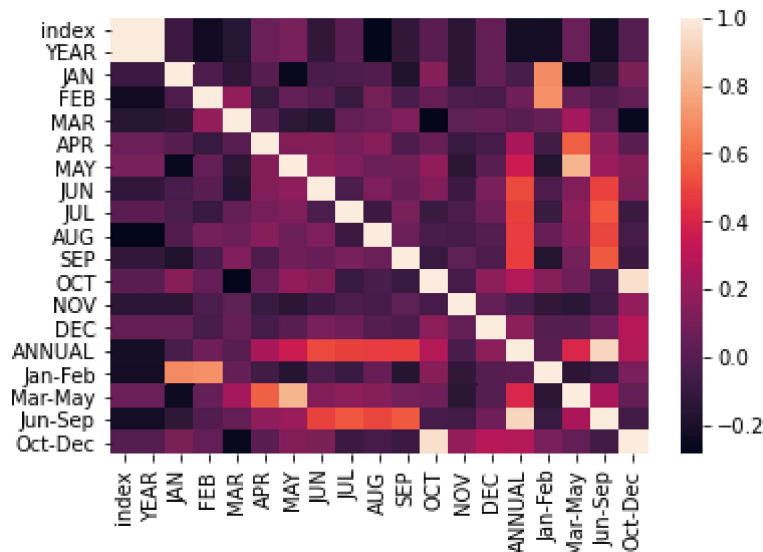stograms).
  warnings.warn(msg, FutureWarning)
```

Out[16]: `<AxesSubplot:xlabel='AUG', ylabel='Density'>`

In [17]: `sns.heatmap(df.corr())`

Out[17]: `<AxesSubplot:>`

In [ ]: