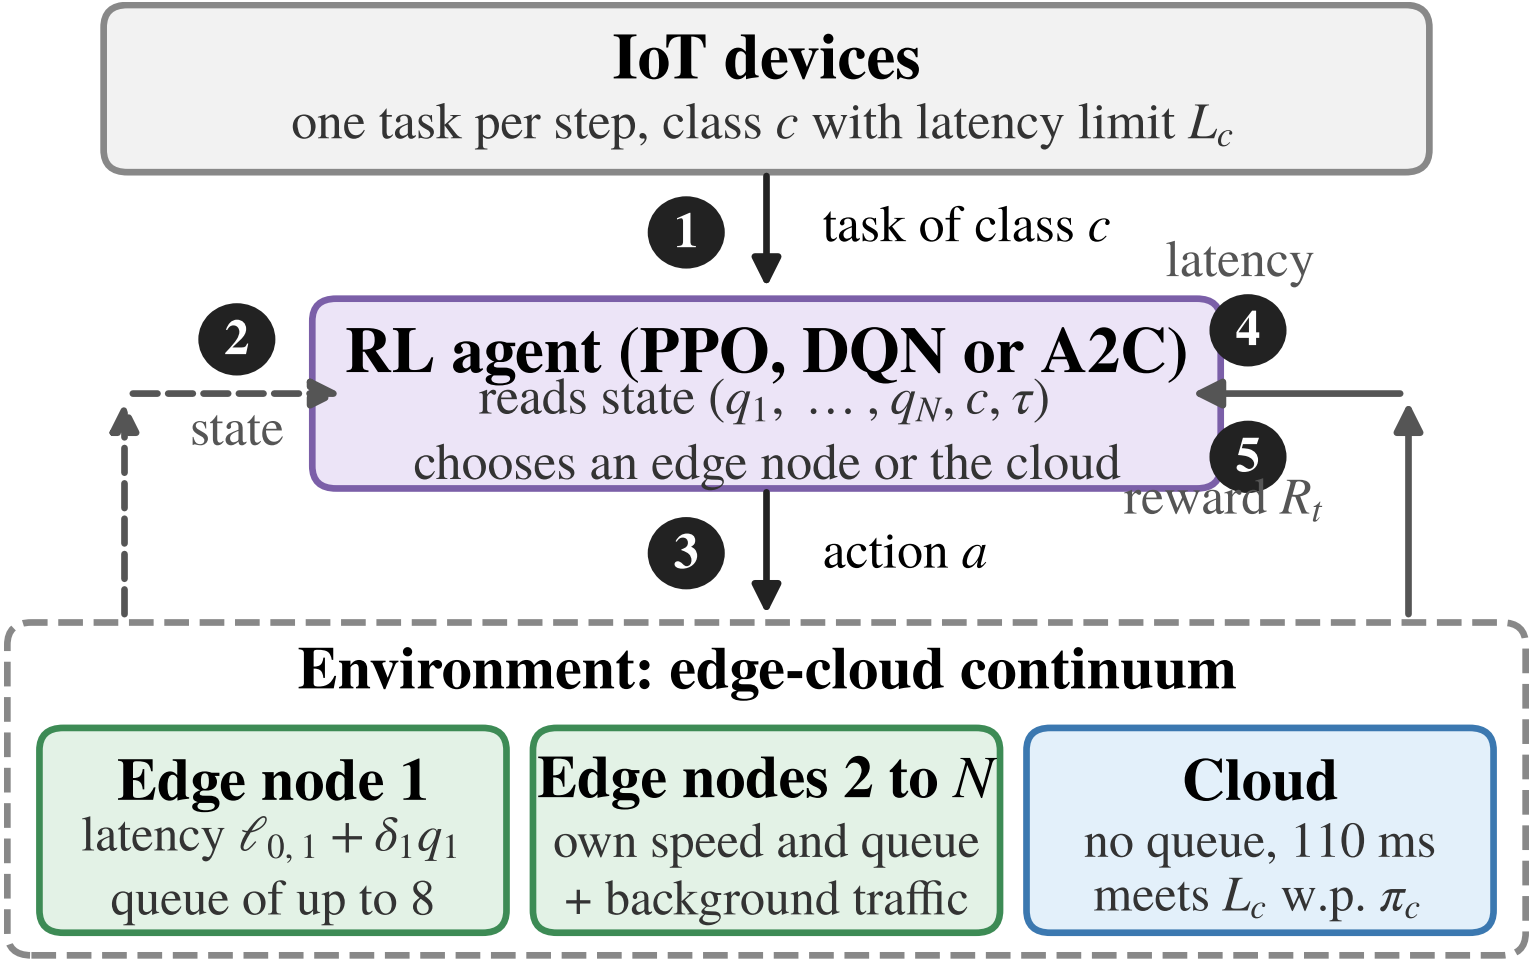
IoT devices
one task per step, class c with latency limit L_c
1
task of class c
latency
2
RL agent (PPO, DQN or A2C)
reads state $(q_1, \ldots, q_N, c, \tau)$
chooses an edge node or the cloud
4
5
reward R_t
state
3
action a
Environment: edge-cloud continuum
Edge node 1
latency $\ell_{0,1} + \delta_1 q_1$
queue of up to 8
Edge nodes 2 to N
own speed and queue
+ background traffic
Cloud
no queue, 110 ms
meets L_c w.p. π_c