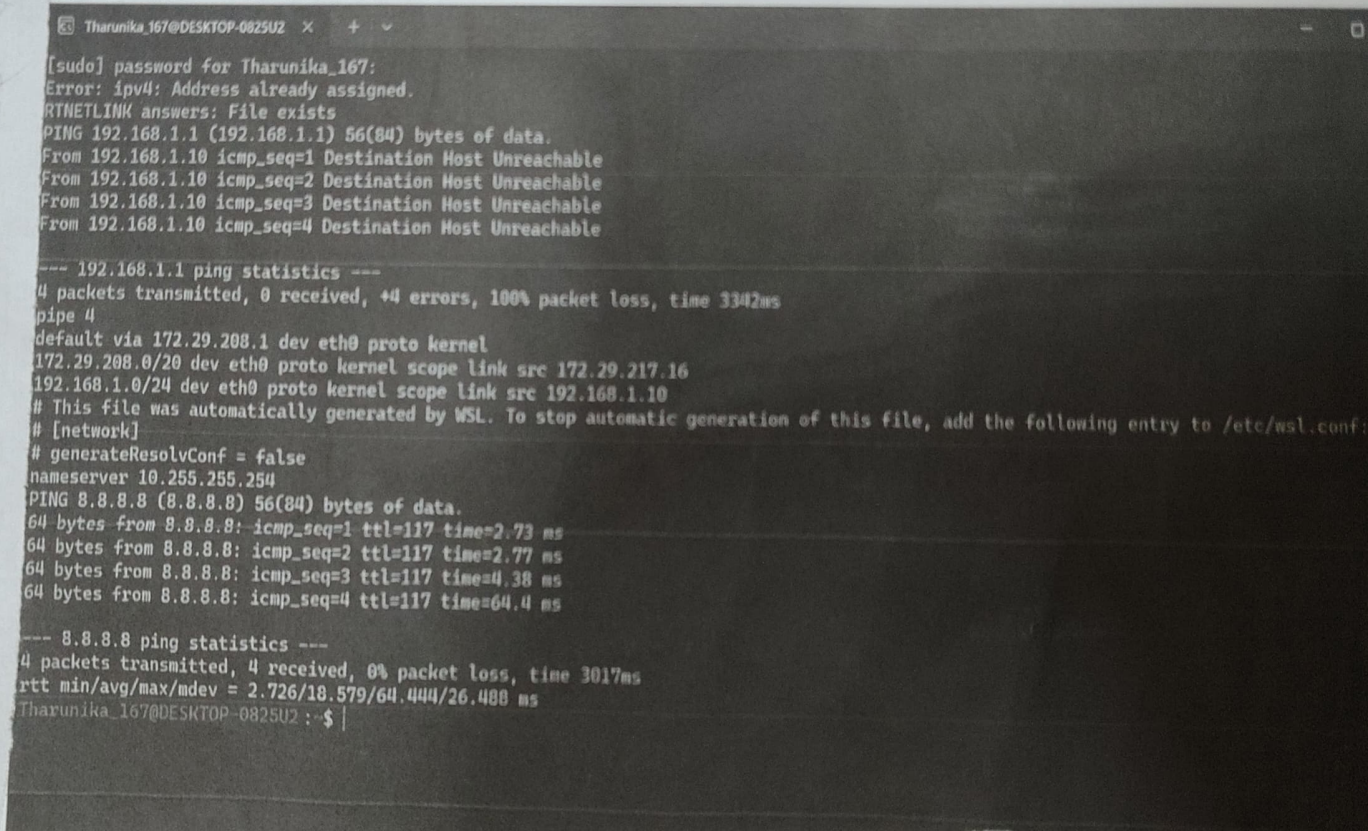

Tharunika_167@DESKTOP-0825U2
[sudo] password for Tharunika_167:
Error: ipv4: Address already assigned.
RTNETLINK answers: File exists
PING 192.168.1.1 (192.168.1.1) 56(84) bytes of data.
From 192.168.1.10 icmp_seq=1 Destination Host Unreachable
From 192.168.1.10 icmp_seq=2 Destination Host Unreachable
From 192.168.1.10 icmp_seq=3 Destination Host Unreachable
From 192.168.1.10 icmp_seq=4 Destination Host Unreachable
--- 192.168.1.1 ping statistics ---
4 packets transmitted, 0 received, +4 errors, 100% packet loss, time 3342ms
pipe 4
default via 172.29.208.1 dev eth0 proto kernel
172.29.208.0/20 dev eth0 proto kernel scope link src 172.29.217.16
192.168.1.0/24 dev eth0 proto kernel scope link src 192.168.1.10
This file was automatically generated by WSL. To stop automatic generation of this file, add the following entry to /etc/wsl.conf:
[network]
generateResolvConf = false
nameserver 10.255.255.254
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=117 time=2.73 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=117 time=2.77 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=117 time=4.38 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=117 time=64.4 ms
--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3017ms
rtt min/avg/max/mdev = 2.726/18.579/64.444/26.488 ms
Tharunika_167@DESKTOP-0825U2:~$

EXP NO: 2

EXPERIMENT-2 (Study)

LEARNING AND ASSIGNMENT OF IP ADDRESS MANOALLY TO COMPUTER

AIM:

To understand IP addressing scheme & manually assign static IP address to computers on a network

THEORY:

An IP (Internet Protocol) address is a unique numerical label assigned to each each device connected to a computer network

IPV4 address are 32-bit numbers written in dotted-decimal notation. (Eg. 192.168.1.10)

IPV6 uses 128-bit addresses

Manual (static) IP assignment is used for servers & network device required a permanent address. DHCP assigns IPs dynamically

CODE:

```
<!Bash>
sudo ip addr add 192.168.1.10/24 dev etho
sudo ip route add default via 192.168.1.10
ip addr show etho
Ping -c 4 192.168.1.1
```

sudo - nmcli con mod "wired connection .1
IPv4. address 192.168.1.10

sudo nmcli con mod "wired connection 1"
IPv4 getway 192.168.1.1

sudo nmcli con mod "wired connection 1"
IPv4 . dns "8.8.8.8"

sudo nmcli con-up "wired connection 1"

RESULT:

Static IP address were successfully assigned to computers . connectivity was verified using ping commands between hosts on the same sub net