RAJALAKSHMI ENGINEERING COLLEGE

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

FUNDAMENTALS OF DATA SCIENCE LAB

LAB EXPERIMENT

Experiment 16

EDA — Quantitative and Qualitative Analysis

SUBMITTED BY

Name: Tharunkumar S

Register Number: 250701784

CS23334 | Regulation 2023

Original experiment content follows unchanged

Exp No:**15** Experiment to understand EDA-Quantitative and Qualitative analysis.

Description: Understand the importance of EDA-Quantitative and Qualitative analysis.

```
import seaborn as sns
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline
```

```
tips=sns.load_dataset('tips')
```

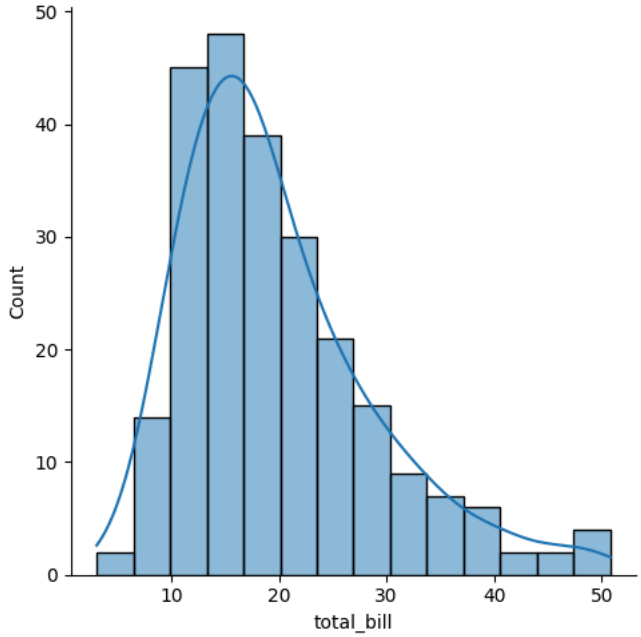
```
tips.head()
```

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

+ Code + Text

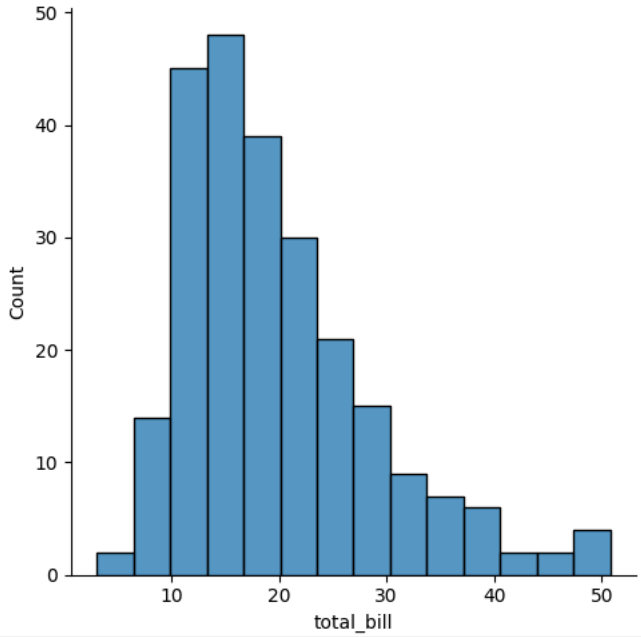
```
sns.displot(tips.total_bill,kde=True)
```

```
<seaborn.axisgrid.FacetGrid at 0x79bb4c7ea680>
```



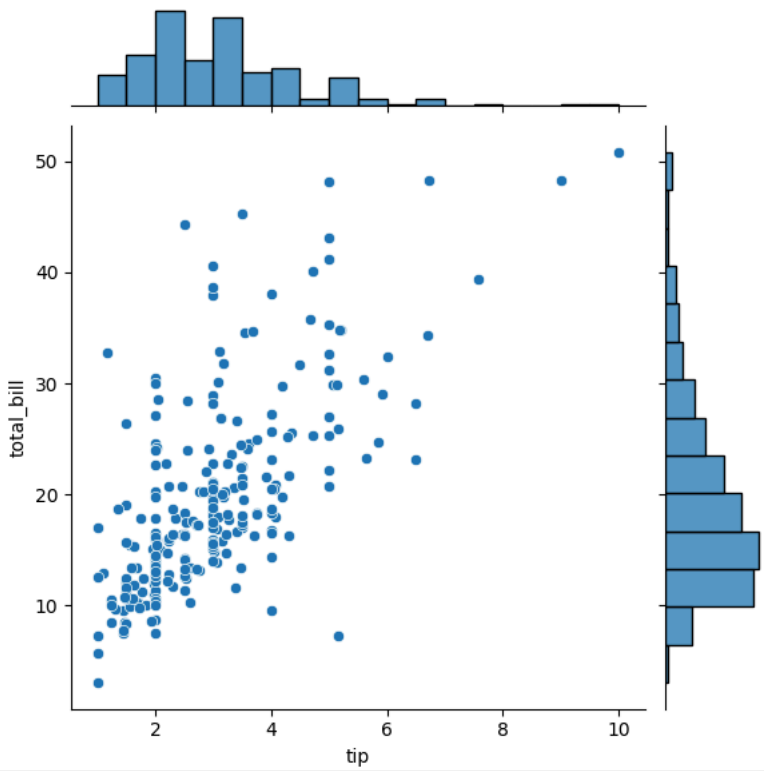

```
sns.displot(tips.total_bill,kde=False)
```

```
<seaborn.axisgrid.FacetGrid at 0x79bb0b0af580>
```



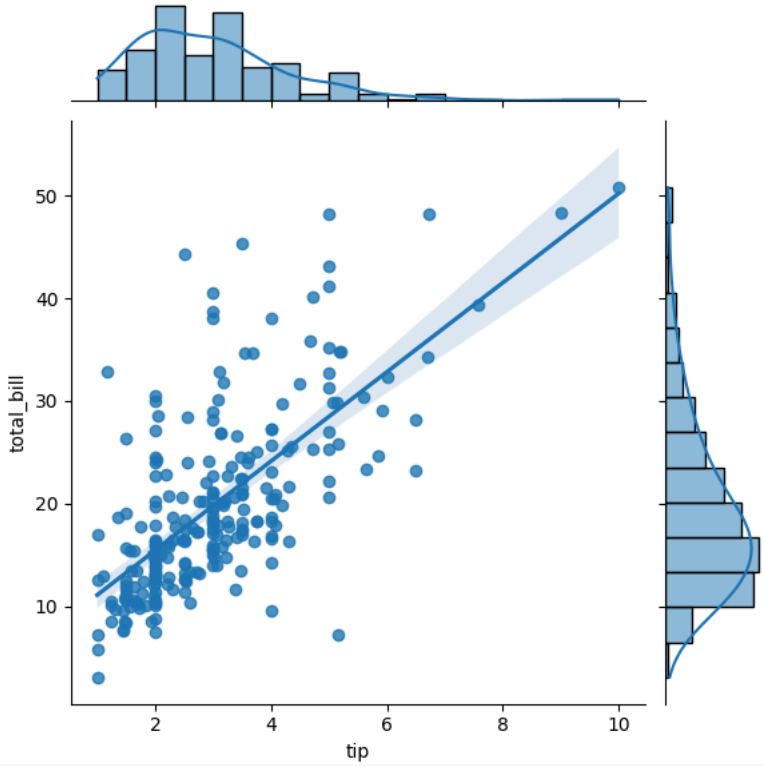

```
sns.jointplot(x=tips.tip,y=tips.total_bill)
```

```
<seaborn.axisgrid.JointGrid at 0x79bb08fc96c0>
```



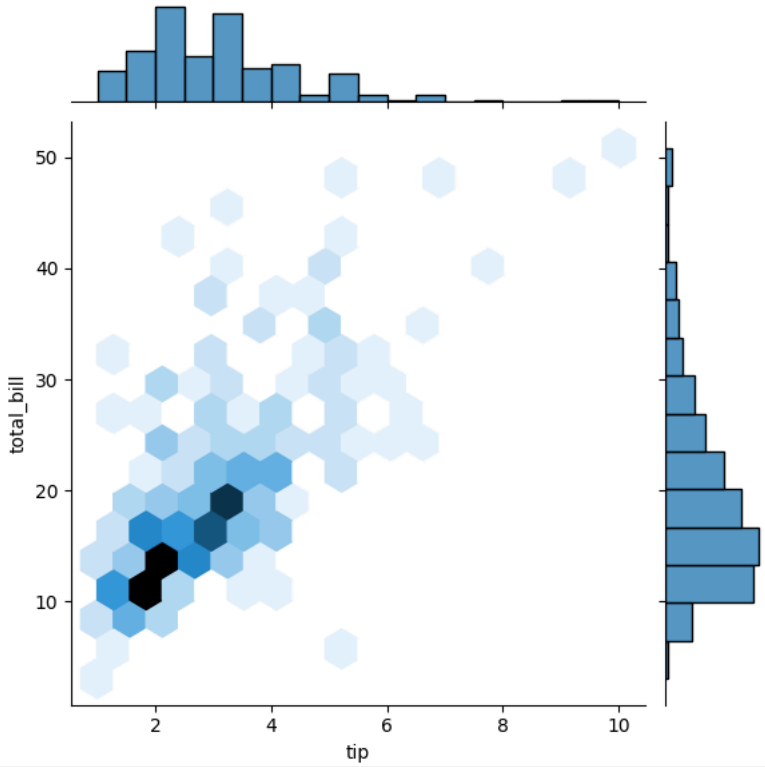

```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="reg")
```

```
<seaborn.axisgrid.JointGrid at 0x79bb08fc9cf0>
```



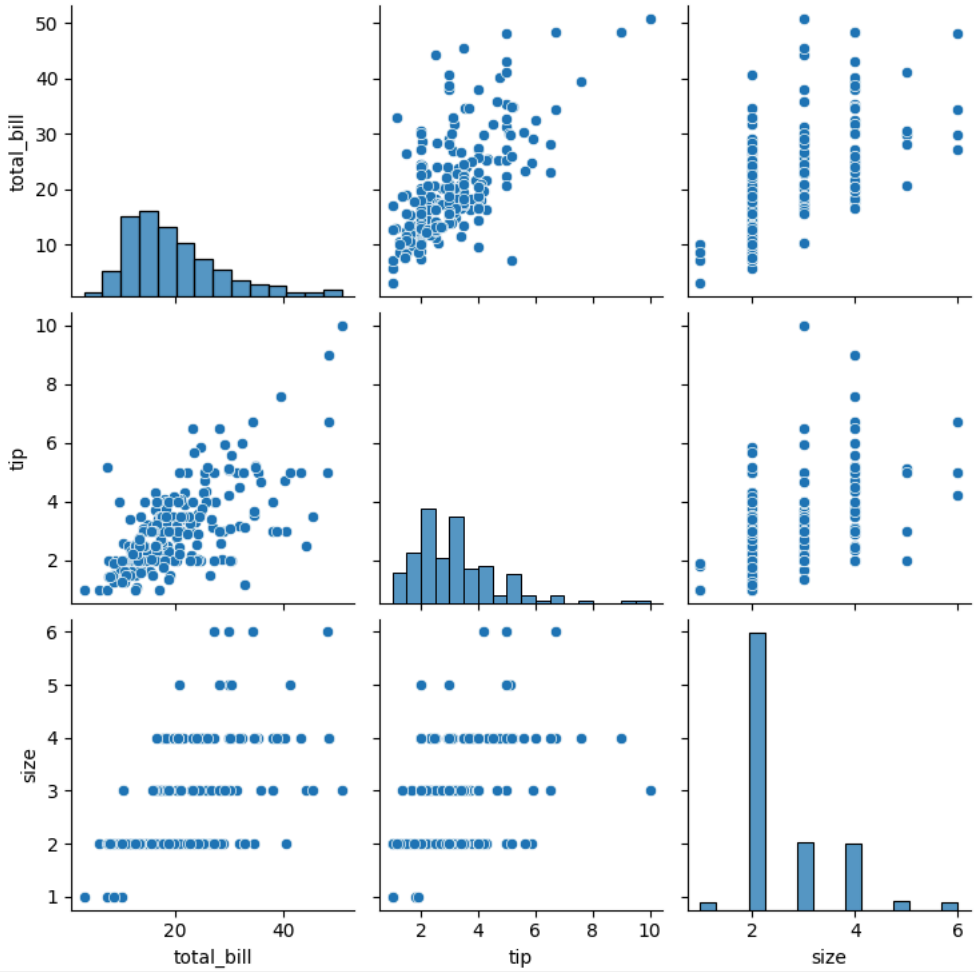

```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="hex")
```

```
<seaborn.axisgrid.JointGrid at 0x79bb088f4730>
```




```
sns.pairplot(tips)
```

```
<seaborn.axisgrid.PairGrid at 0x79bb06fc3d30>
```



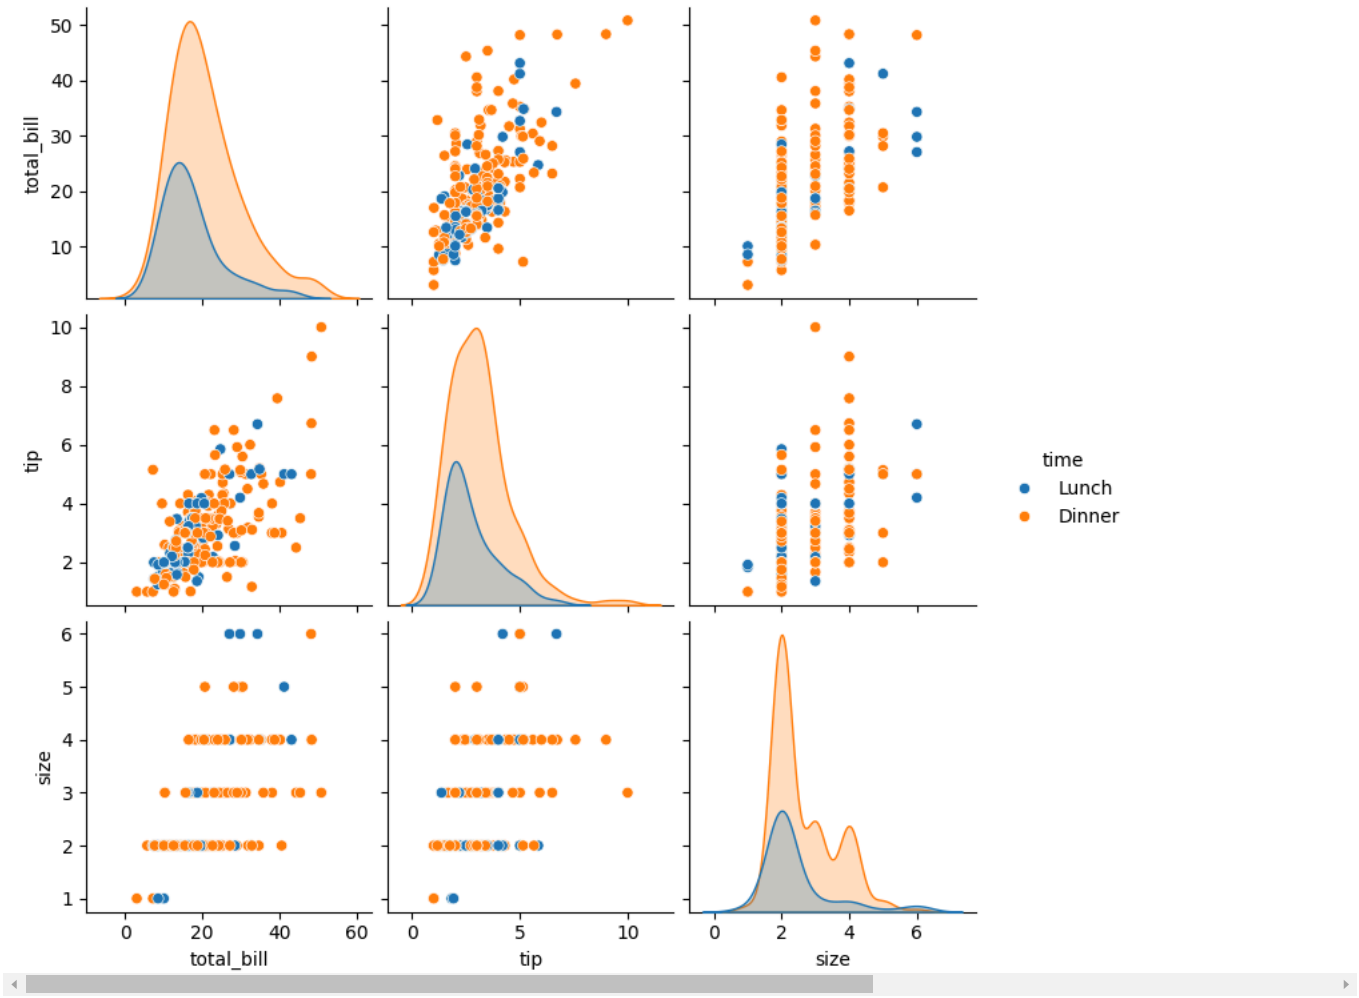

```
tips.time.value_counts()
```

time	count
Dinner	176
Lunch	68

dtype: int64

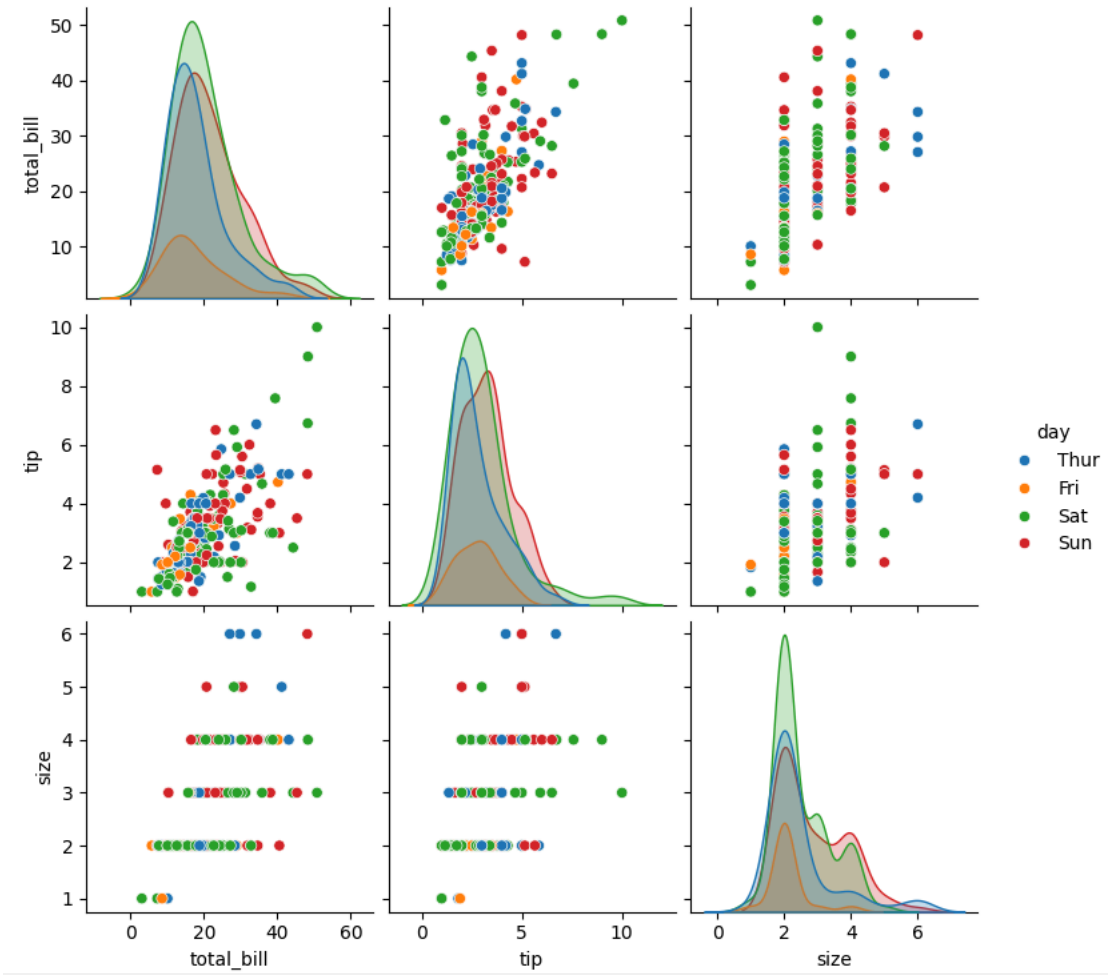
```
sns.pairplot(tips,hue='time')
```

```
<seaborn.axisgrid.PairGrid at 0x79bb088f4670>
```



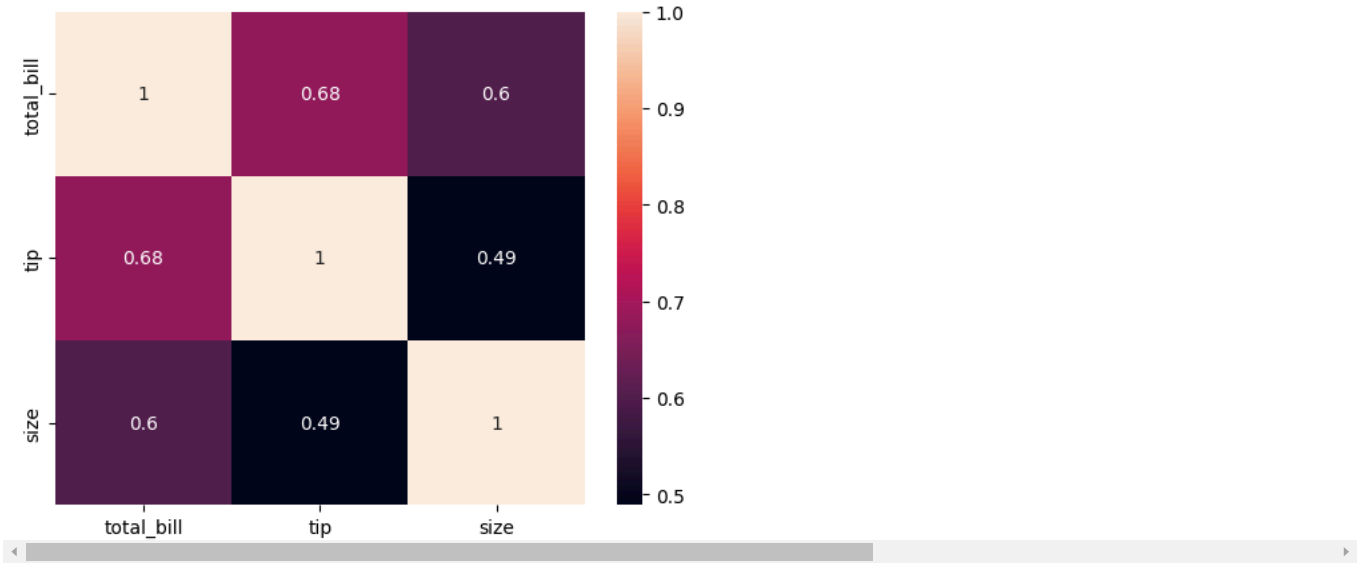

```
sns.pairplot(tips,hue='day')
```

```
<seaborn.axisgrid.PairGrid at 0x79bb08f1f6a0>
```



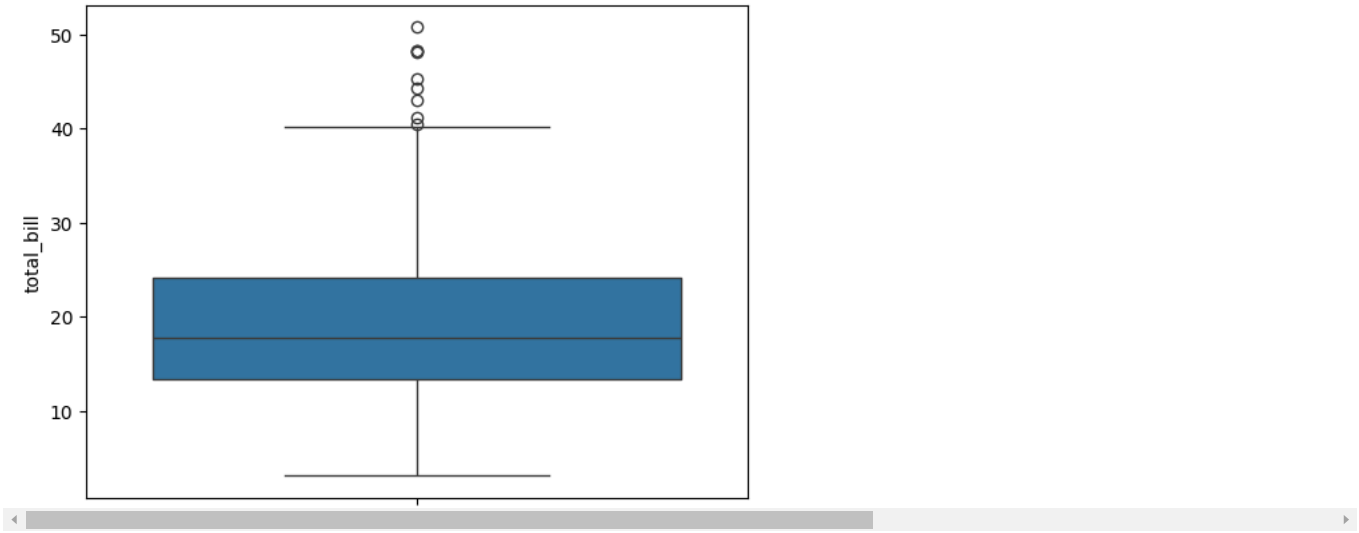

```
sns.heatmap(tips.corr(numeric_only=True),annot=True)
```

```
<Axes: >
```



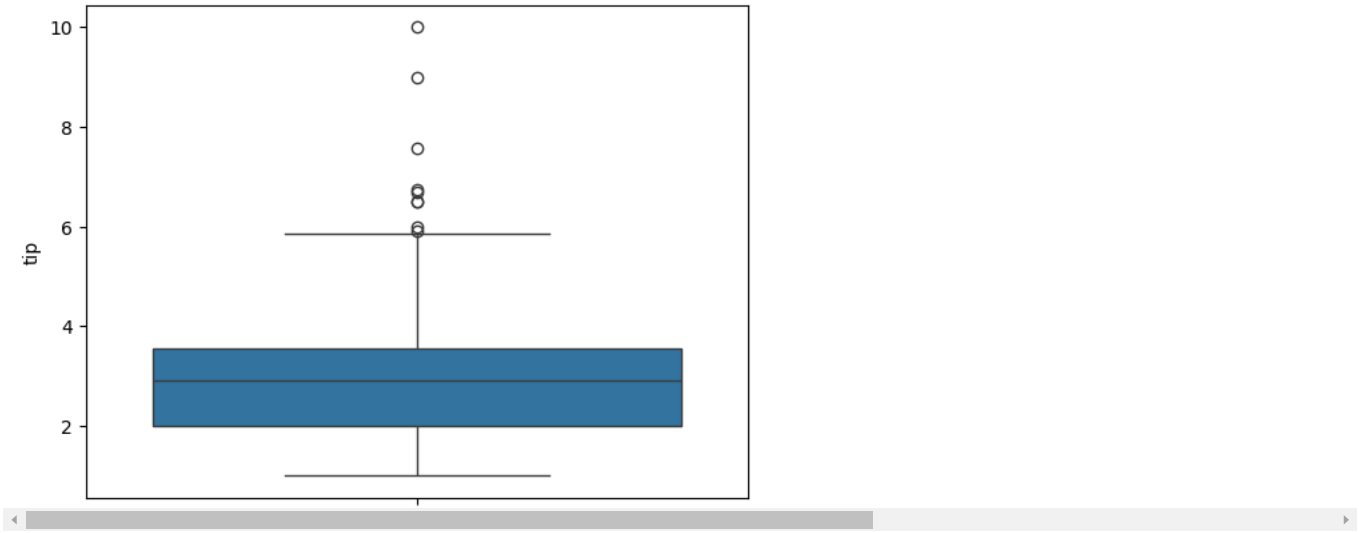

```
sns.boxplot(tips.total_bill)
```

```
<Axes: ylabel='total_bill'>
```



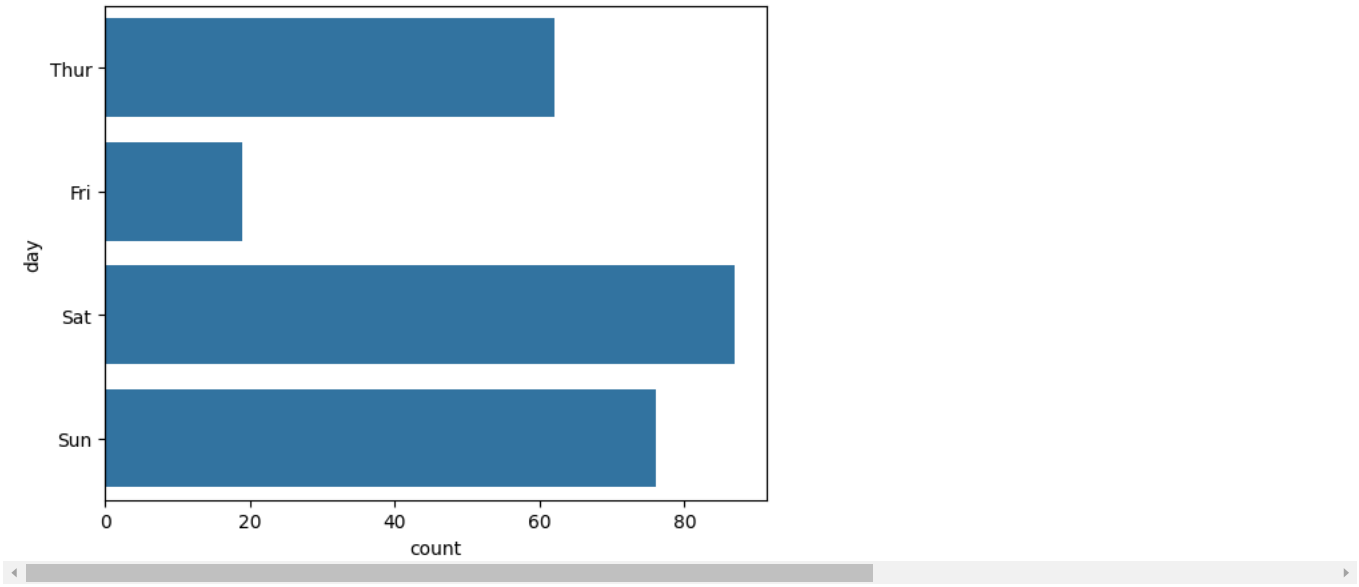

```
sns.boxplot(tips.tip)
```

```
<Axes: ylabel='tip'>
```



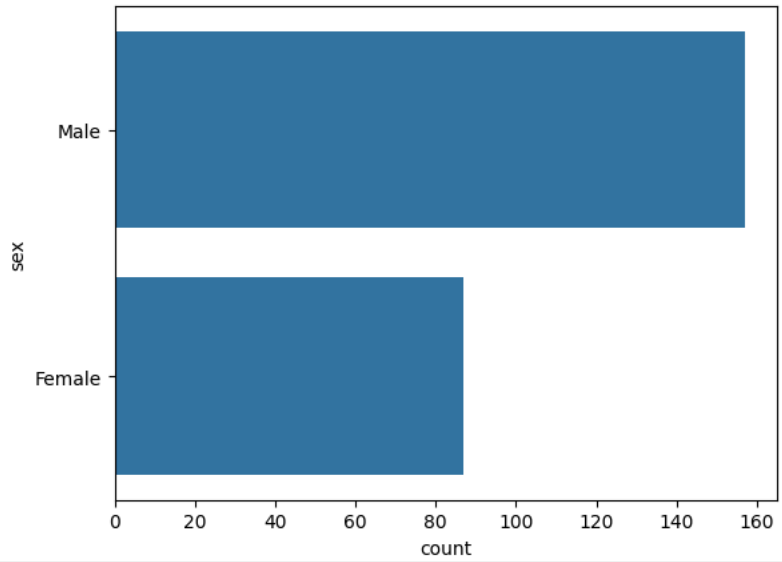

```
sns.countplot(tips.day)
```

```
<Axes: xlabel='count', ylabel='day'>
```



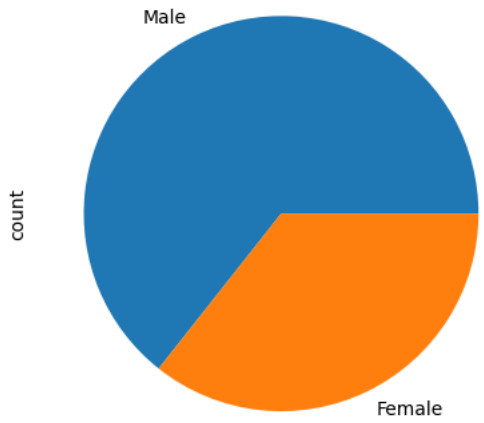

```
sns.countplot(tips.sex)
```

```
<Axes: xlabel='count', ylabel='sex'>
```



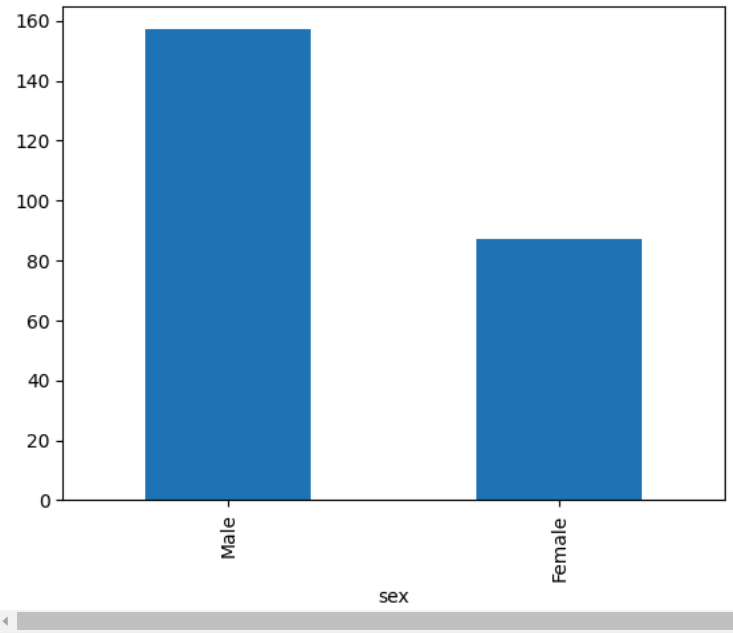

```
tips.sex.value_counts().plot(kind='pie')
```

```
<Axes: ylabel='count'>
```




```
tips.sex.value_counts().plot(kind='bar')
```

```
<Axes: xlabel='sex'>
```




```
sns.countplot(tips[tips.time=='Dinner']['day'])
```

```
<Axes: xlabel='count', ylabel='day'>
```

