


How SPF Works?

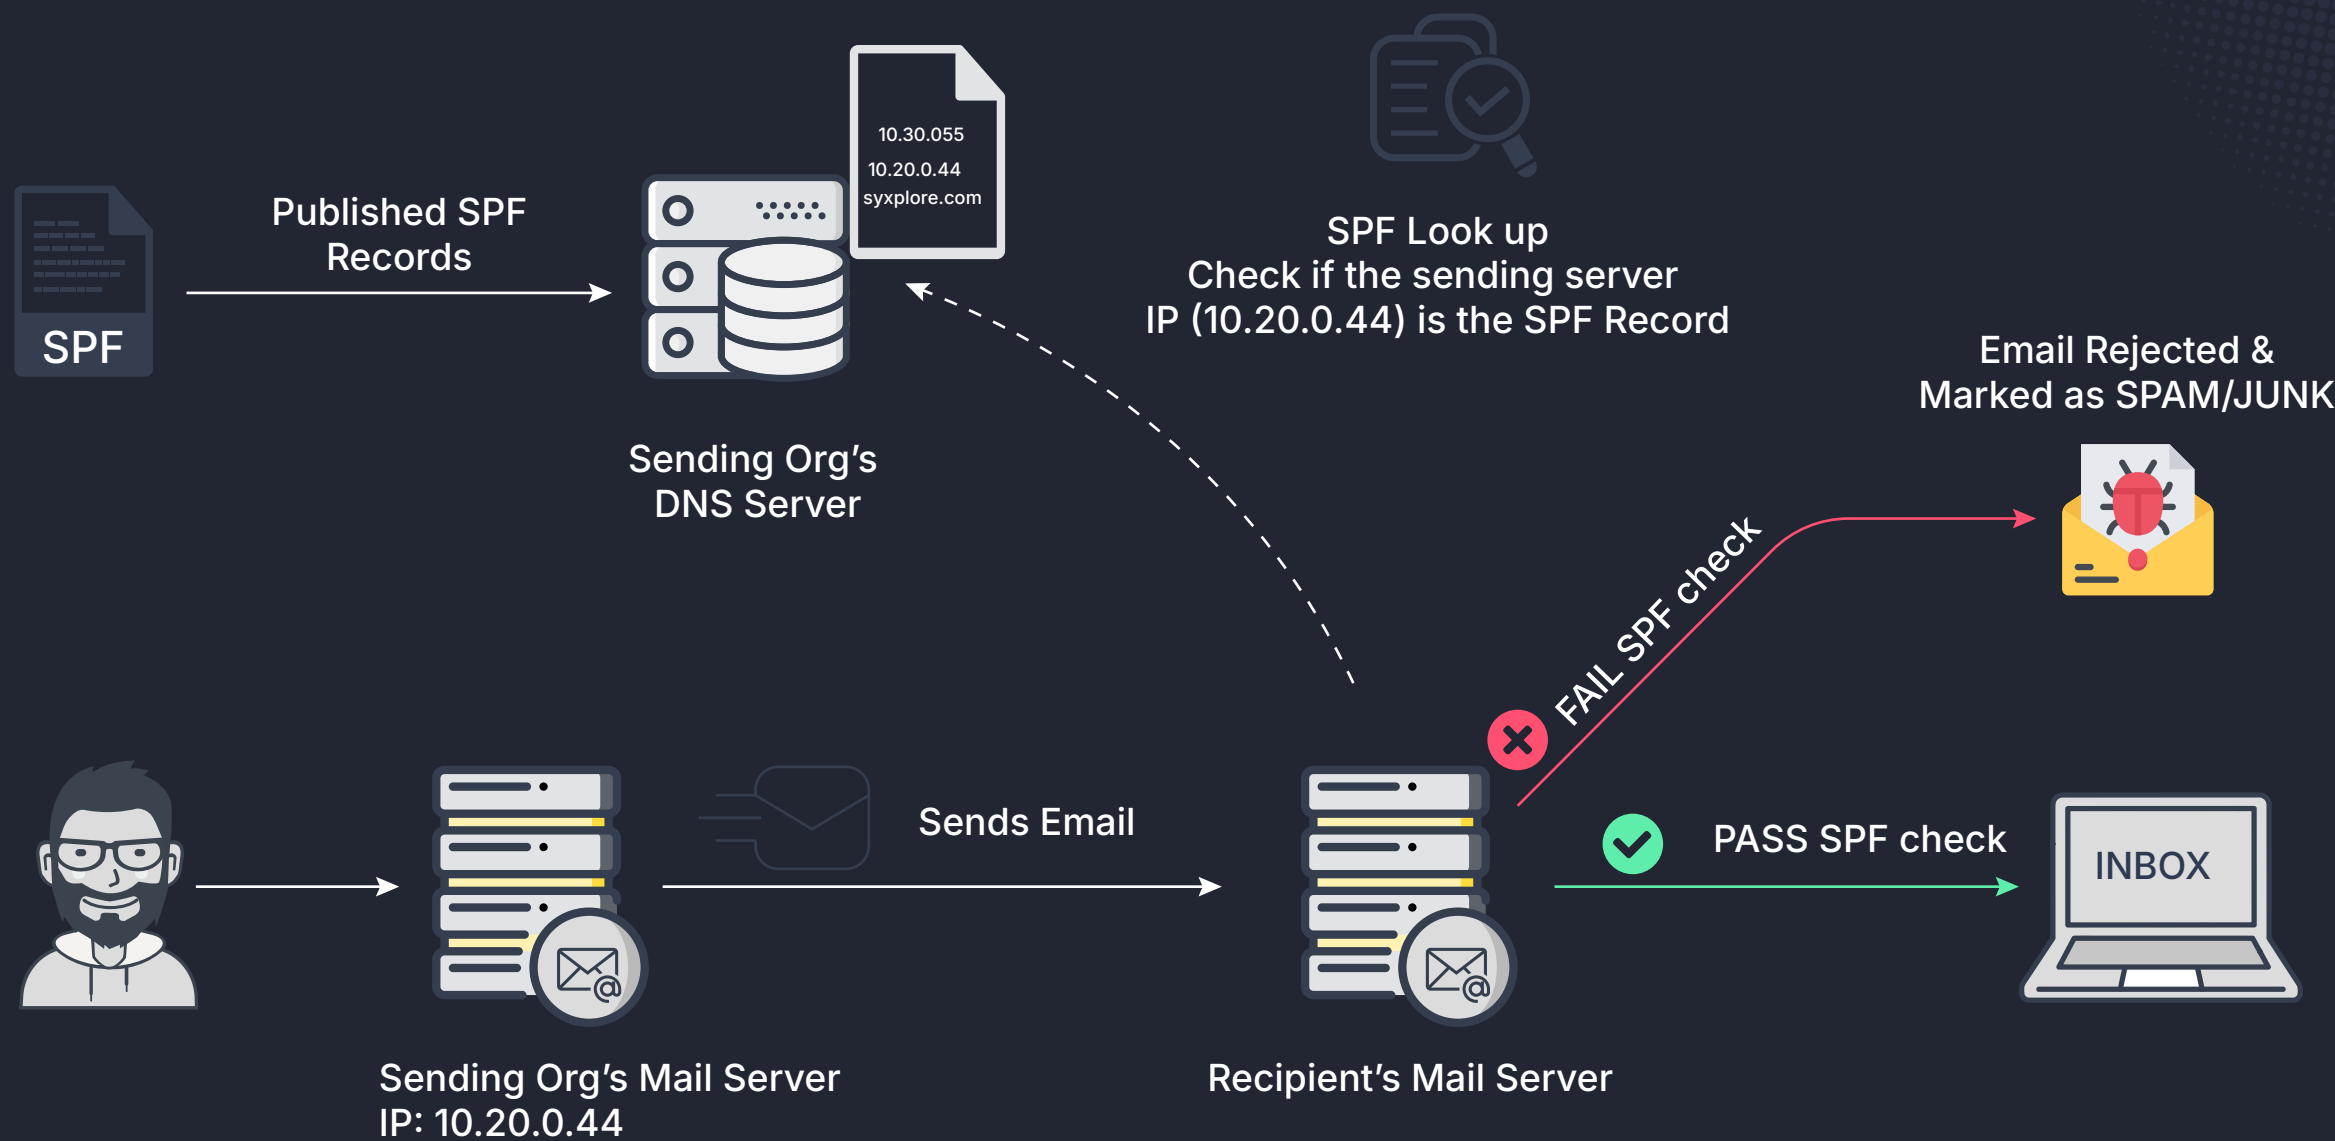

```
$ nslookup
> set q=txt
> sysxplore.com
...
v=spf1 a mx include:_spf.sysxplore.com ~all
Version Mechanism
# same as
v=spf1 +a +mx +include:_spf.sysxplore.com ~all
```

Breaking Down Sender Policy Framework Policy	
v=spf1	Specifies SPF version 1.
a	Allows the domain's A record server to send emails.
mx	Authorizes servers in the domain's MX records to send emails.
include:spf.a=sysxplore.com	Authorizes servers under spf.sysxplore.com to send emails for this domain.
~all	Soft fail for unlisted senders emails from other servers may still be accepted but marked as suspicious.

SPF Mechanisms Qualifiers			
Symbol	Result	Explanation	Intended Action
+	PASS	If an IP matches a mechanism with this qualifier, the SPF check will pass.	Accept
-	FAIL	If an IP matches a mechanism with this qualifier, the SPF check will fail	Reject
~	SOFTFAIL	When an IP matches a mechanism with this qualifier, the SPF check will softly fail. The receiving server should still accept the mail but tag it as an SPF failure.	Accept but mark
?	NEUTRAL	If an IP matches a mechanism with this qualifier, it won't result in a pass or fail for SPF.	Accept