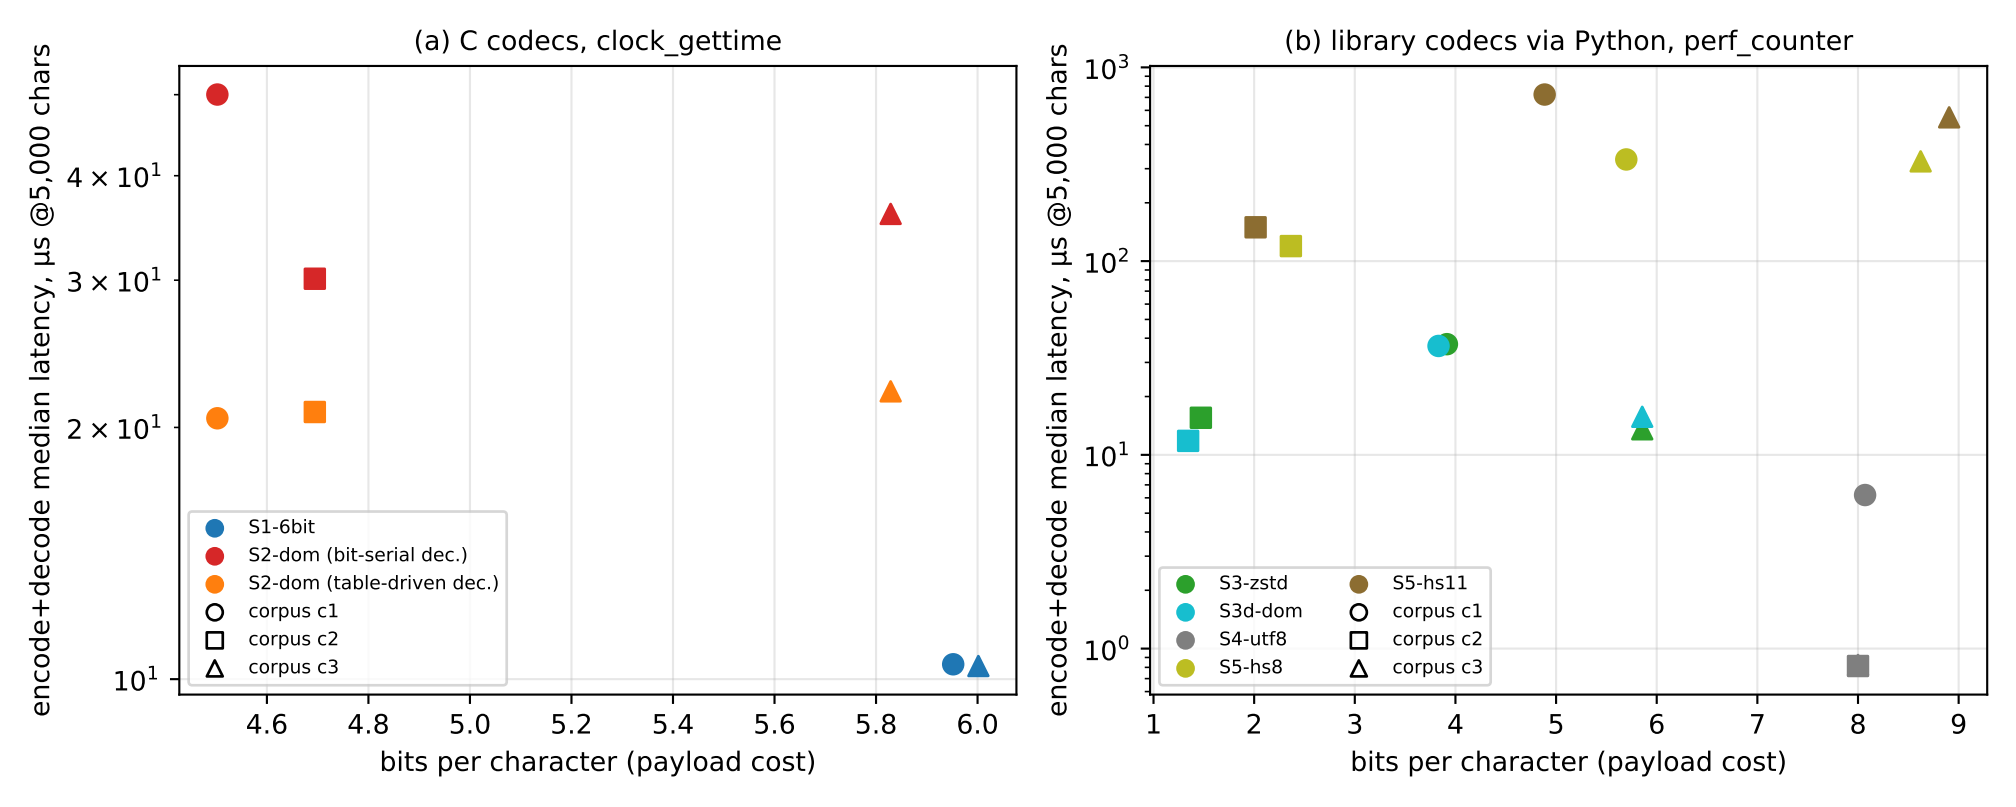
(a) C codecs, clock_gettime
encode+decode median latency, µs @5,000 chars
bits per character (payload cost)
S1-6bit
S2-dom (bit-serial dec.)
S2-dom (table-driven dec.)
corpus c1
corpus c2
corpus c3
(b) library codecs via Python, perf_counter
encode+decode median latency, µs @5,000 chars
bits per character (payload cost)
S3-zstd
S3d-dom
S4-utf8
S5-hs8
S5-hs11
corpus c1
corpus c2
corpus c3