

Protocol-dependent `dst_port` domain

TCP / UDP : `dst_port` $\in [0, 65535]$




A blue rectangular bar representing the domain of the 16-bit port number. The bar is positioned between two horizontal axes. The top axis is labeled 'dst_port' and the bottom axis is labeled 'dst_port value'. The bar spans from 0 to 65535 on the bottom axis.

16-bit port number
($2^{16} = 65,536$ distinct values)

0 16k 32k 48k 65535

`dst_port` value

ICMP : `dst_port` stores ICMP type $\in [0, 255]$ (per RFC 792)

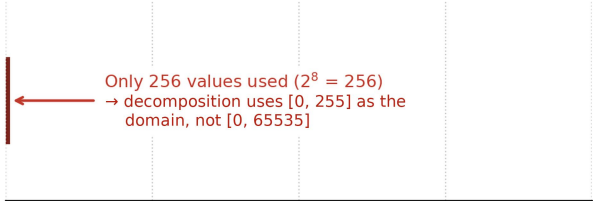

A red vertical line segment at the far left of the diagram, representing the domain of the ICMP type. The line is positioned at the 0 mark on the bottom axis. A red arrow points from the text to the line.

Only 256 values used ($2^8 = 256$)
→ decomposition uses $[0, 255]$ as the domain, not $[0, 65535]$

0 16k 32k 48k 65535

`dst_port` value (= ICMP type)