


Protocol-dependent `dst_port` domain

TCP / UDP : `dst_port` $\in [0, 65,535]$



A blue rectangular box representing the domain of the 16-bit port number. The box is centered horizontally and contains the text "16-bit port number" and "(2¹⁶ = 65,536 distinct values)".

16-bit port number
($2^{16} = 65,536$ distinct values)




A horizontal axis representing the range of dst_port values from 0 to 65,535. The axis has major tick marks at 0, 16k, 32k, 48k, and 65,535. Vertical dashed grid lines extend from these ticks across the chart area.

0 16k 32k 48k 65,535


`dst_port` value

CMP : `dst_port` stores ICMP type $\in [0, 255]$ (per RFC 792)

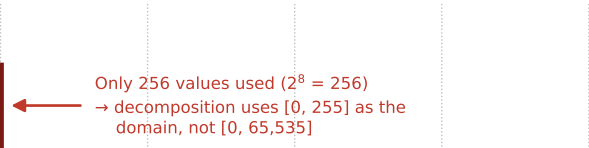

A diagram showing a very small portion of the 0 to 65,535 range. A thick red vertical line is positioned at the very beginning of the axis, near 0. A red arrow points from the text to this line.

Only 256 values used ($2^8 = 256$)
→ decomposition uses $[0, 255]$ as the domain, not $[0, 65,535]$



A horizontal axis representing the range of dst_port values from 0 to 65,535. The axis has major tick marks at 0, 16k, 32k, 48k, and 65,535. Vertical dashed grid lines extend from these ticks across the chart area.

0 16k 32k 48k 65,535

`dst_port` value (= ICMP type)