

<asaph141@gmail.com> אסף גמליאל



צילומים של מה שעשיתי

הודעה אחת

30 ביולי 2018 בשעה 15:36

<asaph141@gmail.com> אסף גמליאל
אל: <daniel.danan1@gmail.com> daniel danan

Latest LTS Version: 8.11.3 (includes npm 5.6.0)

Download the Node.js source code or a pre-built installer for your platform, and start developing today.

LTS Recommended For Most Users	Current Latest Features	
 Windows Installer node-v8.11.3-x86.msi	 macOS Installer node-v8.11.3.pkg	 Source Code node-v8.11.3.tar.gz

Windows Installer (.msi)	32-bit	64-bit
Windows Binary (.zip)	32-bit	64-bit
macOS Installer (.pkg)	64-bit	
macOS Binary (.tar.gz)	64-bit	
Linux Binaries (x86/x64)	32-bit	64-bit
Linux Binaries (ARM)	ARMv6	ARMv7
		ARMv8

Express

[Home](#) [Getting started](#) [Guide](#) [API reference](#) [Advanced topics](#) [Resour](#)

Use the `npm init` command to create a `package.json` file for your application. For more information on how `package.json` works, see [Specifics of npm's package.json handling](#).

```
$ npm init
```

This command prompts you for a number of things, such as the name and version of your application. For now, you can simply hit RETURN to accept the defaults for most of them, with the following exception:

```
entry point: (index.js)
```

Enter `app.js`, or whatever you want the name of the main file to be. If you want it to be `index.js`, hit RETURN to accept the suggested default file name.

Now install Express in the `myapp` directory and save it in the dependencies list. For example:

```
$ npm install express --save
```

To install Express temporarily and not add it to the dependencies list:

```

Node.js command prompt - node app.js
Your environment has been set up for using Node.js 8.11.3 (x64) and npm.

C:\Users\user>cd "Desktop\tableau_extension_writeback"

C:\Users\user\Desktop\tableau_extension_writeback>node app.js
module.js:549
    throw err;
    ^

Error: Cannot find module 'express'
    at Function.Module._resolveFilename (module.js:547:15)
    at Function.Module._load (module.js:474:25)
    at Module.require (module.js:596:17)
    at require (internal/module.js:11:18)
    at Object.<anonymous> (C:\Users\user\Desktop\tableau_extension_writeback\app.js:1:1)
    at Module._compile (module.js:652:30)
    at Object.Module._extensions..js (module.js:663:10)
    at Module.load (module.js:565:32)
    at tryModuleLoad (module.js:505:12)
    at Function.Module._load (module.js:497:3)

C:\Users\user\Desktop\tableau_extension_writeback>npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help json` for definitive documentation on these fields
and exactly what they do.

Use `npm install <pkg>` afterwards to install a package and
save it as a dependency in the package.json file.

Press ^C at any time to quit.
package name: (post_demo)
version: (1.0.0)
git repository: (https://github.com/andre347/tableau_extension_writeback.git)
author:
license: (ISC)
What to write to C:\Users\user\Desktop\tableau_extension_writeback\package.json:


About to write to C:\Users\user\Desktop\tableau_extension_writeback\package.json:
{
  "name": "post_demo",
  "version": "1.0.0",
  "description": "Tableau Extension API: Write Back to Local File\r\n =====\r\n Created on (22nd Jan 2018)",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "dependencies": {
    "body-parser": "^1.18.2",
    "ejs": "^2.5.7",
    "express": "^4.16.2"
  },
  "repository": {
    "type": "git",
    "url": "git+https://github.com/andre347/tableau_extension_writeback.git"
  },
  "bugs": {
    "url": "https://github.com/andre347/tableau_extension_writeback/issues"
  },
  "homepage": "https://github.com/andre347/tableau_extension_writeback#readme"
}

Is this ok? (yes)

C:\Users\user\Desktop\tableau_extension_writeback>npm install express --save
express@4.16.3
added 54 packages in 128.592s

C:\Users\user\Desktop\tableau_extension_writeback>node app.js
Server is running on localhost:3000

```



localhost:3000/addData ⓘ

gmail Bookmarks אפליקציות

product_file
Text file

product_file.txt

Files

☐ Use Data Interpreter

Data Interpreter might be able to clean your Text file workbook.

product_file.txt

New Union

Sort fields

Data source order

product_file.txt	product_file.txt	product_file.txt
Product	Sales	Profit
iPhone	500	400
Nexus	300	200
Samsung	200	430
Pixel	350	50
Huawei	225	300
Nokia	200	570
Nokai Lumia	340	800
Galaxy S8	100	40

Dashboard

Layout

Device Preview

Size

Desktop Browser (1000 x 8...

Sheets

Sheet 1

Sheet 2

Objects

Horizontal

Image

Vertical

Web Page

A

Text

Blank

Tiled Floating

Show dashboard title

Sheet 2

Product

Profit

4000

3500

3000

2500

2000

1500

iPhone

Nexus

Samsung

Pixel


Huawei

Nokia

Nokai Lumia

Galaxy S8

Data Source Sheet 1 Dashboard 1 Sheet 2 Story 1 Dashboard 2 Dashboard 3 Dashboard 4

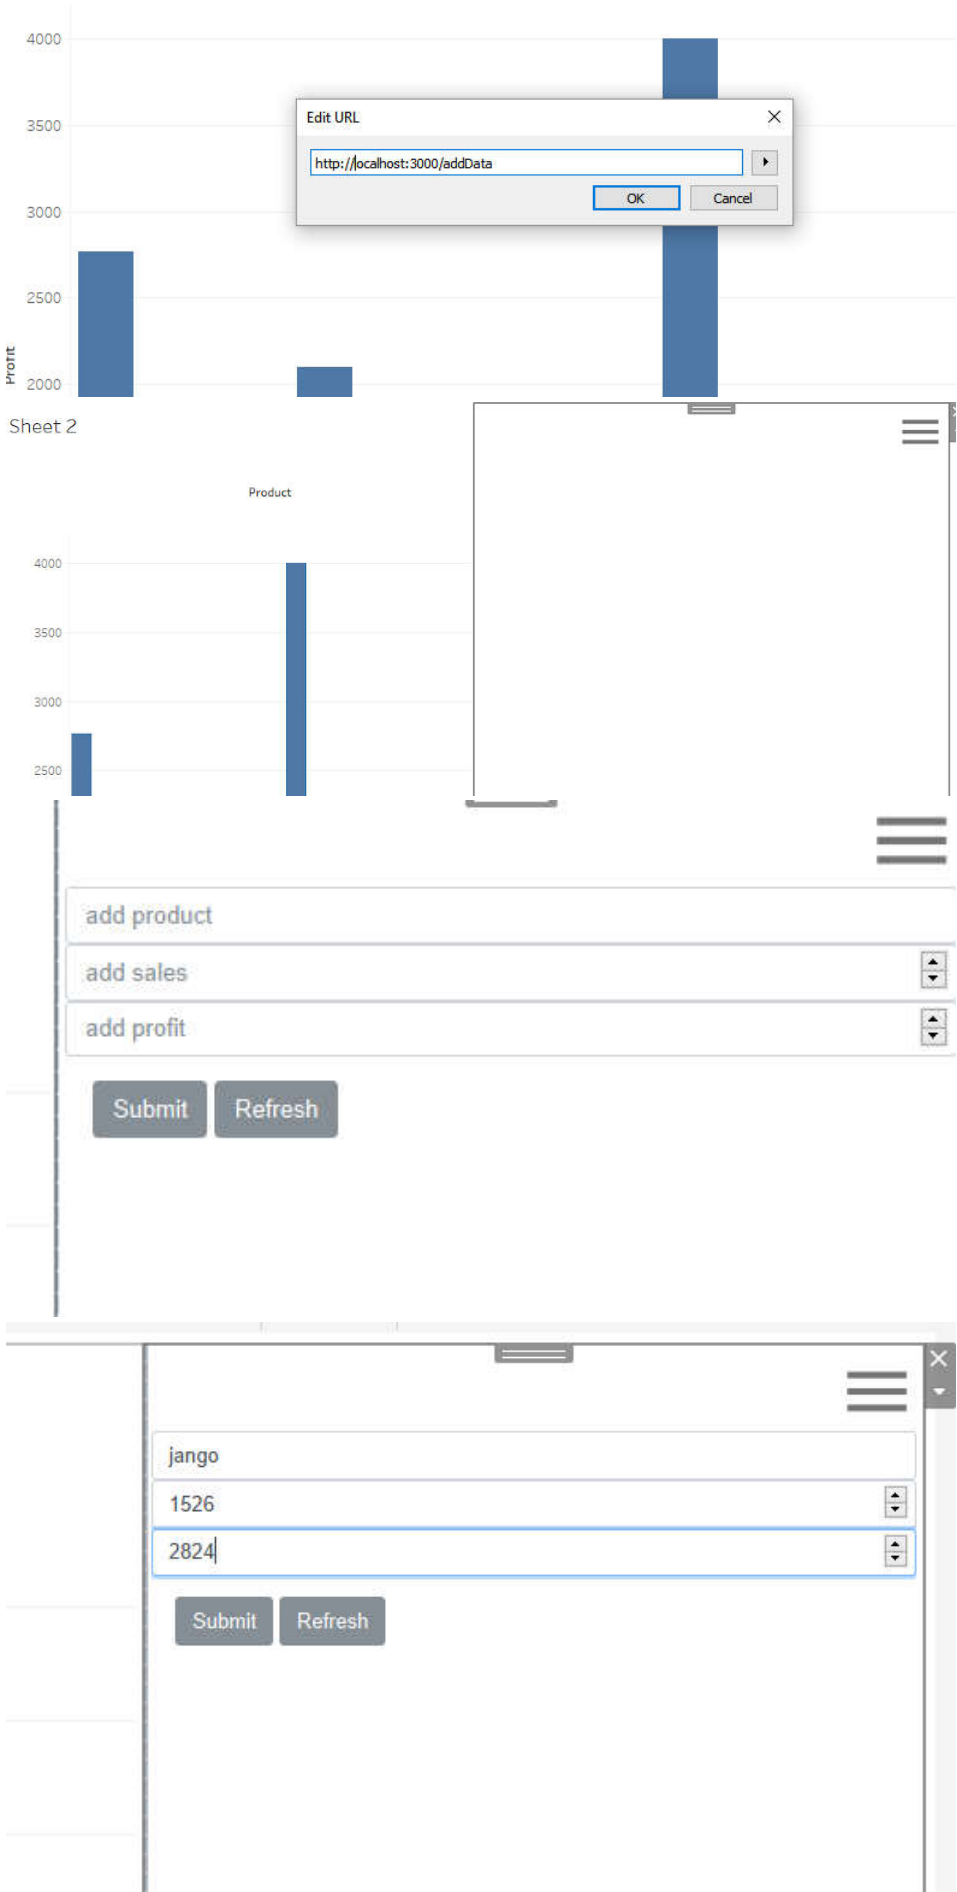

← → 📄 ↺

connections Add

product_file

Text file

pr

product

Abc product_file.txt Product	# product_file.txt Sales	# product_file.txt Profit
new phone	900	960
new producce	2,000	4,000
hello	1,000	2,100
xtr	54	2
Asaphone	2,770	null
aas	null	2,770
null	-7	26
jango	1,526	2,824

