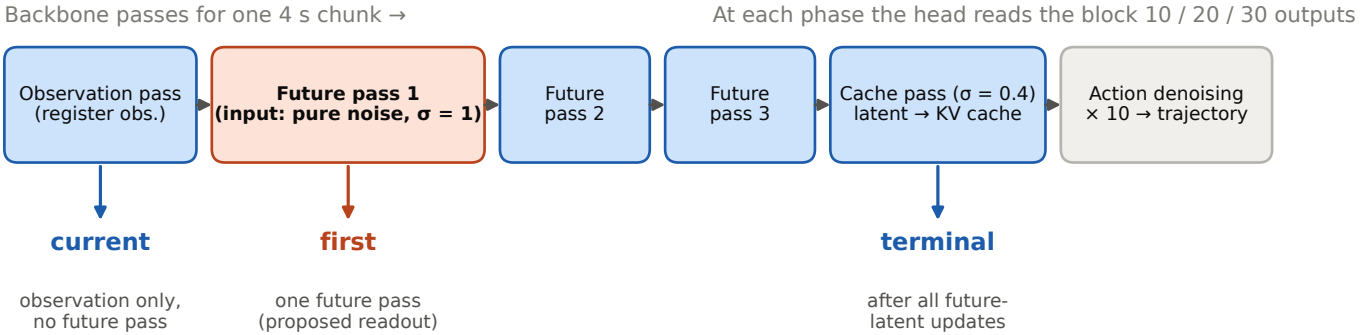
Backbone passes for one 4 s chunk →
At each phase the head reads the block 10 / 20 / 30 outputs
Observation pass (register obs.)
Future pass 1 (input: pure noise, σ = 1)
Future pass 2
Future pass 3
Cache pass (σ = 0.4) latent → KV cache
Action denoising × 10 → trajectory
current
first
terminal
observation only, no future pass
one future pass (proposed readout)
after all future-latent updates