




A screenshot of a web browser window. The address bar shows the URL `localhost:8000/historico`. Below the address bar, there is a toolbar with icons for back, forward, refresh, and home. A dropdown menu labeled "Estilos de formatação" is open. The main content area of the browser displays a JSON object:

```
{"historico": [{"id": 1, "valor_original": 10.0, "de_moeda": "usd", "para_moeda": "brl", "valor_convertido": 50.0}, {"id": 2, "valor_original": 50.0, "de_moeda": "eur", "para_moeda": "brl", "valor_convertido": 50.0}, {"id": 3, "valor_original": 50.0, "de_moeda": "eur", "para_moeda": "brl", "valor_convertido": 50.0}]}
```

Number of pods

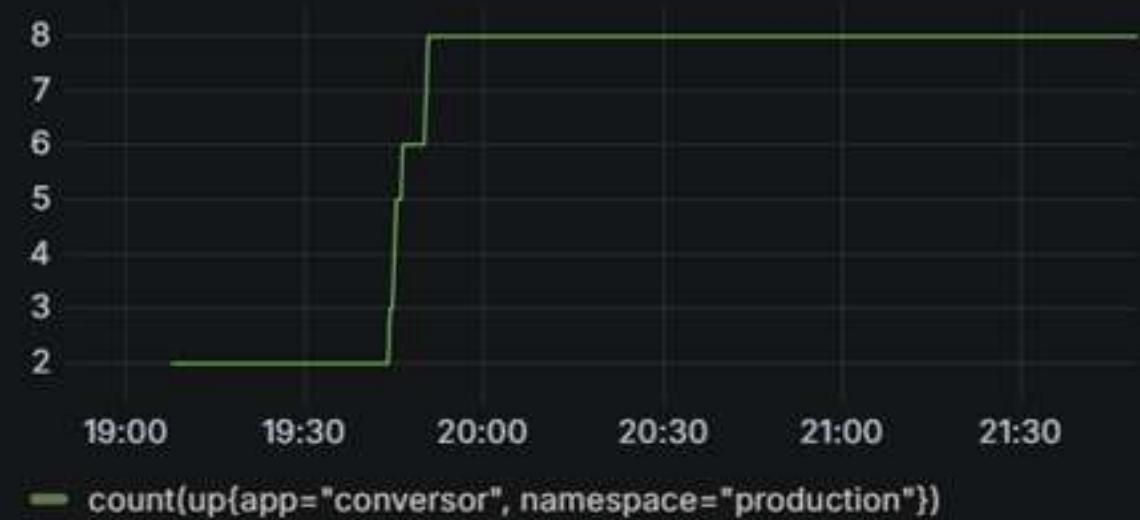

Nº of HTTP requests



Memory



CPU per pod





alertmanager APP 4h21

[FIRING:1] (InstanceDown info)

example /etc/rules/alerts.yaml

FIRING (1)

InstanceDown

FIRING (1)




Jobs



`build-and-test`



`staging-deploy`



`production-deploy`