ON THIS PAGE
- SMD Resistors & Capacitors Sizes Charts
- Tantalum Capacitors Sizes
- Surface Mount Diode Sizes

Surface Mount Sizes: SMD Package Sizes List & Charts

pcbbee December 19, 2024

Surface mount components are the product of miniaturization and high integration of electronic products. Compared with through-hole components, surface mount sizes are smaller. The surface mount devices we often use include resistors, capacitors, inductors, and semiconductor devices. There are many types of SMD package sizes. In this article, we will list the SMD capacitor sizes, SMD resistor sizes, and other SMD sizes and charts in detail.

SMD Resistors & Capacitors Sizes Charts

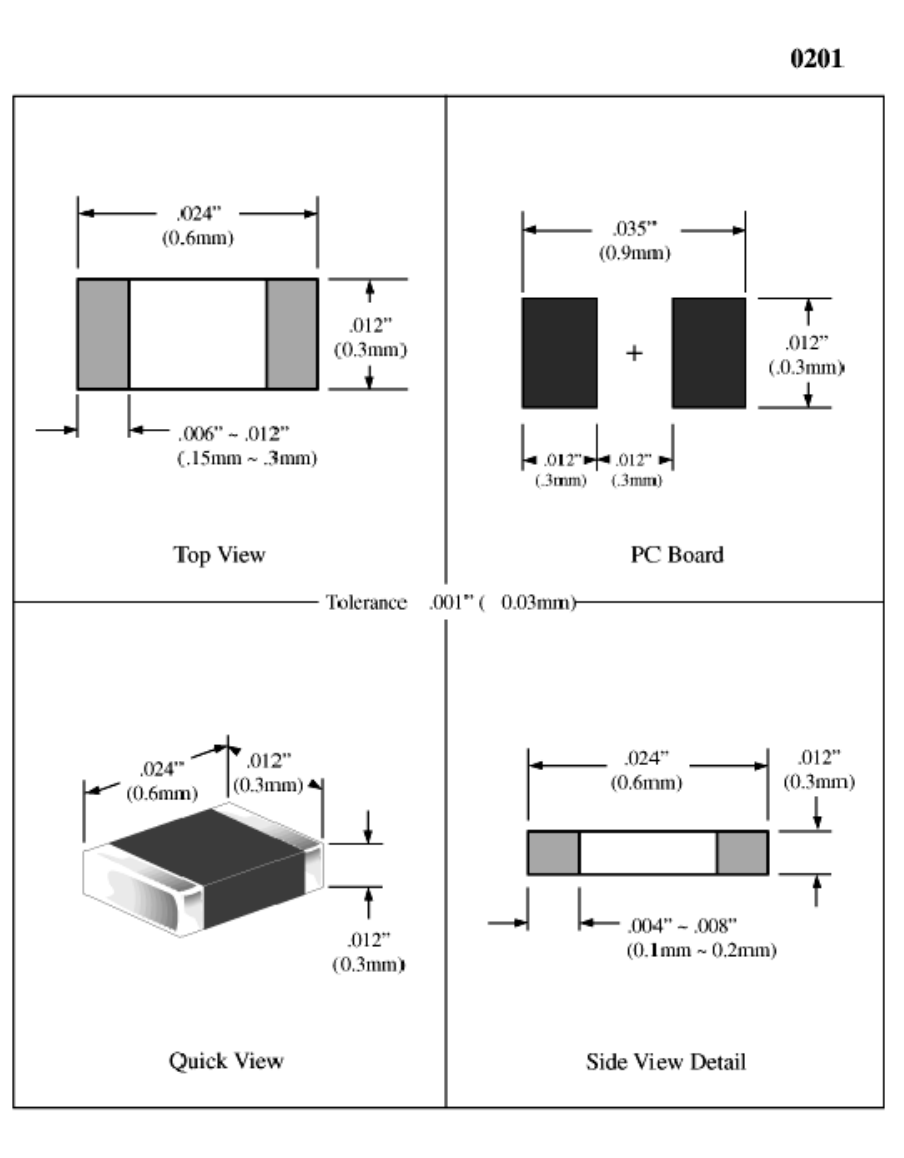
0201
.024" (0.6mm)
.012" (0.3mm)
.006" - .012" (.15mm - .3mm)
Top View
.035" (0.9mm)
.012" (0.3mm)
.012" (.3mm) .012" (.3mm)
PC Board
Tolerance .001" (0.03mm)
.024" (0.6mm)
.012" (0.3mm)
.012" (0.3mm)
Quick View
.024" (0.6mm)
.012" (0.3mm)
.004" - .008" (0.1mm - 0.2mm)
Side View Detail

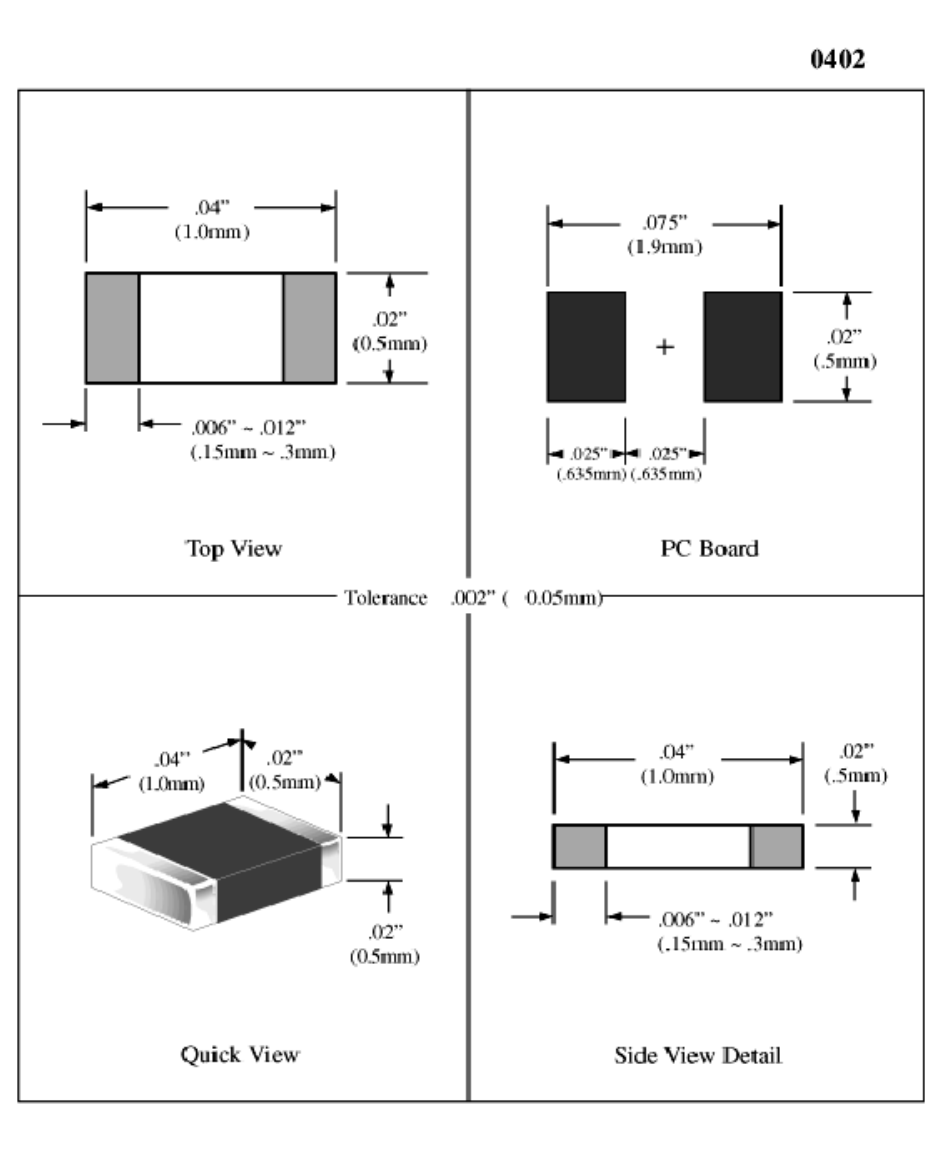
0402
.04" (1.0mm)
.02" (0.5mm)
.006" - .012" (.15mm - .3mm)
Top View
.075" (1.9mm)
.02" (.5mm)
.025" (.635mm) .025" (.635mm)
PC Board
Tolerance .002" (0.05mm)
.04" (1.0mm)
.02" (0.5mm)
.02" (0.5mm)
Quick View
.04" (1.0mm)
.02" (.5mm)
.006" - .012" (.15mm - .3mm)
Side View Detail

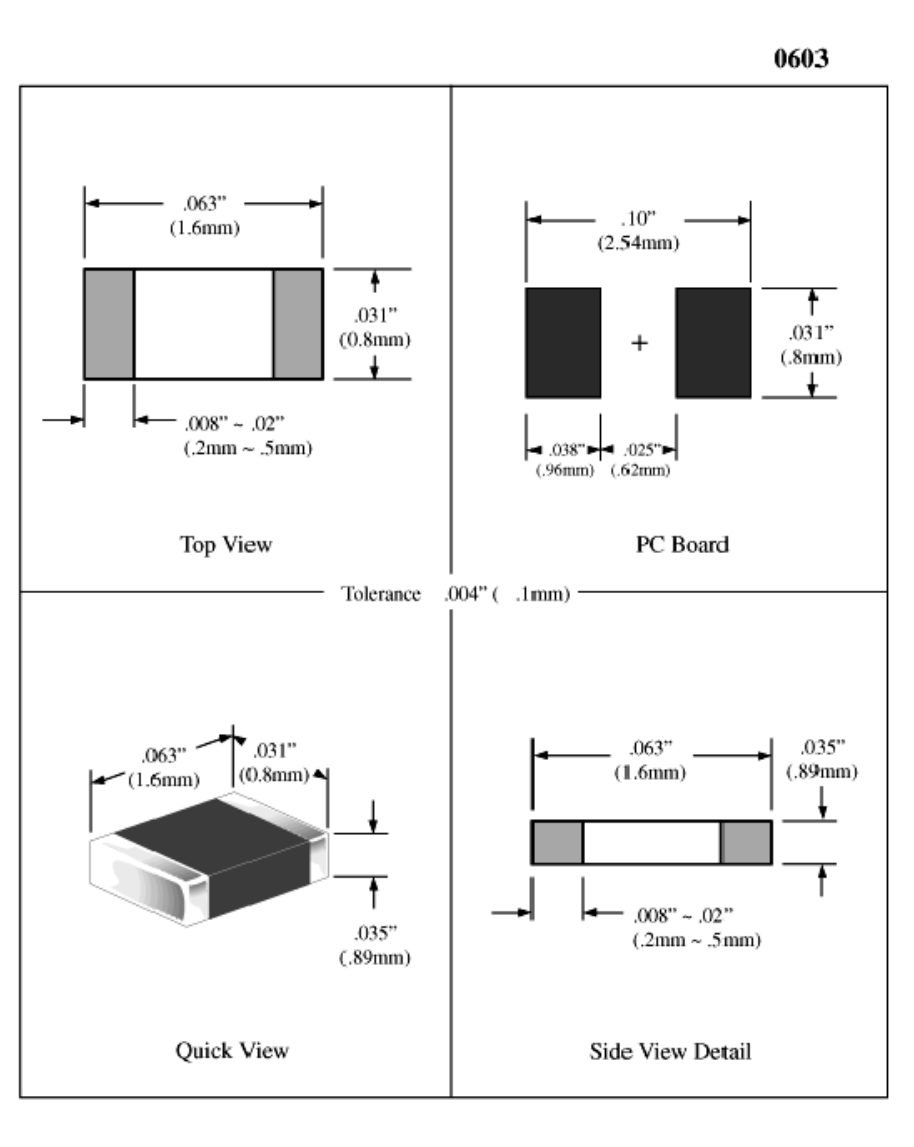
0603
.063" (1.6mm)
.031" (0.8mm)
.008" - .02" (.2mm - .5mm)
Top View
.10" (2.54mm)
.031" (.8mm)
.038" (.96mm) .025" (.62mm)
PC Board
Tolerance .004" (.1mm)
.063" (1.6mm)
.031" (0.8mm)
.035" (.89mm)
Quick View
.063" (1.6mm)
.035" (.89mm)
.008" - .02" (.2mm - .5mm)
Side View Detail

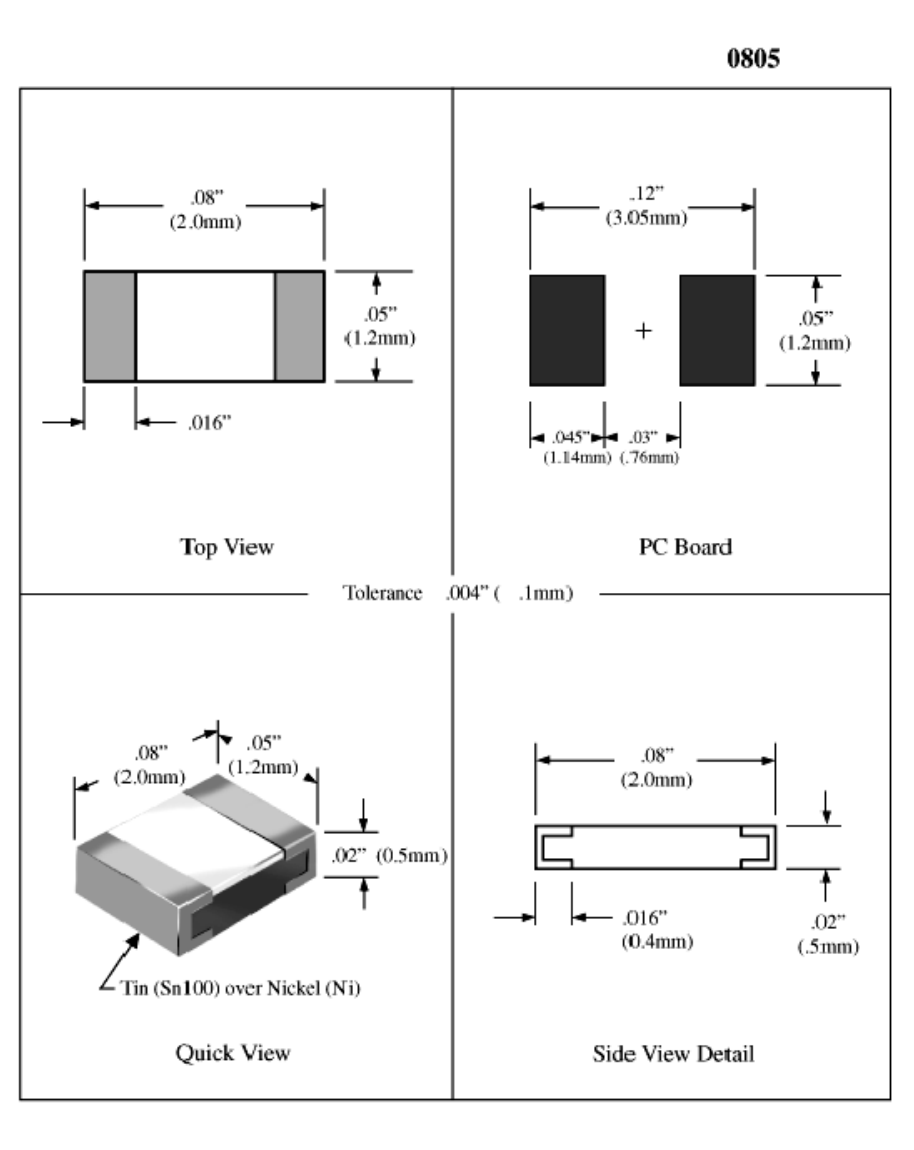
0805
.08" (2.0mm)
.05" (1.2mm)
.016"
Top View
.12" (3.05mm)
.05" (1.2mm)
.045" (1.14mm) .03" (.76mm)
PC Board
Tolerance .004" (.1mm)
.08" (2.0mm)
.05" (1.2mm)
.02" (0.5mm)
Tin (Sn100) over Nickel (Ni)
Quick View
.08" (2.0mm)
.016" (0.4mm)
.02" (.5mm)
Side View Detail

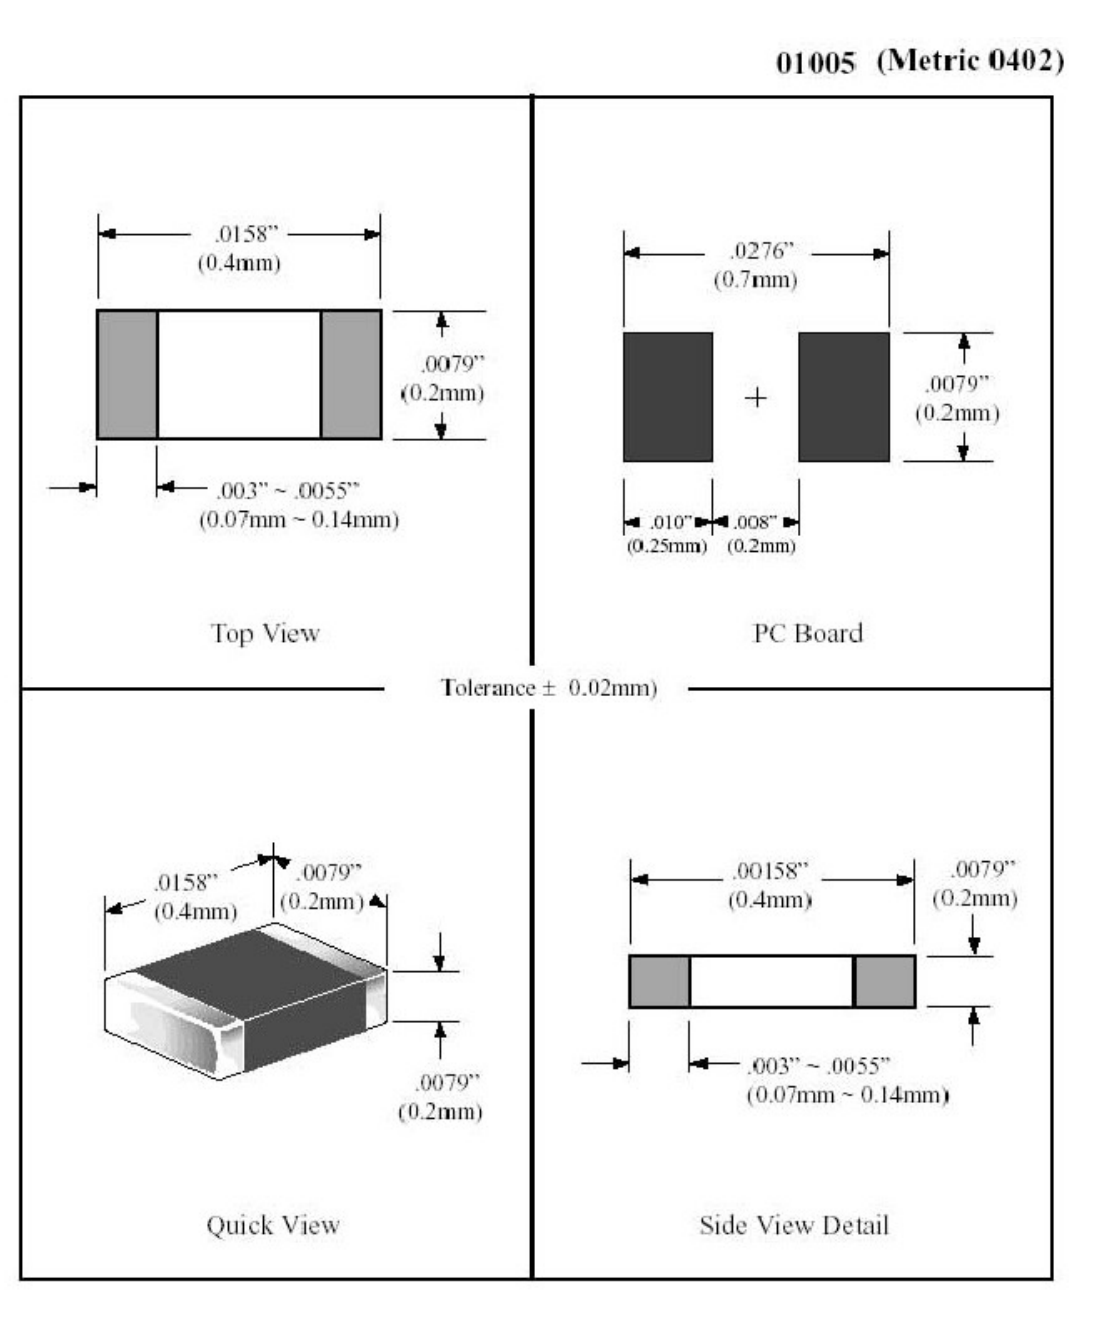
01005 (Metric 0402)
.0158" (0.4mm)
.0079" (0.2mm)
.003" ~ .0055" (0.07mm ~ 0.14mm)
Top View
.0276" (0.7mm)
.0079" (0.2mm)
.010" (0.25mm) .008" (0.2mm)
PC Board
Tolerance ± 0.02mm
.0158" (0.4mm)
.0079" (0.2mm)
.0079" (0.2mm)
Quick View
.00158" (0.4mm)
.0079" (0.2mm)
.003" ~ .0055" (0.07mm ~ 0.14mm)
Side View Detail

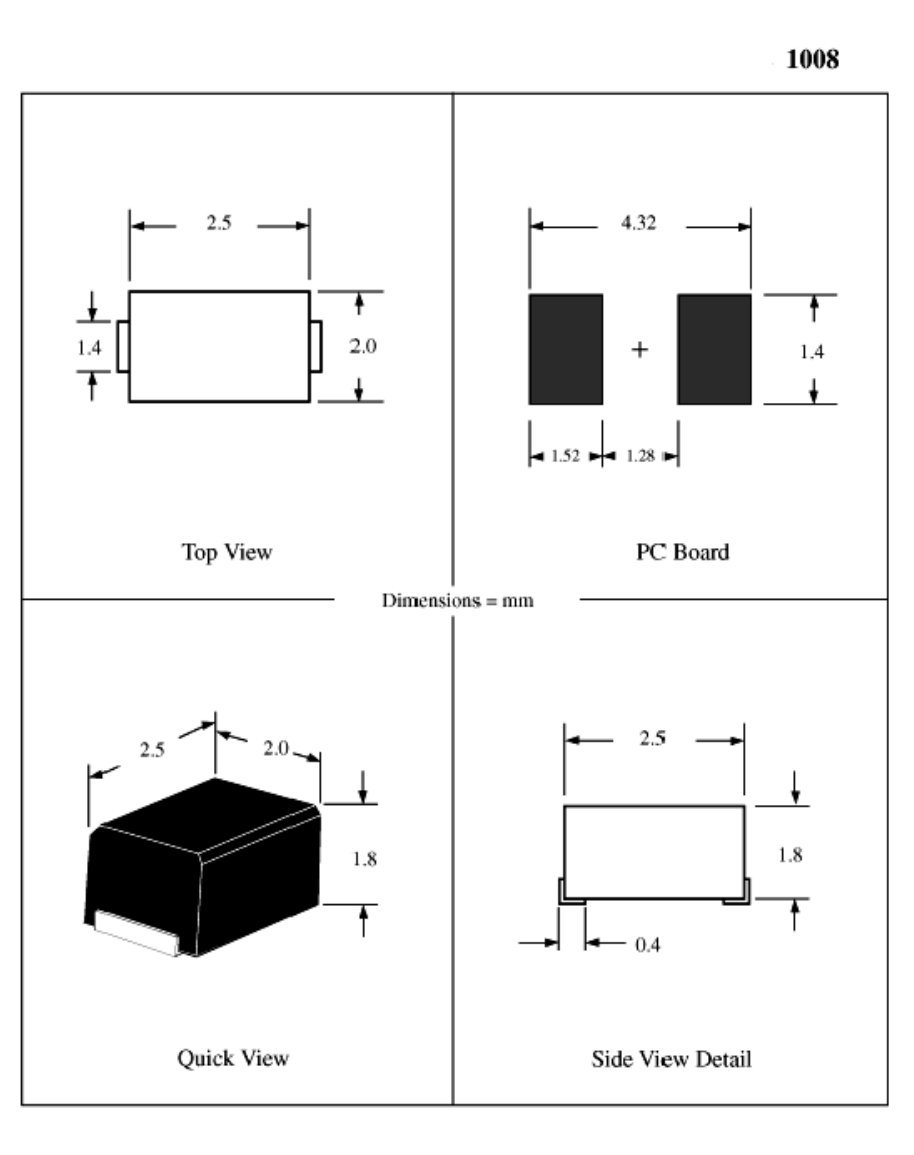
1008
2.5
1.4
2.0
Top View
4.32
1.4
1.52 1.28
PC Board
Dimensions = mm
2.5
2.0
1.8
Quick View
2.5
1.8
0.4
Side View Detail

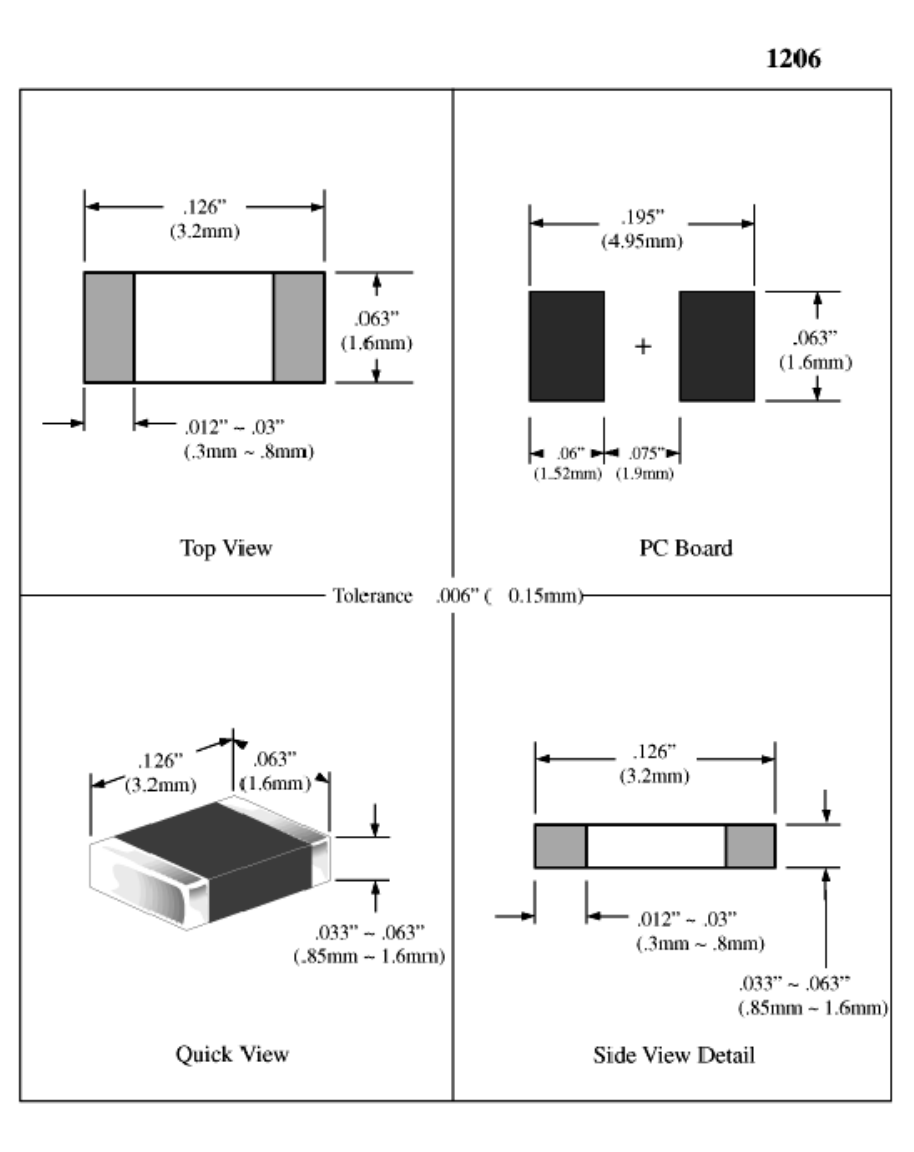
1206
.126" (3.2mm)
.063" (1.6mm)
.012" - .03" (.3mm - .8mm)
Top View
.195" (4.95mm)
.063" (1.6mm)
.06" (1.52mm) .075" (1.9mm)
PC Board
Tolerance .006" (0.15mm)
.126" (3.2mm)
.063" (1.6mm)
.033" - .063" (.85mm - 1.6mm)
Quick View
.126" (3.2mm)
.012" - .03" (.3mm - .8mm)
.033" - .063" (.85mm - 1.6mm)
Side View Detail

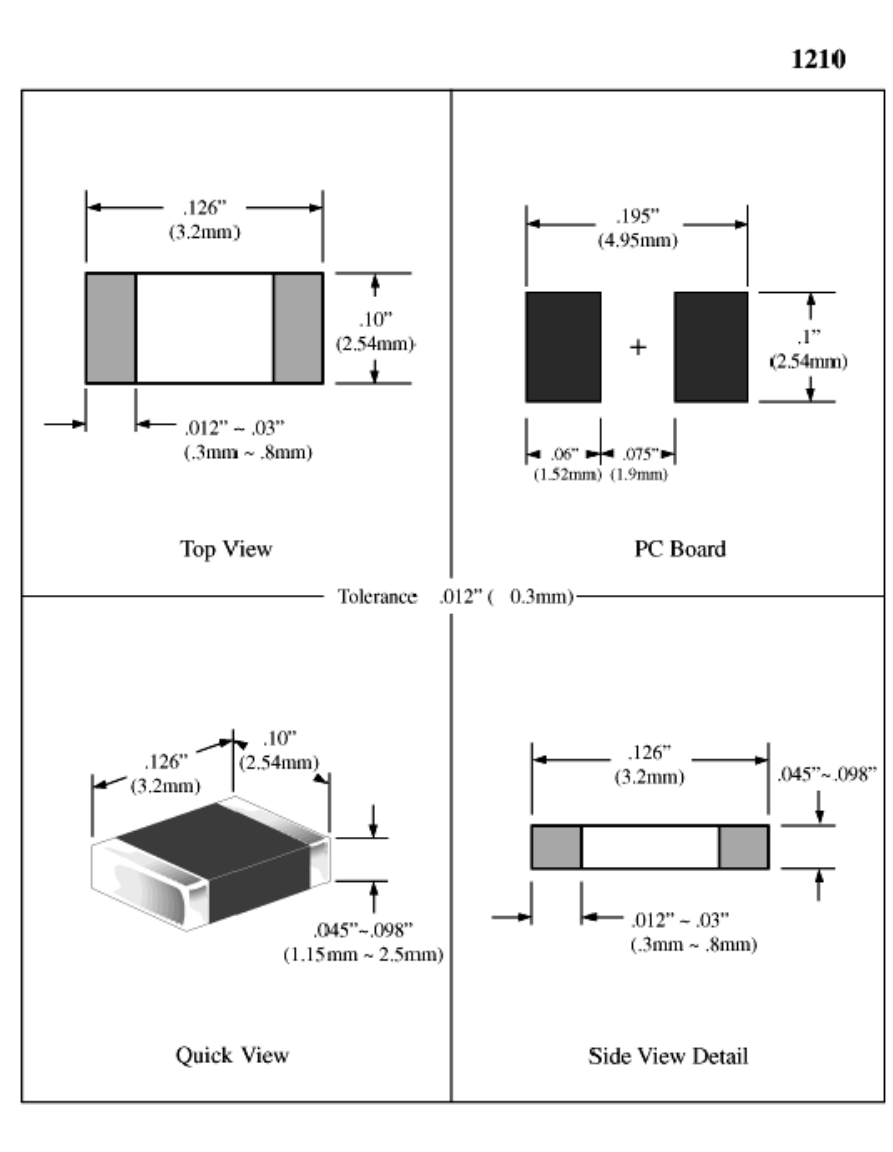
1210
.126" (3.2mm)
.10" (2.54mm)
.012" - .03" (.3mm - .8mm)
Top View
.195" (4.95mm)
.1" (2.54mm)
.06" (1.52mm) .075" (1.9mm)
PC Board
Tolerance .012" (0.3mm)
.126" (3.2mm)
.10" (2.54mm)
.045" - .098" (1.15mm - 2.5mm)
Quick View
.126" (3.2mm)
.045" - .098"
.012" - .03" (.3mm - .8mm)
Side View Detail

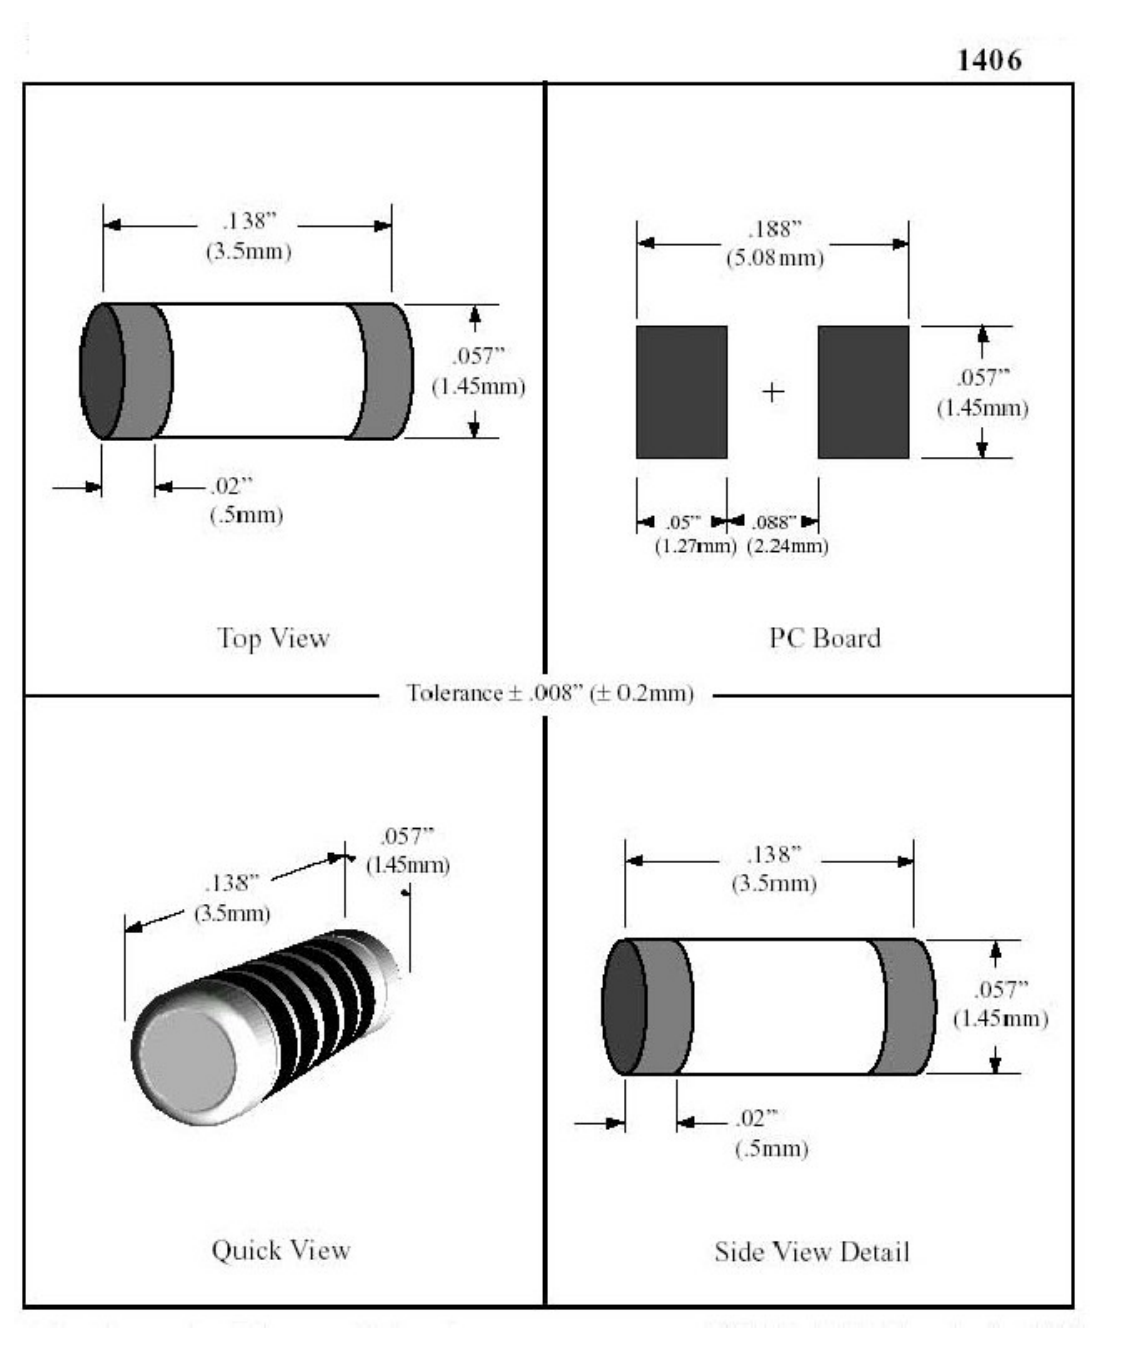
1406
.138" (3.5mm)
.057" (1.45mm)
.02" (.5mm)
Top View
.188" (5.08mm)
.057" (1.45mm)
.05" (1.27mm) .088" (2.24mm)
PC Board
Tolerance ± .008" (± 0.2mm)
.138" (3.5mm)
.057" (1.45mm)
Quick View
.138" (3.5mm)
.057" (1.45mm)
.02" (.5mm)
Side View Detail

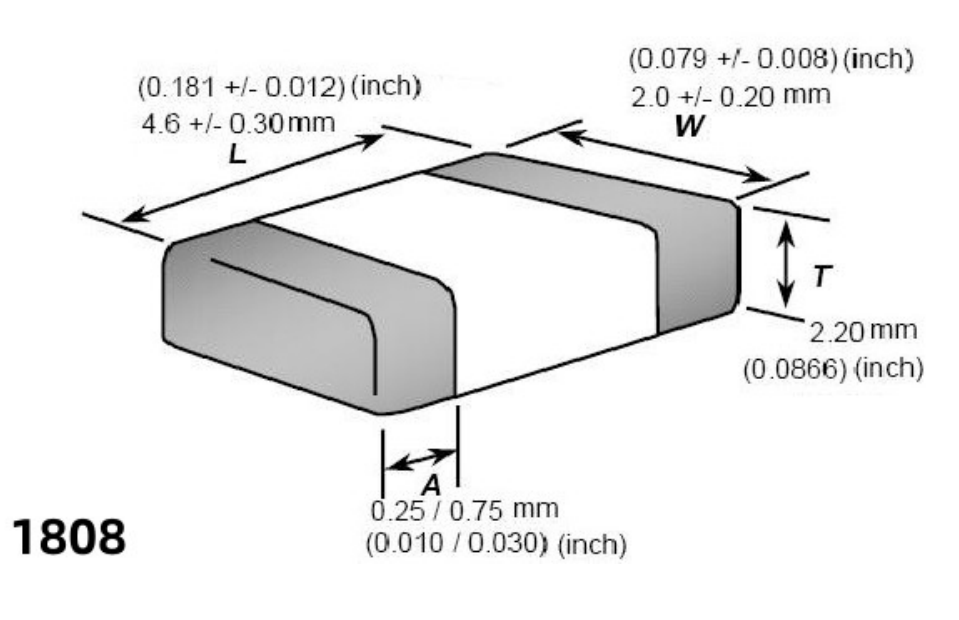
(0.181 +/- 0.012) (inch)
4.6 +/- 0.30 mm
L
(0.079 +/- 0.008) (inch)
2.0 +/- 0.20 mm
W
T
2.20 mm
(0.0866) (inch)
A
0.25 / 0.75 mm
(0.010 / 0.030) (inch)
1808

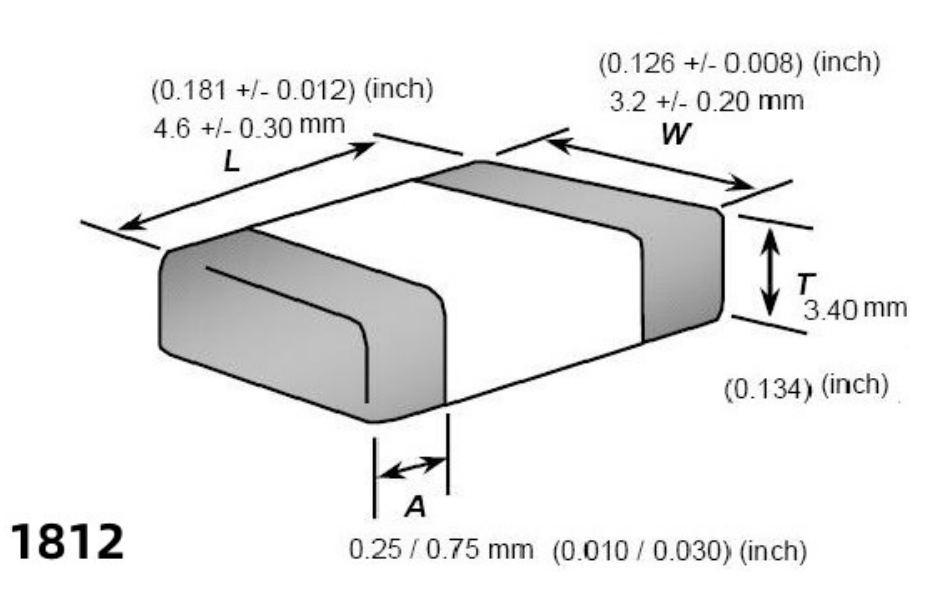
(0.181 +/- 0.012) (inch)
4.6 +/- 0.30 mm
L
(0.126 +/- 0.008) (inch)
3.2 +/- 0.20 mm
W
T
3.40 mm
(0.134) (inch)
A
0.25 / 0.75 mm (0.010 / 0.030) (inch)
1812

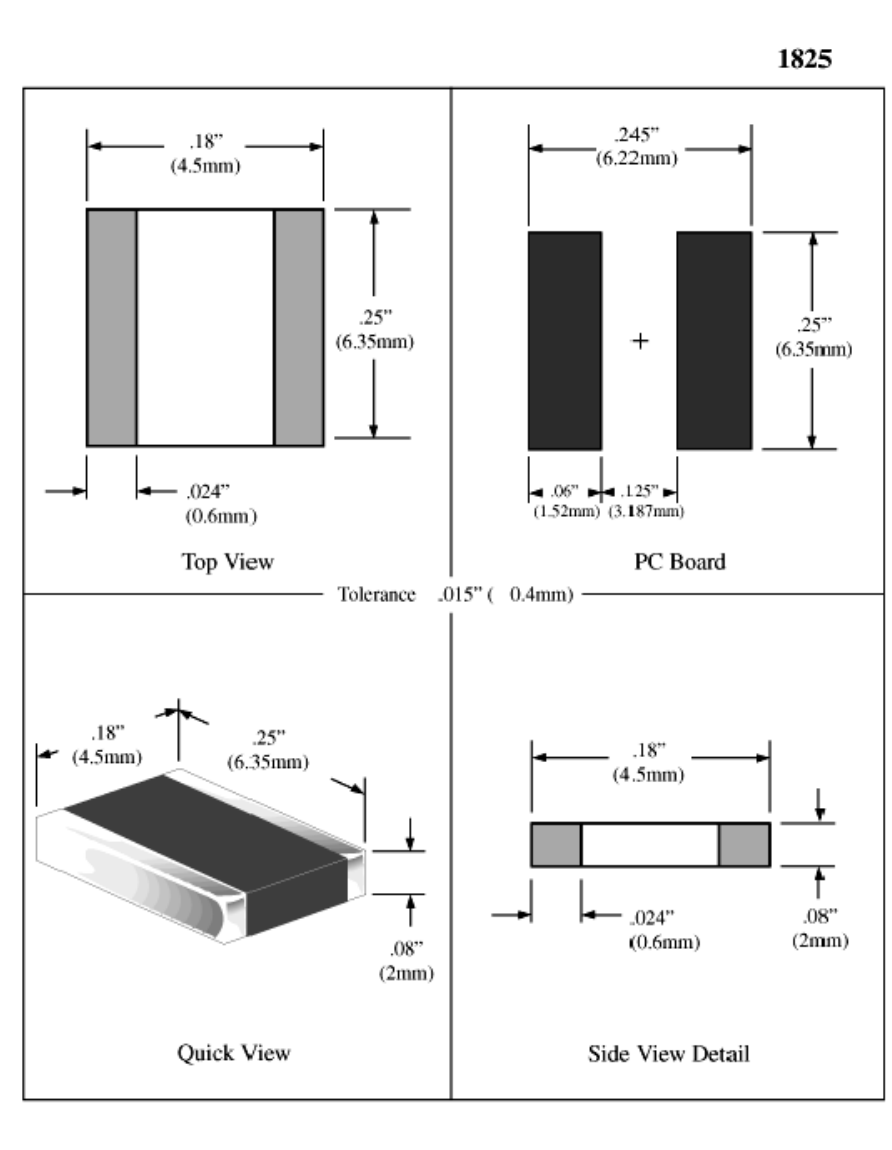
1825
.18" (4.5mm)
.25" (6.35mm)
.024" (0.6mm)
Top View
.245" (6.22mm)
.25" (6.35mm)
.06" (1.5mm) .135" (3.45mm)
PC Board
Tolerance .015" (0.4mm)
.18" (4.5mm)
.25" (6.35mm)
.08" (2mm)
Quick View
.18" (4.5mm)
.024" (0.6mm)
.08" (2mm)
Side View Detail

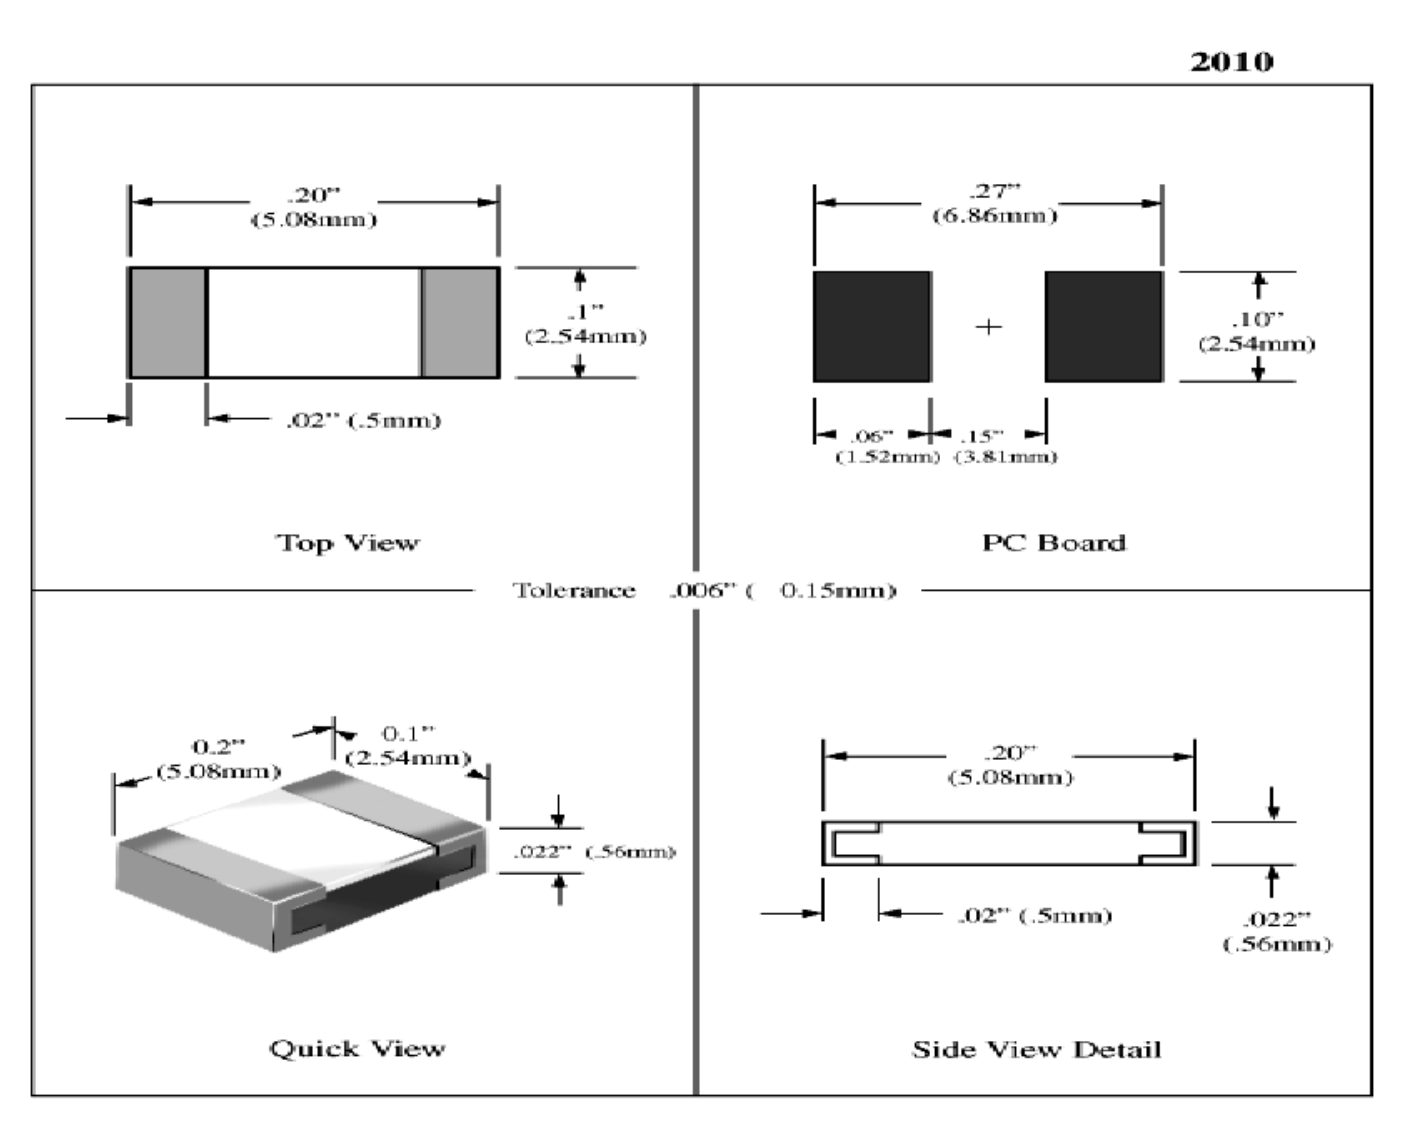
2010
.20" (5.08mm)
.1" (2.54mm)
.02" (.5mm)
Top View
.27" (6.86mm)
.10" (2.54mm)
.06" (1.52mm) .15" (3.81mm)
PC Board
Tolerance .005" (0.15mm)
0.2" (5.08mm)
0.1" (2.54mm)
.022" (.56mm)
Quick View
.20" (5.08mm)
.02" (.5mm)
.022" (.56mm)
Side View Detail

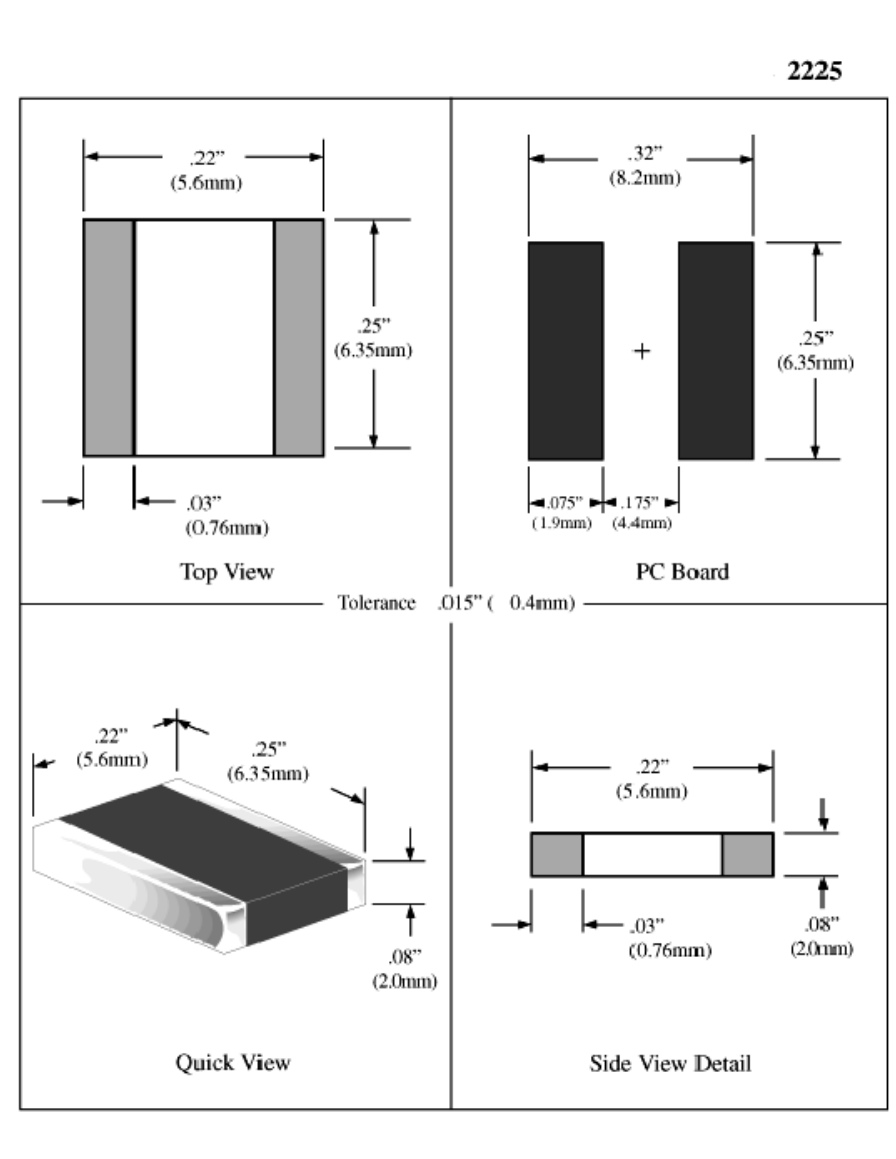
2225
.22" (5.6mm)
.25" (6.35mm)
.03" (0.76mm)
Top View
.32" (8.2mm)
.25" (6.35mm)
.075" (1.9mm) .175" (4.4mm)
PC Board
Tolerance .015" (0.4mm)
.22" (5.6mm)
.25" (6.35mm)
.08" (2.0mm)
Quick View
.22" (5.6mm)
.03" (0.76mm)
.08" (2.0mm)
Side View Detail

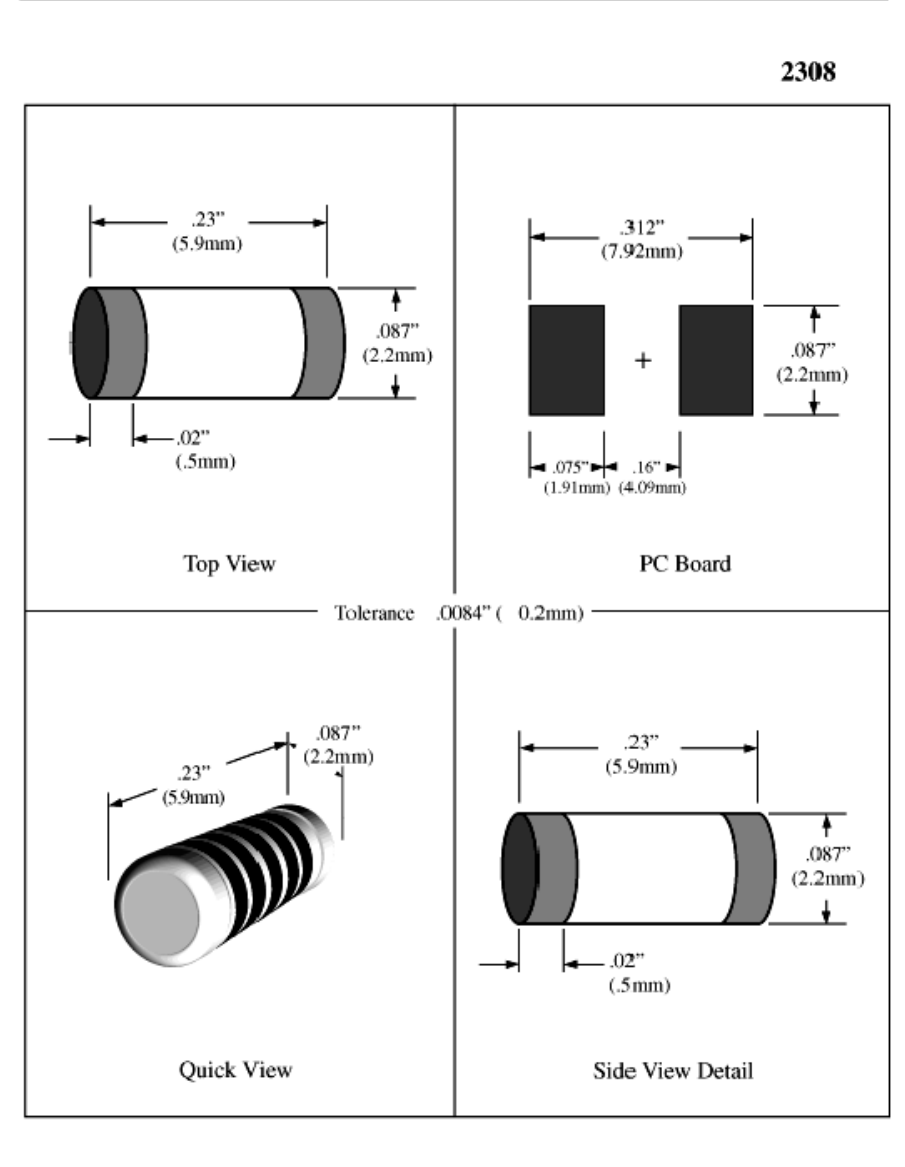
2308
.23" (5.9mm)
.087" (2.2mm)
.02" (.5mm)
Top View
.312" (7.92mm)
.087" (2.2mm)
.075" (1.91mm) .16" (4.09mm)
PC Board
Tolerance .0084" (0.2mm)
.23" (5.9mm)
.087" (2.2mm)
Quick View
.23" (5.9mm)
.087" (2.2mm)
.02" (.5mm)
Side View Detail

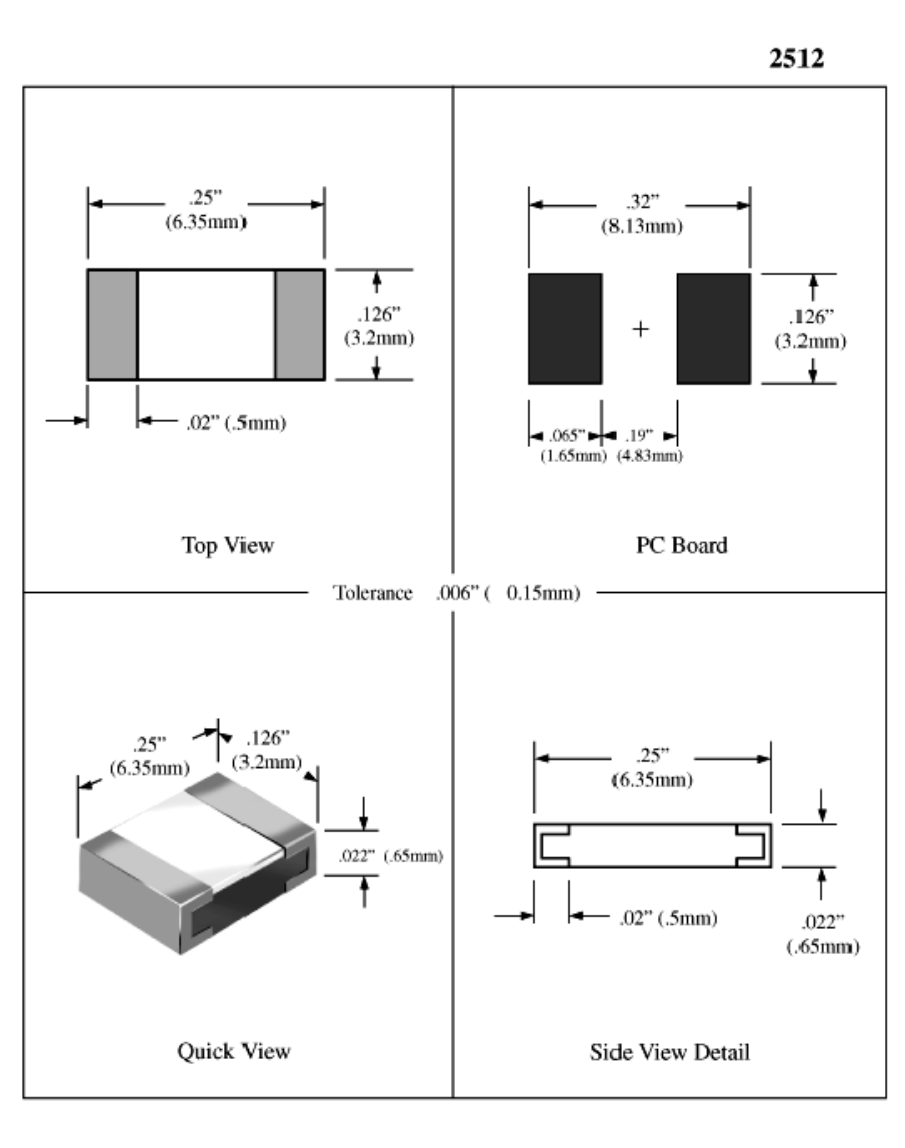
2512
.25" (6.35mm)
.126" (3.2mm)
.02" (.5mm)
Top View
.32" (8.15mm)
.126" (3.2mm)
.065" (1.65mm) .19" (4.83mm)
PC Board
Tolerance .006" (0.15mm)
.25" (6.35mm)
.126" (3.2mm)
.022" (.65mm)
Quick View
.25" (6.35mm)
.02" (.5mm)
.022" (.65mm)
Side View Detail

Size

Tantalum Capacitors Sizes

- A-3216 (Voltage Rating 10V)

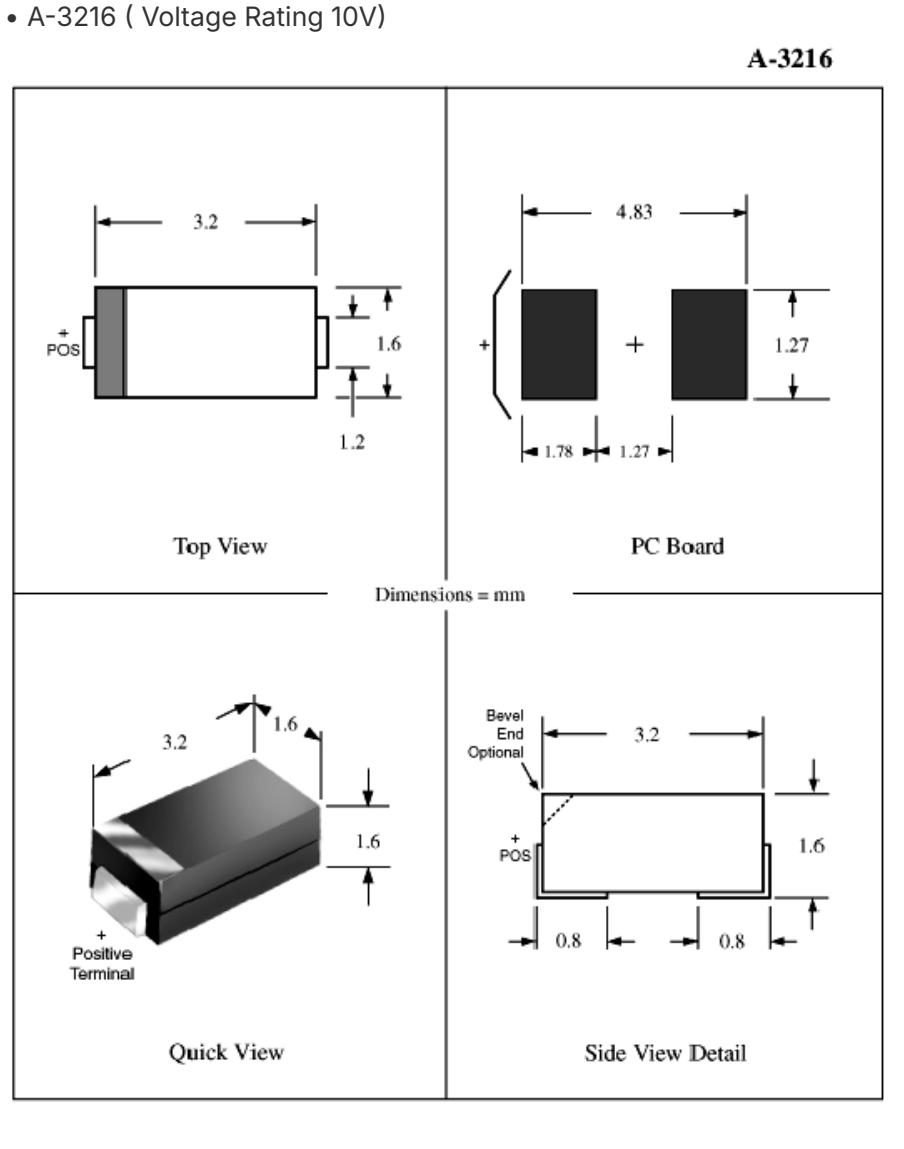
A-3216
3.2
POS
1.6
1.2
Top View
4.83
1.27
1.78 1.27
PC Board
Dimensions = mm
3.2
1.6
1.6
Positive Terminal
Quick View
Bevel End Optional
3.2
POS
1.6
0.8
0.8
Side View Detail

- B-3528 (Voltage Rating 16V)

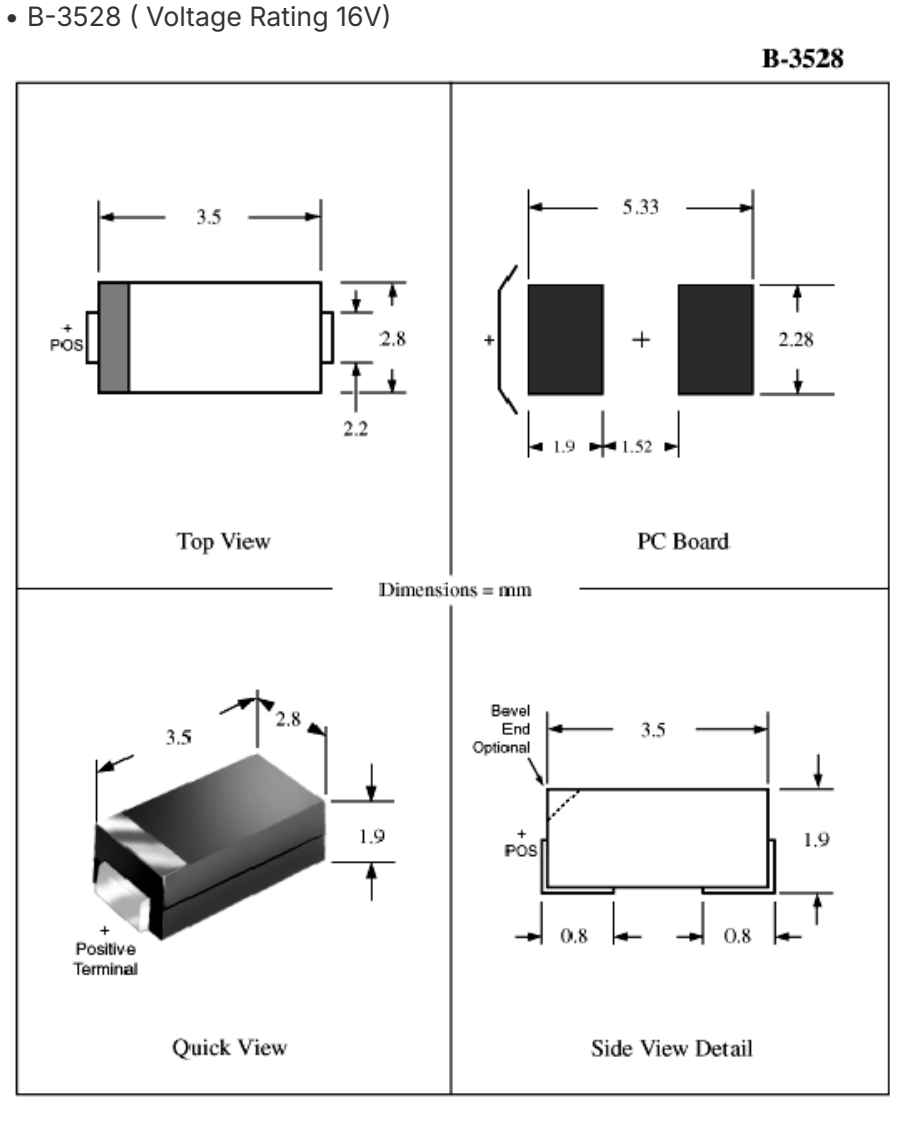
B-3528
3.5
POS
2.8
2.2
Top View
5.33
2.28
1.9 1.52
PC Board
Dimensions = mm
3.5
2.8
1.9
Positive Terminal
Quick View
Bevel End Optional
3.5
POS
1.9
0.8
0.8
Side View Detail

- C-6032 (Voltage Rating 25V)

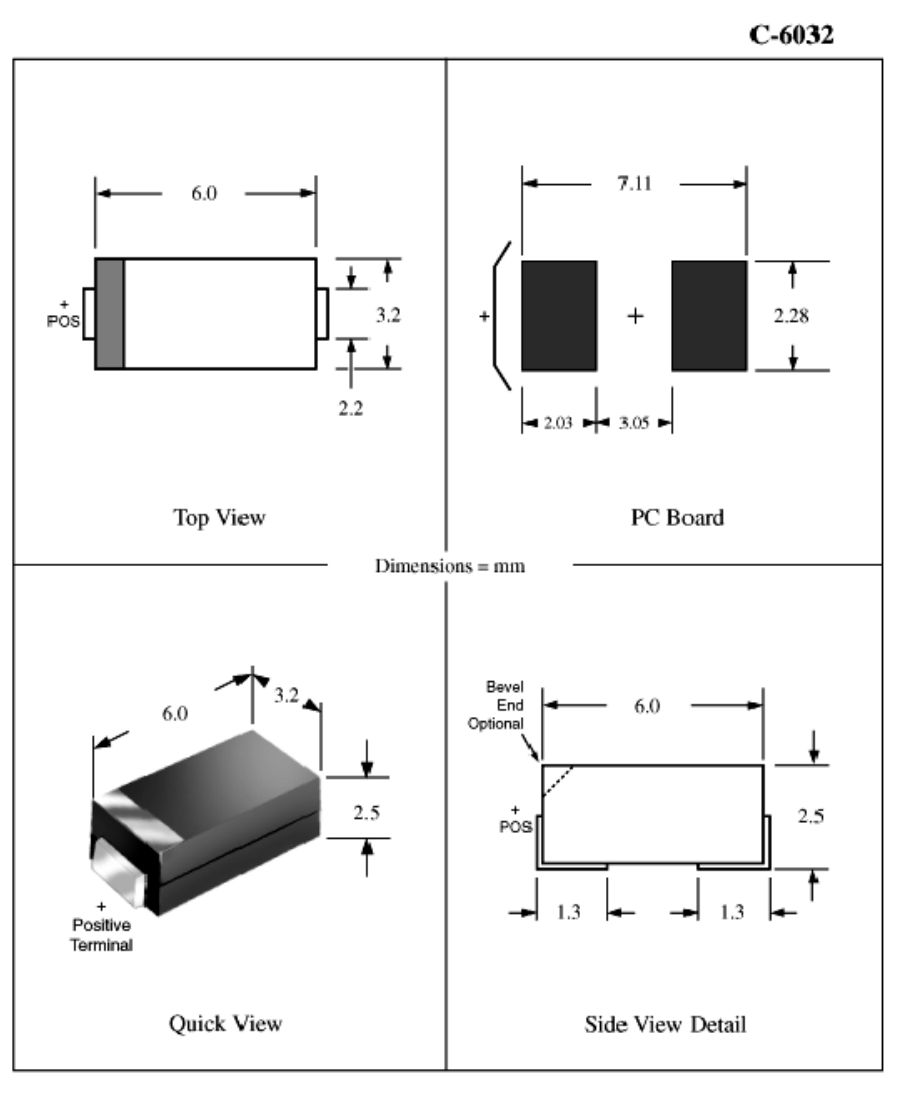
C-6032
6.0
POS
3.2
2.2
Top View
7.11
2.28
2.03 3.05
PC Board
Dimensions = mm
6.0
3.2
2.5
Positive Terminal
Quick View
Bevel End Optional
6.0
POS
2.5
1.3
1.3
Side View Detail

- D-7343 (Voltage Rating 35V)

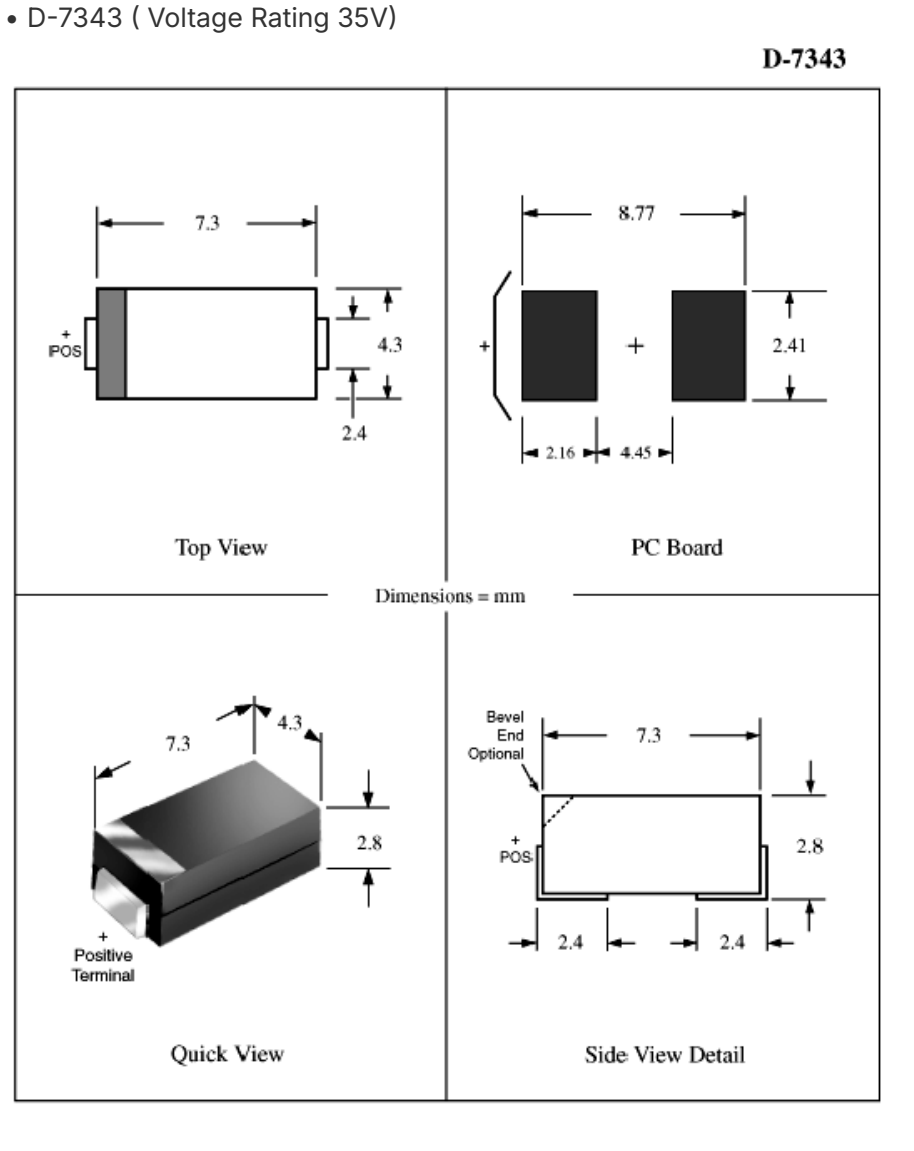
D-7343
7.3
POS
4.3
2.4
Top View
8.77
2.41
2.16 4.45
PC Board
Dimensions = mm
7.3
4.3
2.8
Positive Terminal
Quick View
Bevel End Optional
7.3
POS
2.8
2.4
2.4
Side View Detail

Surface Mount Diode Sizes

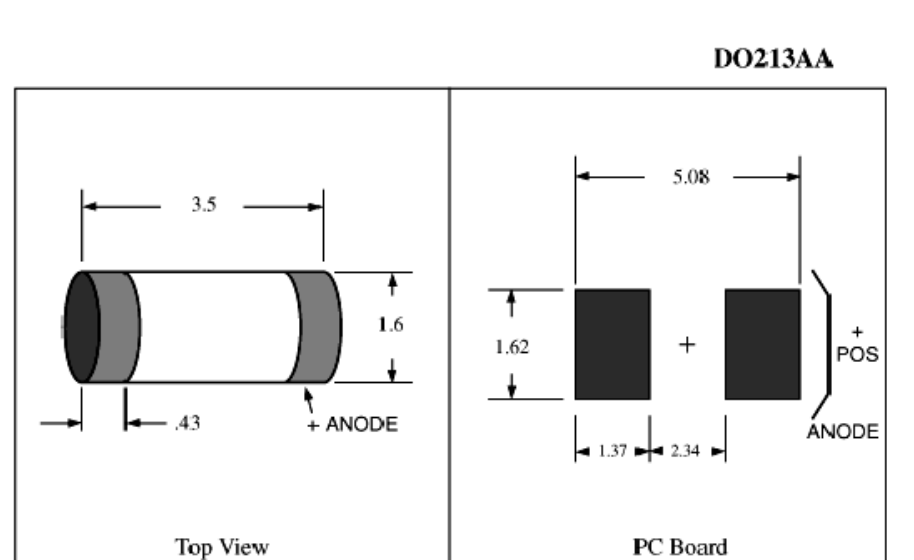
DO213AA
3.5
1.6
.43
ANODE
Top View
5.08
1.62
POS
ANODE
1.37 2.34
PC Board

Recent Posts

- PCB Depaneling: All You Need to Know
- What is PCBA in Electronics?
- How to Clean PCB Board After Soldering

Tags

aluminium PCB aluminium PCB capability Circuit Board circuit boards PCB PCBA PCB Assembly pcb circuit board pcb manufacturing Printed Circuit Board SMT assembly

Get a Free PCB & PCBA Quote in 2 Hours!

Your name *

Your email *

File Upload (optional)
Choose File no file selected

Message (optional)

Submit

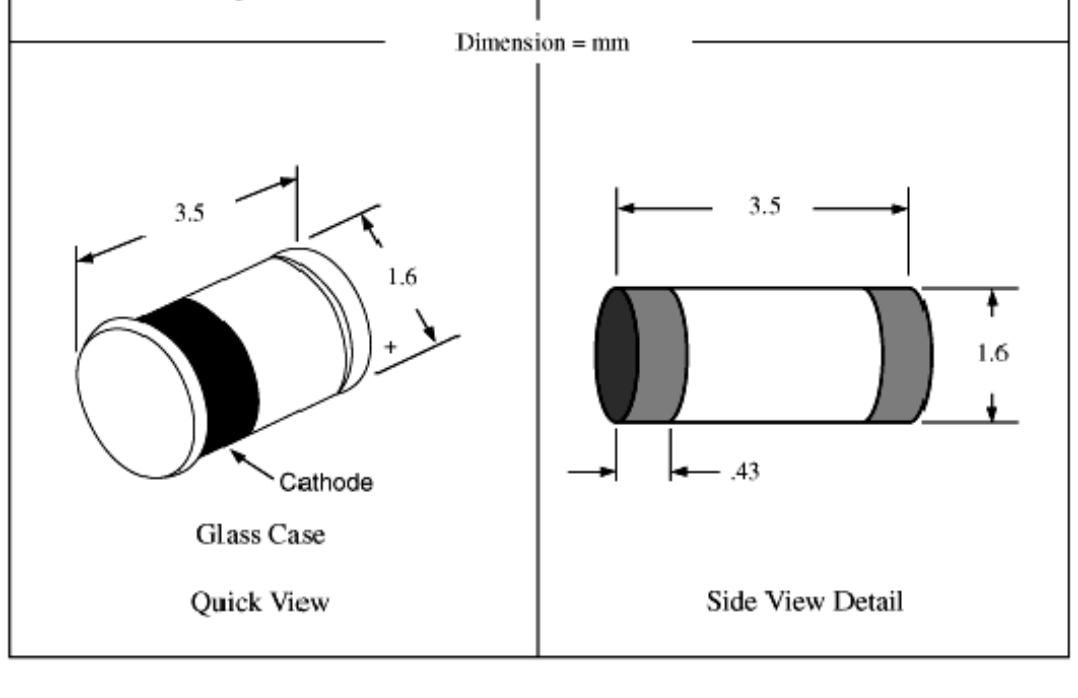
Dimension = mm
3.5
1.6
+
Cathode
Glass Case
Quick View
3.5
1.6
.43
Side View Detail

DO-213AB

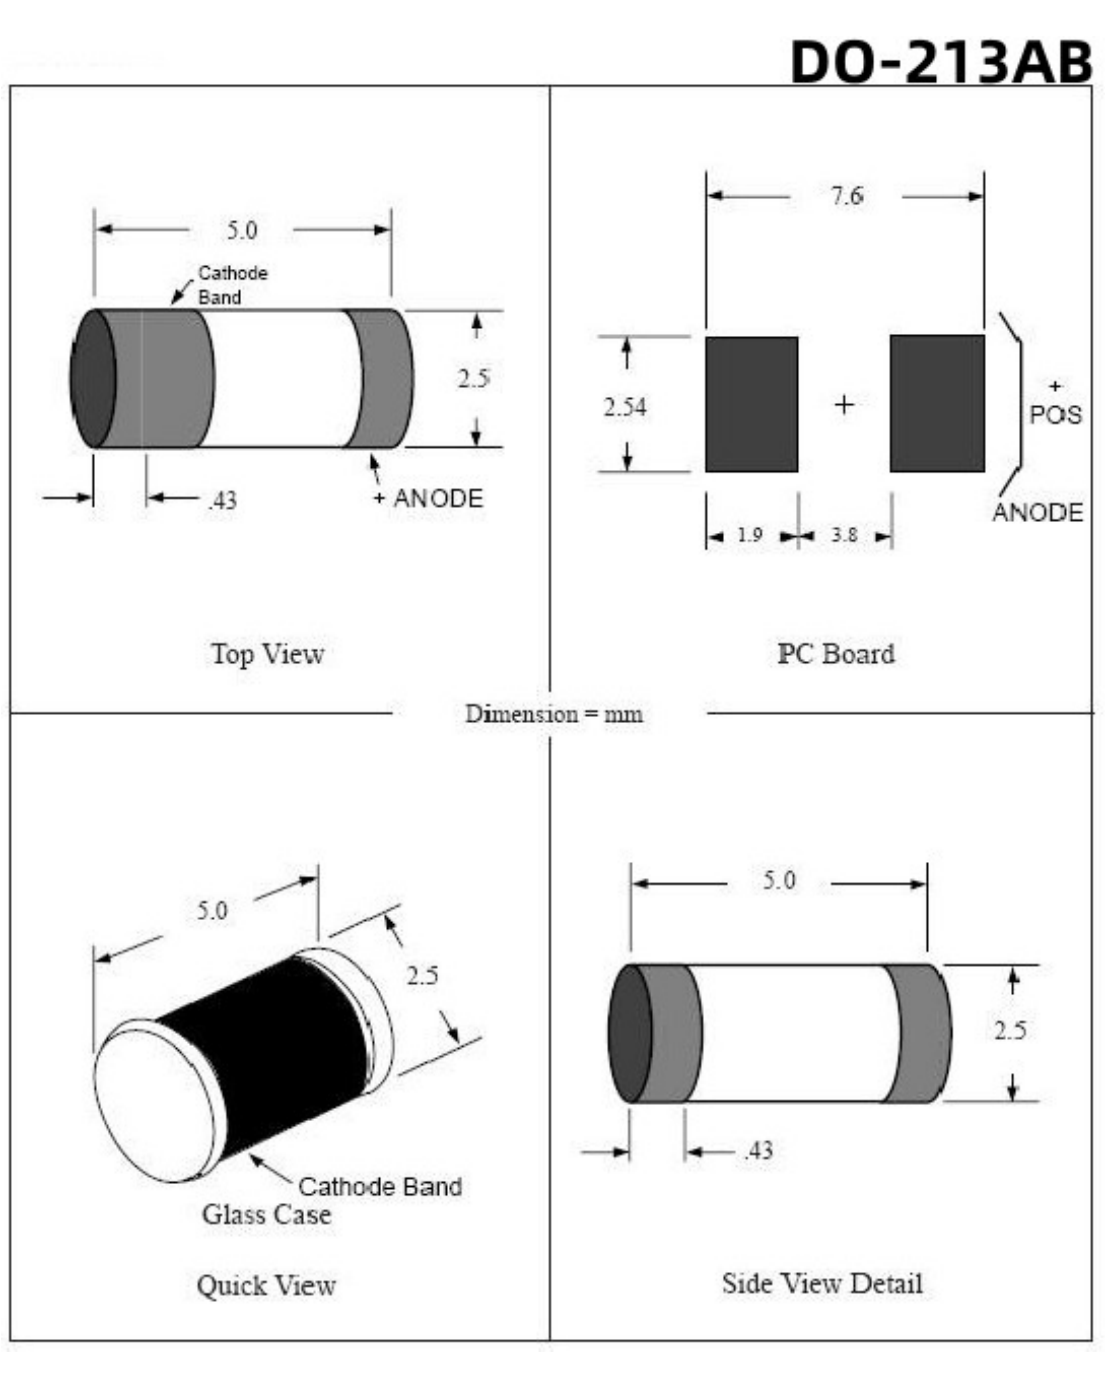
5.0
Cathode Band
2.5
.43
+ ANODE
Top View
7.6
2.54
+
+
POS
ANODE
1.9
3.8
PC Board
Dimension = mm
5.0
2.5
Cathode Band
Glass Case
Quick View
5.0
2.5
.43
Side View Detail

DO-214

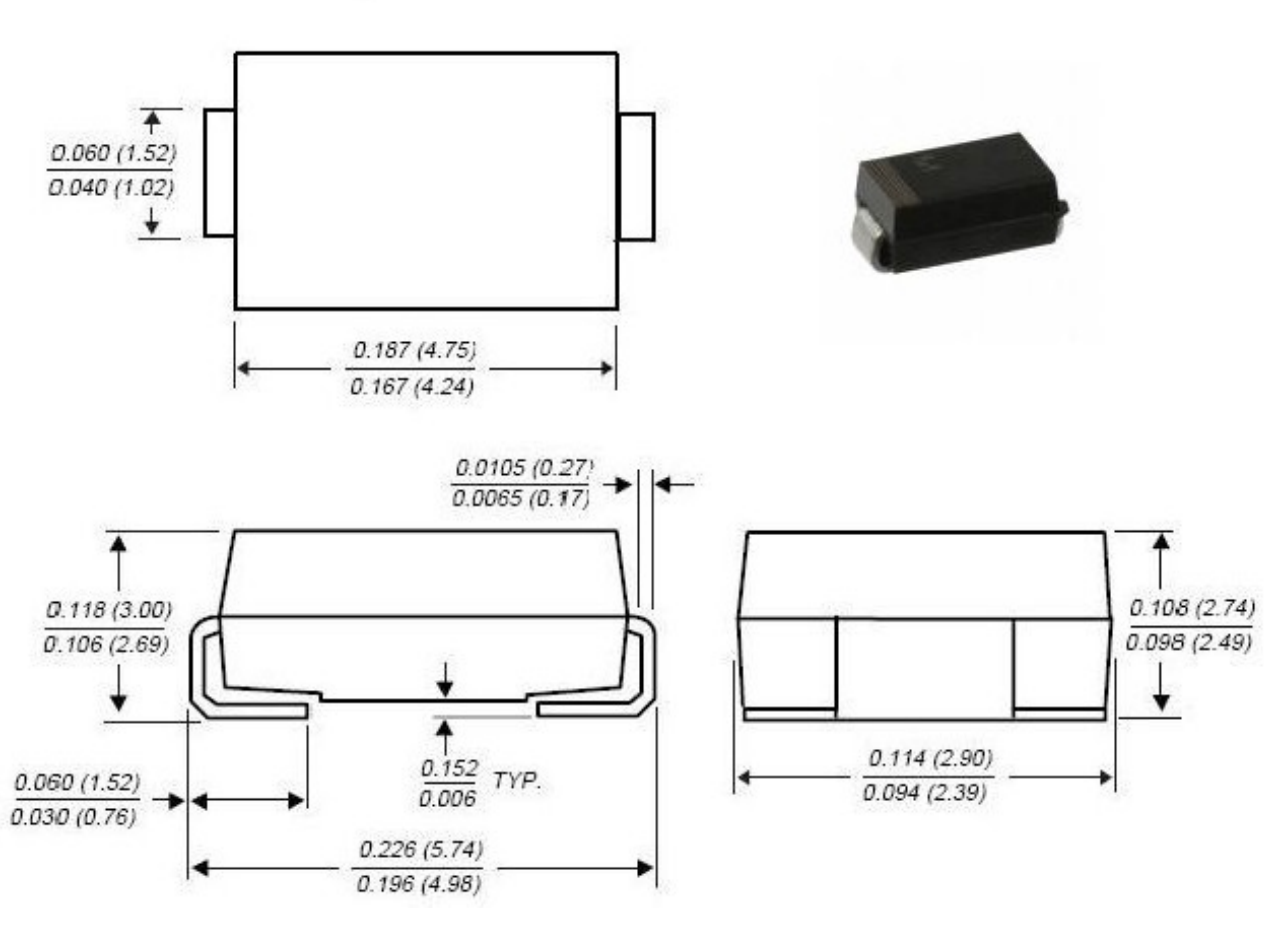
0.060 (1.52)
0.040 (1.02)
0.187 (4.75)
0.167 (4.24)
0.0105 (0.27)
0.0065 (0.17)
0.118 (3.00)
0.106 (2.69)
0.152
0.006
TYP.
0.060 (1.52)
0.030 (0.76)
0.226 (5.74)
0.196 (4.98)
0.108 (2.74)
0.098 (2.49)
0.114 (2.90)
0.094 (2.39)

For more questions about surface mount package sizes, please feel free to contact PCBbee at **service@pcbbee.com**， We will reply within 2 hours.

PREVIOUS
What Are SMD Components? A Complete Guide

NEXT
What is the Difference Between PCB and PCBA?

© 2009-2024 PCBBEE All Rights Reserved | Privacy Policy | Sitemap