Computational Self-Awareness in Musical Robotic Systems

David Thorvaldsen



Thesis submitted for the degree of Master in Informatics: Robotics and Intelligent Systems
60 credits

Institute for Informatics
Faculty of mathematics and natural sciences

UNIVERSITY OF OSLO

Autumn 2021

Computational Self-Awareness in Musical Robotic Systems

David Thorvaldsen

 \bigodot 2021 David Thorvaldsen

 ${\bf Computational\ Self-Awareness\ in\ Musical\ Robotic\ Systems}$

http://www.duo.uio.no/

Printed: Reprosentralen, University of Oslo

Abstract

 $\mathbf{GJ}\mathbf{\emptyset R:}$ Tenk igjennom og besvar så godt som mulig etterhvert:

• What Is Self-Awareness, according to some of history's most prominent thinkers, including central philosophers and psychologists? Or first things first, what Is the self? And what exactly is awareness? What implications does this have as it pertains to the domain and practice of computer science and engineering — especially when designing and describing computing systems? What lessons can designers and researchers of computing systems learn, what can they be inspired by, and which computational benefits/advancements in engineering can be made when exploring the answers to these questions?

|.

INKL.: Despite its elusive, and at times hard-to-tangibly-define, nature; the psychological concept of Self-Awareness have relatively recently served as a rich source of new inspiration, previously unknown or undiscovered for the computer engineer.

Acknowledgement(s?)

Hei og takk til alle dere som støttet og hjalp meg igjennom denne reisen.

Contents

1	Introduction				
	1.1	Motivation	1		
	1.2	Goal of the thesis	3		
	1.3	Outline	4		
2	Bac	kground	5		
	2.1	Nymoen et al. sin Firefly-Synkronisering:	6		
	2.2	Oscillators and Oscillator-Synchronization	7		
3	Too	Tools and Software			
4 Implementation		9			
	4.1				
		tion in (Oscillators ∨ Musical Robot Collectives)	9		
		4.1.1 The Node: the musical robot individual	10		
		4.1.2 Robot communication: the "fire"-signal	10		
		4.1.3 System target state: Harmonic Synchrony	10		
		4.1.4 Update/Adjustment functions: Phase- & Frequency-Adjustm	nent	11	
	4.2	My new proposed algorithm: an additional Self-Awareness com-			
		ponent	13		
5	Exp	periments and Results	14		
6	6 Discussion/Conclusions				

List of Tables

List of Figures

2.1	Fase-justering (som om man skulle tappet med fingrene på et bord)	6
4.1	Decentralized Synchronization of phases achieved in a musical robot collective, consisting of M. J. Krzyzaniak and RITMO's	
	Dr. Squiggles	10
4.2	"Standard" Phase-Adjustment with Mirrollo-Strogatz's approach	12
4.3	Bi-directional Phase-Adjustment with K. Nymoen et al.'s approach	13
GJØ	ÖR: [Finn ut hvordan man endrer Figure-navnene her til noe am	net
enn det	de har som caption i hoved-teksten .	

Introduction

1.1 Motivation

GJØR: Tenk igjennom og besvar så godt som mulig etterhvert (kompilert fra Samuelsens MSc-thesis, og etterhvert Essay-kommentarer. Kan cross-checke med Tønnes og hun andres også):

- Why is the thesis topic, and its outflowing proposed solutions/improvements, of relevance in the world today?
 - History of field, how things have been done before and why the situation/needs/requirements might have changed, or why these traditional/typical solutions may be ripe for improvements or better solutions? Why are these concerns/problems/factors of importance?
 - * Demonstrate, illustrate, and explain these changes / this new situation so that the reader understands why your topic's contributions are necessary or needed.
 - What are the relevant real-world problems in need of solutions/improvement, where the thesis topic can provide such solutions/improvements?
 - Differentiate between what the "Background-/Related-works-proposed method" conributes with, and the "new proposed method" that you yourself want to try out (e.g. differentiate between ODA-loops and MAPE-K-loops, and endowing computational systems with computational self-awareness (and self-expression).
 - * Explain why the "new proposed method" is needed/granted, maybe in relation to a lack or challenge with the original "Background-/Related-works-proposed method". Perhaps also mention the absence or "freshness" of this "new proposed method" in the history or field of the "Background-/Related-works-proposed method".
 - "From Essay-comments": [
 - What constitutes the essential ideas behind the solutions to the problem?

- Have I written a short description of the problem / challenge for my thesis?
- Have I introduced (understandably and intuitively) Self-Awareness as an exciting and relevant field/source-of-inspiration-and-concepts?
- Have I presented motivations and arguable advantages of endowing a computational system with Self-Awareness (Se reMarkable'n)?
- Have I discussed or argued for the motivations for endowing, especially and in particular, music systems with Computational Self-Awareness and then connected this with efforts like Nymoen et al.'s Firefliy-synchronization and/or Chandra et al.'s Solojam?

|.

"Fra Essay-Introduction": [

INKL.: Designing and predicting all possible scenarios of a computing system at design-time is often hard, and sometimes impossible (in the case of unpredictable faults e.g.). If one wants to achieve coordination and continuous adaptation of a system or of system-components (for example in a collective) – some sort of intelligence might be necessary to endow it with. Endowing computing systems with Self-Awareness can be beneficial in several respects, including a greater capacity to adapt, to build potential for future adaptation in unknown environments, and to explain their behaviour to humans and other systems [SACS 17 Ch. 3]. Self-awareness concepts from psychology are inspiring new approaches for engineering computing systems which operate in complex dynamic environments [SACS 16 Ch. 2]. As we can see in various Music Technology Systems, this endowing can also give rise to interesting cooperative and coordinating behaviour.

INKL.: The problem of this thesis will mainly consist of studying the effects differing Self-Awareness levels, varying collective-sizes, levels of task difficulty (like more complex behaviours, and limited communication) – have on usefulness, system dynamics, overall performance, and scalability (primarily within the domain of Musical Multi-Robot/-Agent collectives).

$"Fra\ Essay-Introduction-kommentarer": [$

INKL.: In this MSc. thesis, we will explore an exciting and relatively new translation of the concepts and notions regarding *self-awareness* – as they pertain to humans and animals especially – from the domain of Psychology, into the domain of Computation and Engineering.

INKL.: [We will in this project attempt to implement and explore whether, and indeed in what way (how), a computational system (like computational agents/agent-collectives in a computer-simulation, and/or even on physical musical robots) can exibit and display Self-Awareness (and corresponding Self-Expressive) capabilities, comparable to how they are perceived in humans

and animals.

INKL.: We will in this thesis project investigate methods and models for computational self-awareness in multi-robot systems, with application to the musical robotics domain. ?

INKL.: Engineering a computing system for a certain environment often requires some knowledge of said environment — both on the end of the creator of the computing system, as well as for the computing system in turn. This is at least the case in autonomous computing, where computing systems are supposed to be able to observe, learn, adapt, and act on their own — independently from their creator.

However, predicting all possible future states of complex, dynamic, and everchanging environments is hard, and at times impossible. INKL.: [This calls for online and continuous learning, don't you think? How to best tackle this problem? Glad you asked. — With Self-Awareness of course. Because ...]?

GJØR: Summer de viktigste bidragene av arbeidet her eller under for å få det til å stå frem/ut bedre enn å bare "gjemme" det i den siste delen av oppgaven .

1.2 Goal of the thesis

 $\mathbf{GJ}\mathbf{\emptyset R:}$ Kople tekst oppmot (de 2-3) research-questions'a mine her .

BESKR.: ["to make the reader better understand what the thesis is about"—Jim, og "en rød tråd?"—Sigmund].

Research Question 1:

Will performance in collective multi-robot systems increase as the level of Self-Awareness increases? Specifically, will increased levels of Self-Awareness in the individual agents/musical robots lead to the collective of individuals being able to synchronize to each other faster than with lower levels of Self-Awareness?

Research Question 2:

Will increased levels of Self-Awareness lead to more robustness and flexibility in terms of handling environmental noise and other uncertainties — specifically in the continued ability to synchronize to each other efficiently despite these difficulties/challenges?

1.3 Outline

 $\mathbf{GJ} @ \mathbf{R} : \Big[$ Skriv opp strukturen/oversikten (Eagle's-eye) av thesis-dokumentet her $\Big].$

Background

GJØR: Skriv opp bulletpoints fra mulige inspirasjoner og referanser her. "Write a few lines summarising relevant articles one comes across (which one is likely to refer to in the final report)" - Jims master-skrivingsdokument).

"Fra Essay-kommentarer": [

INKL: Often times, scientists have drawn inspiration from various scientific fields – particularly different fields from ones own – into their own field, for various reasons. Indeed, the translated concepts (from the one domain to the other) will most likely be accompanied with brand new ways to think about ones own domain, as well as other domains again interacting with it (hence having a real opportunity to start a "domino"-like chain-reaction of new ways to think about things emerging). These new ways to think about things (often in ones own domain) – apart from being interesting and intriguing – might be useful, both for ones own field but also for other fields again (especially if thinking long term). For example in the Multi-Agent Systems (MAS) field, it has been a common practice to study complex biological systems in nature, in order to translate these mechanisms into the technology- and engineering-domain (be it the Ant Colony(?), or Beeclust(?)). Such bio-inspired algorithms have been – and still are(?) – some of the most widely used optimization algorithms throughout history.

INKL.: (Fra Essay om 'path planning', 'EA's og 'multi-objective optimization'. Definitivt ikke kopier, men skriv om isåfall): "This essay attempts to give an overview over the fields of path-planning, evolutionary algorithms and multi-objective optimization, including pointers to recent work in these fields, especially where they intersect. In tradition with other literature relating to evolutionary algorithms, algorithms which are not population-based or otherwise based on principles similar to evolutionary algorithms are called 'classical' to separate them from evolutionary variants." ?].

2.1 Nymoen et al. sin Firefly-Synkronisering:

INKL.:

Nymoen et al. [1] showed how one can, by endowing musical agents with self-awareness capabilities, achieve *harmonic synchrony* of phases and frequencies in pulse-coupled oscillators.

"Sigmund Kjøkken-Recall": [

BESKR.: Kanskje denne seksjonen blir gjort overflødig av en god forklaring på Oscillatorer og synkronisering av Oscillatorer i 'Background'-kapittelet, og en god forklaring av akkurat hvordan dette oppnås i 'Implementation'-kapittelet?

GJØR: Demonstrer/Illustrer poenget bak fingrene og tidsaksen på bordet (ish det som er i figuren under for fase), og så det samme for frekvens-justering med f.eks. halve—eller noe annet—som start-frekvens; og at de da ender i harmonisk synkroni.

Phase adjustments only (equal and constant frequencies and periods)

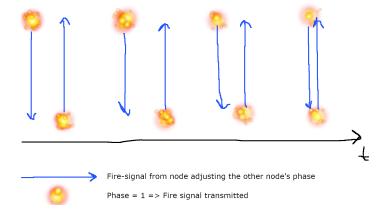


Figure 2.1: Fase-justering (som om man skulle tappet med fingrene på et bord)

"Tante-Kjersti-inspirert (ish Stue-Recall)": [

The diverse and complex phenomena of nature have for long served as exciting inspirations to human engineering and research (cite ant colonies, boids & swarms, beeclust e.g.). One such phenomena studied and attempted modelled is the synchronous firing of fireflies in the rainforests.

 $\mathbf{GJ} \otimes \mathbf{R}$: [Insert illustration/picture of synchronizing/synchronized fireflies firing in a dark forest here].

This has inspired scientists like Mirollo & Strogatz [], and in later time Kristian Nymoen, Kyrre Glette et al. [1], to attempt to model and "etterlikne" this natural phenomenon in human-engineered systems. This work ties into the work on synchronizing oscillators []? which has been subject to study for some time now. What separates Mirollo & Strogatz and K. Nymoen's approach from these previous ones, is that here the oscillators are pulse-coupled, as opposed to the more normal and constraining phase-coupled (explain?). Each modelled "firefly", or firing node, is here implemented and considered as an oscillator, characterized by its phase and frequency. INKL.: [Kinda, the job is to align sinusoidal waves, either by shifting an agent's phase "up", or "down".

INKL.: No training of any neural networks or any model-data was needed to achieve synchrony in this case — and so far no machine learning is used — but instead we see an emergent *harmonic synchrony* in a collective, by endowing fairly simple agents with not too complicated update-functions. This is well known in the Multi-Agent Systems & Swarm Robotics literature []?.]?

2.2 Oscillators and Oscillator-Synchronization

BESKR.: [Beskrive dette så godt at jeg kan snakke fritt om oscillatorers **faser** og **frekvenser** senere (i Implementation f.eks.), spesielt i tilfelle noen ikke har vært borti det før, eller tatt et Signalbehandlings-kurs].

GJØR: Skill på Pulse-coupled Oscillators, og Phase-coupled Oscillators .

Tools and Software

```
BESKR.: ["Det man har brukt" — Kyrre].
BESKR.: [Kan flyttes til en egen seksjon hvis dette kapittelet ikke ville vært så stort (jf. 'ThesisChecklist' på Robin-wikien)].
BESKR.: [(Hentet fra Tønnes sin master, om Tools and engineering) En introduksjon til de forskjellige verktøyene og prosessene brukt iløpet av masteroppgaven. Fokuser på fysisk arbeid gjort, og ingeniør-delene av masteroppgaven, inkludert 3D-design av de fysiske robotene, valg av deler, simulering i systemer, og testingen, valideringen, og verifikasjonsmetoder brukt i oppgaven. Gjerne også en oversikts-tabell av verktøy og programvare brukt].
```

Software:

- Notepad++ v8.1.9.2 (64 bit). For writing my master's thesis and code.
- Unity Version 2021.2.0f1. Unity is originally a game-development platform, but can also be used to make INKL.: [realistic]? simulations containing physical rigid-bodies using the ¡bla.bla Rigidbody¿-physics engine.
- Python 3.10.0. For plotting and analysing data.

Implementation


GJØR: Skriv opp Worklog-materiale (under "muy bien so far"-bokmerket) dandert i henhold til gode master-theses .

This chapter gives an overview of the developed musical multi-robot system. The main goal of the implemented system is to allow for a multi-robot (musical) collective to interact with each other in order to achieve emergent and co-ordinating/co-operative behaviour—synchronization specifically in our case—with varying degrees of difficulty and certainty in the environment and communication. More specifically, the goal with the design is to enable the robot collective to achieve so-called harmonic synchronization within a relatively short time. What is meant by harmonic synchronization will be expounded in Subsection 4.1.3. These goals firstly require of the agents/nodes the modelling of oscillators with their properties, like phase and frequency, as explained further in Subsection 4.1.1. To allow for interaction and communication between the agents, mechanisms so that the agents can transmit "fire"-signals, as well as listen for other agents's "fire"-signals, is necessary as well, and is presented in Subsection 4.1.2.


4.1 The baseline: Achieving Decentralized Harmonic Synchronization in (Oscillators ∨ Musical Robot Collectives)

Envision that we have a multi-agent collective scenario consisting of musical robots modelled as oscillators, solely communicating through brief "fire"-like audio-signals—greatly inspired by K. Nymoen et al.'s approach for achieving decentralized harmonic synchronization in mobile music systems [1]. These agents are initially not synchronized in their firing of audio-signals, but as time goes, they are entraining to synchronize to each other by adjusting their phases and frequencies when or after hearing each other's audio-signals. An illustration of this is given in Figure 4.1.

These aforementioned audio-signals to be expounded further in Subsection 4.1.2, also referred to as "fire"-signals, are transmitted whenever an agent's



(a) The agents firing asynchronously at first. Here, only the two Dr. Squiggles with red tentacles are firing simultaneously, but the rest are not.



(b) Seconds later, after having listened to each other's fire-event signals and adapted themselves accordingly, the agents are here firing synchronously.

Figure 4.1: Decentralized Synchronization of phases achieved in a musical robot collective, consisting of M. J. Krzyzaniak and RITMO's Dr. Squiggles.

oscillator peaks (i.e. after its cycle or period is finished, having phase $\phi(t) = 1$)—or actually every second peak, due to the target system goal of harmonic synchrony. All agents have the ability to listen for such transmitted "fire"-signals from their neighbours, which they then will use as a trigger to adjust themselves according to some well-designed update-functions to be elaborated in Subsection 4.1.4.

4.1.1 The Node: the musical robot individual

BESKR.: Om den enkelte noden/agenten med alle egenskaper den har osv. (som f.eks. en oscillator-komponent (jf. I.A., III.Intro., og 'Implementation' i Nymoens Firefly-paper)).

4.1.2 Robot communication: the "fire"-signal

- Short and impulsive audio sound/signal, representing a node's phase-climax and "fire"-/"flash"-event.
- The only means of communication allowing for stigmergic co-ordination.
- Facilitating PCO (pulse-coupled oscillators), different from phase-coupled oscillators with their differences.

4.1.3 System target state: Harmonic Synchrony

- ullet The goal and target state of the system
- All agents/node having integer-relation frequencies, so that given a fundamental frequency $\omega_{i,0}$ for the agent i with the lowest frequency in the collective all other agents have "legal" harmonic frequencies; meaning, all nodes have frequencies in the mengde $\omega_{i,0} \cdot 2^{\mathbb{N}_0}$.

4.1.4 Update/Adjustment functions: Phase- & Frequency-Adjustment

"Sigmund Stue-(post IN3190-eksamen)Recall": [S: Oppdateres først faser helt ferdig først — og så begynner frekvenser å oppdatere seg? Eller hvordan oppdateres egentlig frekvensen (hva er formelen for det, sammenliknet med den nokså enkle formelen til fase-oppdateringen)?

D: Nei, fase og frekvens oppdateres samtidig, men en nodes fase oppdateres umiddelbart når noden hører et "fire"/"flash"-signal — til forskjell fra nodens frekvens. For frekvens-justering, samler noden opp (akkumulerer) (error-) scores gjennom hele sin periode/syklus. Hver (error-) score sier noe om hvor mye ute av synch noden er, og da altså hvor mye frekvensen dens bør oppdateres for å komme inn i synch (små error-scores fører da til lite behov for justering, og frekvensen oppdateres kun litt). Noen tilleggs-operasjoner på frekvens-oppdaterings-funksjonen forteller også noe om hvilket fortegn denne frekvens-oppdateringen bør ha (da frekvens-justeringen, i likhet med fase-justeringen, også er bi-direksjonell). Gjennomsnittet av disse error-scoresene multiplisert med fortegns-og amplitude-faktorene ρ(n), vektet av en frekvens-koplings konstant β, blir da brukt i kalkuleringen for hva den nye og oppdaterte frekvensen $ω_i(t^+)$ blir, for agent i, der t^+ er tidssteget umiddelbart etter frekvensjusteringen er gjennomført a

4.1.4.1 Phase Adjustment

If we first assume constant and equal oscillator-frequencies in our agents, we can take a look at how the agents adjust their phase in order to synchronize to each other. This is in contrast to the case in 4.1.4.2 where heterogenous, often randomly initialized, oscillator-frequencies in the musical agents are implemented and utilized.

Two approaches were attempted in Unity, as presented in Nymoen et al.'s "Firefly-paper" [1]:

1) Mirollo-Strogatz's "standard" Phase Adjustment

Each musical node updates its phase ϕ according to the **phase update function** (4.1) when hearing a "fire"-event from one of the other musical nodes:

$$P(\phi) = (1+\alpha)\phi,\tag{4.1}$$

where " α is the pulse coupling constant, denoting the strength between nodes" [1]. So, if $\alpha=0.1$ e.g., then a musical node's new and updated phase, immediately after hearing a "fire"-signal from another node, will be equal to $P(\phi)=(1+0.1)\phi=1.1\phi$. 110% of its old phase ϕ , that is. Hence, and in this way, the node would be "pushed" to fire sooner than it would otherwise. An illustration of this is given in Figure 4.2.

2) Nymoen et al.'s Bi-Directional Phase Shifts

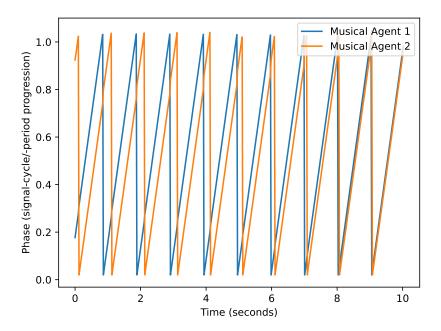


Figure 4.2: "Standard" Phase-Adjustment with Mirrollo-Strogatz's approach

This Phase-adjustment, as in Figure 4.3, works very similarly to the Phase-adjustment performed in the *Mirollo-Strogatz* approach; The only difference being that now, nodes update their phase with the slightly more complex **phase update function** (4.2) when hearing a "fire"-event from one of the other musical nodes — allowing for both larger, but also smaller, updated phases:

$$P(\phi) = \phi - \alpha \cdot \sin(2\pi\phi) \cdot |\sin(2\pi\phi)| \tag{4.2}$$

The fact that new and updated phases can both be larger, but also smaller, compared to the old phases, is exactly what's meant by the Phase-adjustment being **Bi-Directional**, or as the authors call it in the paper as using "both excitatory and inhibitory phase couplings between oscillators" [1].

The effects then of adjusting phases, upon hearing "fire"-events, according to this newest update-function (4.2) are that the nodes's phases now get decreased if ϕ is lower than 0.5, increased if ϕ is higher than 0.5, and neither—at least almost—if the phases are close to $0.5 = \frac{1}{2}$. This is due to the negative and positive sign of the sinewave-component in Equation (4.2), as well as the last attenuating factor in it of $|\sin(2\pi\phi)| \approx |\sin(2\pi\frac{1}{2})| = |\sin(\pi)| = |0| = 0$.

4.1.4.2 Frequency Adjustment

GJØR: Presenter hva Frequency-adjustment er (hvis det ikke ble tydelig nok i slutten av Seksjon-4.1), bygg opp fremgangsmåten på hvordan man oppnår Frequency-adjustment (som i reMarkable-notatet 'Logs' \rightarrow 'Simulations' \rightarrow 'Frequency adjustment', Worklog'en, og Mattermost-chatten med Kyrre evt.) — med passende figurer og illustrasjoner .

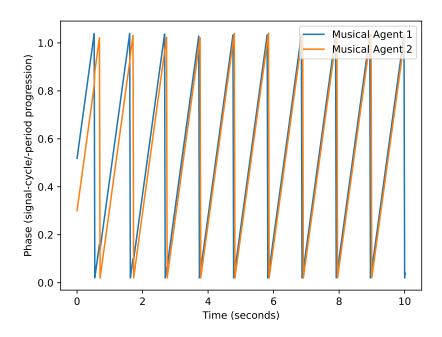


Figure 4.3: Bi-directional Phase-Adjustment with K. Nymoen et al.'s approach

4.2 My new proposed algorithm: an additional Self-Awareness component

Experiments and Results

BESKR.: $\Big[$ Skal følge opp research questions'a mine ved en diskusjon av til hvilken grad og på hvilke måter arbeidet har besvart dem $\Big]$.

 \mathbf{GJ} ØR: [Vurder å dele opp som Tønnes: Først 1) Evolusjonære/Simulator? eksperimenter og resultater, så 2) Fysiske eksperiment og resultater].

 $\mathbf{GJ} \oslash \mathbf{R}$: Legg inn performance-plot av initielt Simulator-eksperiment for synkroniseringstider for f.eks. Mirollo-Strogatz vs. Nymoen et al.'s fase-justering .

Discussion/Conclusions

```
 \begin{aligned} \mathbf{GJ} @\mathbf{R} &: \Big[ \text{ Se på Tønnes sin masteroppgave for inspirasjon } \Big]. \\ \mathbf{GJ} @\mathbf{R} &: \Big[ \end{aligned} \end{aligned}  (\text{Hvis jeg heller vil bruke 'Conclusions' som tittel og dra inspirasjon fra Jim)}  Eller se på 'how to write a master thesis' av Jim om 'Conclusions' \Big].
```

Bibliography

[1] Kristian Nymoen et al. "Decentralized Harmonic Synchronization in Mobile Music Systems". In: *Grant agreement no. 257906 (EPiCS) from EU FP7* (2014).