Every classifier misses more than half of the shear-flexural images.

counts, shaded by share of each true class; specimen folds

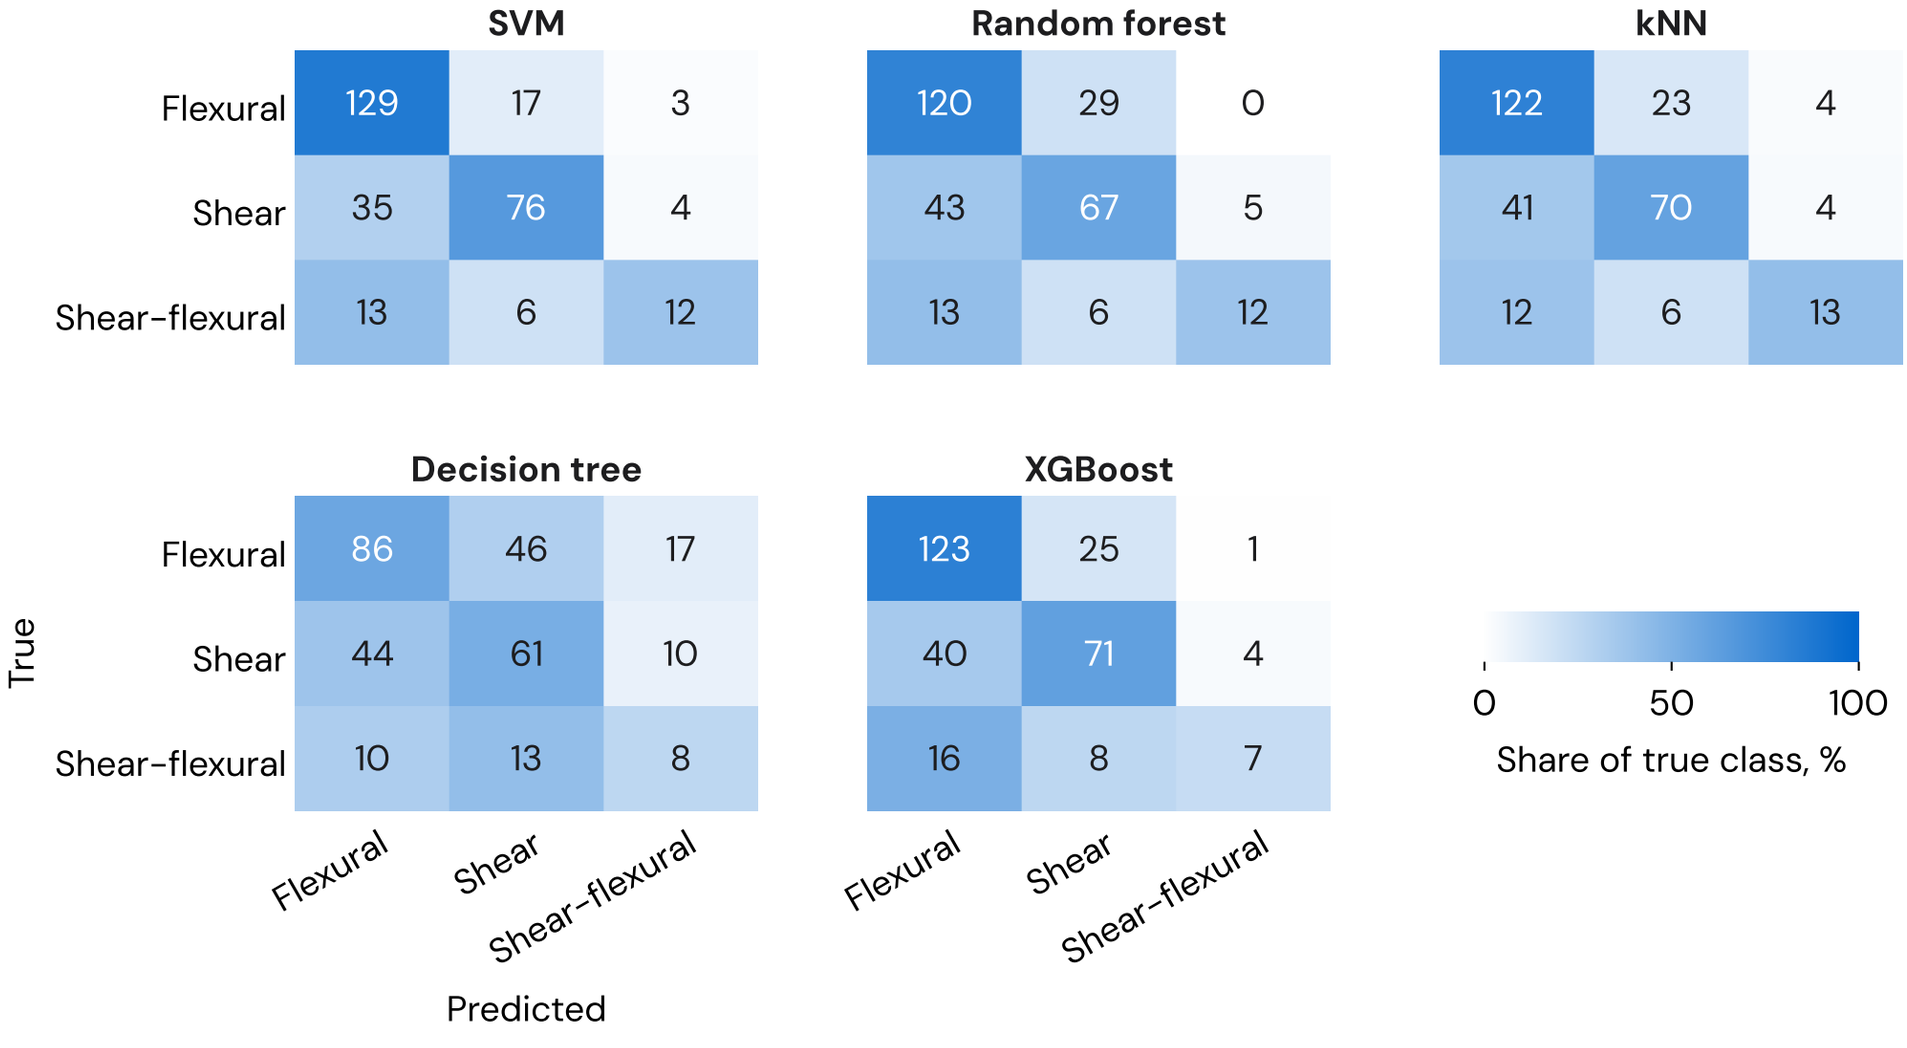

Source: 295 images, 275 specimens, 50 open-access articles