



CSS Selectors

#7

- ✓ 1. Simple Selectors
 - ✓ 2. Combinator Selectors
 - ✓ 3. Pseudo-class Selectors
 - ✓ 4. Pseudo-elements Selectors
 - ✓ 5. Attribute Selectors
- } Part-1
- } → Part-2

1



Simple Selectors

#7

Simple Selectors types:

1. Universal Selector ✓
2. Element Selector
3. ID Selector
4. Class Selector
5. Descendant Selector
6. Group Selector →

2



1. Universal Selector

#7

- The Universal Selector targets all elements in the document

Example:

`*{`

`margin: 0;`

`.html`

✓ {selector}

property : value;

```
margin: 0;  
padding: 0;  
}
```

```
}
```

3



2.Element Selector

#7

- The CSS element selector targets elements by tag name

Example:

```
p {  
  font-size: 16px;  
  color: #333;  
}
```

4



3.ID Selector

#7

- The CSS ID selector targets an element with a specific id attribute.

Example:

```
#demo {  
  color: blue;  
  background-color: #f4f4f4;  
}
```

id = '??'

to pass extra inf
to the tag

S. Rajesh (3) => Rollno

✓
h3 id="3" > ~ ~ ~ </h3>
~ ~ ~ sub-heading

hyphen
sub-heading
sub-heading
subHeading

5



4.Class Selector

#7

- The CSS class selector selects elements with a specific class attribute



1. Adjacent Sibling Combinator

#7

- The adjacent sibling combinator **(+)** selects an element that is immediately preceded by a specific element.

Example:

```
h1 + p {  
  margin-top: 0;  
}
```

(+)



9



2. Child Combinator

#7

- The child combinator **(>)** selects direct children of a specified element.

Example:

```
div > p {  
  color: blue;  
}
```

```
div {  
  p {  
  }  
}
```

child combinator
→ direct children

Descendant selector
→ all elems

10



Let's **recall** what we've learned so far

#7

Simple selectors

- 1) Universal selector
- 2) Element selector
- 3) ID selector
- 4) Class selector

}⇒

Combination selectors

- 1) Adjacent sibling combi..
- 2) Child combinator

5) Descendant selector

6) Group selector

11

id - uniqueness
↓
<h1 id="main-heading">Web dev </h1>

○ ○ ○ ○ ○
2

1) question?

2) select

<h2 id="sub-heading">Frontend </h2>
↑
<h2 id="sub-heading">Frontend </h2>
↑

h1
h2
h3
h4
:
h6


h1
h2
h3
h4
h5
h6

headings
}

h1, h2, h3, h4, h5, h6
color: —;

✓ class → as many no of times
✓ <button class="btn"> start </button>
✓ <button class="btn"> stop </button>

```
<div>  
  ✓ <p>I am inner paragraph</p> ✓  
  <!-- inner div -->  
  ✓ <div>  
    ✓ <p>I am paragraph2</p> ✓  
    <span>  
      ✓ <p>I am paragraph 3</p>  
    </span>  
    ✓ <p>I am paragraph 4</p> ✓  
  </div>  
  ✓ <p>I am paragraph5</p> ✓  
</div>
```

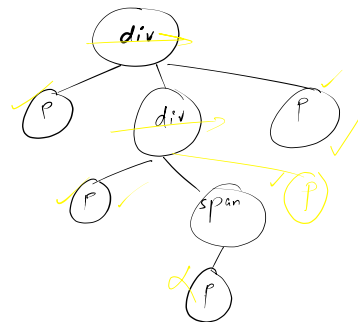

div = p