

PilotFish Synchronous Response Processor – Complete Reference (26R1.11 WAR)

Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

Sends a synchronous response back to the listener instance in the route that triggered this transaction.

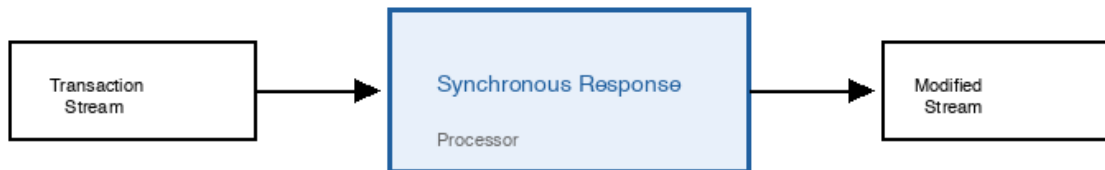


Figure 1: At a glance (plain English)

- Call `checkRequiredData(data)`.
- Copy transaction stream into EIP default cache (ensures seekability).
- Replace data stream with cached copy.
- Retrieve `synchronousResponseTicket` attribute from transaction attributes.

Purpose

Deep dive into **Synchronous Response** (`SynchronousResponseProcessor`) in `eip.war.hs.26R1.11`.

Provenance	Value
WAR	<code>eip.war.hs.26R1.11</code>
Module JAR	<code>xcs-modules-other-1.0.1.jar</code>
Implementation class	<code>com.pilotfish.eip.modules.other.SynchronousResponseProcessor</code>
Type string	<code>Synchronous Response</code>
Categories	<code>MISC</code>

1. High-level behavior (`processData`)

1. Call `checkRequiredData(data)`.
2. Copy transaction stream into EIP default cache (ensures seekability).
3. Replace data stream with cached copy.
4. Retrieve `synchronousResponseTicket` attribute from transaction attributes.
5. If ticket is null -> throw `EIPEException`.
6. If ticket is not a `SynchronousResponseTicket` -> throw `EIPEException`.
7. Clone the `TransactionData` with a fresh cache input stream.
8. Return the cloned data to `SynchronousResponseBroker` via `returnTicket()`.
9. Return original data to continue route.

2. Configuration reference

No user-configurable options for this processor.

Inherited `AbstractProcessor` options

Property	Value
UI label	Conditional Execution
Tag	<code>ExecuteProcessor</code>
Type	Boolean (expression-capable)
Default	<code>true</code>
Tab	Conditional Execution
Nuance	When false (or expression resolves false), processor is skipped entirely. Supports enhanced expression toggle for complex conditions.

3. Transaction attributes

Reads: `com.pilotfish.eip.synchronousResponseTicket` (set by sync listeners)

4. Known quirks and caveats

1. No user-configurable options beyond `ExecuteProcessor`.
 2. Must be paired with a synchronous listener (HTTP Post, SOAP, etc.) that creates the ticket.
 3. Route continues AFTER response is sent – downstream processors still execute.
 4. Data is cloned so the response and downstream see independent streams.
-

5. Operational recommendations

Goal	Guidance
Placement	Place immediately before the point where you want to return the response
Error handling	Wrap in try/catch fork if downstream failures should not affect the response
Listener pairing	Only works with listeners that create synchronous response tickets

6. Source index

Topic	Path
Synchronous Response processor	<code>com/pilotfish/eip/modules/other/SynchronousResponseProcessor</code>
Module JAR	<code>xcs-modules-other-1.0.1.jar</code>
<code>AbstractProcessor</code>	<code>com/pilotfish/eip/extend/AbstractProcessor.java</code>

Deep-dive – Synchronous Response Processor – 26R1.11 – August 2026.