

PilotFish RegEx Into Transaction Attribute Processor – Complete Reference (26R1.11 WAR)

Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

This step **searches the transaction payload with a regular expression** and copies one capture group into a named transaction attribute — useful for pulling an ID, date, or code out of raw text or XML without a full parser.

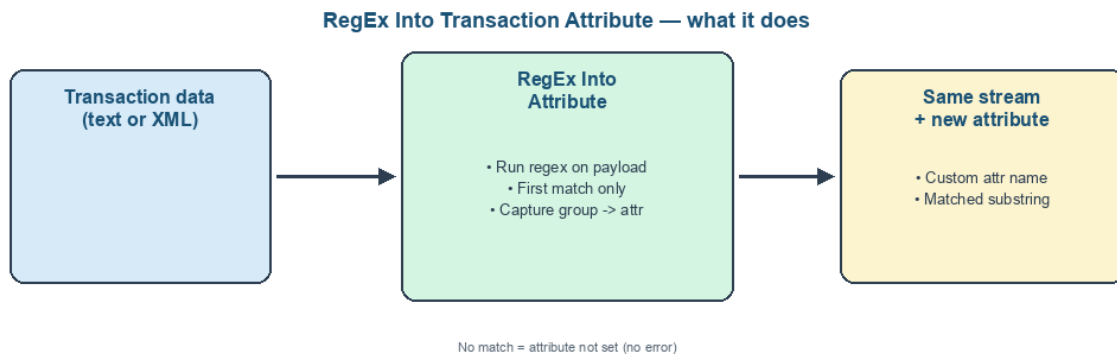


Figure 1: At a glance (plain English)

- **Reads** the full transaction body into memory as a string.
- **Finds** the **first** regex match only.
- **Stores** the chosen capture group under your attribute name.
- **Demo UI** may label this module **RegEx to Attribute**.

Purpose

Deep dive into **RegEx Into Transaction Attribute** (RegExIntoTransactionAttributeProcessor) in `eip.war.hs.26R1.11`.

Provenance	Value
WAR	<code>eip.war.hs.26R1.11</code>
Module JAR	<code>xcs-modules-core-1.0.3.jar</code>
Implementation class	<code>com.pilotfish.eip.modules.other.RegExIntoTransactionAttributeProcessor</code>
Type string	<code>RegEx Into Transaction Attribute</code>
Help ID	<code>console.processor.RegEx_into_transaction_attribute</code>
Categories	<code>ATTRIBUTES, PILOT_FISH</code>

1. Conceptual model

Transaction stream

```
|
v
read full bytes -> String (platform default charset from byte[])
|
v
Pattern.compile(RegEx) -> matcher.find() [first match only]
|
+-- match -> setAttribute(AttributeName, group(MatchGroupNumber))
+-- no match -> attribute unchanged
|
v
return TransactionData
```

2. High-level behavior (processData)

1. `TransactionUtilities.getInputStreamAndRecover(data)` then `DataUtil.readBytes(...)`
— recovers stream after read.
2. `workString = new String(copy)` — **platform default charset**, not configurable.
3. `Pattern.compile(manager.getStringValue("RegEx", data))`.
4. `matcher.find()` — **single search**, first match only (not `findAll` / global).
5. If match:
 - `groupNumber = Integer.parseInt(manager.getStringValue("MatchGroupNumber", data))`
 - `matchedText = matcher.group(groupNumber)`
 - `setAttribute(AttributeName, matchedText)`
6. Return data.

7. Any exception -> `EIPEException("Failure in RegEx Into Transaction Attribute Processor", cause).`
-

3. Configuration reference

3.1 RegEx

Property	Value
UI label	RegEx (tag used as label in descriptor)
Tag	RegEx
Type	String
Default	empty

Required for `isConfigurationComplete()`.

3.2 Transaction Attribute Name

Property	Value
UI label	Transaction Attribute Name
Tag	AttributeName
Type	String
Default	empty

3.3 Match Group Number

Property	Value
UI label	Match Group Number
Tag	MatchGroupNumber
Type	String (parsed as int at runtime)
Default	empty

Nuances:

- Group 0 is the entire match; 1 is the first parenthesized group.
- Invalid integer or missing group throws and wraps in `EIPEException`.
- No match does **not** throw — attribute simply stays unset.

3.4 Configuration completeness

`isConfigurationComplete()` returns true only when **RegEx** and **AttributeName** are non-empty (Match Group Number not checked at design time).

3.5 Inherited AbstractProcessor

Tag | `ExecuteProcessor` | Default `true` |

4. Transaction attributes

Writes the user-defined **AttributeName** key with the matched substring. No registered fixed keys.

5. Worked example

Payload: `OrderId=ABC-12345;Status=NEW`

Setting	Value
RegEx	<code>OrderId=([A-Z0-9-]+)</code>
Attribute Name	<code>com.acme.OrderId</code>
Match Group	<code>1</code>

Result: attribute `com.acme.OrderId` = `ABC-12345`.

6. Known quirks and caveats

1. **First match only** — later matches ignored.
 2. **Default charset** — `new String(byte[])` without explicit encoding.
 3. **Entire payload in memory** — large files consume heap.
 4. **No match is silent** — distinguish unset vs empty in route logic carefully.
 5. **Java regex syntax** — not Perl/Python; validate patterns in test mode.
-

7. Operational recommendations

Goal	Guidance
IDs in text	Use explicit capture groups; document group index
XML snippets	Prefer XPath Evaluation when structure matters
Multiple fields	Chain multiple processor instances or use Attribute Population
Validation	Require match via separate assertion processor if missing match must fail

8. Source index

Topic	Path
RegEx Into Transaction Attribute Module JAR	com/pilotfish/eip/modules/other/RegExIntoTransact. xcs-modules-core-1.0.3.jar

Deep-dive – RegEx Into Transaction Attribute – 26R1.11 – August 2026.