

PilotFish Listener Trigger Processor – Complete Reference (26R1.11 WAR)


Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

This step **triggers another listener** from within a running route – it can activate a listener, deactivate it, run it for a timed window, or fire a single cycle passing the current transaction data. This enables orchestration patterns where one route controls the lifecycle of another.

PilotFish Listener Trigger Processor

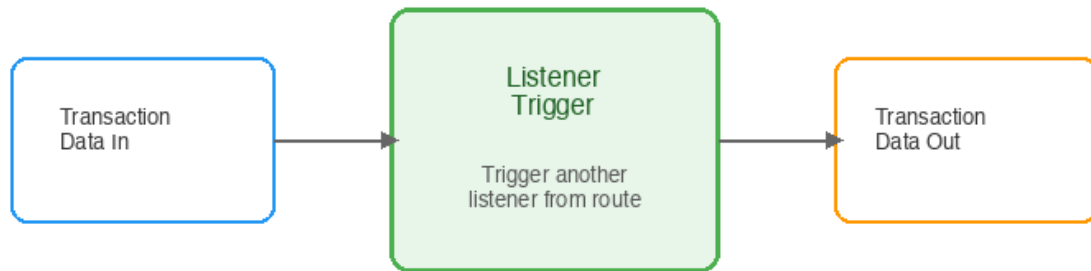

eip.war.hs.26R1.11

Figure 1: At a glance (plain English)

- **Run One Cycle** fires the target listener once with current transaction context.
- **Activate** starts the target listener.
- **Deactivate** stops it (optionally after a timed window).
- **Triggerable listeners** can be invoked directly with current data.

Purpose

Deep dive into **Listener Trigger** (`ListenerTriggeringProcessor`) in `eip.war.hs.26R1.11`.

Provenance	Value
WAR	<code>eip.war.hs.26R1.11</code>
Module JAR	<code>xcs-modules-internal</code>
Decompiler	CFR 0.152
Implementation class	<code>com.pilotfish.eip.modules.internal.ListenerTriggeringProcessor</code>
Handler	<code>com.pilotfish.eip.modules.internal.ListenerTriggeringProcessor</code>
Type string	<code>Listener Trigger</code>
Help ID	<code>console.processor.listener_triggering</code>
Categories	<code>PILOT_FISH</code>

1. High-level behavior

Delegates to `ListenerTriggeringHandler.executeListenerTriggering(manager, data, this)`:

1. Resolve listener by **ServiceName** via `TransactionUtilities.getListener(name)`.
2. If listener is null -> throw `EIPEXception`.
3. If listener is `TriggerableListener` and currently listening -> `TriggerableListenerUtils.trigger(...)` with current data stream.
4. If **Run One Cycle** = true:
 - Create new `TransactionData` with imported attributes.
 - Launch `doListening(triggerData)` on a new NTM thread.
5. Else:
 - If **Activate** = true and not listening -> `startListening()`.
 - If **Deactivate** = true:
 - If not activated in this call -> `stopListening()` immediately.
 - If activated -> schedule `stopListening()` after **Wait Time Window** seconds.

2. Configuration reference

2.1 Target Listener

Property	Value
Tag	<code>ServiceName</code>
Type	Listener selector
Tooltip	The listener name to be targeted; should be <code>Triggerable-enabled</code> .

2.2 Run One Cycle

Property	Value
Tag	<code>RUN_ONCE</code>
Type	Boolean
Default	<code>false</code>
Tooltip	Runs one cycle, passing current transaction data/attributes. Overrides activate/deactivate.

2.3 Activate Listener

Property	Value
Tag	<code>ENABLE_LISTENER_ACTION</code>
Type	Boolean
Default	<code>true</code>
Visible when	Run One Cycle = <code>false</code>

2.4 Deactivate Listener

Property	Value
Tag	<code>DISABLE_LISTENER_ACTION</code>
Type	Boolean
Default	<code>true</code>
Visible when	Run One Cycle = <code>false</code>

2.5 Wait Time Window

Property	Value
Tag	<code>ACTION_WAIT_TIME</code>
Type	Time (seconds)
Default	30
Visible when	Deactivate = <code>true</code>

2.6 Inherited AbstractProcessor options

Tag	Label	Default
<code>ExecuteProcessor</code>	Conditional Execution	<code>true</code>

3. Transaction attributes

None directly written. Run One Cycle imports all current attributes into the triggered listener's context.

4. Known quirks and caveats

1. **Async execution** – Run One Cycle launches on a separate NTM thread; the calling route continues immediately.
 2. **Timer-based deactivation** – uses `NTMThreadFactory.getSharedTimer().schedule()`.
 3. **Wait time in seconds** – multiplied by 1000 internally for milliseconds.
 4. **Listener name resolution** – uses `ServiceName` which may include `::` prefix for programmatic listeners.
-

5. Operational recommendations

Goal	Guidance
Orchestration	Use to chain listener processing from a controlling route
One-shot processing	Run One Cycle for single-fire listener with current data
Timed window	Activate + Deactivate with Wait Time for batch-window patterns

6. Source index

Topic	Path
ListenerTriggeringProcessor	<code>com/pilotfish/eip/modules/internal/ListenerTriggeringProcessor</code>
ListenerTriggeringHandler	<code>com/pilotfish/eip/modules/internal/ListenerTriggeringHandler</code>

Deep-dive – Listener Trigger Processor – 26R1.11 – August 2026.