

PilotFish SOAP Web Service Listener – Complete Reference (26R1.11 WAR)

Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

Think of this as an **HTTP Post listener with SOAP unpacking**. Clients POST SOAP envelopes to your configured path; the listener strips the SOAP wrapper and passes the body payload into your route. It inherits synchronous HTTP response, WSDL, and authentication from HTTP Post.

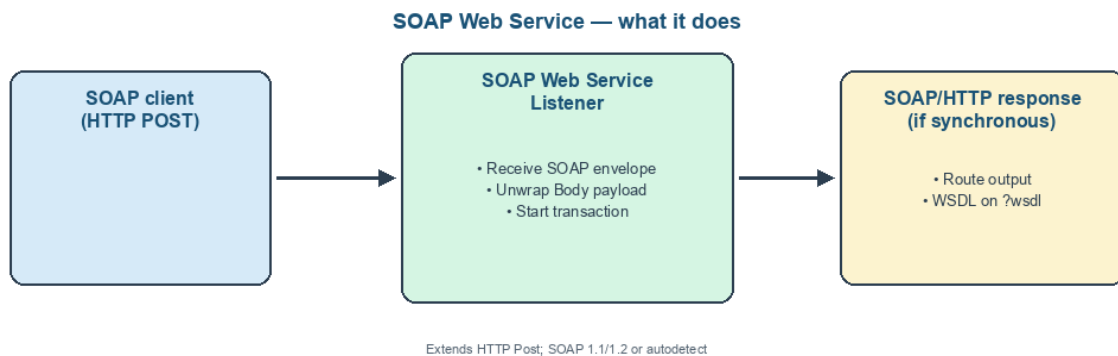


Figure 1: At a glance (plain English)

- **Receives** SOAP 1.1, 1.2, or autodetected envelopes over HTTP POST.
- **Unwraps** the SOAP Body via XSLT into the inner XML payload.
- **Inherits** HTTP Post options: sync response, Basic auth, SSL, WSDL.
- **Returns** route output as HTTP/SOAP response when synchronous.

Purpose

Provenance	Value
WAR	eip.war.hs.26R1.11
Module JAR	xcs-modules-http-1.0.3.jar
Implementation class	com.pilotfish.eip.modules.http.SoapHttpPostListener
Extends	HttpPostListener
Listener type string	SOAP Web Service
Description	Monitors a specified local HTTP path for POST requests with SOAP wrappers.
Help ID	console.listener.soapwebservice
Categories	WEB, WEB_SERVICE

Related: SoapCommon, HttpPostServlet, HttpPostListener.

1. High-level behavior

1. HTTP POST arrives at **Request path** via **HttpPostServlet**.
2. **postReceived(InputStream)** (SOAP override): copies body -> **SoapCommon.soapMessageToData(byte[], SoapVersion, false)**.
3. Unwrapped payload passed to **HttpPostListener.postReceived** (auth, SSL, validation, dispatch).
4. On SOAP processing error: **notifyListenersOnError**; falls back to passing original stream to super.

POST -> copy body -> **soapMessageToData** (XSLT unwrap Body)
-> **HttpPostListener.postReceived** (SSL, auth, WSDL validate, sync/async)

2. Configuration reference

2.1 SOAP-specific

Label	Tag	Default	Notes
Soap Version	SoapVersion	Autodetect SOAP Version	Choices: Autodetect, SOAP Version 1.2, SOAP Version 1.1

Autodetect: Reads envelope namespace from incoming document. Fixed 1.1/1.2 validates namespace matches expected URI.

2.2 Inherited from HttpPostListener

Label	Tag	Default
Request path	RequestPath	"" (required)
Timeout	Timeout	600
Synchronous	Synchronous	false
Require SSL	RequireSSL	false
Timeout handling	TimeoutHandlingMechanism	Send timeout message
HTTP Headers	HTTPHeaders	Content-Type default pair
WSDL file	WsdFile	—
WSDL Content Type	WsdContentType	application/wsdl+xml
Validate At The Listener Level	ValidateAtListenerLevel	false
Use Basic Authentication	USE_BASIC_AUTH	false
Authentication File	AUTH_FILE	—
Authentication Realm	REALM	PilotFish
Additional Resources	AdditionalResources	—

Timeout handling choices: **Send timeout message**, **Return original request**, **Throw listener exception**.

Shared HTTP Post servlet behavior

All servlet-based POST listeners register with `HttpPostServlet.addPostListener`. Duplicate path -> error logged, listener does not start.

Synchronous response protocol (%CODE): When route sets `com.pilotfish.HTTPResponseCode`, response stream may be prefixed with `%CODE:NNN%` + body bytes; outer servlet layer strips prefix and sets HTTP status.

Async acknowledgment: Many paths return UTF-8 `pf:default` or `POST Received` when not waiting for route output.

WSDL: Listeners implementing `ExpandedWSDLPostListener` serve configured WSDL when request ends with `?wsdl`.

3. SOAP unwrapping algorithm (SoapCommon)

1. `set_SOAP_NAMESPACE(data, choice)` determines SOAP namespace (autodetect or fixed).
2. Builds runtime XSLT template matching `/soap:Envelope/soap:Body` -> copy-of child nodes; Header stripped.
3. Transform via `TransformerFactory`; result bytes become transaction input.
4. Invalid envelope namespace -> `EIException`.

Outbound SOAP wrapping (transport) uses separate `transporter_choices` (1.2 / 1.1 only).

4. Transaction attributes

Same as **HTTP Post** (registered): `com.pilotfish.RequestPath`, `ServerName`, `ServerPort`, `RemoteAddr`, `RemoteHost`, `RequestURL`, `Protocol`, `Locale`.

Runtime also sets: all HTTP headers as `com.pilotfish.{HeaderName}`, query params as `com.pilotfish.http.parameter.*`, `com.pilotfish.Content-Type`, `com.pilotfish.Synchronous`, `com.pilotfish.eip.modules.http.StoredHeaders`.

5. Known quirks

1. **SOAP error fallback:** Throwable in unwrap calls super with **original** data (not unwrapped).
 2. **Validate At Listener Level** validates **unwrapped** payload against WSDL schema (inherited).
 3. **Autodetect tooltip** notes behavior on non-SOAP messages is unspecified.
 4. **Duplicate Request path** prevents listener start (inherited).
-

6. Operational recommendations

Goal	Settings
Strict SOAP version	Fixed 1.1 or 1.2 instead of Autodetect
Contract testing	WSDL file + Validate At Listener Level
Sync SOAP response	Synchronous true + HTTP Headers for SOAP content-type
HTTPS only	Require SSL true

Inherited AbstractListener options

From `AbstractListener.getBaseConfiguration()` (Advanced, Throttling, Inactivity, Scheduling tabs):

Label	Tag	Default
Initialize on trigger only	<code>IS_TRIGGERABLE_LISTENER</code>	<code>false</code>
Allow command-line invocation	<code>CLIAAllowed</code>	<code>false</code>
Restart on listening error	<code>RESTART_ON_ERROR_TAG</code>	<code>false</code>
FIFO Queue Name	<code>FIFOQueueName</code>	<code>""</code>
FIFO Queue Delay	<code>FIFOQueueDelay</code>	<code>500</code>
Throttling Mode	<code>ThrottlingMode</code>	<code>None</code>
Throttling Mechanism	<code>ThrottlingMechanism</code>	<code>Blocking</code>
Max Concurrent Messages	<code>ThrottlingConcurrentMessages</code>	
Timed Emission Interval	<code>ThrottlingTimedInterval</code>	

Label	Tag	Default
Synchronous Timeout Interval	ThrottlingSynchronousTimeout	500
Enable Inactivity Monitor	CheckInactivity	false
Min. Transactions to Expect	InactivityTransactionCount	1
Monitoring Interval	InactivityPolling	500
Excluded Days / Dates	InactivityExcludedDays!	
	InactivityExcludedDates	
Start / End schedule	Scheduler items	–

Scheduling uses Quartz cron when configured; polling listeners also honor engage/disengage lifecycle.

7. Source index

Topic	Path
SoapHttpPostListener	com/pilotfish/eip/modules/http/SoapHttpPostListener
SoapCommon	com/pilotfish/eip/modules/http/SoapCommon.java
HttpPostListener	com/pilotfish/eip/modules/http/HttpPostListener.java

Deep-dive documentation from WAR decompile – 26R1.11 – August 2026.