

PilotFish SOAP Web Service Transport – Complete Reference (26R1.11 WAR)

Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

This transport **wraps your payload in a SOAP envelope** (version 1.1 or 1.2) and then sends it with the same engine as **HTTP Post**. Use it when a partner exposes a SOAP endpoint and expects a proper Envelope/Body around your XML.

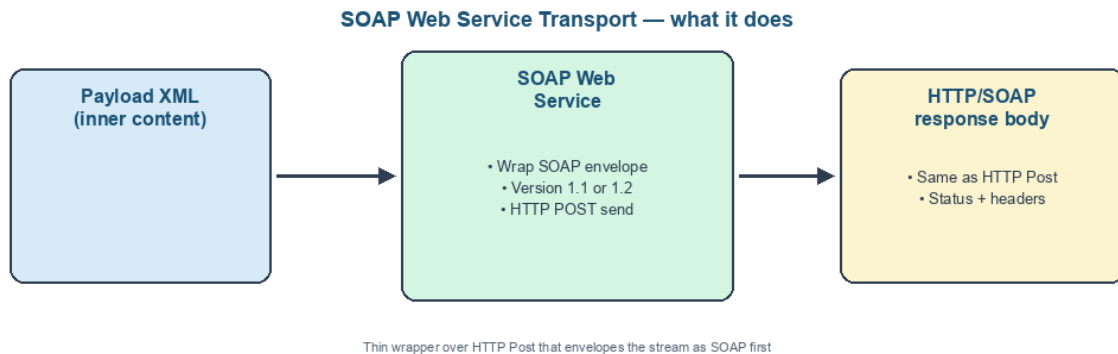


Figure 1: At a glance (plain English)

- **Wraps** the current stream as SOAP 1.1 or 1.2 via **SoapCommon**.
- **POSTs** the enveloped XML using all HTTP Post options (URL, auth, SSL, proxy, response handling).
- **Returns** the HTTP response body (often a SOAP response) as the new stream.
- **Adds** one extra configuration item: **SoapVersion**.

Purpose

Deep dive into the **SOAP Web Service** transport in **eip.war.hs.26R1.11**: thin subclass of `HttpPostTransport`, `SoapCommon.dataToSoapMessage`, and the full inherited HTTP Post configuration surface.

Provenance	Value
WAR	<code>eip.war.hs.26R1.11</code>
Module JAR	<code>xcs-modules-http-1.0.3.jar</code>
Decompiler	CFR 0.152
Implementation class	<code>com.pilotfish.eip.modules.http.SoopHttpPostTransport</code>
Decompiled path	<code>war-pipeline/decompiled/eip-26R1.11/.../SoopHttpPostTransport.class</code>
Transport type string	SOAP Web Service
Description	Sends data to a specified remote SOAP web service.
Help ID	<code>console.transport.soapwebservice</code>
Extends	<code>HttpPostTransport</code>
Wrapper helper	<code>SoapCommon</code> (<code>transporter_choices</code>)

1. Conceptual model

Transaction XML payload (typically Body contents)

```
|
v
SoapCommon.dataToSoapMessage(version, needsEscaping=false)
|
v
HttpPostTransport.executeTransport (enveloped stream)
|
v
HTTP response body -> transaction stream
```

2. High-level behavior (`executeTransport`)

From `SoopHttpPostTransport`:

1. Read `SoapVersion` via `manager.getStringValue("SoapVersion", txData)`.
2. `dataToSoapMessage(stream, version) -> SOAP_HANDLER.dataToSoapMessage(data, version, false)`.
3. Replace stream on `TransactionData` and call `super.executeTransport(data)`.

HTTP Post `sendData` (caching, Synchronization Key, complete/error) still wraps the call.

SoapCommon sets SOAP 1.2 namespace `http://www.w3.org/2003/05/soap-envelope` or SOAP 1.1 `http://schemas.xmlsoap.org/soap/envelope/` based on choice, then builds Envelope/Body wrapping (XSLT/DOM path in helper). Escaping flag hardcoded `false` for transport.

3. Configuration reference

3.1 SOAP-specific

UI label	Tag	Type	Default	Tab	Required	Nuances
SoapVersion	SoapVersion	Choice	SOAP Version 1.2 (index 0)	Basic	Yes	Choices: SOAP Version 1.2, SOAP Version 1.1 (no Autodetect on transport)

Descriptor title set to `SoapHttpPostTransport`.

3.2 Inherited HTTP Post options (complete)

All `HttpPostTransport.getConfigDescriptor` items apply. Summary:

Area	Tags / options
Target	TargetURL
Credentials	UserName, Password, AUTH_HOST_TAG, AUTH_PORT_TAG, PreemptiveAuthentication
Response	ResponseListener, ResponseCodeHandling, ResponseCodeList, Timeout, ErrorOnConnectionFailure, OldResponseHeaders
Advanced	SynchronizationKey, FormElement, HTTPHeaders (default Content-Type text/xml; charset=UTF-8), DisableChunking
Proxy	useProxy, proxyHost, ProxyPort, proxyUsername, ProxyPassword
Encoding	UrlParamEncoding, FormElementEncoding, ErrorResponseEncoding
SSL	Full SSLAuthUtil set (KeyStore/TrustStore/TLS/hostname/self-signed)
Button	Test Connection

See companion deep dive **PilotFish-HTTP-Post-Transport-Reference-26R1.11** for per-option nuances (especially Timeout seconds quirk, redirect POST, Pass Through mode). Those behaviors are identical after enveloping.

3.3 Inherited AbstractTransport

Via HTTP Post override of `sendData`. Batch sync still false; Synchronization Key available from HTTP Post Advanced tab.

4. Transaction attributes

Same as HTTP Post:

- `com.pilotfish.eip.modules.http.HTTPPostTransport.HTTPResponseCode`
- `com.pilotfish.HTTPResponseCode`
- `com.pilotfish.HTTPPostRedirectResponseCode` (redirects)
- `com.pilotfish.http.response.*` header attributes
- Consumes `com.pilotfish.eip.modules.http.StoredHeaders`

No SOAP-specific attributes written.

5. Worked example

1. Route builds claim detail XML (no Envelope).
 2. SOAP Web Service: SoapVersion **1.1**, Target URL partner SOAP endpoint, Content-Type `text/xml; charset=UTF-8`, SOAPAction header via HTTP Headers or StoredHeaders if required.
 3. Transport wraps Envelope/Body then POSTs.
 4. Response SOAP (or fault XML) becomes stream; Response Code Handling Default fails 4xx/5xx.
-

6. Known quirks and caveats

1. **No Autodetect** on transport (listener has Autodetect choice).
 2. **Double processing** if stream already has Envelope – may nest envelopes depending on SoapCommon assumptions.
 3. **needsEscaping=false** always for transport wrapper.
 4. **Form Element** still available from HTTP Post but unusual for SOAP; prefer raw body.
 5. All HTTP Post quirks (timeout unit, proxy empty TransactionData, response code substring) apply unchanged.
-

7. Operational recommendations

Goal	Guidance
Version	Match WSDL / partner; prefer 1.2 when supported
Headers	Add SOAPAction / Content-Type explicitly for 1.1 endpoints
Faults	Keep Error on Connection Failure true; inspect fault XML on soft-fail mode when needed
Prefer REST?	Use RESTful transport for non-SOAP JSON/XML APIs

8. Source index (this WAR)

Topic	Path under war-pipeline/decompiled/eip-26R1.11/
SOAP transport	com/pilotfish/eip/modules/http/SoapHttpPostTransport.java
SoapCommon	com/pilotfish/eip/modules/http/SoapCommon.java
HTTP Post base	com/pilotfish/eip/modules/http/HttpPostTransport.java
Abstract transport	com/pilotfish/eip/extend/AbstractTransport.java
Module JAR	war-pipeline/jars/eip-26R1.11/xcs-modules-http-1.0.3.jar

9. Pipeline provenance

PilotFish WARs/eip.war.hs.26R1.11

-> xcs-modules-http-1.0.3.jar

-> CFR decompile

-> Documents/Transports/26R1.11/PilotFish-SOAP-Web-Service-Transport-Reference-26R1.11.(md|p

Deep-dive documentation from WAR decompile – SOAP Web Service Transport – 26R1.11 – August 2026.