

PilotFish XML Formatting Processor – Complete Reference (26R1.11 WAR)

Derived from decompiled eip.war.hs.26R1.11

August 4, 2026

At a glance (plain English)

Format an XML output file for human readability, with line returns and indents as per XML specifications.

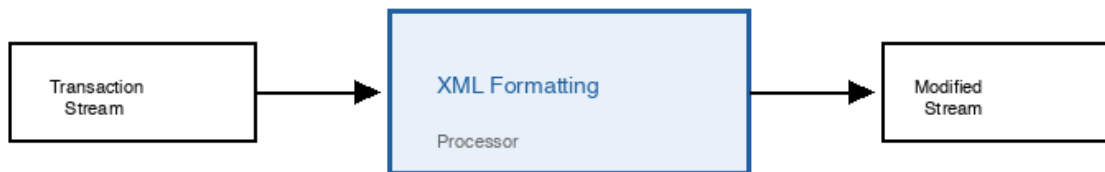


Figure 1: At a glance (plain English)

- **Get transaction data stream.**
- **Create identity Transformer from TransformerFactory.**
- **Set output property 'indent' = 'yes'.**
- **Set indent-amount to 2 (Apache Xalan property).**

Purpose

Deep dive into **XML Formatting** (`XMLFormattingProcessor`) in `eip.war.hs.26R1.11`.

Provenance	Value
WAR	<code>eip.war.hs.26R1.11</code>
Module JAR	<code>xcs-modules-transform-1.0.1.jar</code>
Implementation class	<code>com.pilotfish.eip.modules.transform.XMLFor</code>
Type string	XML Formatting
Categories	XML

1. High-level behavior (`processData`)

1. Get transaction data stream.
2. Create identity Transformer from `TransformerFactory`.
3. Set output property `'indent' = 'yes'`.
4. Set indent-amount to 2 (Apache Xalan property).
5. Transform `StreamSource(input)` to `StreamResult(ByteArrayOutputStream)`.
6. If successful: replace transaction stream with formatted output.
7. On `TransformerException`: throw `EIPEException`.

2. Configuration reference

No user-configurable options for this processor.

Inherited `AbstractProcessor` options

Property	Value
UI label	Conditional Execution
Tag	<code>ExecuteProcessor</code>
Type	Boolean (expression-capable)
Default	<code>true</code>
Tab	Conditional Execution
Nuance	When false (or expression resolves false), processor is skipped entirely. Supports enhanced expression toggle for complex conditions.

3. Transaction attributes

None written.

4. Known quirks and caveats

1. No user-configurable options beyond ExecuteProcessor.
 2. Indent amount is hardcoded to 2 spaces – not configurable.
 3. Uses system default TransformerFactory – behavior may vary across JVMs.
 4. Input must be well-formed XML or TransformerException is thrown.
 5. Output includes XML declaration () from the transformer.
 6. Full document loaded into ByteArrayOutputStream in memory.
-

5. Operational recommendations

Goal	Guidance
Use case	Pretty-print XML for logging, debugging, or human-readable output
Non-XML	Will fail on non-XML content – guard with conditional execution
Encoding	Output encoding follows transformer defaults (typically UTF-8)

6. Source index

Topic	Path
XML Formatting processor	com/pilotfish/eip/modules/transform/XMLFormatting
Module JAR	xcs-modules-transform-1.0.1.jar
AbstractProcessor	com/pilotfish/eip/extend/AbstractProcessor.java

Deep-dive – XML Formatting Processor – 26R1.11 – August 2026.