

ASC X12N/005010X212

Based on Version 5, Release 1

**ASC X12 Standards for Electronic Data Interchange
Technical Report Type 3**

Health Care Claim Status Request and Response (276/277)

AUGUST 2006

The Type 2 Errata published in 005010X212E1, April 2008, 005010X212E2, January 2009, and 005010X212E3, June 2014, has been incorporated into this document.

Copyright © 2011, Data Interchange Standards Association (DISA) on behalf of the membership of ASC X12. Format © 2011 Washington Publishing Company (WPC). Exclusively published by WPC under license from DISA. All Rights Reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission.

Table of Contents

1	Purpose and Business Information	1
1.1	Implementation Purpose and Scope	1
1.2	Version Information	1
1.3	Implementation Limitations	2
1.3.1	Batch and Real-time Usage	2
1.3.2	Other Usage Limitations	2
1.3.2.1	Real Time and Batch Transmissions	3
1.3.2.2	Claim Status Category Codes	3
1.3.2.3	277 Business Functions	3
1.4	Business Usage	4
1.4.1	Transaction Participants	4
1.4.1.1	Defining the “Patient” Participant	6
1.4.2	Claim and Service Information	7
1.4.2.1	The Claim	7
1.4.2.2	The Service	8
1.4.2.3	Claim and Service loop placement	8
1.4.3	277 Status Information (STC) Segment Usage	10
1.4.3.1	STC Composite and Code Use Rules	11
1.4.3.2	Status Response Levels	12
1.4.4	Payer’s System Status Locations	14
1.4.4.1	Pre-Adjudication	14
1.4.4.2	Pended	14
1.4.4.3	Finalized	15
1.4.5	277 Transaction Uses	15
1.5	Business Terminology	16
1.6	Transaction Acknowledgments	17
1.6.1	997 Functional Acknowledgment	17
1.6.2	999 Implementation Acknowledgment	17
1.6.3	824 Application Advice	17
1.7	Related Transactions	18
1.7.1	The Claim (837)	18
1.7.2	The Remittance Advice	18
1.8	Trading Partner Agreements	18
1.9	The HIPAA Role in Implementation Guides	19
1.10	Data Overview	19
1.10.1	Overall Data Architecture	19

2	Transaction Set	21
2.1	Presentation Examples	21
2.2	Implementation Usage	26
2.2.1	Industry Usage	26
2.2.1.1	Transaction Compliance Related to Industry Usage	27
2.2.2	Loops	27

2.3	276 Transaction Set Listing	29
2.3.1	Implementation	29
2.3.2	X12 Standard	32
2.4	276 Segment Detail.....	35
	ST Transaction Set Header	36
	BHT Beginning of Hierarchical Transaction	37
	HL Information Source Level.....	39
	NM1 Payer Name.....	41
	HL Information Receiver Level	43
	NM1 Information Receiver Name	45
	HL Service Provider Level.....	47
	NM1 Provider Name.....	49
	HL Subscriber Level	52
	DMG Subscriber Demographic Information	54
	NM1 Subscriber Name	56
	TRN Claim Status Tracking Number	58
	REF Payer Claim Control Number.....	59
	REF Institutional Bill Type Identification	60
	REF Application or Location System Identifier.....	61
	REF Group Number.....	62
	REF Patient Control Number	63
	REF Pharmacy Prescription Number.....	64
	REF Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	65
	AMT Claim Submitted Charges.....	66
	DTP Claim Service Date	67
	SVC Service Line Information	69
	REF Service Line Item Identification	73
	DTP Service Line Date	74
	HL Dependent Level	75
	DMG Dependent Demographic Information.....	77
	NM1 Dependent Name	79
	TRN Claim Status Tracking Number	81
	REF Payer Claim Control Number.....	82
	REF Institutional Bill Type Identification	83
	REF Application or Location System Identifier.....	84
	REF Group Number.....	85
	REF Patient Control Number	86
	REF Pharmacy Prescription Number.....	87
	REF Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	88
	AMT Claim Submitted Charges.....	89
	DTP Claim Service Date	90
	SVC Service Line Information	92
	REF Service Line Item Identification	96
	DTP Service Line Date	97
	SE Transaction Set Trailer.....	98

2.5	277 Transaction Set Listing	99
2.5.1	Implementation	99
2.5.2	X12 Standard	102
2.6	277 Segment Detail.....	105
	ST Transaction Set Header	106
	BHT Beginning of Hierarchical Transaction	107
	HL Information Source Level.....	109
	NM1 Payer Name.....	111
	PER Payer Contact Information	113
	HL Information Receiver Level	116
	NM1 Information Receiver Name	118
	TRN Information Receiver Trace Identifier	120
	STC Information Receiver Status Information	121
	HL Service Provider Level.....	124
	NM1 Provider Name.....	126
	TRN Provider of Service Trace Identifier.....	129
	STC Provider Status Information	130
	HL Subscriber Level	133
	NM1 Subscriber Name	135
	TRN Claim Status Tracking Number	137
	STC Claim Level Status Information.....	138
	REF Payer Claim Control Number.....	149
	REF Institutional Bill Type Identification	150
	REF Patient Control Number	151
	REF Pharmacy Prescription Number.....	152
	REF Voucher Identifier.....	153
	REF Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	154
	DTP Claim Service Date	155
	SVC Service Line Information	157
	STC Service Line Status Information.....	161
	REF Service Line Item Identification	171
	DTP Service Line Date	172
	HL Dependent Level	173
	NM1 Dependent Name	175
	TRN Claim Status Tracking Number	177
	STC Claim Level Status Information.....	178
	REF Payer Claim Control Number.....	189
	REF Institutional Bill Type Identification	190
	REF Patient Control Number	191
	REF Pharmacy Prescription Number.....	192
	REF Voucher Identifier.....	193
	REF Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	194
	DTP Claim Service Date	195
	SVC Service Line Information	197
	STC Service Line Status Information.....	201
	REF Service Line Item Identification	211
	DTP Service Line Date	212
	SE Transaction Set Trailer.....	213

3	Examples	215
3.1	Business Scenario 1 – Claim Level Status	215
3.2	Business Scenario 2 – Provider Level Status	218
3.3	Business Scenario 3 – Information Receiver Level Status	221
3.4	Business Scenario 4 – Claim Level Status with NCPDP Reject/Payment Code	222
A	External Code Sources	A.1
130	Healthcare Common Procedural Coding System	A.1
132	National Uniform Billing Committee (NUBC) Codes	A.1
135	American Dental Association	A.2
240	National Drug Code by Format	A.2
507	Health Care Claim Status Category Code	A.3
508	Health Care Claim Status Code	A.3
513	Home Infusion EDI Coalition (HIEC) Product/Service Code List	A.3
530	National Council for Prescription Drug Programs Reject/Payment Codes	A.4
537	Centers for Medicare and Medicaid Services National Provider Identifier	A.4
540	Centers for Medicare and Medicaid Services PlanID	A.5
576	Workers Compensation Specific Procedure and Supply Codes	A.6
716	Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities	A.6
843	Advanced Billing Concepts (ABC) Codes	A.7
B	Nomenclature	B.1
B.1	ASC X12 Nomenclature	B.1
B.1.1	Interchange and Application Control Structures	B.1
B.1.1.1	Interchange Control Structure	B.1
B.1.1.2	Application Control Structure Definitions and Concepts	B.2
B.1.1.3	Business Transaction Structure Definitions and Concepts	B.6
B.1.1.4	Envelopes and Control Structures	B.19
B.1.1.5	Acknowledgments	B.22
B.2	Object Descriptors	B.23
C	EDI Control Directory	C.1
C.1	Control Segments	C.1
ISA	Interchange Control Header	C.3
GS	Functional Group Header	C.7
GE	Functional Group Trailer	C.9
IEA	Interchange Control Trailer	C.10

D	Change Summary	D.1
----------	-----------------------------	------------

E	Data Element Glossary	E.1
E.1	Data Element Name Index	E.1

1 Purpose and Business Information

1.1 Implementation Purpose and Scope

For the health care industry to achieve the potential administrative cost savings with Electronic Data Interchange (EDI), standards have been developed and need to be implemented consistently by all organizations. To facilitate a smooth transition into the EDI environment, uniform implementation is critical.

The purpose of this implementation guide is to provide standardized data requirements and content for all users of the ASC X12 Health Care Claim Status Request (276) and the ASC X12 Health Care Information Status Notification (277). This implementation guide focuses on the use of the 276 to request the status of a health care claim(s) and the 277 to respond with the information regarding the specified claim(s). This implementation guide provides detailed explanations of the transaction sets by defining uniform data content, identifying valid code tables, and specifying values applicable for the business focus of the 276 Health Care Claim Status Request and the 277 Health Care Claim Status Response. The intention of the developers of the 276 and 277 is represented in the guide.

Entities using the 276 to request health care claim status include, but are not limited to, hospitals, nursing homes, laboratories, physicians, dentists, allied professional groups, employers, and supplemental (i.e., other than primary payer) health care claims adjudication processors.

Organizations sending the 277 response include payers, who may be insurance companies; third party administrators; service corporations; state and federal agencies and their contractors; and any other entity that processes health care claims.

Other business partners affiliated with the 276 and/or the 277 include billing services; consulting services; vendors of systems; software and EDI translators; and EDI network intermediaries such as Automated Clearing Houses (ACHs), Value-Added Networks (VANs), and telecommunications services.

1.2 Version Information

This implementation guide is based on the October 2003 ASC X12 standards, referred to as Version 5, Release 1, Sub-release 0 (005010).

The unique Version/Release/Industry Identifier Code for transaction sets that are defined by this implementation guide is 005010X212.

The two-character Functional Identifier Code for the transaction set included in this implementation guide:

- ***HR Health Care Claim Status Request (276)***
- ***HN Health Care Information Status Notification (277)***

The Version/Release/Industry Identifier Code and the applicable Functional Identifier Code must be transmitted in the Functional Group Header (GS segment) that begins a functional group of these transaction sets. For more information, see the descriptions of GS01 and GS08 in Appendix C, EDI Control Directory.

1.3 Implementation Limitations

1.3.1 Batch and Real-time Usage

There are multiple methods available for sending and receiving business transactions electronically. Two common modes for EDI transactions are batch and real-time.

Batch - In a batch mode the sender does not remain connected while the receiver processes the transactions. Processing is usually completed according to a set schedule. If there is an associated business response transaction (such as a 271 Response to a 270 Request for Eligibility), the receiver creates the response transaction and stores it for future delivery. The sender of the original transmission reconnects at a later time and picks up the response transaction. This implementation guide does not set specific response time parameters for these activities.

Real Time - In real-time mode the sender remains connected while the receiver processes the transactions and returns a response transaction to the sender. This implementation guide does not set specific response time parameters for implementers.

This implementation guide is intended to support use in batch mode. This implementation guide is intended to support use in real-time mode. A statement that the transaction is not intended to support a specific mode does not preclude its use in that mode between willing trading partners.

1.3.2 Other Usage Limitations

There are other usage limitations.

1.3.2.1 Real Time and Batch Transmissions

The Claim Status Request and Response transaction may be sent in batch or real time. If trading partners are going to engage in both transmission options, it is recommended they establish a method for identifying the difference.

Real Time Limitations

- The 276 must only contain one status request. The 277 may return multiple responses depending on the specificity of the request criteria and the payer's system capabilities.
- Date search criteria may vary by payer. This includes date ranges or available history.

Batch Limitations

- This implementation supports the sending and receiving of multiple claim status requests and responses within the Transaction.
- When requesting and responding to claim status for both a subscriber and a dependent of that subscriber, the Subscriber HL Loop 2000D must be followed by the subscriber's claim status data, Loop 2200D. Then the Subscriber HL Loop 2000D must be repeated prior to the dependent HL Loop 2000E and their corresponding claim status data, Loop 2200E. See Section 1.4.2.3 - *Claim and Service loop placement* for an example of this structure.
- Date search criteria may vary by payer. This includes date ranges or available history.

1.3.2.2 Claim Status Category Codes

- The 'Request for Additional Information' Claims Status Category Codes (R codes) are excluded from use in this implementation.
- The usage of the other allowable Category Codes vary by Hierarchical levels. See Section 1.4.3.2 - *Status Response Levels* for those variations.

1.3.2.3 277 Business Functions

Additional 277 business functions that are not in direct response to a Claim Status Request (276) are not supported in this implementation. See Section 1.4.5 - *277 Transaction Uses*, for additional information on the varied 277 business functions.


1.4 Business Usage

The ASC X12 Health Care Claim Status Request and Response (276/277) implementation guide addresses the paired usage of the 276 as a **request for claim status** and the 277 as a **response to that request**. The 276 is used to transmit request(s) to obtain the status of specific health care claim(s) within a payer's adjudication process. The payer uses the 277 to transmit the current system status of those requested claims. Claim history parameters may vary by payers and systems.

Status information can be requested and responded to at the claim and/or service level. The 276 provides information that is necessary for the payer to identify the specific claim(s) in question. Some primary or unique identifying element(s) may be supplied to obtain an exact match for that request. However, when the 276 does not uniquely identify the claim within the payer's system, the response may include multiple claims that meet the parameters supplied by the requester.

Figure 1.1 - *Information Flow for Claim Status Request/Response*, illustrates the flow of information for the 276 Health Care Claim Status Request and the 277 Health Care Claim Status Response.

Figure 1.1 - Information Flow for Claim Status Request/Response

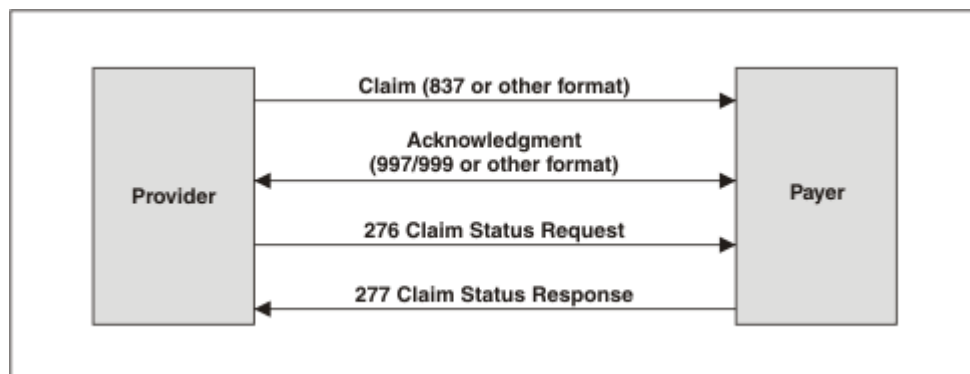

1.4.1 Transaction Participants

The hierarchical level structure is used to identify and relate the participants involved in the transaction. The relationships between the hierarchical levels are described by the hierarchical level code data elements, also known as HL01 and HL02. The data element, HL03, identifies the participants within the transaction. The hierarchical structure and participants are the same for both the 276 and 277. The participants described are as follows:

When HL03 = 20, the hierarchical level contains the **Information Source**. This entity is the decision maker in the business transaction. For this business use, this entity is the payer who has the current status information for the specified claims.

When HL03 = 21, the hierarchical level contains the **Information Receiver**. This entity expects the response from the Information Source. For this business use, this entity can be a provider, a provider group, a claims clearinghouse, a service bureau, an agency, an employer, etc. This entity will be identified via their electronic ID as the sender of the 276 Request and receiver of the 277 Response.

When HL03 = 19, the hierarchical level contains the **Provider of Service**. This entity delivered the health care service. Provider of Service is generic in that this could be the entity that originally submitted the claim (Billing Provider) or may be the entity that provided or participated in some aspect of the health care (Rendering Provider).

When HL03 = 22, the hierarchical level contains the **Insured or Subscriber** information. This entity is the contract holder of the health care benefits. This entity may or may not be the recipient of the health care service rendered. See Section 1.4.1.1 - *Defining the "Patient" Participant*, for more information on this entity.

When HL03 = 23, the hierarchical level contains the **Dependent** information. This entity is eligible for health care benefits due to their relationship to the subscriber. When this HL is reported, this entity is the recipient of the health care service rendered. See Section 1.4.1.1 - *Defining the "Patient" Participant*, for more information on this entity.

The Information Receiver and the Service Provider hierarchical levels have a unique relationship. Information Receiver refers to the entity that processes the detailed information contained within the transaction set. In some cases, the Information Receiver is an entity acting on behalf of the Service Provider. When this occurs, the entity is described when HL03 = 21, and the Provider of Service is described when HL03 = 19. In other instances, the Information Receiver is also the Service Provider. When this occurs, the same entity is described at two hierarchical levels - when HL03 = 21 and when HL03 = 19.

The coding examples are presented sequentially as found within an actual transaction set. However, for reading ease each segment begins on a new line.

The following example demonstrates the coding of the segments and data elements within the Information Source hierarchical level:

HL*120*1~**

NM1*PR*2*ABC INSURANCE***PI*12345~**

The following is a coding example of the Information Receiver hierarchical level:

HL*2*1*21*1~

NM1*41*2*XYZ SERVICE***46*X67E~**

The following is a coding example of the Service Provider hierarchical level:

HL*3*2*19*1~

NM1*1P*2*HOME MEDICAL***SV*987666666~**

The following is a coding example of the Subscriber Hierarchical level:

HL*4*3*22*1~

NM1*IL*1*MANN*JOHN***MI*345678901~**

The following is a coding example of the Dependent Hierarchical level:

HL*5*4*23~

NM1*QC*1*MANN*JOSEPH~

1.4.1.1 Defining the "Patient" Participant

Subscriber Loop 2000D and Dependent Loop 2000E identify the patient for whom a claim status inquiry is being generated. When reporting status at the patient level (see Section 1.4.3.2 - *Status Response Levels*), Loop 2000D is always used. Loop 2000E is used only when necessary to identify a patient who is a dependent that does not have a unique identification number.

- When the patient is the subscriber, only Loop 2000D is used. Loop 2000E is not used.
- When the patient is a dependent and their identification number is the same as the subscriber's, Loop 2000D is used to identify the subscriber and Loop 2000E is used to identify the subscriber's dependent. This structure is more common in traditional group insurance where a patient is identified within the primary subscriber identifier.
- When the patient is a dependent and they have a unique identification number (different from the subscriber), the patient is considered to be the subscriber and must be reported in Loop 2000D. Loop 2000E is not used. This situation is common when an insurance company issues a unique insurance identification number to each individual insured.

1.4.2 Claim and Service Information

Unlike the Transaction Participants, specific claim and service details are not given a hierarchical level. Claim and Service details are positioned in the same hierarchical level that describes its owner-participant, either the Subscriber or the Dependent. The claim(s) details are said to "float". That means the claim(s) details are placed at the Subscriber hierarchical level (2200D) when the patient is the subscriber or a uniquely identified dependent. The claim(s) details are placed at the Dependent hierarchical level (2200E) when the patient is the dependent of the subscriber and not uniquely identified. The specific claim(s) in question are described in Loop 2200 in both the 276 and 277 transactions, while the service information follows the claim data in Loop 2210 of the 276 and Loop 2220 of the 277.

1.4.2.1 The Claim

The 276 and 277 Loop 2200 may contain different segments, with the exception of the TRN Segment. However, the intent of the loop is similar in both transactions. The provider and payer may identify the claim within their respective system using different data. As a result, the segments used for the request (276) may differ from the segments returned in the response (277).

When claim status is requested, the provider supplies data that helps the payer locate the claim(s). This data may include the payer's claim number, dates of service, claim amount, type of bill, patient control number, etc. Similarly, when the claim status is returned, the payer supplies data that helps the provider locate the claim within their system. This data may include patient control number, type of bill, dates and amounts of the service, etc.

Reassociation of the response to the original request is a necessity of the 276/277 paired transaction. The reassociation is accomplished with a unique trace or reference number identified in the TRN Segment (TRN02). This number is determined by the originator (Information Receiver) of the 276 and must be returned in the 277 by the sender (Information Source). The 277 response TRN02 must contain the same value that was submitted in the 276 request. The only exceptions for not returning the 2200D or 2200E TRN segment in the 277 are when rejection statuses are reported at either the Information Receiver or Provider of Service levels. In both of those instances, lower level (child) HL's are not used. With respect to the Provider of Service Level status, only those lower HL's directly tied to the rejected Provider would be impacted. See Section 1.4.3.2 - Status Response Levels, for details on Information Receiver and Provider of Service level rejections.

1.4.2.2 The Service

The service information follows the claim data in Loop 2210 of the 276 and Loop 2220 of the 277. Some payers' adjudication systems support service line information. When the requester is inquiring on the status of a specific service, Loop 2210 must be populated in the 276. When the payer is reporting the status of a specific service, Loop 2220 must be populated in the 277.

For Service line status requests and responses, the SVC segment is used to report the actual service (procedure) data. When capable of providing this level of detail, the SVC Segment is returned by the payer indicating the adjudicated procedure code. Due to the payer's adjudication processes and policies, service line data may be changed as a result of bundling or unbundling. In this case, the service line(s) returned in the 277 may be different than those submitted in the 276. Procedure code bundling or unbundling occurs when a payer believes the actual services performed and reported for claim payment can be represented by a different group of procedure codes. Bundling occurs when two or more submitted procedures are processed using one procedure code. Unbundling occurs when one submitted procedure code is processed and reported back as two or more procedure codes.

1.4.2.3 Claim and Service loop placement

The following reflects the transaction participant structure, along with the claim and service loops placement for the identified patient. See Section 1.4.1.1 - *Defining the "Patient" Participant*, for the definition of the patient.

Claim and Service loop placement when the patient is the subscriber or a dependent with a unique identification number.

276 Request

- Information Source (2000A)
 - Information Receiver (2000B)
 - Service Provider (2000C)
 - Subscriber (2000D)
 - Claim Status Request (2200D)
 - Service Status Request (2210D)

277 Response (multiple claim response)

- Information Source (2000A)
 - Information Receiver (2000B)
 - Service Provider (2000C)
 - Subscriber (2000D)

Claim Status Response (2200D)
Service Status Response (2220D)
Claim Status Response (2200D)
Service Status Response (2220D)

Claim and Service loop placement when the patient is a dependent of the subscriber. The dependent has the same identification number as the subscriber.

276 Request (multiple service requests)

Information Source (2000A)
Information Receiver (2000B)
Service Provider (2000C)
Subscriber (2000D)
Dependent (2000E)
Claim Status Request (2200E)
Service Status Request (2210E)
Service Status Request (2210E)

277 Response (multiple service responses)

Information Source (2000A)
Information Receiver (2000B)
Service Provider (2000C)
Subscriber (2000D)
Dependent (2000E)
Claim Status Response (2200E)
Service Status Response (2220E)
Service Status Response (2220E)

Claim and Service loop placement for multiple patient requests (batch mode) where one patient is the subscriber (A) and one or more other patients (A.1, A.2) are dependents of that subscriber (A). The dependent(s) has the same identification number as the subscriber.

276 Request

Information Source (2000A)
Information Receiver (2000B)
Service Provider (2000C)
Subscriber (2000D) - A
Requested Claim(s) Identification (2200D)
Subscriber (2000D) - A
Dependent (2000E) – A.1

Claim Status Request (2200E)
Service Status Request (2210E)
Dependent (2000E) – A.2
Claim Status Request (2200E)
Service Status Request (2210E)

277 Response

Information Source (2000A)
Information Receiver (2000B)
Service Provider (2000C)
Subscriber (2000D) - A
Claim Status Response (2200D)
Subscriber (2000D) - A
Dependent (2000E) – A.1
Claim Status Response (2200E)
Service Status Response (2220E)
Dependent (2000E) – A.2
Claim Status Response (2200E)
Service Status Response (2220E)

1.4.3 277 Status Information (STC) Segment Usage

The primary vehicle for the claim status information in the 277 Transaction is the Status Information (STC) Segment. The level of information returned in the STC Segment may vary from payer to payer. Payers are urged to provide the greatest level of response detail to the Information Receiver so that the data exchange is beneficial to both entities. Payers who meet the minimum required basics, defined in Section 1.4.3.1 - STC Composite and Code Use Rules, may not satisfy the receiver's need for complete and detailed status which could result in the generation of subsequent inquiries to the payer.

The STC segment contains three iterations of the C043 (Health Care Claim Status) composite within STC01, STC10 and STC11.

The Health Care Claim Status composite (C043) consists of four elements:

The first element in the C043 composite (C043-01) is the Health Care Claim Status Category Code (Code Source 507). The Category Code indicates the payer's current system status of the claim. This implementation guide allows the use of all Category Codes in the list, except the 'Request for Additional Information Codes' (R). The 'Request' codes apply only to the 277 Request for Additional Information Implementation Guide (see Section 1.4.5 - 277 Transaction Uses).

The second element in the C043 composite (C043-02) is either the Health Care Claim Status Code (Code Source 508) or the National Council for Prescription Drug Programs Reject/Payment Codes (Code Source 530). These codes provide more specific information about the claim or line item.

The third element in the C043 composite (C043-03) is the Entity Identifier Code (ASC X12 data element 98). The Entity Identifier code is used to clarify the entity when referred to in the status message (C043-02). The code list identifies an organizational entity, a physical location, property, or an individual. A list of appropriate code values for data element 98 appears within the STC segments in Section 2.6.

The fourth element in the C043 composite (C043-04) is the Code List Qualifier Code (ASC X12 data element 1270). This element is Situational and only used when identifying the second element of the composite (C043-02) as a National Council for Prescription Drug Programs Reject/Payment Code. When this element is used, it will contain code value 'RX' - National Council for Prescription Drug Programs Reject/Payment Codes.

A committee of healthcare industry representatives from payer, provider and vendor organizations maintain the Health Care Claim Status Category Codes and Health Care Claim Status Codes (Code Sources 507 and 508). They are updated after each ASC X12 trimester meeting. Version specific code additions or deactivations are noted on the code lists.

The Blue Cross Blue Shield Association (BCBSA) is the owner of these code lists. The primary distribution source is the Washington Publishing Company web site (www.wpc-edi.com). This web site offers an online conferencing facility that allows interested parties to submit requests for new codes, changes to existing codes, or simply view comments on pending requests. Individuals who are unable to access the Internet may contact BCBSA directly.

The National Council for Prescription Drug Programs (NCPDP) Reject/Payment Codes are maintained by the National Council for Prescription Drug Programs. For information on the NCPDP Reject/Payment Codes (Code Source 530) refer to Appendix A, *External Code Sources*.

1.4.3.1 STC Composite and Code Use Rules

The following rules apply to use of the composites and codes within the STC segment:

- STC01 is required.

- STC10 and STC11 are situational and provide additional status information (second and third, respectively) when needed.
- The Status Category Code for STC10 and STC11 must be within the same Status Category Code (i.e., Acknowledgments, Pending, Finalized) as that used in STC01, but not necessarily the same Status Category Code. (For example, if STC01 uses the Category Code 'P0 - Pending: Adjudication/Details', STC10 and STC11 must use Category Codes from the 'Pending' Category Code List but not necessarily the 'P0' value.)
- An Entity Code must be identified when the Health Care Claim Status Code or the National Council for Prescription Drug Programs Reject/Payment Code message refers to an Entity. For example the Entity Code '85 - Billing Provider' could be used when Status Code '24 - Entity not approved as an electronic submitter' is used.
- When reporting multiple statuses, payers must use discretion in choosing the appropriate Category and Status Codes to ensure business compatibility between the status messages reflected.
- Allowable Category Codes vary per Hierarchical Levels. See Section 1.4.3.2 - *Status Response Levels*, for those variations.
- The Information Source must discriminate between all of the Status Category Codes applicable to their business process. (Example - Code 'P0 - Pending: Adjudication/Details' should not be used when a claim is really in a category of 'P3 - Pending/Requested Information'.)
- The Information Source must strive to provide full status information by making use of the entire Claim Status Code list. However, the minimum requirement is to support the following basic codes:

Code	Description
0	Cannot provide further status electronically.
1	For more detailed information, see remittance advice.
2	More detailed information in letter.

Minimum Reporting Requirement Example - Claim is pended awaiting additional information to identify the medical necessity for the service. At a bare minimum, the Information Source must report a Category code of P3 and a Status code of 0. However, the Information Source is encouraged to support more detail by identifying a Status code of 287 (Medical necessity for service).

1.4.3.2 Status Response Levels

The STC segment is used in the 277 at various participant levels and within the claim and service loops for the patient level (subscriber or dependent). When the 277 transaction is sent, a status response is not required at all levels within the transaction.

In most instances, the Information Source must respond with status at the appropriate patient level (Subscriber or Dependent loop) of the claim, and when applicable the service level. Responses at these patient levels meet the intended business purpose of this paired transaction.

The Information Receiver and Provider of Service status response levels are Situational and provide the flexibility for an Information Source to reject an entire 276 transaction or a specific provider's portion of the 276 transaction without having to repeat the status error at each patient level. The Information Receiver and Provider of Service status response levels have limited defined functionality and are not to be used in place of providing valid claim status at a patient level. The patient (Subscriber or Dependent loop) claim level status can also accommodate the error statuses allowable at the Information Receiver and Provider of Service level, if an Information Source chooses to respond by repeating those types of error statuses for each patient claim status request received in the 276 transaction.

The following describes use of the various status levels.

Loop 2200B - Information Receiver

The Loop 2200B STC segment allows the capability to report a rejected status for the entire 276 Transaction for errors at the Information Source or Information Receiver levels. Status at this level is the result of system or application availability, transaction size limitations for real time capability or Trading Partner authorization/verification issues. When status is reported at this level, the 2000C, 2000D and 2000E hierarchical levels (children) are not used.

Only the 'D0' Category Code and 'E' Category Code types are allowed at the Information Receiver status level.

Loop 2200C - Provider of Service

The Loop 2200C STC segment allows the capability to report rejected claim status requests for errors at the provider level. Typically a rejection at this level is the result of provider authorization/verification issues. When status is reported at this level, the 2000D and 2000E hierarchical levels (children) associated to that specific provider are not used.

Only the 'D0' Category Code and 'E' Category Code types are allowed at the Provider of Service status level.

Loop 2200D or 2200E - The Claim Level

The Loop 2200D (Subscriber) or 2200E (Dependent) STC segments are used to report the payer's adjudication status that applies to the entire claim.

This implementation guide allows the use of all Category Codes in the list, except the 'Request for Additional Information Codes' (R Category Codes) at the claim level.

Loop 2220D or 2220E - The Service Level

The Loop 2220D (Subscriber) or 2220E (Dependent) STC segments are used to report the payer's adjudication status that applies to the service line.

This implementation guide allows the use of all Category Codes in the list, except the 'Request for Additional Information Codes' (R Category Codes) at the service level.

When service lines within a claim have various statuses (example both pending and finalized), a single status must be reflected at the claim level and the service specific statuses must be reported at the service level (2220D or 2220E).

1.4.4 Payer's System Status Locations

In response to a 276 request, the 277 can support responding with status for claims in the payer system locations identified in sections 1.4.4.1 through 1.4.4.3 (Pre-Adjudication, Pended and Finalized). However, a payer's response capability for claim status in those locations will vary from payer to payer, as well as their determination of when a claim is in a pended versus finalized status.

1.4.4.1 Pre-Adjudication

Payers may pre-process claims to determine whether or not to introduce them to their adjudication system. This process is performed so that incorrectly formatted claims or those that are missing information can be returned to the provider for correction. Returned claims may not have a claim number assigned by the payer.

Status for claims in this location generally use the 'Acknowledgments' (A) Category Codes.

1.4.4.2 Pended

Payers may perform various functions, such as validation editing, medical reviews, contractual requirements, request additional information, etc. within their adjudication

system that may cause claims to be placed in a 'pending' or 'suspended' status. Payers usually assign a claim number to a pending claim. Claims generally remain in a 'pending' state until the payer resolves or completes validation editing, medical reviews, etc. and the claims are finalized.

Status for claims in this location generally use the 'Pending' (P) Category Codes.

1.4.4.3 Finalized

Claims that complete the adjudication process and/or remittance cycle are referred to as 'finalized' claims. The adjudication determination on finalized claims has concluded. Claims in a finalized status may include rejected, denied, approved for payment and paid.

Status for claims in this location generally use the 'Finalized' (F) Category Codes.

1.4.5 277 Transaction Uses

The Health Care Information Status Notification (277) transaction set has multiple implementation conventions to meet various business needs of the health care industry. The transaction set can be used to provide healthcare claim information in the following business scenarios:


- *ASC X12 Health Care Claim Status Request and Response (276/277)*, where the 277 is a response to a request for claim status information. This function is supported in this implementation guide.
- *ASC X12 Health Care Claim Acknowledgment (277)*, which is a business application response to the ASC X12 837 claim/encounter transactions. This function is not supported in this implementation guide.
- *ASC X12 Health Care Claim Request for Additional information (277)*, which is a payer's request for additional information to support a health care claim. This function is not supported in this implementation guide.
- *ASC X12 Health Care Claim Pending Status Information (277)*, which is used as a listing of pending claims in a payer's system. This function is not supported in this implementation guide.

Figure 1.2 - *General ASC X12 Health Care Claim Information Flow* illustrates the flow of information related to several usages of the 277. The multiple uses of the 277 claim status are differentiated by values in the ST and BHT Segments of Table 1 data. Element

BHT06, in addition to the ST03 and GS08 values, is used to distinguish between these varied business functions. The various 277 - BHT06 code values are:

- DG - Response (*Health Care Claim Status Request and Response*)
- NO - Notice (*Health Care Claim Pending Status Information*)
- RQ - Request (*Health Care Claim Request for Additional Information*)
- TH - Receipt Acknowledgment Advice (*Health Care Claim Acknowledgment*)

Figure 1.2 - General ASC X12 Health Care Claim Information Flow

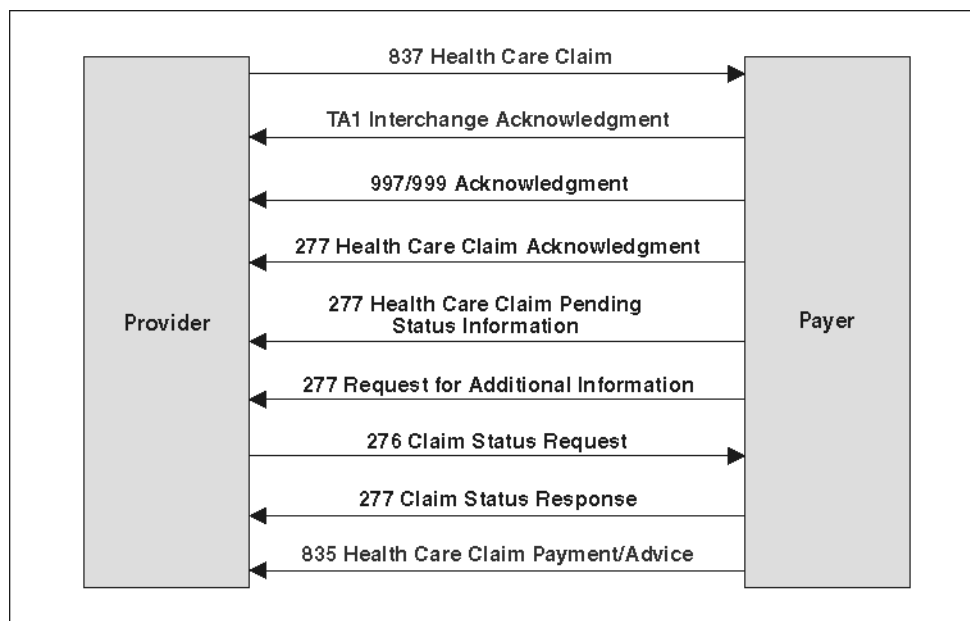

1.5 Business Terminology

Remittance cycle

The point in a payer's claim adjudication process where a remittance advice notice (835, paper remittance or Explanation of Benefits) has been issued providing the final claim payment or denial details.

Claim

For the purposes of this implementation guide, claim is intended to be an all inclusive term to represent both claims and encounters.

1.6 Transaction Acknowledgments

There are several acknowledgment implementation transactions available for use. The IG developers have noted acknowledgment requirements in this section. Other recommendations of acknowledgment transactions may be used at the discretion of the trading partners. A statement that the acknowledgment is not required does not preclude its use between willing trading partners.

1.6.1 997 Functional Acknowledgment

The 997 informs the submitter that the functional group arrived at the destination. It may include information about the syntactical quality of the functional group.

The Functional Acknowledgment (997) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Functional Acknowledgment (997) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

A 997 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.6.2 999 Implementation Acknowledgment

The 999 informs the submitter that the functional group arrived at the destination. It may include information about the syntactical quality of the functional group and the implementation guide compliance.

The Implementation Acknowledgment (999) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Implementation Acknowledgment (999) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

A 999 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.6.3 824 Application Advice

The 824 informs the submitter of the results of the receiving application system's data content edits of transaction sets.

The Application Advice (824) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Application Advice (824) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

An 824 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.7 Related Transactions

There are one or more transactions related to the transactions described in this implementation guide.

1.7.1 The Claim (837)

Submitting a claim, whether by using the 837 or another format, is the first step in the claim status request/response process. Certain data elements (e.g., the patient control number, type of bill, dates of service, insured identifier, service provider identifier, and payer's claim number when available) found on the claim help locate a claim within a payer's adjudication system. When the provider initiates a claim status request, as many of these data elements as possible should be forwarded to the payer. With the exception of the payer's claim number, the source of this information is the provider's billing system.

1.7.2 The Remittance Advice

The Remittance Advice, whether using an electronic transaction (835) or paper, provides the final adjudication details related to the payment or denial of a claim. The 277 Claim Status Response is not intended to provide the final claim adjudication details. Some remittance advice data is reflected in the 2200 STC to provide the link between the finalized claim and the remittance advice on which it was reported.

1.8 Trading Partner Agreements

Trading partner agreements are used to establish and document the relationship between trading partners. A trading partner agreement must not override the specifications in this implementation guide if a transmission is reported in GS08 to be a product of this implementation guide.

1.9 HIPAA Role in Implementation Guides

Administrative Simplification provisions of the Health Insurance Portability and Accountability Act of 1996 (PL 104-191 - known as HIPAA) direct the Secretary of Health and Human Services to adopt standards for transactions to enable health information to be exchanged electronically and to adopt specifications for implementing each standard.

This implementation guide has been developed for use as an insurance industry implementation guide. At the time of publication it has not been adopted as a HIPAA standard. Should the Secretary adopt this implementation guide as a standard, the Secretary will establish compliance dates for its use by HIPAA covered entities.

1.10 Data Overview

This section introduces the structures of the 276 and 277. Familiarity with ASC X12 nomenclature, segments, data elements, hierarchical levels, and looping structure is recommended. For a review, see Appendix B, *Nomenclature* and Appendix C, EDI Control Directory.

1.10.1 Overall Data Architecture

Two formats, or views, are used to present the transaction set: the implementation view and the standard view. The intent of the implementation view is to clarify the purpose and use of the segments by restricting the view to display only those segments used with their assigned health care names. The implementation views for both the 276 and 277 are presented in the Implementation Sections 2.3.1 and 2.5.1, respectively. The standard views for both the 276 and 277 display all segments available within the transaction sets with their assigned ASC X12 names. These views are presented in the X12 Standard Sections 2.3.2 and 2.5.2, respectively.

The 276 and 277 transaction sets are similar in structure but are not duplicates. Both transaction sets are divided into two levels, or tables, Table 1 and Table 2.

Table 1

Table 1 is named the Header Level and contains the transaction control information. This table contains the same segments, ST and BHT for both of the 276 and 277 transaction sets. The ST segment identifies the start of a transaction and the specific transaction set. The BHT identifies the transactions business purpose and the hierarchical structure used in Table 2.

Table 2

Table 2 is named the Detail Level because it contains the detail information for the business function of the transactions. This table uses the hierarchical level structure. Each hierarchical level (HL) is a series of loops, which are identified by numbers. The hierarchical level that identifies the participant and the relationship to other participants is Loop ID- 2000. The individual or entity name is contained in Loop ID-2100. Specific claim details begin with Loop ID-2200. It is at this point that the 276 and 277 transactions begin to differ in segment usage.

The following are HL segment coding examples and the data element significance within the HL segments:

HL*1**20*1~	Information Source level
HL*2*1*21*1~	Information Receiver level
HL*3*2*19*1~	Service Provider level
HL*4*3*22*1~	Subscriber level
HL*5*4*23~	Dependent level

- HLs are sequentially numbered. The sequential number is found in HL01, which is the first data element in the HL segment.
- The second element, HL02, indicates the sequential number of the parent hierarchical level to which this hierarchical level is subordinate. The absence of a data value in HL02, indicates it is the highest hierarchical level. In this example, the Information Source is the highest parent. The Information Receiver level is subordinate to the Information Source hierarchical level numbered 1 (HL01 =1). The provider of service level is subordinate to the Information Receiver hierarchical level numbered 2 (HL01=2), etc.
- The data value in data element HL03 describes the hierarchical level entity. For example, when HL03 = 20, the hierarchical level is the Information Source. When HL03 = 23, the hierarchical level is the Dependent.
- Data element HL04 indicates whether or not child (subordinate) hierarchical levels exist. A value of "1" indicates subordinate hierarchical levels exist. A value of "0" or the absence of a data value indicates that no subordinate hierarchical levels exist.

2 Transaction Set

NOTE

See Appendix B, Nomenclature, to review the transaction set structure, including descriptions of segments, data elements, levels, and loops.

2.1 Presentation Examples

The ASC X12 standards are generic. For example, multiple trading communities use the same PER segment to specify administrative communication contacts. Each community decides which elements to use and which code values in those elements are applicable.

This implementation guide uses a format that depicts both the generalized standard and the insurance industry-specific implementation. In this implementation guide, **IMPLEMENTATION** specifies the requirements for this implementation. **X12 STANDARD** is included as a reference only.

The transaction set presentation is comprised of two main sections with subsections within the main sections:

2.3 Transaction Set Listing

There are two sub-sections under this general title. The first sub-section concerns this implementation of a generic X12 transaction set. The second sub-section concerns the generic X12 standard itself.

IMPLEMENTATION

This section lists the levels, loops, and segments contained in this implementation. It also serves as an index to the segment detail.

STANDARD

This section is included as a reference.

2.4 Segment Detail

There are three sub-sections under this general title. This section repeats once for each segment used in this implementation providing segment specific detail and X12 standard detail.

SEGMENT DETAIL

This section is included as a reference.

DIAGRAM

This section is included as a reference. It provides a pictorial view of the standard and shows which elements are used in this implementation.

ELEMENT DETAIL

This section specifies the implementation details of each data element.

These illustrations (Figures 2.1 through 2.5) are examples and are not extracted from the Section 2 detail in this implementation guide. Annotated illustrations, presented below in the same order they appear in this implementation guide, describe the format of the transaction set that follows.

IMPLEMENTATION						
Indicates that this section is the implementation and not the standard 8XX Insurance Transaction Set						
Table 1 - Header						
PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
53	0100	ST	Transaction Set Header	R	1	Segment repeats and loop repeats reflect actual usage
54	0200	BPR	Financial Information	R	1	
60	0400	TRN	Reassociation Key	R	1	
62	0500	CUR	Non-US Dollars Currency	S	1	
65	0600	REF	Receiver ID	S	1	
66	0600	REF	Version Number	S	1	Each loop is assigned an industry specific name
68	0700	DTM	Production Date	S	1	
PAYER NAME						1
70	0800	N1	Payer Name	R	1	R=Required S=Situational
72	1000	N3	Payer Address	S	1	
75	1100	N4	Payer City, State, Zip	S	1	
76	1200	REF	Additional Payer Reference Number	S	1	
78	1300	PER	Payer Contact	S	1	
PAYEE NAME						1
79	0800	N1	Payee Name	R	1	Individual segments and entire loops are repeated
81	1000	N3	Payee Address	S	1	
82	1100	N4	Payee City, State, Zip	S	1	
84	1200	REF	Payee Additional Reference Number	S	>1	

Position Numbers and Segment IDs retain their X12 values

Each segment is assigned an industry specific name. Not used segments do not appear

Each loop is assigned an industry specific name

Segment repeats and loop repeats reflect actual usage

R=Required
S=Situational

Individual segments and entire loops are repeated

Figure 2.1. Transaction Set Key — Implementation

STANDARD						
Indicates that this section is identical to the ASC X12 standard 8XX Insurance Transaction Set Functional Group ID: XX See <i>Appendix B.1, ASC X12 Nomenclature</i> for a complete description of the standard This Draft Standard for Trial Use contains the format and establishes the data contents of the Insurance Transaction Set (8XX) within the context of the Electronic Data Interchange (EDI) environment.						
Table 1 - Header						
POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT	
0100	ST	Transaction Set Header	M	1		
0200	BPR	Beginning Segment	M	1		
0300	NTE	Note/Special Instruction	O	>1		
0400	TRN	Trace	O	1		

Figure 2.2. Transaction Set Key — Standard

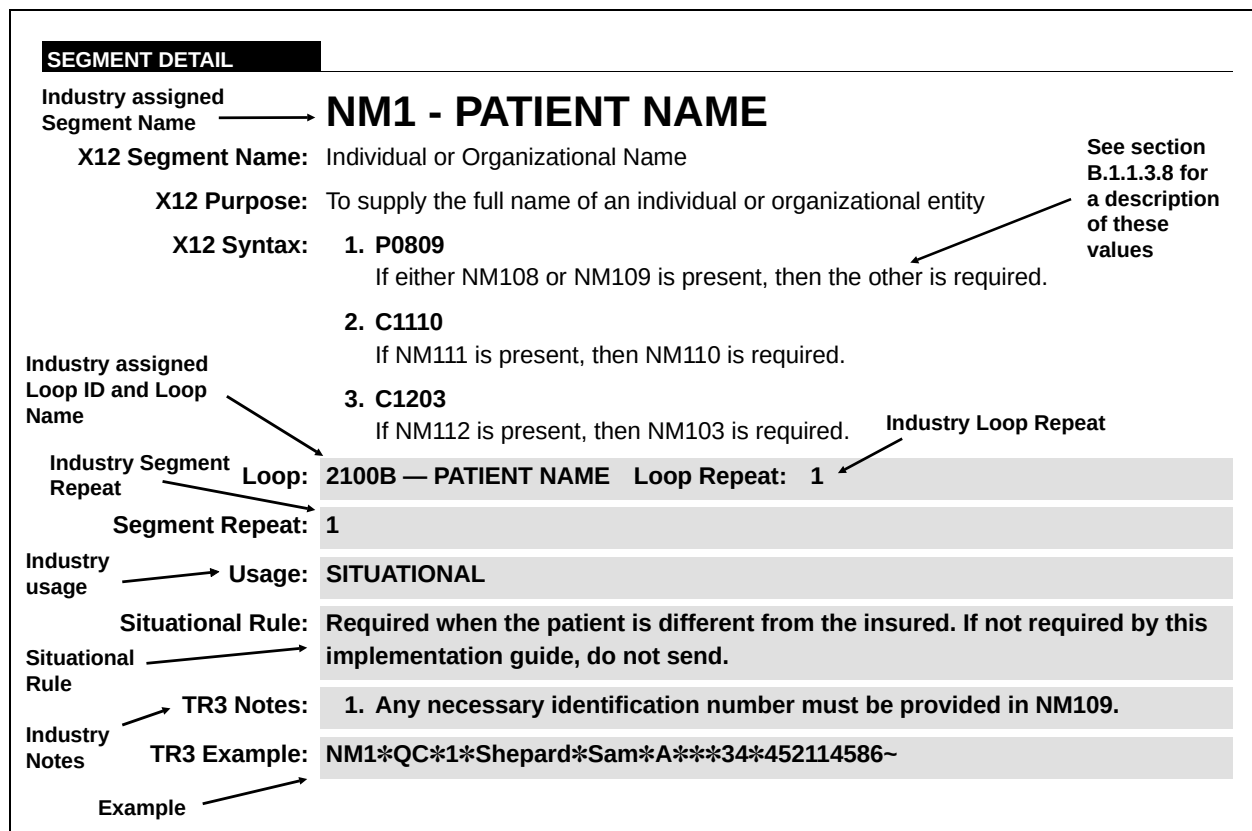


Figure 2.3. Segment Key — Implementation

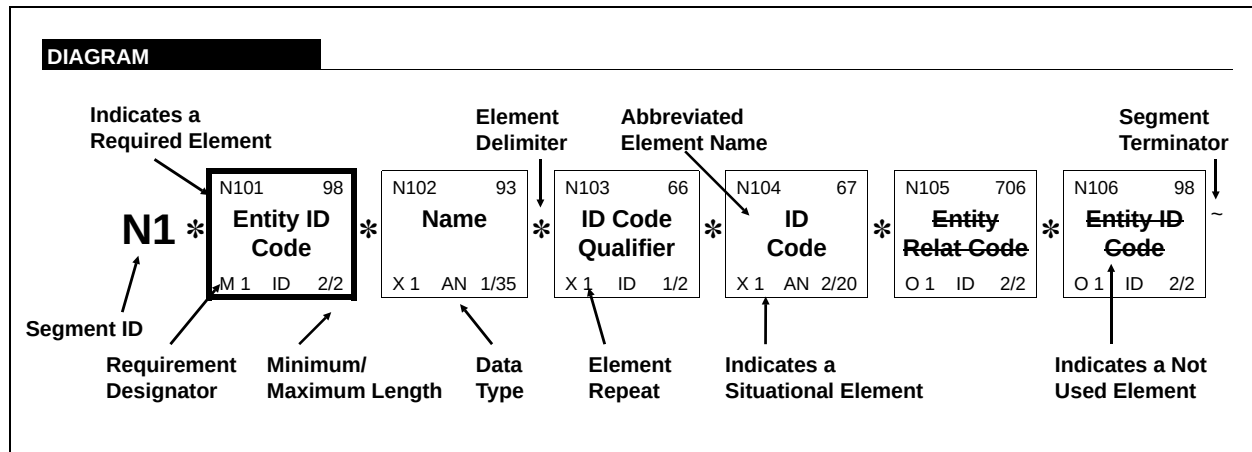


Figure 2.4. Segment Key — Diagram

ELEMENT DETAIL						
USAGE	REF. DES.	DATA ELEMENT	NAME	Element Repeat	ATTRIBUTES	
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers Use the Primary Payer's adjudicated Medical Procedure Code.	M 1		
Reference Designator			Composite Number			
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) IMPLEMENTATION NAME: Product or Service ID Qualifier The value in SVC01-1 qualifies the values in SVC01-2, SVC01-3, SVC01-4, SVC01-5, and SVC01-6.	M ID	2/2	
Industry Usage: See the following page for complete descriptions			Industry Note			
Selected Code Values			AD	American Dental Association Codes CODE SOURCE 135: American Dental Association		
See Appendix A for external code source reference			HP	Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities		
REQUIRED	SVC01 - 2	234	Product/Service ID Identifying number for a product or service	M AN	1/48	
NOT USED	SVC01 - 3	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 4	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 5	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 6	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 7	352	Description	O AN	1/80	
REQUIRED	SVC02	782	Monetary Amount Monetary amount SEMANTIC: SVC02 is the submitted service charge. This value can not be negative.	M 1 R	1/18	
Data Element Number						
NOT USED	SVC03	782	Monetary Amount	O 1 R	1/18	
SITUATIONAL	SVC04	234	Product/Service ID Identifying number for a product or service SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code. SITUATIONAL RULE: Required when an NUBC revenue code was considered during adjudication in addition to a procedure code already identified in SVC01. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: National Uniform Billing Committee Revenue Code	O 1 AN	1/48	
X12 Semantic Note						
Situational Rule						
Implementation Name See Appendix E for definition						

Figure 2.5. Segment Key — Element Summary

2.2 Implementation Usage

2.2.1 Industry Usage

Industry Usage describes when loops, segments, and elements are to be sent when complying with this implementation guide. The three choices for Usage are required, not used, and situational. To avoid confusion, these are named differently than the X12 standard Condition Designators (mandatory, optional, and relational).

Required This loop/segment/element must always be sent.

Required segments in Situational loops only occur when the loop is used.

Required elements in Situational segments only occur when the segment is used.

Required component elements in Situational composite elements only occur when the composite element is used.

Not Used This element must never be sent.

Situational Use of this loop/segment/element varies, depending on data content and business context as described in the defining rule. The defining rule is documented in a Situational Rule attached to the item.

There are two forms of Situational Rules.

The first form is “Required when <explicit condition statement>. If not required by this implementation guide, may be provided at the sender’s discretion, but cannot be required by the receiver.” The data qualified by such a situational rule cannot be required or requested by the receiver, transmission of this data is solely at the sender’s discretion.

The alternative form is “Required when <explicit condition statement>. If not required by this implementation guide, do not send.” The data qualified by such a situational rule cannot be sent except as described in the explicit condition statement.

2.2.1.1

Transaction Compliance Related to Industry Usage

A transmitted transaction complies with an implementation guide when it satisfies the requirements as defined within the implementation guide. The presence or absence of an item (loop, segment, or element) complies with the industry usage specified by this implementation guide according to the following table.

Industry Usage	Business Condition is	Item is	Transaction Complies with Implementation Guide?
Required	N/A	Sent	Yes
		Not Sent	No
Not Used	N/A	Sent	No
		Not Sent	Yes
Situational (Required when <explicit condition statement>. If not required by this implementation guide, may be provided at the sender's discretion, but cannot be required by the receiver.)	True	Sent	Yes
		Not Sent	No
	Not True	Sent	Yes
		Not Sent	Yes
Situational (Required when <explicit condition statement>. If not required by this implementation guide, do not send.)	True	Sent	Yes
		Not Sent	No
	Not True	Sent	No
		Not Sent	Yes

This table specifies how an entity is to evaluate a transmitted transaction for compliance with industry usage. It is not intended to require or imply that the receiver must reject non-compliant transactions. The receiver will handle non-compliant transactions based on its business process and any applicable regulations.

2.2.2

Loops

Loop requirements depend on the context or location of the loop within the transaction. See Appendix B for more information on loops.

- A nested loop can be used only when the associated higher level loop is used.
- The usage of a loop is the same as the usage of its beginning segment.
 - If a loop's beginning segment is Required, the loop is Required and must occur at least once unless it is nested in a loop that is not being used.
 - If a loop's beginning segment is Situational, the loop is Situational.
- Subsequent segments within a loop can be sent only when the beginning segment is used.
- Required segments in Situational loops occur only when the loop is used.

2.3 Transaction Set Listing

2.3.1 Implementation

This section lists the levels, loops, and segments contained in this implementation. It also serves as an index to the segment detail. Refer to section 2.1 Presentation Examples for detailed information on the components of the Implementation section.

IMPLEMENTATION

276 Health Care Claim Status Request

Table 1 - Header

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
36	0100	ST	Transaction Set Header	R	1	
37	0200	BHT	Beginning of Hierarchical Transaction	R	1	

Table 2 - Information Source Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000A INFORMATION SOURCE LEVEL			>1
39	0100	HL	Information Source Level	R	1	
			LOOP ID - 2100A PAYER NAME			1
41	0500	NM1	Payer Name	R	1	

Table 2 - Information Receiver Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000B INFORMATION RECEIVER LEVEL			>1
43	0100	HL	Information Receiver Level	R	1	
			LOOP ID - 2100B INFORMATION RECEIVER NAME			1
45	0500	NM1	Information Receiver Name	R	1	

Table 2 - Service Provider Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000C SERVICE PROVIDER LEVEL			>1
47	0100	HL	Service Provider Level	R	1	
			LOOP ID - 2100C PROVIDER NAME			2
49	0500	NM1	Provider Name	R	1	

Table 2 - Subscriber Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000D SUBSCRIBER LEVEL			>1
52	0100	HL	Subscriber Level	R	1	
54	0400	DMG	Subscriber Demographic Information	S	1	
			LOOP ID - 2100D SUBSCRIBER NAME			1
56	0500	NM1	Subscriber Name	R	1	
			LOOP ID - 2200D CLAIM STATUS TRACKING NUMBER			>1
58	0900	TRN	Claim Status Tracking Number	S	1	
59	1000	REF	Payer Claim Control Number	S	1	
60	1000	REF	Institutional Bill Type Identification	S	1	
61	1000	REF	Application or Location System Identifier	S	1	
62	1000	REF	Group Number	S	1	
63	1000	REF	Patient Control Number	S	1	
64	1000	REF	Pharmacy Prescription Number	S	1	
65	1000	REF	Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	S	1	
66	1100	AMT	Claim Submitted Charges	S	1	
67	1200	DTP	Claim Service Date	S	1	
			LOOP ID - 2210D SERVICE LINE INFORMATION			>1
69	1300	SVC	Service Line Information	S	1	
73	1400	REF	Service Line Item Identification	S	1	
74	1500	DTP	Service Line Date	R	1	

Table 2 - Dependent Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000E DEPENDENT LEVEL			>1
75	0100	HL	Dependent Level	S	1	
77	0400	DMG	Dependent Demographic Information	R	1	
			LOOP ID - 2100E DEPENDENT NAME			1
79	0500	NM1	Dependent Name	R	1	
			LOOP ID - 2200E CLAIM STATUS TRACKING NUMBER			>1
81	0900	TRN	Claim Status Tracking Number	R	1	
82	1000	REF	Payer Claim Control Number	S	1	
83	1000	REF	Institutional Bill Type Identification	S	1	
84	1000	REF	Application or Location System Identifier	S	1	
85	1000	REF	Group Number	S	1	
86	1000	REF	Patient Control Number	S	1	
87	1000	REF	Pharmacy Prescription Number	S	1	
88	1000	REF	Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	S	1	
89	1100	AMT	Claim Submitted Charges	S	1	
90	1200	DTP	Claim Service Date	S	1	
			LOOP ID - 2210E SERVICE LINE INFORMATION			>1
92	1300	SVC	Service Line Information	S	1	
96	1400	REF	Service Line Item Identification	S	1	
97	1500	DTP	Service Line Date	R	1	
98	1600	SE	Transaction Set Trailer	R	1	

2.3.2 X12 Standard

This section is included as a reference. The implementation guide reference clarifies actual usage. Refer to section 2.1 Presentation Examples for detailed information on the components of the X12 Standard section.

STANDARD

276 Health Care Claim Status Request

Functional Group ID: **HR**

This X12 Transaction Set contains the format and establishes the data contents of the Health Care Claim Status Request Transaction Set (276) for use within the context of an Electronic Data Interchange (EDI) environment. This transaction set can be used by a provider, recipient of health care products or services, or their authorized agent to request the status of a health care claim or encounter from a health care payer. This transaction set is not intended to replace the Health Care Claim Transaction Set (837), but rather to occur after the receipt of a claim or encounter information. The request may occur at the summary or service line detail level.

Table 1 - Header

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
0100	ST	Transaction Set Header	M	1	
0200	BHT	Beginning of Hierarchical Transaction	M	1	
0300	REF	Reference Information	O	10	
LOOP ID - 1000					>1
0400	NM1	Individual or Organizational Name	O	1	
0500	N2	Additional Name Information	O	2	
0600	N3	Party Location	O	2	
0700	N4	Geographic Location	O	1	
0800	REF	Reference Information	O	2	
0900	PER	Administrative Communications Contact	O	1	

Table 2 - Detail

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
LOOP ID - 2000					>1
0100	HL	Hierarchical Level	M	1	
0200	SBR	Subscriber Information	O	1	
0300	PAT	Patient Information	O	1	
0400	DMG	Demographic Information	O	1	
LOOP ID - 2100					>1
0500	NM1	Individual or Organizational Name	O	1	
0600	N3	Party Location	O	2	
0700	N4	Geographic Location	O	1	
0800	PER	Administrative Communications Contact	O	1	
LOOP ID - 2200					>1
0900	TRN	Trace	O	1	
1000	REF	Reference Information	O	9	
1100	AMT	Monetary Amount Information	O	1	
1200	DTP	Date or Time or Period	O	2	
LOOP ID - 2210					>1
1300	SVC	Service Information	O	1	
1400	REF	Reference Information	O	1	
1500	DTP	Date or Time or Period	O	1	
1600	SE	Transaction Set Trailer	M	1	

NOTES:

2/0200 The SBR segment may only appear at the Subscriber (HL03=22) level.

2/0300 The PAT segment may only appear at the Dependent (HL03=23) level.

2/0400 The DMG segment may only appear at the Subscriber (HL03=22) or Dependent (HL03=23) level.

2.4 276 - Segment Detail


This section specifies the segments, data elements, and codes for this implementation. Refer to section 2.1 Presentation Examples for detailed information on the components of the Segment Detail section.

SEGMENT DETAIL

ST - TRANSACTION SET HEADER

X12 Segment Name: Transaction Set Header**X12 Purpose:** To indicate the start of a transaction set and to assign a control number**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** ST*276*0001*005010X212~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ST01	143	Transaction Set Identifier Code Code uniquely identifying a Transaction Set SEMANTIC: The transaction set identifier (ST01) is used by the translation routines of the interchange partners to select the appropriate transaction set definition (e.g., 810 selects the Invoice Transaction Set).	M 1 ID 3/3
			CODE	DEFINITION
			276	Health Care Claim Status Request
REQUIRED	ST02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set The Transaction Set Control Numbers in ST02 and SE02 must be identical. The number is assigned by the originator and must be unique within a functional group (GS-GE). For example, start with the number 0001 and increment from there.	M 1 AN 4/9
REQUIRED	ST03	1705	Implementation Convention Reference Reference assigned to identify Implementation Convention SEMANTIC: The implementation convention reference (ST03) is used by the translation routines of the interchange partners to select the appropriate implementation convention to match the transaction set definition. When used, this implementation convention reference takes precedence over the implementation reference specified in the GS08. IMPLEMENTATION NAME: Version, Release, or Industry Identifier This element must be populated with the implementation guide Version/Release/Industry Identifier Code named in Section 1.2. This field contains the same value as GS08. Some translator products strip off the ISA and GS segments prior to application (ST/SE) processing. Providing the information from the GS08 at this level will ensure that the appropriate application mapping is utilized at translation time.	O 1 AN 1/35

SEGMENT DETAIL

BHT - BEGINNING OF HIERARCHICAL TRANSACTION**X12 Segment Name:** Beginning of Hierarchical Transaction**X12 Purpose:** To define the business hierarchical structure of the transaction set and identify the business application purpose and reference data, i.e., number, date, and time**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** BHT*0010*13*ABC276XXX*20050920*1425~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	BHT01	1005	Hierarchical Structure Code	M 1 ID 4/4
			Code indicating the hierarchical application structure of a transaction set that utilizes the HL segment to define the structure of the transaction set	
			CODE	DEFINITION
			0010	Information Source, Information Receiver, Provider of Service, Subscriber, Dependent
REQUIRED	BHT02	353	Transaction Set Purpose Code	M 1 ID 2/2
			Code identifying purpose of transaction set	
			CODE	DEFINITION
			13	Request
REQUIRED	BHT03	127	Reference Identification	O 1 AN 1/50
			Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	
			SEMANTIC: BHT03 is the number assigned by the originator to identify the transaction within the originator's business application system.	
REQUIRED	BHT04	373	Date	O 1 DT 8/8
			Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year	
			SEMANTIC: BHT04 is the date the transaction was created within the business application system.	
			IMPLEMENTATION NAME: Transaction Set Creation Date	

REQUIRED	BHT05	337	Time O 1 TM 4/8 Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99) SEMANTIC: BHT05 is the time the transaction was created within the business application system. IMPLEMENTATION NAME: Transaction Set Creation Time
NOT USED	BHT06	640	Transaction Type Code O 1 ID 2/2

SEGMENT DETAIL


HL - INFORMATION SOURCE LEVEL

X12 Segment Name: Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000A — INFORMATION SOURCE LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Notes:** 1. This entity is the payer who has the current status information for the specified claims.**TR3 Example:** HL*1**20*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must begin with "1" within each ST/SE envelope and be incremented by one each time an HL is used in the transaction. Only numeric values are allowed in HL01.	M 1 AN 1/12
NOT USED	HL02	734	Hierarchical Parent ID Number	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code	M 1	ID	1/2
-----------------	-------------	------------	--------------------------------	------------	-----------	------------

Code defining the characteristic of a level in a hierarchical structure

COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.

CODE	DEFINITION
------	------------

20 Information Source

REQUIRED	HL04	736	Hierarchical Child Code	O 1	ID	1/1
-----------------	-------------	------------	--------------------------------	------------	-----------	------------

Code indicating if there are hierarchical child data segments subordinate to the level being described

COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.

CODE	DEFINITION
------	------------

1	Additional Subordinate HL Data Segment in This Hierarchical Structure.
----------	---

SEGMENT DETAIL

NM1 - PAYER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100A — PAYER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*PR*2*ABC INSURANCE*****PI*12345~

DIAGRAM

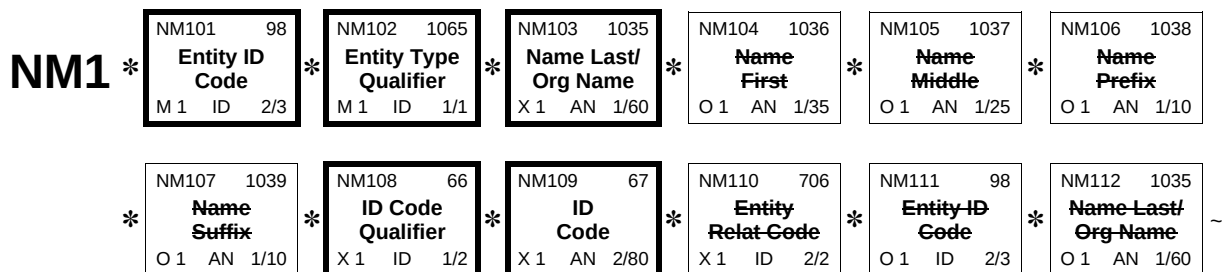

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>PR</td><td>Payer</td></tr></table>	CODE	DEFINITION	PR	Payer			
CODE	DEFINITION									
PR	Payer									
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>2</td><td>Non-Person Entity</td></tr></table>	CODE	DEFINITION	2	Non-Person Entity			
CODE	DEFINITION									
2	Non-Person Entity									
REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203	X 1	AN	1/60				
			IMPLEMENTATION NAME: Payer Name							

NOT USED	NM104	1036	Name First	O 1	AN	1/35
NOT USED	NM105	1037	Name Middle	O 1	AN	1/25
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10
NOT USED	NM107	1039	Name Suffix	O 1	AN	1/10
REQUIRED	NM108	66	Identification Code Qualifier	X 1	ID	1/2
			Code designating the system/method of code structure used for Identification Code (67)			
			SYNTAX: P0809			
			CODE	DEFINITION		
			PI	Payor Identification		
				Payer identification number established through trading partner agreement.		
			XV	Centers for Medicare and Medicaid Services PlanID		
				Use when reporting Health Plan ID (HPID) or Other Entity Identifier (OEID).		
				CODE SOURCE 540: Centers for Medicare and Medicaid Services PlanID		
REQUIRED	NM109	67	Identification Code	X 1	AN	2/80
			Code identifying a party or other code			
			SYNTAX: P0809			
			IMPLEMENTATION NAME: Payer Identifier			
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60

SEGMENT DETAIL

HL - INFORMATION RECEIVER LEVEL

X12 Segment Name: Hierarchical Level

X12 Purpose: To identify dependencies among and the content of hierarchically related groups of data segments

X12 Comments:

1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.

2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000B — INFORMATION RECEIVER LEVEL **Loop Repeat:** >1

Segment Repeat: 1


Usage: REQUIRED

TR3 Notes:

1. This entity expects a response from the Information Source. See Section 1.4.1 Transaction Participants for more information on the Information Receiver.

TR3 Example: HL*2*1*21*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code	M 1	ID	1/2
----------	------	-----	--------------------------------	-----	----	-----

Code defining the characteristic of a level in a hierarchical structure

COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.

CODE	DEFINITION
------	------------

21 Information Receiver

REQUIRED	HL04	736	Hierarchical Child Code	O 1	ID	1/1
----------	------	-----	--------------------------------	-----	----	-----

Code indicating if there are hierarchical child data segments subordinate to the level being described

COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.

CODE	DEFINITION
------	------------

1	Additional Subordinate HL Data Segment in This Hierarchical Structure.
---	---

SEGMENT DETAIL

NM1 - INFORMATION RECEIVER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100B — INFORMATION RECEIVER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*41*2*XYZ SERVICE*****46*A22222221~

DIAGRAM

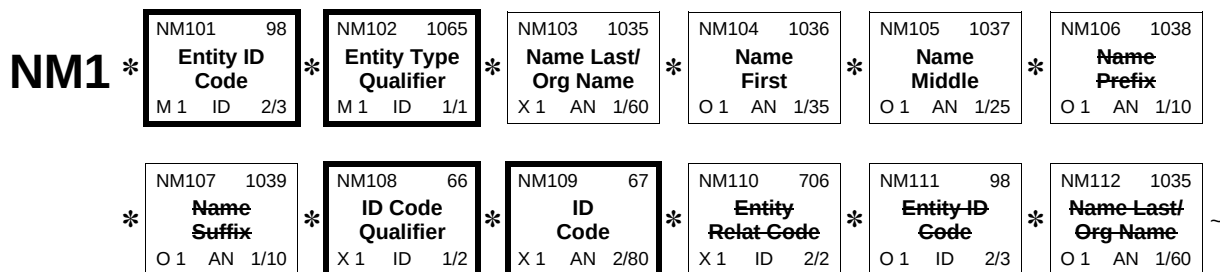

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES								
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>41</td><td>Submitter</td></tr></table>	CODE	DEFINITION	41	Submitter					
CODE	DEFINITION											
41	Submitter											
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Person</td></tr><tr><td>2</td><td>Non-Person Entity</td></tr></table>	CODE	DEFINITION	1	Person	2	Non-Person Entity			
CODE	DEFINITION											
1	Person											
2	Non-Person Entity											

SITUATIONAL	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 SITUATIONAL RULE: <i>Required when the identifier in NM109 is not sufficient to identify the Information Receiver. If not required by this implementation guide, may be provided at sender's discretion, but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Information Receiver Last or Organization Name	X 1	AN	1/60				
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: <i>Required when the value in NM102 = "1" and the person has a first name that is known. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Information Receiver First Name	O 1	AN	1/35				
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Information Receiver Middle Name	O 1	AN	1/25				
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10				
NOT USED	NM107	1039	Name Suffix	O 1	AN	1/10				
REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809 <table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>46</td><td>Electronic Transmitter Identification Number (ETIN)</td></tr></table>	CODE	DEFINITION	46	Electronic Transmitter Identification Number (ETIN)	X 1	ID	1/2
CODE	DEFINITION									
46	Electronic Transmitter Identification Number (ETIN)									
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 IMPLEMENTATION NAME: Information Receiver Identification Number The ETIN is established through Trading Partner agreement.	X 1	AN	2/80				
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2				
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3				
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60				

SEGMENT DETAIL

HL - SERVICE PROVIDER LEVEL

X12 Segment Name: Hierarchical Level

X12 Purpose: To identify dependencies among and the content of hierarchically related groups of data segments

X12 Comments:

1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.

2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000C — SERVICE PROVIDER LEVEL **Loop Repeat:** >1


Segment Repeat: 1

Usage: REQUIRED

TR3 Notes: 1. This entity delivered the health care service. See Section 1.4.1 Transaction Participants for more information on the Provider.

TR3 Example: HL*3*2*19*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1	ID	1/2				
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>19</td><td>Provider of Service</td></tr></table>							CODE	DEFINITION	19	Provider of Service
CODE	DEFINITION									
19	Provider of Service									
REQUIRED	HL04	736	Hierarchical Child Code Code indicating if there are hierarchical child data segments subordinate to the level being described COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.	O 1	ID	1/1				
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Additional Subordinate HL Data Segment in This Hierarchical Structure.</td></tr></table>							CODE	DEFINITION	1	Additional Subordinate HL Data Segment in This Hierarchical Structure.
CODE	DEFINITION									
1	Additional Subordinate HL Data Segment in This Hierarchical Structure.									

SEGMENT DETAIL

NM1 - PROVIDER NAME

X12 Segment Name: Individual or Organizational Name

X12 Purpose: To supply the full name of an individual or organizational entity

X12 Syntax: 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**

If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100C — PROVIDER NAME **Loop Repeat:** 2

Segment Repeat: 1

Usage: REQUIRED


TR3 Notes: 1. Provider of Service is generic in that this could be the entity that originally submitted the claim (Billing Provider) or may be the entity that provided or participated in some aspect of the health care (Rendering Provider). The provider identified facilitates identification of the claim within a payer's system.

2. During the transition to NPI, for those health care providers covered under the NPI mandate, two iterations of the 2100C Loop may be sent to accommodate reporting dual provider identification numbers (NPI and Legacy). When two iterations are reported, the NPI number will be in the iteration where the NM108 qualifier will be 'XX' and the legacy number will be in the iteration where the NM108 qualifier will be either 'SV' or 'FI'.

3. After the transition to NPI, for those health care providers covered under the NPI mandate, only one iteration of the 2100C loop must be sent with the NPI reported in the NM109 and NM108=XX.

TR3 Example: NM1*1P*2*HOME MEDICAL*****XX*166666666~

DIAGRAM

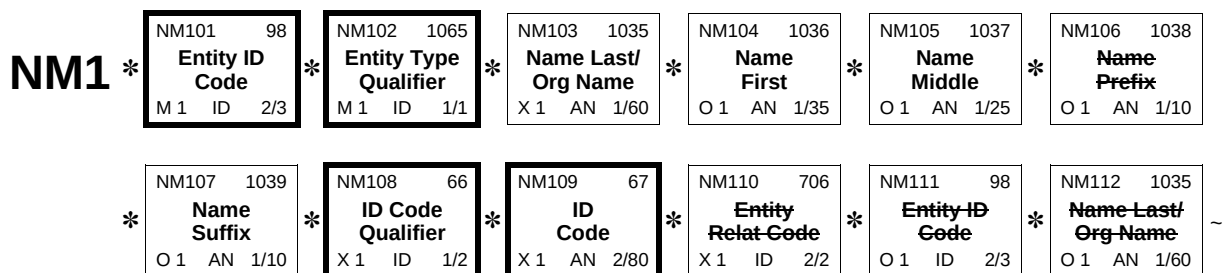

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES								
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1P</td><td>Provider</td></tr></table>	CODE	DEFINITION	1P	Provider					
CODE	DEFINITION											
1P	Provider											
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Person</td></tr><tr><td>2</td><td>Non-Person Entity</td></tr></table>	CODE	DEFINITION	1	Person	2	Non-Person Entity			
CODE	DEFINITION											
1	Person											
2	Non-Person Entity											
SITUATIONAL	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 SITUATIONAL RULE: <i>Required when the identifier in NM109 is not sufficient to identify the Provider. If not required by this implementation guide, may be provided at sender's discretion, but cannot be required by the receiver.</i>	X 1	AN	1/60						
			IMPLEMENTATION NAME: Provider Last or Organization Name									
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: <i>Required when the value in NM102 = "1" and the person has a first name that is known. If not required by this implementation guide, do not send.</i>	O 1	AN	1/35						
			IMPLEMENTATION NAME: Provider First Name									
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send.</i>	O 1	AN	1/25						
			IMPLEMENTATION NAME: Provider Middle Name									
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10						
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a name suffix that is known. If not required by this implementation guide, do not send.</i>	O 1	AN	1/10						
			IMPLEMENTATION NAME: Provider Name Suffix									

REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809 <table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>FI</td><td>Federal Taxpayer's Identification Number</td></tr><tr><td>SV</td><td>Service Provider Number</td></tr><tr><td>XX</td><td>Centers for Medicare and Medicaid Services National Provider Identifier</td></tr></tbody></table> Required value when the National Provider ID is mandated for use and the provider is a covered health care provider under the mandate. Otherwise, one of the other listed codes must be used. CODE SOURCE 537: Centers for Medicare and Medicaid Services National Provider Identifier	CODE	DEFINITION	FI	Federal Taxpayer's Identification Number	SV	Service Provider Number	XX	Centers for Medicare and Medicaid Services National Provider Identifier	X 1	ID	1/2
CODE	DEFINITION													
FI	Federal Taxpayer's Identification Number													
SV	Service Provider Number													
XX	Centers for Medicare and Medicaid Services National Provider Identifier													
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 IMPLEMENTATION NAME: Provider Identifier	X 1	AN	2/80								
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2								
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3								
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60								

SEGMENT DETAIL

HL - SUBSCRIBER LEVEL

X12 Segment Name: Hierarchical Level

X12 Purpose: To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000D — SUBSCRIBER LEVEL **Loop Repeat:** >1


Segment Repeat: 1

Usage: REQUIRED

- TR3 Notes:**
1. When the patient is the subscriber or a dependent with a unique identification number, the claim status request information is reflected in the 2200D Loop under the Subscriber HL, 2000D Loop (HL03 = 22). The Dependent HL, 2000E Loop is not used. See Section 1.4.1.1 for more information on defining the patient.
 2. When requesting and responding to claim status for both a subscriber and a dependent of that subscriber, the Subscriber HL Loop 2000D must be followed by the subscriber's claim status data, Loop 2200D. In this instance, HL04=0 would be used. Then the Subscriber HL Loop 2000D must be repeated prior to the dependent HL Loop 2000E and their corresponding claim status data, Loop 2200E. In this instance, HL04=1 would be used. See Section 1.4.2.3 for an example of this structure.

TR3 Example: HL*4*3*22*0~ or HL*4*3*22*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be “1” for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12						
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12						
REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1 ID 1/2						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>22</td><td>Subscriber</td></tr></table>	CODE	DEFINITION	22	Subscriber			
CODE	DEFINITION									
22	Subscriber									
REQUIRED	HL04	736	Hierarchical Child Code Code indicating if there are hierarchical child data segments subordinate to the level being described COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.	O 1 ID 1/1						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>0</td><td>No Subordinate HL Segment in This Hierarchical Structure. Required when there are no dependent claim status requests for this subscriber.</td></tr><tr><td>1</td><td>Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when there are dependent claim status requests for this subscriber.</td></tr></table>	CODE	DEFINITION	0	No Subordinate HL Segment in This Hierarchical Structure. Required when there are no dependent claim status requests for this subscriber.	1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when there are dependent claim status requests for this subscriber.	
CODE	DEFINITION									
0	No Subordinate HL Segment in This Hierarchical Structure. Required when there are no dependent claim status requests for this subscriber.									
1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when there are dependent claim status requests for this subscriber.									

SEGMENT DETAIL

DMG - SUBSCRIBER DEMOGRAPHIC INFORMATION**X12 Segment Name:** Demographic Information**X12 Purpose:** To supply demographic information**X12 Set Notes:** 1. The DMG segment may only appear at the Subscriber (HL03=22) or Dependent (HL03=23) level.


X12 Syntax: 1. **P0102**
If either DMG01 or DMG02 is present, then the other is required.

2. **P1011**
If either DMG10 or DMG11 is present, then the other is required.

3. **C1105**
If DMG11 is present, then DMG05 is required.

Loop: 2000D — SUBSCRIBER LEVEL**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the patient is the subscriber or a dependent with a unique identification number. If not required by this implementation guide, do not send.**TR3 Example:** DMG*D8*19330706*M~

DIAGRAM

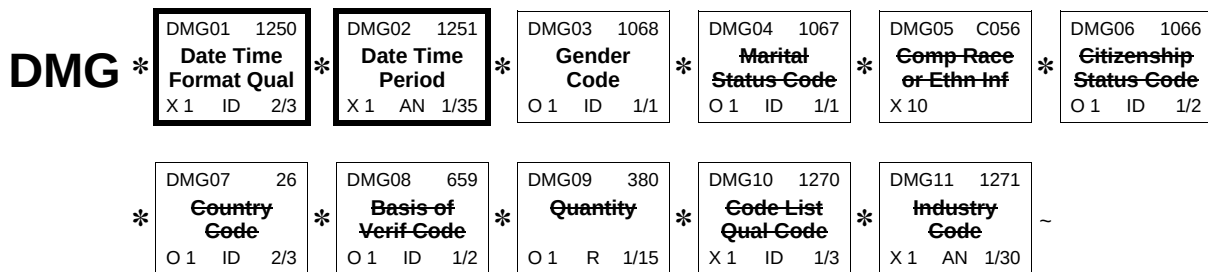

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DMG01	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format SYNTAX: P0102	X 1 ID 2/3
			CODE	DEFINITION
			D8	Date Expressed in Format CCYYMMDD

REQUIRED	DMG02	1251	Date Time Period		X 1	AN	1/35
			Expression of a date, a time, or range of dates, times or dates and times				
			SYNTAX: P0102				
			SEMANTIC: DMG02 is the date of birth.				
			IMPLEMENTATION NAME: Subscriber Birth Date				
SITUATIONAL	DMG03	1068	Gender Code		O 1	ID	1/1
			Code indicating the sex of the individual				
			SITUATIONAL RULE: Required when available from the Information Receiver. If not required by this implementation guide, do not send				
			IMPLEMENTATION NAME: Subscriber Gender Code				
			CODE	DEFINITION			
			F	Female			
			M	Male			
NOT USED	DMG04	1067	Marital Status Code		O 1	ID	1/1
NOT USED	DMG05	C056	COMPOSITE RACE OR ETHNICITY INFORMATION		X 10		
NOT USED	DMG06	1066	Citizenship Status Code		O 1	ID	1/2
NOT USED	DMG07	26	Country Code		O 1	ID	2/3
NOT USED	DMG08	659	Basis of Verification Code		O 1	ID	1/2
NOT USED	DMG09	380	Quantity		O 1	R	1/15
NOT USED	DMG10	1270	Code List Qualifier Code		X 1	ID	1/3
NOT USED	DMG11	1271	Industry Code		X 1	AN	1/30

SEGMENT DETAIL

NM1 - SUBSCRIBER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100D — SUBSCRIBER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*IL*1*SMITH*ROBERT*****MI*9876543210~

DIAGRAM

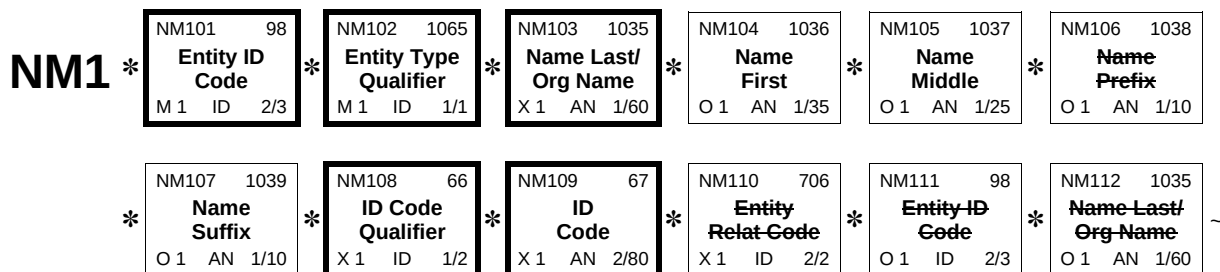

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES										
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3								
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>IL</td><td>Insured or Subscriber</td></tr></table>	CODE	DEFINITION	IL	Insured or Subscriber							
CODE	DEFINITION													
IL	Insured or Subscriber													
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1								
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Person</td></tr><tr><td>2</td><td>Non-Person Entity</td></tr><tr><td></td><td>Use the value “2” in an employer-subscriber situation, such as Worker’s Compensation.</td></tr></table>	CODE	DEFINITION	1	Person	2	Non-Person Entity		Use the value “2” in an employer-subscriber situation, such as Worker’s Compensation.			
CODE	DEFINITION													
1	Person													
2	Non-Person Entity													
	Use the value “2” in an employer-subscriber situation, such as Worker’s Compensation.													

REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 IMPLEMENTATION NAME: Subscriber Last Name	X 1	AN	1/60								
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: Required when the value in NM102 = “1” and the person has a first name that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber First Name	O 1	AN	1/35								
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber Middle Name or Initial	O 1	AN	1/25								
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10								
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name SITUATIONAL RULE: Required when NM102 = 1 and the person has a name suffix that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber Name Suffix	O 1	AN	1/10								
REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809 <table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>24</td><td>Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.</td></tr><tr><td>II</td><td>Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.</td></tr><tr><td>MI</td><td>Member Identification Number</td></tr></table>	CODE	DEFINITION	24	Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.	II	Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.	MI	Member Identification Number	X 1	ID	1/2
CODE	DEFINITION													
24	Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.													
II	Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.													
MI	Member Identification Number													
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 IMPLEMENTATION NAME: Subscriber Identifier	X 1	AN	2/80								
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2								
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3								
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60								

SEGMENT DETAIL

TRN - CLAIM STATUS TRACKING NUMBER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200D — CLAIM STATUS TRACKING NUMBER Loop Repeat: >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the patient is the subscriber or a dependent with a unique identification number. If not required by this implementation guide, do not send.

- TR3 Notes:
1. This segment conveys a unique trace or reference number for each 2200D loop. This number will be returned in the 277 response.
 2. When the patient is not the subscriber or a dependent with a unique identification number, the Loop 2200E TRN and subsequent segments will be used to reflect the claim status information.

TR3 Example: TRN*1*1722634842~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1	ID	1/2				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Current Transaction Trace Numbers</td></tr></table>	CODE	DEFINITION	1	Current Transaction Trace Numbers			
CODE	DEFINITION									
1	Current Transaction Trace Numbers									
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SEMANTIC: TRN02 provides unique identification for the transaction.	M 1	AN	1/50				
			IMPLEMENTATION NAME: Current Transaction Trace Number							
NOT USED	TRN03	509	Originating Company Identifier	O 1	AN	10/10				
NOT USED	TRN04	127	Reference Identification	O 1	AN	1/50				

SEGMENT DETAIL


REF - PAYER CLAIM CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Information Receiver knows the payer assigned number and intends the search criteria be narrowed to a specific claim. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This is the payer's assigned control number, also known as, Internal Control Number (ICN), Document Control Number (DCN), or Claim Control Number (CCN).**TR3 Example:** REF*1K*9918046987~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			1K	Payor's Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Payer Claim Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - INSTITUTIONAL BILL TYPE
IDENTIFICATION**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when needed to refine the search criteria on Institutional claims. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.**TR3 Example:** REF*BLT*111~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>BLT</td><td>Billing Type</td></tr></table>	CODE	DEFINITION	BLT	Billing Type			
CODE	DEFINITION									
BLT	Billing Type									
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Bill Type Identifier Concatenate the 837I CLM05-1 (Facility Type Code) and CLM05-3 (Claim Frequency Code) values. Code Source 236: Uniform Billing Claim Form Bill Type Code Source 235: Claim Frequency Type Code	X 1	AN	1/50				
NOT USED	REF03	352	Description	X 1	AN	1/80				
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1						

SEGMENT DETAIL

REF - APPLICATION OR LOCATION SYSTEM IDENTIFIER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203


At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the application or location system identifier is known. If not required by this implementation guide, do not send.

TR3 Notes: 1. This identifier will be provided to the Information Receiver by the Information Source through a companion document or other trading partner document. If a payer has multiple adjudication systems processing the same type of claim (e.g. professional or institutional), this identifier can be used to improve status routing and response time.

TR3 Example: REF*LU*SYS5963~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			LU	Location Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Application or Location System Identifier	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - GROUP NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the patient has a group number and the number is known by the Information Receiver. If not required by this implementation guide, do not send.**TR3 Example:** REF*6P*GRP123~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			6P	Group Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Group Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

REF - PATIENT CONTROL NUMBER

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the Patient Control Number has been assigned by the service provider. If not required by this implementation guide, do not send.

TR3 Notes: 1. The maximum number of characters supported for the Patient Control Number is '20'.

TR3 Example: REF*EJ*PT12345~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			EJ	Patient Account Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Patient Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PHARMACY PRESCRIPTION NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Pharmacy Prescription Number is needed to refine the search criteria for pharmacy claims. If not required by this implementation guide, do not send.**TR3 Example:** REF*XZ*1234567~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>XZ</td><td>Pharmacy Prescription Number</td></tr></table>	CODE	DEFINITION	XZ	Pharmacy Prescription Number			
CODE	DEFINITION									
XZ	Pharmacy Prescription Number									
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Pharmacy Prescription Number	X 1	AN	1/50				
NOT USED	REF03	352	Description	X 1	AN	1/80				
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1						


SEGMENT DETAIL

REF - CLAIM IDENTIFICATION NUMBER FOR
CLEARINGHOUSES AND OTHER
TRANSMISSION INTERMEDIARIES**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when a Clearinghouse or other transmission intermediary needs to attach their own unique claim number. If not required by this implementation guide, do not send.**TR3 Example:** REF*D9*20041513010001~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			D9	Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Clearinghouse Trace Number	X 1 AN 1/50
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

AMT - CLAIM SUBMITTED CHARGES

X12 Segment Name: Monetary Amount Information**X12 Purpose:** To indicate the total monetary amount**Loop:** 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when needed to refine the search criteria for a specific claim. If not required by this implementation guide, do not send.**TR3 Notes:** 1. Not all payer systems retain the original submitted charges. Charges are sometimes changed during processing.**TR3 Example:** AMT*T3*75~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	AMT01	522	Amount Qualifier Code Code to qualify amount	M 1 ID 1/3
			CODE DEFINITION	
			T3 Total Submitted Charges	
REQUIRED	AMT02	782	Monetary Amount Monetary amount	M 1 R 1/18
			IMPLEMENTATION NAME: Total Claim Charge Amount	
NOT USED	AMT03	478	Credit/Debit Flag Code	O 1 ID 1/1

SEGMENT DETAIL

DTP - CLAIM SERVICE DATE

X12 Segment Name: Date or Time or Period

X12 Purpose: To specify any or all of a date, a time, or a time period

Loop: 2200D — CLAIM STATUS TRACKING NUMBER

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required for institutional claims or for professional and dental claims when the service date (Loop 2210) is not used. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.

TR3 Notes: 1. For professional claims, this date is derived from the service level dates.

TR3 Example: DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
		CODE	DEFINITION	
		472	Service	
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
		CODE	DEFINITION	
		D8	Date Expressed in Format CCYYMMDD	
		RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD	
		RD8 is required only when the "To and From" dates are different. However, at the discretion of the submitter, RD8 can also be used when the "To and From" dates are the same.		


REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1 AN 1/35
IMPLEMENTATION NAME: Claim Service Period				

SEGMENT DETAIL

SVC - SERVICE LINE INFORMATION

X12 Segment Name: Service Information**X12 Purpose:** To supply payment and control information to a provider for a particular service**Loop:** 2210D — SERVICE LINE INFORMATION **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when requesting status for Service Lines. If not required by this implementation guide, do not send.**TR3 Notes:** 1. For Institutional claims, when both an NUBC revenue code and a HCPCS or HIPPS code are reported, the HCPCS or HIPPS code is reported in SVC01-2 and the revenue code is reported in SVC04. When only a revenue code is used, it is reported in SVC01-2.**TR3 Example:** SVC*HC:C8900:AA*800**0111***12~
or
SVC*NU:0710*50*****1~

DIAGRAM

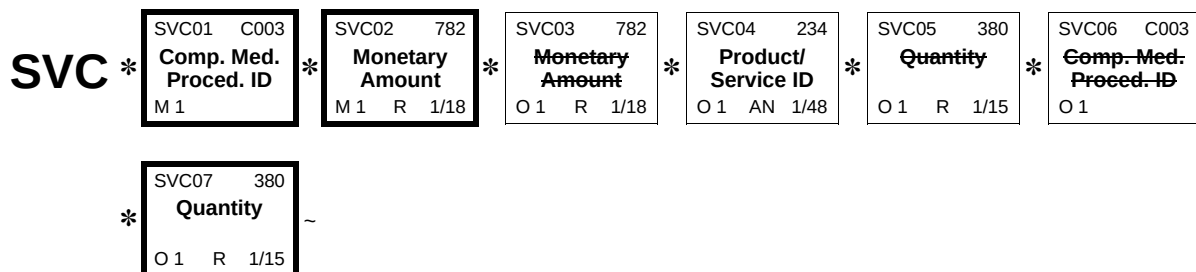

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers SVC01-2 will contain the procedure code of the adjudicated claim. If the adjudicated code is not known then SVC01-2 will contain the original submitted procedure code.	M 1
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) SEMANTIC: C003-01 qualifies C003-02 and C003-08. IMPLEMENTATION NAME: Product or Service ID Qualifier	M ID 2/2

CODE	DEFINITION
AD	American Dental Association Codes
ER	CODE SOURCE 135: American Dental Association Jurisdiction Specific Procedure and Supply Codes
	This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Jurisdiction Specific Procedure and Supply Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
HC	CODE SOURCE 576: Workers Compensation Specific Procedure and Supply Codes Health Care Financing Administration Common Procedural Coding System (HCPCS) Codes
	Because the CPT codes of the American Medical Association are also level 1 HCPCS codes, the CPT codes are reported under the code HC.
HP	CODE SOURCE 130: Healthcare Common Procedural Coding System Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code
IV	CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities Home Infusion EDI Coalition (HIEC) Product/Service Code
	This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Home Infusion EDI Coalition Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
N4	CODE SOURCE 513: Home Infusion EDI Coalition (HIEC) Product/Service Code List National Drug Code in 5-4-2 Format
NU	CODE SOURCE 240: National Drug Code by Format National Uniform Billing Committee (NUBC) UB92 Codes
	This code is the NUBC Revenue Code.
	CODE SOURCE 132: National Uniform Billing Committee (NUBC) Codes

		WK	Advanced Billing Concepts (ABC) Codes			
			At the time of this writing, this code set has been approved by the Secretary of HHS as a pilot project allowed under HIPAA law. The qualifier may only be used in transactions covered under HIPAA; By parties registered in the pilot project and their trading partners, OR If a new rule names the Complementary, Alternative, or Holistic Procedure Codes as an allowable code set under HIPAA, OR For claims which are not covered under HIPAA.			
			CODE SOURCE 843: Advanced Billing Concepts (ABC) Codes			
REQUIRED	SVC01 - 2	234	Product/Service ID	M	AN	1/48
			Identifying number for a product or service			
			SEMANTIC: If C003-08 is used, then C003-02 represents the beginning value in the range in which the code occurs.			
			IMPLEMENTATION NAME: Procedure Code			
			If the value in SVC01-1 is "NU", then this is an NUBC Revenue Code. If the revenue code is present here, then SVC04 is not used.			
SITUATIONAL	SVC01 - 3	1339	Procedure Modifier	O	AN	2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners			
			SEMANTIC: C003-03 modifies the value in C003-02 and C003-08.			
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>			
SITUATIONAL	SVC01 - 4	1339	Procedure Modifier	O	AN	2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners			
			SEMANTIC: C003-04 modifies the value in C003-02 and C003-08.			
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>			
SITUATIONAL	SVC01 - 5	1339	Procedure Modifier	O	AN	2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners			
			SEMANTIC: C003-05 modifies the value in C003-02 and C003-08.			
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>			

SITUATIONAL	SVC01 - 6	1339	Procedure Modifier	O AN 2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners	
			SEMANTIC: C003-06 modifies the value in C003-02 and C003-08.	
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>	
NOT USED	SVC01 - 7	352	Description	O AN 1/80
NOT USED	SVC01 - 8	234	Product/Service ID	O AN 1/48
REQUIRED	SVC02 782		Monetary Amount	M 1 R 1/18
			Monetary amount	
			SEMANTIC: SVC02 is the submitted service charge.	
			IMPLEMENTATION NAME: Line Item Charge Amount	
			This amount is the original submitted charge.	
NOT USED	SVC03 782		Monetary Amount	O 1 R 1/18
SITUATIONAL	SVC04 234		Product/Service ID	O 1 AN 1/48
			Identifying number for a product or service	
			SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code.	
			SITUATIONAL RULE: <i>Required on institutional claims when an NUBC revenue code needs to be reported in addition to a HCPCS or HIPPS code reported in SVC01-2. If not required by this implementation guide, do not send.</i>	
			IMPLEMENTATION NAME: Revenue Code	
NOT USED	SVC05 380		Quantity	O 1 R 1/15
NOT USED	SVC06 C003		COMPOSITE MEDICAL PROCEDURE IDENTIFIER	O 1
REQUIRED	SVC07 380		Quantity	O 1 R 1/15
			Numeric value of quantity	
			SEMANTIC: SVC07 is the original submitted units of service.	
			IMPLEMENTATION NAME: Units of Service Count	

SEGMENT DETAIL

REF - SERVICE LINE ITEM IDENTIFICATION

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2210D — SERVICE LINE INFORMATION


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when needed to refine the search criteria for a specific service line. If not required by this implementation guide, do not send.

TR3 Example: REF*FJ*6042201~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			FJ	Line Item Control Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Line Item Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

DTP - SERVICE LINE DATE

X12 Segment Name: Date or Time or Period**X12 Purpose:** To specify any or all of a date, a time, or a time period**Loop:** 2210D — SERVICE LINE INFORMATION**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			472	Service
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
			CODE	DEFINITION
			D8	Date Expressed in Format CCYYMMDD
			RD8	Range of Dates Expressed in Format CCYYMMDD- CCYYMMDD
			RD8 is required only when the “To and From” dates are different. However, at the discretion of the submitter, RD8 can also be used when the “To and From” dates are the same.	
REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1 AN 1/35
IMPLEMENTATION NAME: Service Line Date				

SEGMENT DETAIL

HL - DEPENDENT LEVEL

X12 Segment Name: Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.


Loop: 2000E — DEPENDENT LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the patient is a dependent who does not have a unique identification number. If not required by this implementation guide, do not send.

TR3 Notes:

1. When the patient is the dependent, the claim status request information is reflected in the 2200E Loop under the Dependent HL, 2000E Loop (HL03 = 23). See Section 1.4.1.1 for more information on defining the patient.

TR3 Example: HL*5*4*23~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code	M 1	ID	1/2		
			Code defining the characteristic of a level in a hierarchical structure					
			COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.					
			<table><tr><th>CODE</th><th>DEFINITION</th></tr></table>				CODE	DEFINITION
CODE	DEFINITION							
<table><tr><td>23</td><td>Dependent</td></tr></table>							23	Dependent
23	Dependent							
NOT USED	HL04	736	Hierarchical Child Code	O 1	ID	1/1		

SEGMENT DETAIL

DMG - DEPENDENT DEMOGRAPHIC
INFORMATION**X12 Segment Name:** Demographic Information**X12 Purpose:** To supply demographic information**X12 Set Notes:** 1. The DMG segment may only appear at the Subscriber (HL03=22) or Dependent (HL03=23) level.


X12 Syntax: 1. **P0102**
If either DMG01 or DMG02 is present, then the other is required.

2. **P1011**
If either DMG10 or DMG11 is present, then the other is required.

3. **C1105**
If DMG11 is present, then DMG05 is required.

Loop: 2000E — DEPENDENT LEVEL**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** DMG*D8*20010706*M~

DIAGRAM

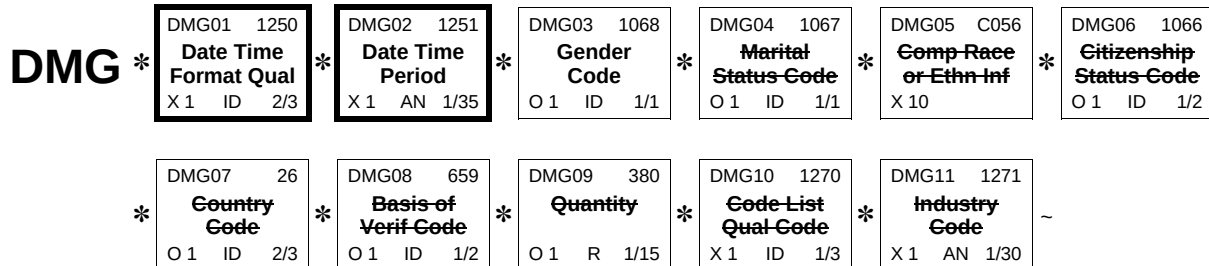

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DMG01	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format SYNTAX: P0102	X 1 ID 2/3
			CODE	DEFINITION
			D8	Date Expressed in Format CCYYMMDD
REQUIRED	DMG02	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times SYNTAX: P0102 SEMANTIC: DMG02 is the date of birth.	X 1 AN 1/35
			IMPLEMENTATION NAME: Patient Birth Date	

SITUATIONAL	DMG03	1068	Gender Code Code indicating the sex of the individual	O 1	ID	1/1						
SITUATIONAL RULE: <i>Required when available from the Information Receiver. If not required by this implementation guide, do not send.</i>												
IMPLEMENTATION NAME: Patient Gender Code												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>F</td><td>Female</td></tr><tr><td>M</td><td>Male</td></tr></table>							CODE	DEFINITION	F	Female	M	Male
CODE	DEFINITION											
F	Female											
M	Male											
NOT USED	DMG04	1067	Marital Status Code	O 1	ID	1/1						
NOT USED	DMG05	C056	COMPOSITE RACE OR ETHNICITY INFORMATION	X 10								
NOT USED	DMG06	1066	Citizenship Status Code	O 1	ID	1/2						
NOT USED	DMG07	26	Country Code	O 1	ID	2/3						
NOT USED	DMG08	659	Basis of Verification Code	O 1	ID	1/2						
NOT USED	DMG09	380	Quantity	O 1	R	1/15						
NOT USED	DMG10	1270	Code List Qualifier Code	X 1	ID	1/3						
NOT USED	DMG11	1271	Industry Code	X 1	AN	1/30						

SEGMENT DETAIL

NM1 - DEPENDENT NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100E — DEPENDENT NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*QC*1*SMITH*JOSEPH~

DIAGRAM

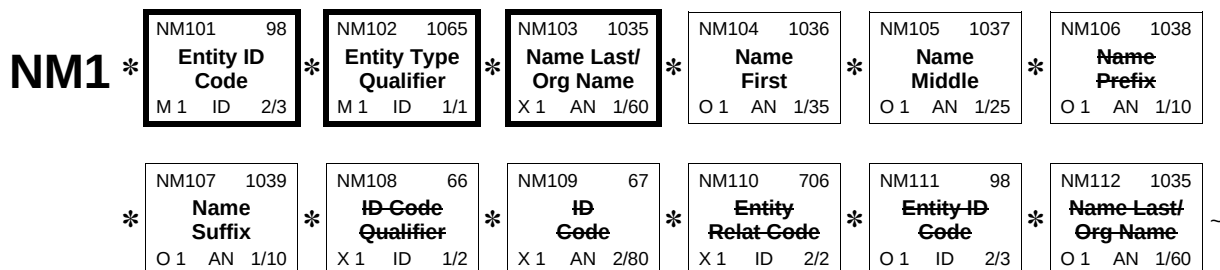

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>QC</td><td>Patient</td></tr></table>	CODE	DEFINITION	QC	Patient			
CODE	DEFINITION									
QC	Patient									
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Person</td></tr></table>	CODE	DEFINITION	1	Person			
CODE	DEFINITION									
1	Person									
REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203	X 1	AN	1/60				
			IMPLEMENTATION NAME: Patient Last Name							

SITUATIONAL	NM104	1036	Name First Individual first name	O 1	AN	1/35
SITUATIONAL RULE: <i>Required when the person has a first name that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient First Name						
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial	O 1	AN	1/25
SITUATIONAL RULE: <i>Required when the person has a middle name that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient Middle Name or Initial						
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name	O 1	AN	1/10
SITUATIONAL RULE: <i>Required when the person has a name suffix that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient Name Suffix						
NOT USED	NM108	66	Identification Code Qualifier	X 1	ID	1/2
NOT USED	NM109	67	Identification Code	X 1	AN	2/80
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60

SEGMENT DETAIL

TRN - CLAIM STATUS TRACKING NUMBER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200E — CLAIM STATUS TRACKING NUMBER **Loop Repeat:** >1


Segment Repeat: 1

Usage: REQUIRED

TR3 Notes: 1. This segment conveys a unique trace or reference for each 2200E Loop. This number will be returned in the 277 response.

TR3 Example: TRN*1*1722634842~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1 ID 1/2
			CODE	DEFINITION
			1	Current Transaction Trace Numbers
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	M 1 AN 1/50
			SEMANTIC: TRN02 provides unique identification for the transaction.	
			IMPLEMENTATION NAME: Current Transaction Trace Number	
NOT USED	TRN03	509	Originating Company Identifier	O 1 AN 10/10
NOT USED	TRN04	127	Reference Identification	O 1 AN 1/50

SEGMENT DETAIL


REF - PAYER CLAIM CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Information Receiver knows the payer assigned number and intends the search criteria be narrowed to a specific claim. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This is the payer's assigned control number, also known as, Internal Control Number (ICN), Document Control Number (DCN), or Claim Control Number (CCN).**TR3 Example:** REF*1K*9918046987~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			1K	Payor's Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Payer Claim Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

REF - INSTITUTIONAL BILL TYPE IDENTIFICATION

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when needed to refine the search criteria on Institutional claims. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.

TR3 Example: REF*BLT*111~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			BLT	Billing Type
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Bill Type Identifier	
			Concatenate the 837I CLM05-1 (Facility Type Code) and CLM05-3 (Claim Frequency Code) values. Code Source 236: Uniform Billing Claim Form Bill Type Code Source 235: Claim Frequency Type Code	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

REF - APPLICATION OR LOCATION SYSTEM IDENTIFIER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203


At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the application or location system identifier is known. If not required by this implementation guide, do not send.

TR3 Notes: 1. This identifier will be provided to the Information Receiver by the Information Source through a companion document or other trading partner document. If a payer has multiple adjudication systems processing the same type of claim (e.g. professional or institutional), this identifier can be used to improve status routing and response time.

TR3 Example: REF*LU*SYS5963~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			LU	Location Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Application or Location System Identifier	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - GROUP NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the patient has a group number and the number is known by the Information Receiver. If not required by this implementation guide, do not send.**TR3 Example:** REF*6P*GRP123~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			6P	Group Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Group Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PATIENT CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Patient Control Number has been assigned by the service provider. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The maximum number of characters supported for the Patient Control Number is '20'.**TR3 Example:** REF*EJ*PT12345~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>EJ</td><td>Patient Account Number</td></tr></table>	CODE	DEFINITION	EJ	Patient Account Number			
CODE	DEFINITION									
EJ	Patient Account Number									
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Patient Control Number	X 1	AN	1/50				
NOT USED	REF03	352	Description	X 1	AN	1/80				
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1						

SEGMENT DETAIL


REF - PHARMACY PRESCRIPTION NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Pharmacy Prescription Number is needed to refine the search criteria for pharmacy claims. If not required by this implementation guide, do not send.**TR3 Example:** REF*XZ*1234567~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			XZ	Pharmacy Prescription Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Pharmacy Prescription Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - CLAIM IDENTIFICATION NUMBER FOR
CLEARINGHOUSES AND OTHER
TRANSMISSION INTERMEDIARIES**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when a Clearinghouse or other transmission intermediary needs to attach their own unique claim number. If not required by this implementation guide, do not send.**TR3 Example:** REF*D9*20041513010001~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			D9	Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Clearinghouse Trace Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

AMT - CLAIM SUBMITTED CHARGES

X12 Segment Name: Monetary Amount Information

X12 Purpose: To indicate the total monetary amount

Loop: 2200E — CLAIM STATUS TRACKING NUMBER

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when needed to refine the search criteria for a specific claim. If not required by this implementation guide, do not send.

TR3 Notes: 1. Not all payer systems retain the original submitted charges. Charges are sometimes changed during processing.

TR3 Example: AMT*T3*75~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	AMT01	522	Amount Qualifier Code Code to qualify amount	M 1	ID	1/3
			CODE	DEFINITION		
			T3	Total Submitted Charges		
REQUIRED	AMT02	782	Monetary Amount Monetary amount	M 1	R	1/18
			IMPLEMENTATION NAME: Total Claim Charge Amount			
NOT USED	AMT03	478	Credit/Debit Flag Code	O 1	ID	1/1

SEGMENT DETAIL

DTP - CLAIM SERVICE DATE

X12 Segment Name: Date or Time or Period**X12 Purpose:** To specify any or all of a date, a time, or a time period**Loop:** 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required for institutional claims or for professional and dental claims when the service date (Loop 2210) is not used. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.**TR3 Notes:** 1. For professional claims, this date is derived from the service level dates.**TR3 Example:** DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			472	Service
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
			CODE	DEFINITION
			D8	Date Expressed in Format CCYYMMDD
			RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD
			RD8 is required only when the "To and From" dates are different. However, at the discretion of the submitter, RD8 can also be used when the "To and From" dates are the same.	

REQUIRED

DTP03

1251

Date Time Period

M 1 AN 1/35

Expression of a date, a time, or range of dates, times or dates and times


IMPLEMENTATION NAME: **Claim Service Period**

SEGMENT DETAIL

SVC - SERVICE LINE INFORMATION

X12 Segment Name: Service Information**X12 Purpose:** To supply payment and control information to a provider for a particular service**Loop:** 2210E — SERVICE LINE INFORMATION **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when requesting status for Service Lines. If not required by this implementation guide, do not send.**TR3 Notes:** 1. For Institutional claims, when both an NUBC revenue code and a HCPCS or HIPPS code are reported, the HCPCS or HIPPS code is reported in SVC01-2 and the revenue code is reported in SVC04. When only a revenue code is used, it is reported in SVC01-2.**TR3 Example:** SVC*HC:C8900:AA*800**0111***12~
or
SVC*NU:0710*50*****1~

DIAGRAM

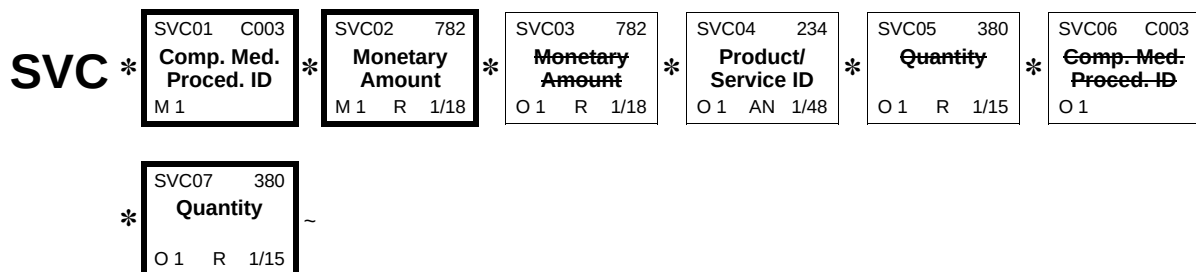

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers SVC01-2 will contain the procedure code of the adjudicated claim. If the adjudicated code is not known then SVC01-2 will contain the original submitted procedure code.	M 1
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) SEMANTIC: C003-01 qualifies C003-02 and C003-08. IMPLEMENTATION NAME: Product or Service ID Qualifier	M ID 2/2

CODE	DEFINITION
AD	American Dental Association Codes
ER	CODE SOURCE 135: American Dental Association Jurisdiction Specific Procedure and Supply Codes This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Jurisdiction Specific Procedure and Supply Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
HC	CODE SOURCE 576: Workers Compensation Specific Procedure and Supply Codes Health Care Financing Administration Common Procedural Coding System (HCPCS) Codes Because the CPT codes of the American Medical Association are also level 1 HCPCS codes, the CPT codes are reported under the code HC.
HP	CODE SOURCE 130: Healthcare Common Procedural Coding System Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code
IV	CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities Home Infusion EDI Coalition (HIEC) Product/Service Code This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Home Infusion EDI Coalition Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
N4	CODE SOURCE 513: Home Infusion EDI Coalition (HIEC) Product/Service Code List National Drug Code in 5-4-2 Format
NU	CODE SOURCE 240: National Drug Code by Format National Uniform Billing Committee (NUBC) UB92 Codes This code is the NUBC Revenue Code. CODE SOURCE 132: National Uniform Billing Committee (NUBC) Codes

		WK	Advanced Billing Concepts (ABC) Codes		
			At the time of this writing, this code set has been approved by the Secretary of HHS as a pilot project allowed under HIPAA law. The qualifier may only be used in transactions covered under HIPAA; By parties registered in the pilot project and their trading partners, OR If a new rule names the Complementary, Alternative, or Holistic Procedure Codes as an allowable code set under HIPAA, OR For claims which are not covered under HIPAA.		
			CODE SOURCE 843: Advanced Billing Concepts (ABC) Codes		
REQUIRED	SVC01 - 2	234	Product/Service ID	M	AN 1/48
			Identifying number for a product or service		
			SEMANTIC: If C003-08 is used, then C003-02 represents the beginning value in the range in which the code occurs.		
			IMPLEMENTATION NAME: Procedure Code		
			If the value in SVC01-1 is "NU", then this is an NUBC Revenue Code. If the revenue code is present here, then SVC04 is not used.		
SITUATIONAL	SVC01 - 3	1339	Procedure Modifier	O	AN 2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners		
			SEMANTIC: C003-03 modifies the value in C003-02 and C003-08.		
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 4	1339	Procedure Modifier	O	AN 2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners		
			SEMANTIC: C003-04 modifies the value in C003-02 and C003-08.		
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 5	1339	Procedure Modifier	O	AN 2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners		
			SEMANTIC: C003-05 modifies the value in C003-02 and C003-08.		
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		

SITUATIONAL	SVC01 - 6	1339	Procedure Modifier	O AN 2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners	
			SEMANTIC: C003-06 modifies the value in C003-02 and C003-08.	
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated or submitted procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>	
NOT USED	SVC01 - 7	352	Description	O AN 1/80
NOT USED	SVC01 - 8	234	Product/Service ID	O AN 1/48
REQUIRED	SVC02 782		Monetary Amount	M 1 R 1/18
			Monetary amount	
			SEMANTIC: SVC02 is the submitted service charge.	
			IMPLEMENTATION NAME: Line Item Charge Amount	
			This amount is the original submitted charge.	
NOT USED	SVC03 782		Monetary Amount	O 1 R 1/18
SITUATIONAL	SVC04 234		Product/Service ID	O 1 AN 1/48
			Identifying number for a product or service	
			SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code.	
			SITUATIONAL RULE: <i>Required on institutional claims when an NUBC revenue code needs to be reported in addition to a HCPCS or HIPPS code reported in SVC01-2. If not required by this implementation guide, do not send.</i>	
			IMPLEMENTATION NAME: Revenue Code	
NOT USED	SVC05 380		Quantity	O 1 R 1/15
NOT USED	SVC06 C003		COMPOSITE MEDICAL PROCEDURE IDENTIFIER	O 1
REQUIRED	SVC07 380		Quantity	O 1 R 1/15
			Numeric value of quantity	
			SEMANTIC: SVC07 is the original submitted units of service.	
			IMPLEMENTATION NAME: Units of Service Count	

SEGMENT DETAIL


REF - SERVICE LINE ITEM IDENTIFICATION

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2210E — SERVICE LINE INFORMATION**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when needed to refine the search criteria for a specific service line. If not required by this implementation guide, do not send.**TR3 Example:** REF*FJ*6042201~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			FJ	Line Item Control Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Line Item Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

DTP - SERVICE LINE DATE

X12 Segment Name: Date or Time or Period

X12 Purpose: To specify any or all of a date, a time, or a time period


Loop: 2210E — SERVICE LINE INFORMATION

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
		CODE	DEFINITION	
		472	Service	
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
		CODE	DEFINITION	
		D8	Date Expressed in Format CCYYMMDD	
		RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD	
RD8 is required only when the "To and From" dates are different. However, at the discretion of the submitter, RD8 can also be used when the "To and From" dates are the same.				
REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1 AN 1/35
IMPLEMENTATION NAME: Service Line Date				

SEGMENT DETAIL

SE - TRANSACTION SET TRAILER

X12 Segment Name: Transaction Set Trailer**X12 Purpose:** To indicate the end of the transaction set and provide the count of the transmitted segments (including the beginning (ST) and ending (SE) segments)**X12 Comments:** 1. SE is the last segment of each transaction set.**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** SE*34*0001~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SE01	96	Number of Included Segments Total number of segments included in a transaction set including ST and SE segments IMPLEMENTATION NAME: Transaction Segment Count	M 1 NO 1/10
REQUIRED	SE02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set Data value in SE02 must be identical to ST02.	M 1 AN 4/9

2.5 Transaction Set Listing

2.5.1 Implementation

This section lists the levels, loops, and segments contained in this implementation. It also serves as an index to the segment detail. Refer to section 2.1 Presentation Examples for detailed information on the components of the Implementation section.

IMPLEMENTATION

277 Health Care Information Status Notification

Table 1 - Header

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
106	0100	ST	Transaction Set Header	R	1	
107	0200	BHT	Beginning of Hierarchical Transaction	R	1	

Table 2 - Information Source Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000A INFORMATION SOURCE LEVEL			>1
109	0100	HL	Information Source Level	R	1	
			LOOP ID - 2100A PAYER NAME			1
111	0500	NM1	Payer Name	R	1	
113	0800	PER	Payer Contact Information	S	1	

Table 2 - Information Receiver Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000B INFORMATION RECEIVER LEVEL			>1
116	0100	HL	Information Receiver Level	R	1	
			LOOP ID - 2100B INFORMATION RECEIVER NAME			1
118	0500	NM1	Information Receiver Name	R	1	
			LOOP ID - 2200B INFORMATION RECEIVER TRACE IDENTIFIER			1
120	0900	TRN	Information Receiver Trace Identifier	S	1	
121	1000	STC	Information Receiver Status Information	R	>1	

Table 2 - Service Provider Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000C SERVICE PROVIDER LEVEL			>1
124	0100	HL	Service Provider Level	S	1	
			LOOP ID - 2100C PROVIDER NAME			2
126	0500	NM1	Provider Name	R	1	
			LOOP ID - 2200C PROVIDER OF SERVICE TRACE IDENTIFIER			1
129	0900	TRN	Provider of Service Trace Identifier	S	1	
130	1000	STC	Provider Status Information	R	>1	

Table 2 - Subscriber Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000D SUBSCRIBER LEVEL			>1
133	0100	HL	Subscriber Level	S	1	
			LOOP ID - 2100D SUBSCRIBER NAME			1
135	0500	NM1	Subscriber Name	R	1	
			LOOP ID - 2200D CLAIM STATUS TRACKING NUMBER			>1
137	0900	TRN	Claim Status Tracking Number	S	1	
138	1000	STC	Claim Level Status Information	R	>1	
149	1100	REF	Payer Claim Control Number	S	1	
150	1100	REF	Institutional Bill Type Identification	S	1	
151	1100	REF	Patient Control Number	S	1	
152	1100	REF	Pharmacy Prescription Number	S	1	
153	1100	REF	Voucher Identifier	S	1	
154	1100	REF	Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	S	1	
155	1200	DTP	Claim Service Date	S	1	
			LOOP ID - 2220D SERVICE LINE INFORMATION			>1
157	1800	SVC	Service Line Information	S	1	
161	1900	STC	Service Line Status Information	R	>1	
171	2000	REF	Service Line Item Identification	S	1	
172	2100	DTP	Service Line Date	R	1	

Table 2 - Dependent Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
			LOOP ID - 2000E DEPENDENT LEVEL			>1
173	0100	HL	Dependent Level	S	1	
			LOOP ID - 2100E DEPENDENT NAME			1
175	0500	NM1	Dependent Name	R	1	
			LOOP ID - 2200E CLAIM STATUS TRACKING NUMBER			>1
177	0900	TRN	Claim Status Tracking Number	R	1	
178	1000	STC	Claim Level Status Information	R	>1	
189	1100	REF	Payer Claim Control Number	S	1	
190	1100	REF	Institutional Bill Type Identification	S	1	
191	1100	REF	Patient Control Number	S	1	
192	1100	REF	Pharmacy Prescription Number	S	1	
193	1100	REF	Voucher Identifier	S	1	
194	1100	REF	Claim Identification Number For Clearinghouses and Other Transmission Intermediaries	S	1	
195	1200	DTP	Claim Service Date	S	1	
			LOOP ID - 2220E SERVICE LINE INFORMATION			>1
197	1800	SVC	Service Line Information	S	1	
201	1900	STC	Service Line Status Information	R	>1	
211	2000	REF	Service Line Item Identification	S	1	
212	2100	DTP	Service Line Date	R	1	
213	2700	SE	Transaction Set Trailer	R	1	

2.5.2 X12 Standard

This section is included as a reference. The implementation guide reference clarifies actual usage. Refer to section 2.1 Presentation Examples for detailed information on the components of the X12 Standard section.

STANDARD

277 Health Care Information Status Notification

Functional Group ID: **HN**

This X12 Transaction Set contains the format and establishes the data contents of the Health Care Information Status Notification Transaction Set (277) for use within the context of an Electronic Data Interchange (EDI) environment. This transaction set can be used by a health care payer or authorized agent to notify a provider, recipient, or authorized agent regarding the status of a health care claim or encounter or to request additional information from the provider regarding a health care claim or encounter, health care services review, or transactions related to the provisions of health care. This transaction set is not intended to replace the Health Care Claim Payment/Advice Transaction Set (835) and therefore, will not be used for account payment posting. The notification may be at a summary or service line detail level. The notification may be solicited or unsolicited.

Table 1 - Header

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
0100	ST	Transaction Set Header	M	1	
0200	BHT	Beginning of Hierarchical Transaction	M	1	
0300	REF	Reference Information	O	10	
LOOP ID - 1000					>1
0400	NM1	Individual or Organizational Name	O	1	
0500	N2	Additional Name Information	O	2	
0600	N3	Party Location	O	2	
0700	N4	Geographic Location	O	1	
0800	REF	Reference Information	O	2	
0900	PER	Administrative Communications Contact	O	1	

Table 2 - Detail

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
LOOP ID - 2000					>1
0100	HL	Hierarchical Level	M	1	
0200	SBR	Subscriber Information	O	1	
0300	PAT	Patient Information	O	1	
0400	DMG	Demographic Information	O	1	
LOOP ID - 2100					>1
0500	NM1	Individual or Organizational Name	O	1	
0600	N3	Party Location	O	2	
0700	N4	Geographic Location	O	1	
0800	PER	Administrative Communications Contact	O	1	
LOOP ID - 2200					>1
0900	TRN	Trace	O	1	
1000	STC	Status Information	O	>1	
1100	REF	Reference Information	O	9	
1200	DTP	Date or Time or Period	O	2	
1210	QTY	Quantity Information	O	5	

1220	AMT	Monetary Amount Information	O	5	
LOOP ID - 2210					>1
1300	PWK	Paperwork	O	1	
1400	PER	Administrative Communications Contact	O	1	
1500	N1	Party Identification	O	1	
1600	N3	Party Location	O	1	
1700	N4	Geographic Location	O	1	
LOOP ID - 2220					>1
1800	SVC	Service Information	O	1	
1900	STC	Status Information	O	>1	
2000	REF	Reference Information	O	1	
2100	DTP	Date or Time or Period	O	1	
LOOP ID - 2225					>1
2200	PWK	Paperwork	O	1	
2300	PER	Administrative Communications Contact	O	1	
2400	N1	Party Identification	O	1	
2500	N3	Party Location	O	1	
2600	N4	Geographic Location	O	1	
2700	SE	Transaction Set Trailer	M	1	

NOTES:

2/0200 The SBR segment may only appear at the Subscriber (HL03=22) level.

2/0400 The DMG segment may only appear at the Subscriber (HL03=22) or Dependent (HL03=23) level.

2/1300 The 2210 loop may be used when there is a status notification or a request for additional information about a particular claim.

2/2200 The 2225 loop may be used when there is a status notification or a request for additional information about a particular service line.

2.6 277 - Segment Detail


This section specifies the segments, data elements, and codes for this implementation. Refer to section 2.1 Presentation Examples for detailed information on the components of the Segment Detail section.

SEGMENT DETAIL

ST - TRANSACTION SET HEADER

X12 Segment Name: Transaction Set Header**X12 Purpose:** To indicate the start of a transaction set and to assign a control number**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** ST*277*0001*005010X212~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ST01	143	Transaction Set Identifier Code Code uniquely identifying a Transaction Set SEMANTIC: The transaction set identifier (ST01) is used by the translation routines of the interchange partners to select the appropriate transaction set definition (e.g., 810 selects the Invoice Transaction Set).	M 1 ID 3/3
			CODE	DEFINITION
			277	Health Care Information Status Notification
REQUIRED	ST02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set The Transaction Set Control Numbers in ST02 and SE02 must be identical. The number is assigned by the originator and must be unique within a functional group (GS-GE). For example, start with the number 0001 and increment from there.	M 1 AN 4/9
REQUIRED	ST03	1705	Implementation Convention Reference Reference assigned to identify Implementation Convention SEMANTIC: The implementation convention reference (ST03) is used by the translation routines of the interchange partners to select the appropriate implementation convention to match the transaction set definition. When used, this implementation convention reference takes precedence over the implementation reference specified in the GS08. IMPLEMENTATION NAME: Version, Release, or Industry Identifier This element must be populated with the implementation guide Version/Release/Industry Identifier Code named in Section 1.2. This field contains the same value as GS08. Some translator products strip off the ISA and GS segments prior to application (ST/SE) processing. Providing the information from the GS08 at this level will ensure that the appropriate application mapping is utilized at translation time.	O 1 AN 1/35

SEGMENT DETAIL

BHT - BEGINNING OF HIERARCHICAL TRANSACTION**X12 Segment Name:** Beginning of Hierarchical Transaction**X12 Purpose:** To define the business hierarchical structure of the transaction set and identify the business application purpose and reference data, i.e., number, date, and time**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** BHT*0010*08*277XXXX*20050921*0430*DG~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	BHT01	1005	Hierarchical Structure Code	M 1 ID 4/4
Code indicating the hierarchical application structure of a transaction set that utilizes the HL segment to define the structure of the transaction set				
		CODE	DEFINITION	
		0010	Information Source, Information Receiver, Provider of Service, Subscriber, Dependent	
REQUIRED	BHT02	353	Transaction Set Purpose Code	M 1 ID 2/2
Code identifying purpose of transaction set				
		CODE	DEFINITION	
		08	Status	
REQUIRED	BHT03	127	Reference Identification	O 1 AN 1/50
Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier				
SEMANTIC: BHT03 is the number assigned by the originator to identify the transaction within the originator's business application system.				
IMPLEMENTATION NAME: Originator Application Transaction Identifier				
REQUIRED	BHT04	373	Date	O 1 DT 8/8
Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year				
SEMANTIC: BHT04 is the date the transaction was created within the business application system.				
IMPLEMENTATION NAME: Transaction Set Creation Date				

REQUIRED	BHT05	337	Time	O 1 TM 4/8
-----------------	--------------	------------	-------------	-------------------

Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99)

SEMANTIC: BHT05 is the time the transaction was created within the business application system.

IMPLEMENTATION NAME: Transaction Set Creation Time

REQUIRED	BHT06	640	Transaction Type Code	O 1 ID 2/2
-----------------	--------------	------------	------------------------------	-------------------

Code specifying the type of transaction

CODE	DEFINITION
DG	Response

SEGMENT DETAIL


HL - INFORMATION SOURCE LEVEL

X12 Segment Name: Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000A — INFORMATION SOURCE LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Notes:** 1. This entity is the payer who has the current status information for the specified claims.**TR3 Example:** HL*1**20*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must begin with "1" within each ST/SE envelope and be incremented by one each time an HL is used in the transaction. Only numeric values are allowed in HL01.	M 1 AN 1/12
NOT USED	HL02	734	Hierarchical Parent ID Number	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code		M 1	ID	1/2
			Code defining the characteristic of a level in a hierarchical structure				
			COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.				
			CODE	DEFINITION			
REQUIRED	HL04	736	20	Information Source			
			Hierarchical Child Code		O 1	ID	1/1
			Code indicating if there are hierarchical child data segments subordinate to the level being described				
			COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.				
			CODE	DEFINITION			
			1	Additional Subordinate HL Data Segment in This Hierarchical Structure.			

SEGMENT DETAIL

NM1 - PAYER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100A — PAYER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*PR*2*ABC INSURANCE*****PI*12345~

DIAGRAM

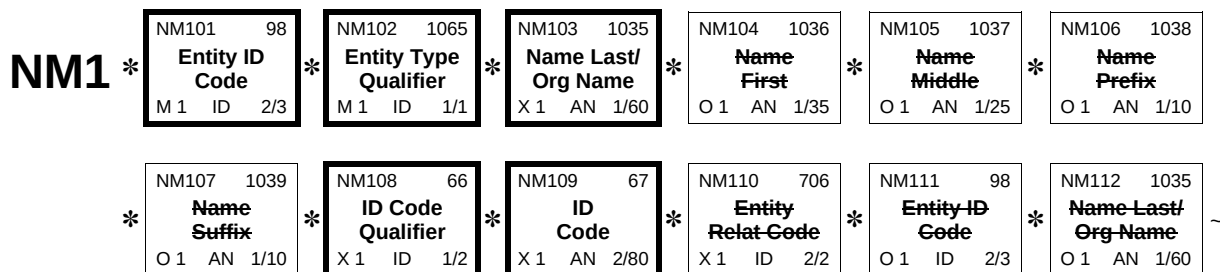

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>PR</td><td>Payer</td></tr></table>	CODE	DEFINITION	PR	Payer			
CODE	DEFINITION									
PR	Payer									
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>2</td><td>Non-Person Entity</td></tr></table>	CODE	DEFINITION	2	Non-Person Entity			
CODE	DEFINITION									
2	Non-Person Entity									
REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203	X 1	AN	1/60				
			IMPLEMENTATION NAME: Payer Name							

NOT USED	NM104	1036	Name First	O 1	AN	1/35
NOT USED	NM105	1037	Name Middle	O 1	AN	1/25
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10
NOT USED	NM107	1039	Name Suffix	O 1	AN	1/10
REQUIRED	NM108	66	Identification Code Qualifier	X 1	ID	1/2
			Code designating the system/method of code structure used for Identification Code (67)			
			SYNTAX: P0809			
			CODE	DEFINITION		
			PI	Payor Identification		
				Payer identification number established through trading partner agreement.		
			XV	Centers for Medicare and Medicaid Services PlanID		
				Use when reporting Health Plan ID (HPID) or Other Entity Identifier (OEID).		
				CODE SOURCE 540: Centers for Medicare and Medicaid Services PlanID		
REQUIRED	NM109	67	Identification Code	X 1	AN	2/80
			Code identifying a party or other code			
			SYNTAX: P0809			
			IMPLEMENTATION NAME: Payer Identifier			
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60

SEGMENT DETAIL

PER - PAYER CONTACT INFORMATION

X12 Segment Name: Administrative Communications Contact

X12 Purpose: To identify a person or office to whom administrative communications should be directed

X12 Syntax: 1. **P0304**

If either PER03 or PER04 is present, then the other is required.

2. **P0506**

If either PER05 or PER06 is present, then the other is required.

3. **P0708**

If either PER07 or PER08 is present, then the other is required.

Loop: 2100A — PAYER NAME

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the payer's contact information is not otherwise specified in a Trading Partner Agreement and the Information Receiver does not know how to contact the payer. If not required by this implementation guide, may be provided at the sender's discretion, but cannot be required by the receiver.

TR3 Notes: 1. When the communication number represents a telephone number in the United States and other countries using the North American Dialing Plan (for voice, data, fax, etc.), the communication number should always include the area code and phone number using the format AAABBBCCCC. A telephone extension, when applicable is reported in the communication number immediately after the telephone number.

TR3 Example: PER*IC*MEDICAL REVIEW
DEPARTMENT*TE*3135551234*EX*6593*FX*3135554321~
OR
PER*IC**TE*3135551234*FX*3135554321~

DIAGRAM

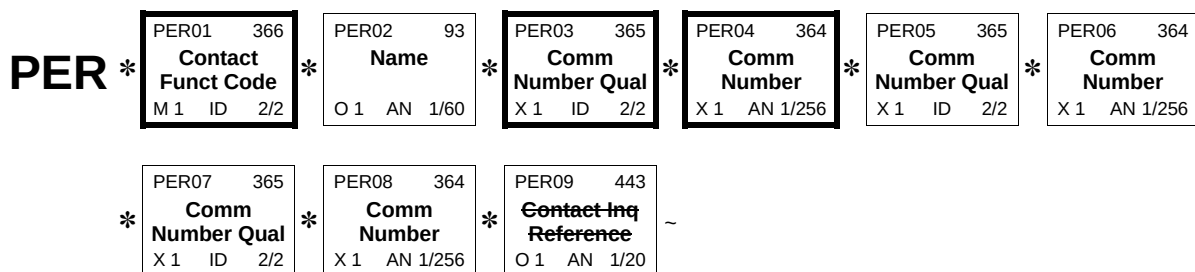

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES														
REQUIRED	PER01	366	Contact Function Code Code identifying the major duty or responsibility of the person or group named	M 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>IC</td><td>Information Contact</td></tr></table>	CODE	DEFINITION	IC	Information Contact											
CODE	DEFINITION																	
IC	Information Contact																	
SITUATIONAL	PER02	93	Name Free-form name	O 1	AN	1/60												
			SITUATIONAL RULE: <i>Required when a specific person or department is the contact for the response. If not required by this implementation guide, do not send.</i>															
			IMPLEMENTATION NAME: Payer Contact Name															
REQUIRED	PER03	365	Communication Number Qualifier Code identifying the type of communication number	X 1	ID	2/2												
			SYNTAX: P0304															
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>ED</td><td>Electronic Data Interchange Access Number</td></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	ED	Electronic Data Interchange Access Number	EM	Electronic Mail	FX	Facsimile	TE	Telephone					
CODE	DEFINITION																	
ED	Electronic Data Interchange Access Number																	
EM	Electronic Mail																	
FX	Facsimile																	
TE	Telephone																	
REQUIRED	PER04	364	Communication Number Complete communications number including country or area code when applicable	X 1	AN	1/256												
			SYNTAX: P0304															
			IMPLEMENTATION NAME: Payer Contact Communication Number															
			When an extension or additional contact number is required, use PER06.															
SITUATIONAL	PER05	365	Communication Number Qualifier Code identifying the type of communication number	X 1	ID	2/2												
			SYNTAX: P0506															
			SITUATIONAL RULE: <i>Required when a telephone extension or multiple communication types are available. If not required by this implementation guide, do not send.</i>															
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>ED</td><td>Electronic Data Interchange Access Number</td></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>EX</td><td>Telephone Extension</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	ED	Electronic Data Interchange Access Number	EM	Electronic Mail	EX	Telephone Extension	FX	Facsimile	TE	Telephone			
CODE	DEFINITION																	
ED	Electronic Data Interchange Access Number																	
EM	Electronic Mail																	
EX	Telephone Extension																	
FX	Facsimile																	
TE	Telephone																	

SITUATIONAL	PER06	364	Communication Number	X 1 AN 1/256
Complete communications number including country or area code when applicable				

SYNTAX: P0506

SITUATIONAL RULE: *Required when a telephone extension or multiple communication types are available. If not required by this implementation guide, do not send.*

IMPLEMENTATION NAME: Payer Contact Communication Number

SITUATIONAL	PER07	365	Communication Number Qualifier	X 1 ID 2/2
Code identifying the type of communication number				

SYNTAX: P0708

SITUATIONAL RULE: *Required when a telephone extension or multiple communication types are available. If not required by this implementation guide, do not send.*

CODE	DEFINITION
ED	Electronic Data Interchange Access Number
EM	Electronic Mail
EX	Telephone Extension
FX	Facsimile
TE	Telephone

SITUATIONAL	PER08	364	Communication Number	X 1 AN 1/256
Complete communications number including country or area code when applicable				

SYNTAX: P0708

SITUATIONAL RULE: *Required when a telephone extension or multiple communication types are available. If not required by this implementation guide, do not send.*

IMPLEMENTATION NAME: Payer Contact Communication Number

NOT USED	PER09	443	Contact Inquiry Reference	O 1 AN 1/20
-----------------	--------------	------------	----------------------------------	--------------------

SEGMENT DETAIL

HL - INFORMATION RECEIVER LEVEL**X12 Segment Name:** Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments


- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000B — INFORMATION RECEIVER LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** REQUIRED

TR3 Notes: 1. This entity expects a response from the Information Source. See Section 1.4.1 Transaction Participants for more information on the Information Receiver.

TR3 Example: HL*2*1*21*1~ or HL*2*1*21*0~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1 ID 1/2						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>21</td><td>Information Receiver</td></tr></table>	CODE	DEFINITION	21	Information Receiver			
CODE	DEFINITION									
21	Information Receiver									
REQUIRED	HL04	736	Hierarchical Child Code Code indicating if there are hierarchical child data segments subordinate to the level being described COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.	O 1 ID 1/1						
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>0</td><td>No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the status request for errors at the Information Source or Information Receiver levels.</td></tr><tr><td>1</td><td>Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at the lower hierarchial levels (i.e. Provider, Subscriber or Dependent).</td></tr></table>	CODE	DEFINITION	0	No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the status request for errors at the Information Source or Information Receiver levels.	1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at the lower hierarchial levels (i.e. Provider, Subscriber or Dependent).	
CODE	DEFINITION									
0	No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the status request for errors at the Information Source or Information Receiver levels.									
1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at the lower hierarchial levels (i.e. Provider, Subscriber or Dependent).									

SEGMENT DETAIL

NM1 - INFORMATION RECEIVER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100B — INFORMATION RECEIVER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Notes:** 1. This is the individual or organization requesting to receive the status information.**TR3 Example:** NM1*41*2*XYZ SERVICE*****46*A222222221~

DIAGRAM

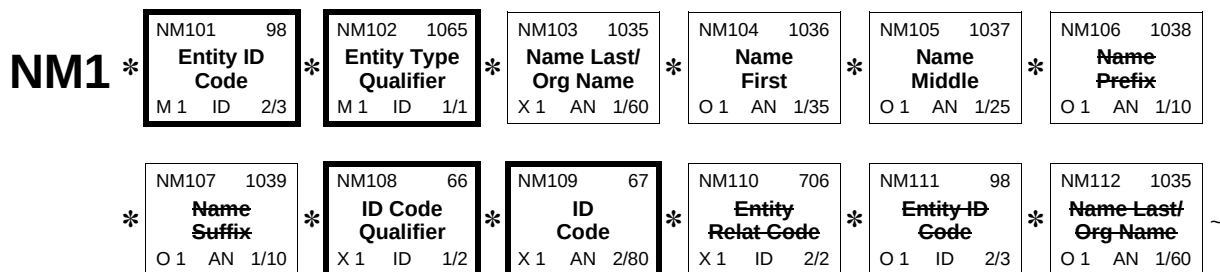

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1 ID 2/3
			CODE	DEFINITION
			41	Submitter
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1 ID 1/1
			CODE	DEFINITION
			1	Person
			2	Non-Person Entity

SITUATIONAL	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 SITUATIONAL RULE: <i>Required when the identifier in NM109 is not sufficient to identify the Information Receiver. If not required by this implementation guide, may be provided at sender's discretion, but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Information Receiver Last or Organization Name	X 1	AN	1/60				
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: <i>Required when the value in NM102 = "1" and the person has a first name that is known. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Information Receiver First Name	O 1	AN	1/35				
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Information Receiver Middle Name	O 1	AN	1/25				
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10				
NOT USED	NM107	1039	Name Suffix	O 1	AN	1/10				
REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809	X 1	ID	1/2				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>46</td><td>Electronic Transmitter Identification Number (ETIN)</td></tr></table>	CODE	DEFINITION	46	Electronic Transmitter Identification Number (ETIN)			
CODE	DEFINITION									
46	Electronic Transmitter Identification Number (ETIN)									
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 IMPLEMENTATION NAME: Information Receiver Identification Number The ETIN is established through Trading Partner agreement.	X 1	AN	2/80				
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2				
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3				
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60				

SEGMENT DETAIL

TRN - INFORMATION RECEIVER TRACE
IDENTIFIER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200B — INFORMATION RECEIVER TRACE IDENTIFIER Loop Repeat: 1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when rejecting claim status requests for errors at Information Source or Information Receiver levels. If not required by this implementation guide, do not send.

TR3 Notes: 1. If reporting error status at this level, 2000C, 2000D and 2000E Loops are not used.

TR3 Example: TRN*2*ABC276XXX~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1 ID 1/2
2 Referenced Transaction Trace Numbers				
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SEMANTIC: TRN02 provides unique identification for the transaction. IMPLEMENTATION NAME: Claim Transaction Batch Number This value must be the BHT03 data element value from the 276 Claim Status Request being rejected.	M 1 AN 1/50
NOT USED	TRN03	509	Originating Company Identifier	O 1 AN 10/10
NOT USED	TRN04	127	Reference Identification	O 1 AN 1/50

SEGMENT DETAIL

STC - INFORMATION RECEIVER STATUS
INFORMATION**X12 Segment Name:** Status Information**X12 Purpose:** To report the status, required action, and paid information of a claim or service line**Loop:** 2200B — INFORMATION RECEIVER TRACE IDENTIFIER**Segment Repeat:** >1**Usage:** REQUIRED**TR3 Notes:** 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.**TR3 Example:** STC*E0:24:41*20050830~

DIAGRAM

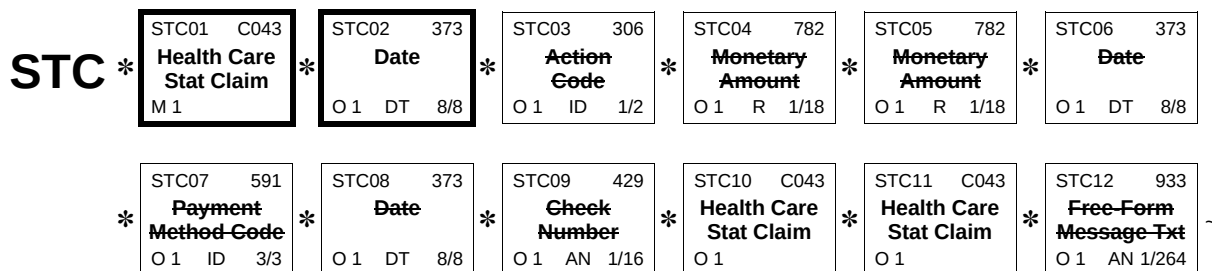

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code Only the 'D0' Category Code and 'E' Category Codes are allowable at this level.
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code

SITUATIONAL	STC01 - 3	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code. SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>	O	ID	2/3
NOT USED	STC01 - 4	1270	Code List Qualifier Code	O	ID	1/3
REQUIRED	STC02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC02 is the effective date of the status information. IMPLEMENTATION NAME: Status Information Effective Date	O 1	DT	8/8
NOT USED	STC03	306	Action Code	O 1	ID	1/2
NOT USED	STC04	782	Monetary Amount	O 1	R	1/18
NOT USED	STC05	782	Monetary Amount	O 1	R	1/18
NOT USED	STC06	373	Date	O 1	DT	8/8
NOT USED	STC07	591	Payment Method Code	O 1	ID	3/3
NOT USED	STC08	373	Date	O 1	DT	8/8
NOT USED	STC09	429	Check Number	O 1	AN	1/16
SITUATIONAL	STC10	C043	HEALTH CARE CLAIM STATUS Used to convey status of the entire claim or a specific service line SITUATIONAL RULE: <i>Required when a second status is needed. If not required by this implementation guide, do not send.</i>	O 1		
REQUIRED	STC10 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M	AN	1/30
REQUIRED	STC10 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code	M	AN	1/30

SITUATIONAL	STC10 - 3	98	Entity Identifier Code	O	ID	2/3
Code identifying an organizational entity, a physical location, property or an individual						
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.						
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>						
See STC01-3 for valid values.						
NOT USED	STC10 - 4	1270	Code List Qualifier Code	O	ID	1/3
SITUATIONAL	STC11 C043		HEALTH CARE CLAIM STATUS	O	1	
Used to convey status of the entire claim or a specific service line						
SITUATIONAL RULE: <i>Required when a third status is needed. If not required by this implementation guide, do not send.</i>						
REQUIRED	STC11 - 1	1271	Industry Code	M	AN	1/30
Code indicating a code from a specific industry code list						
SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).						
IMPLEMENTATION NAME: Health Care Claim Status Category Code						
See STC01-1 for valid values.						
REQUIRED	STC11 - 2	1271	Industry Code	M	AN	1/30
Code indicating a code from a specific industry code list						
SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.						
IMPLEMENTATION NAME: Status Code						
SITUATIONAL	STC11 - 3	98	Entity Identifier Code	O	ID	2/3
Code identifying an organizational entity, a physical location, property or an individual						
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.						
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>						
See STC01-3 for valid values.						
NOT USED	STC11 - 4	1270	Code List Qualifier Code	O	ID	1/3
NOT USED	STC12 933		Free-form Message Text	O	1 AN	1/264

SEGMENT DETAIL


HL - SERVICE PROVIDER LEVEL

X12 Segment Name: Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments**X12 Comments:** 1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.

2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000C — SERVICE PROVIDER LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when status was not reported at the Information Receiver level. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This entity delivered the health care service. See Section 1.4.1 Transaction Participants for more information on the Provider.**TR3 Example:** HL*3*2*19*0~ or HL*3*2*19*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1 ID 1/2						
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>19</td><td>Provider of Service</td></tr></table>					CODE	DEFINITION	19	Provider of Service		
CODE	DEFINITION									
19	Provider of Service									
REQUIRED	HL04	736	Hierarchical Child Code Code indicating if there are hierarchical child data segments subordinate to the level being described COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.	O 1 ID 1/1						
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>0</td><td>No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the claim status requests for errors at the provider level. The 2000D and 2000E hierarchical levels (children) associated with this provider are not used.</td></tr><tr><td>1</td><td>Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at lower hierarchical levels (Subscriber or Dependent).</td></tr></table>					CODE	DEFINITION	0	No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the claim status requests for errors at the provider level. The 2000D and 2000E hierarchical levels (children) associated with this provider are not used.	1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at lower hierarchical levels (Subscriber or Dependent).
CODE	DEFINITION									
0	No Subordinate HL Segment in This Hierarchical Structure. Required when rejecting the claim status requests for errors at the provider level. The 2000D and 2000E hierarchical levels (children) associated with this provider are not used.									
1	Additional Subordinate HL Data Segment in This Hierarchical Structure. Required when reporting status responses at lower hierarchical levels (Subscriber or Dependent).									

SEGMENT DETAIL

NM1 - PROVIDER NAME**X12 Segment Name:** Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**

If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.


Loop: 2100C — PROVIDER NAME **Loop Repeat:** 2**Segment Repeat:** 1**Usage:** REQUIRED

TR3 Notes: 1. During the transition to NPI, for those health care providers covered under the NPI mandate, two iterations of the 2100C Loop may be sent to accommodate reporting dual provider identification numbers (NPI and Legacy). When two iterations are reported, the NPI number will be in the iteration where the NM108 qualifier will be 'XX' and the legacy number will be in the iteration where the NM108 qualifier will be either 'SV' or 'FI'.

2. After the transition to NPI, for those health care providers covered under the NPI mandate, only one iteration of the 2100C loop must be sent with the NPI reported in the NM109 and NM108=XX.

TR3 Example: NM1*1P*2*HOME MEDICAL*****XX*1666666666~

DIAGRAM

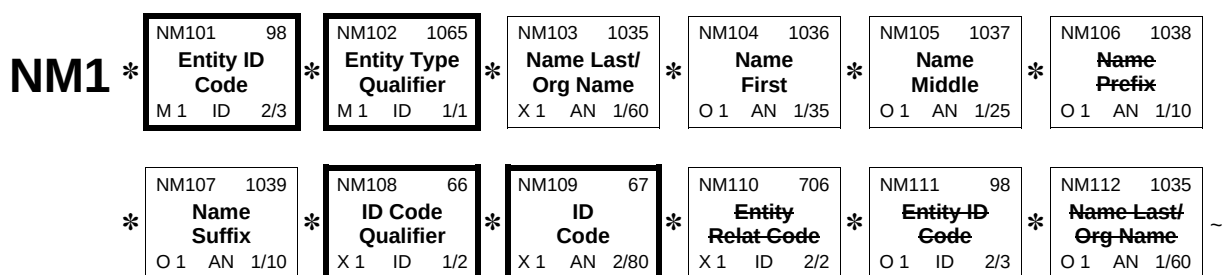

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1 ID 2/3
			CODE	DEFINITION
			1P	Provider
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1 ID 1/1
			CODE	DEFINITION
			1	Person
			2	Non-Person Entity
SITUATIONAL	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 SITUATIONAL RULE: <i>Required when the identifier in NM109 is not sufficient to identify the Provider. If not required by this implementation guide, may be provided at sender's discretion, but cannot be required by the receiver.</i>	X 1 AN 1/60
			IMPLEMENTATION NAME: Provider Last or Organization Name	
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: <i>Required when the value in NM102 = "1" and the person has a first name that is known. If not required by this implementation guide, do not send.</i>	O 1 AN 1/35
			IMPLEMENTATION NAME: Provider First Name	
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send.</i>	O 1 AN 1/25
			IMPLEMENTATION NAME: Provider Middle Name	
NOT USED	NM106	1038	Name Prefix	O 1 AN 1/10
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name SITUATIONAL RULE: <i>Required when NM102 = 1 and the person has a name suffix that is known. If not required by this implementation guide, do not send.</i>	O 1 AN 1/10
			IMPLEMENTATION NAME: Provider Name Suffix	

REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809	X 1	ID	1/2								
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>FI</td><td>Federal Taxpayer's Identification Number</td></tr><tr><td>SV</td><td>Service Provider Number</td></tr><tr><td>XX</td><td>Centers for Medicare and Medicaid Services National Provider Identifier</td></tr></table>	CODE	DEFINITION	FI	Federal Taxpayer's Identification Number	SV	Service Provider Number	XX	Centers for Medicare and Medicaid Services National Provider Identifier			
CODE	DEFINITION													
FI	Federal Taxpayer's Identification Number													
SV	Service Provider Number													
XX	Centers for Medicare and Medicaid Services National Provider Identifier													
			Required value when the National Provider ID is mandated for use and the provider is a covered health care provider under the mandate. Otherwise, one of the other listed codes must be used.											
			CODE SOURCE 537: Centers for Medicare and Medicaid Services National Provider Identifier											
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809	X 1	AN	2/80								
			IMPLEMENTATION NAME: Provider Identifier											
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2								
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3								
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60								

SEGMENT DETAIL

TRN - PROVIDER OF SERVICE TRACE IDENTIFIER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200C — PROVIDER OF SERVICE TRACE IDENTIFIER Loop Repeat: 1

Segment Repeat: 1

Usage: SITUATIONAL


Situational Rule: Required when rejecting the claim status request(s) for errors at the provider level. If not required by this implementation guide, do not send.

TR3 Notes: 1. If reporting error status at this level, the 2000D and 2000E Loops related to this provider are not used.

2. The TRN Segment is syntactically required in order to use the Loop 2200C STC. TRN02 can be either a default value of zero (0) or any value the Information Source chooses to assign.

TR3 Example: TRN*1*0~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1	ID	1/2				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Current Transaction Trace Numbers</td></tr></table>	CODE	DEFINITION	1	Current Transaction Trace Numbers			
CODE	DEFINITION									
1	Current Transaction Trace Numbers									
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SEMANTIC: TRN02 provides unique identification for the transaction.	M 1	AN	1/50				
			IMPLEMENTATION NAME: Provider of Service Information Trace Identifier							
NOT USED	TRN03	509	Originating Company Identifier	O 1	AN	10/10				
NOT USED	TRN04	127	Reference Identification	O 1	AN	1/50				

SEGMENT DETAIL

STC - PROVIDER STATUS INFORMATION

X12 Segment Name: Status Information

X12 Purpose: To report the status, required action, and paid information of a claim or service line

Loop: 2200C — PROVIDER OF SERVICE TRACE IDENTIFIER


Segment Repeat: >1

Usage: REQUIRED

TR3 Notes: 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.

TR3 Example: STC*E0:24:85*20050830~

DIAGRAM

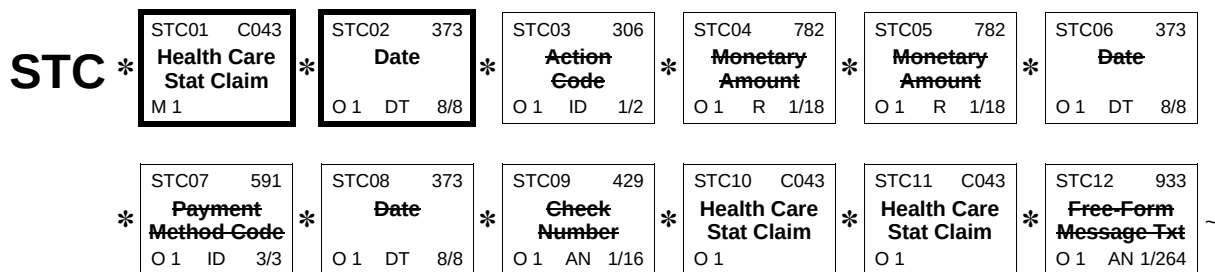

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code Only the 'D0' Category Code and 'E' Category Codes are allowable at this level.
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code

SITUATIONAL	STC01 - 3	98	Entity Identifier Code	O	ID	2/3
			Code identifying an organizational entity, a physical location, property or an individual			
			SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.			
			SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>			
			CODE	DEFINITION		
			1P	Provider		
NOT USED	STC01 - 4	1270	Code List Qualifier Code	O	ID	1/3
REQUIRED	STC02 373	Date		O 1	DT	8/8
		Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year				
		SEMANTIC: STC02 is the effective date of the status information.				
		IMPLEMENTATION NAME: Status Information Effective Date				
NOT USED	STC03 306	Action Code		O 1	ID	1/2
NOT USED	STC04 782	Monetary Amount		O 1	R	1/18
NOT USED	STC05 782	Monetary Amount		O 1	R	1/18
NOT USED	STC06 373	Date		O 1	DT	8/8
NOT USED	STC07 591	Payment Method Code		O 1	ID	3/3
NOT USED	STC08 373	Date		O 1	DT	8/8
NOT USED	STC09 429	Check Number		O 1	AN	1/16
SITUATIONAL	STC10 C043	HEALTH CARE CLAIM STATUS		O 1		
		Used to convey status of the entire claim or a specific service line				
		SITUATIONAL RULE: <i>Required when a second status is needed. If not required by this implementation guide, do not send.</i>				
REQUIRED	STC10 - 1	1271	Industry Code	M	AN	1/30
		Code indicating a code from a specific industry code list				
		SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).				
		IMPLEMENTATION NAME: Health Care Claim Status Category Code				
		See STC01-1 for valid values.				
REQUIRED	STC10 - 2	1271	Industry Code	M	AN	1/30
		Code indicating a code from a specific industry code list				
		SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.				
		IMPLEMENTATION NAME: Status Code				

SITUATIONAL	STC10 - 3	98	Entity Identifier Code	O	ID	2/3
Code identifying an organizational entity, a physical location, property or an individual						
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.						
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>						
See STC01-3 for valid value.						
NOT USED	STC10 - 4	1270	Code List Qualifier Code	O	ID	1/3
SITUATIONAL	STC11 C043		HEALTH CARE CLAIM STATUS	O	1	
Used to convey status of the entire claim or a specific service line						
SITUATIONAL RULE: <i>Required when a third status is needed. If not required by this implementation guide, do not send.</i>						
REQUIRED	STC11 - 1	1271	Industry Code	M	AN	1/30
Code indicating a code from a specific industry code list						
SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).						
IMPLEMENTATION NAME: Health Care Claim Status Category Code						
See STC01-1 for valid values.						
REQUIRED	STC11 - 2	1271	Industry Code	M	AN	1/30
Code indicating a code from a specific industry code list						
SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.						
IMPLEMENTATION NAME: Status Code						
SITUATIONAL	STC11 - 3	98	Entity Identifier Code	O	ID	2/3
Code identifying an organizational entity, a physical location, property or an individual						
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.						
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>						
See STC01-3 for valid value.						
NOT USED	STC11 - 4	1270	Code List Qualifier Code	O	ID	1/3
NOT USED	STC12 933		Free-form Message Text	O	1 AN	1/264

SEGMENT DETAIL

HL - SUBSCRIBER LEVEL

X12 Segment Name: Hierarchical Level

X12 Purpose: To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.

Loop: 2000D — SUBSCRIBER LEVEL **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the patient is the subscriber or a dependent with a unique identification number and status was not reported at the Provider level. If not required by this implementation guide, do not send.

- TR3 Notes:**
1. When the patient is the subscriber or a dependent with a unique identification number, the claim status response information is reflected in the 2200D Loop under the Subscriber HL, 2000D Loop (HL03 = 22). The Dependent HL, 2000E Loop is not used. See Section 1.4.1.1 for more information on defining the patient.
 2. When requesting and responding to claim status for both a subscriber and a dependent of that subscriber, the Subscriber HL Loop 2000D must be followed by the subscriber's claim status data, Loop 2200D. In this instance, HL04=0 would be used. Then the Subscriber HL Loop 2000D must be repeated prior to the dependent HL Loop 2000E and their corresponding claim status data, Loop 2200E. In this instance, HL04=1 would be used. See Section 1.4.2.3 for an example of this structure.

TR3 Example: HL*4*3*22*0~ or HL*4*3*22*1~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12
REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1 ID 1/2
REQUIRED	HL04	736	22 Subscriber	
			Hierarchical Child Code Code indicating if there are hierarchical child data segments subordinate to the level being described COMMENT: HL04 indicates whether or not there are subordinate (or child) HL segments related to the current HL segment.	O 1 ID 1/1
			0 No Subordinate HL Segment in This Hierarchical Structure.	
			1 Additional Subordinate HL Data Segment in This Hierarchical Structure.	
			Required when there are no dependent claim status responses for this subscriber.	
			Required when there are dependent claim status responses for this subscriber.	

SEGMENT DETAIL

NM1 - SUBSCRIBER NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100D — SUBSCRIBER NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*IL*1*SMITH*ROBERT*****MI*9876543210~

DIAGRAM

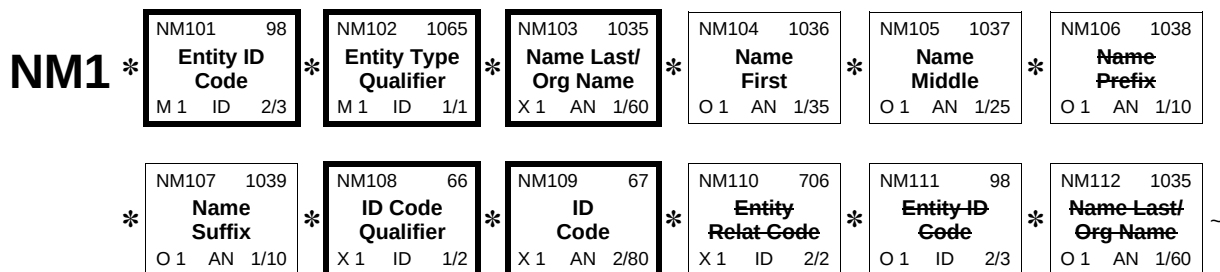

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	NM101	98	Entity Identifier Code	M 1 ID 2/3
			Code identifying an organizational entity, a physical location, property or an individual	
			CODE	DEFINITION
			IL	Insured or Subscriber
REQUIRED	NM102	1065	Entity Type Qualifier	M 1 ID 1/1
			Code qualifying the type of entity	
			SEMANTIC: NM102 qualifies NM103.	
			CODE	DEFINITION
			1	Person
			2	Non-Person Entity
				Use the value "2" in an employer-subscriber situation, such as Worker's Compensation.

REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 IMPLEMENTATION NAME: Subscriber Last Name	X 1	AN	1/60								
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: Required when the value in NM102 = “1” and the person has a first name that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber First Name	O 1	AN	1/35								
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: Required when NM102 = 1 and the person has a middle name that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber Middle Name or Initial	O 1	AN	1/25								
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10								
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name SITUATIONAL RULE: Required when NM102 = 1 and the person has a name suffix that is known. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: Subscriber Name Suffix	O 1	AN	1/10								
REQUIRED	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809 <table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>24</td><td>Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.</td></tr><tr><td>II</td><td>Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.</td></tr><tr><td>MI</td><td>Member Identification Number</td></tr></table>	CODE	DEFINITION	24	Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.	II	Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.	MI	Member Identification Number	X 1	ID	1/2
CODE	DEFINITION													
24	Employer’s Identification Number This code may be used in conjunction with a workers compensation claim.													
II	Standard Unique Health Identifier for each Individual in the United States Required if the HIPAA Individual Patient Identifier is mandated for use. If not required, use one of the other values.													
MI	Member Identification Number													
REQUIRED	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 IMPLEMENTATION NAME: Subscriber Identifier	X 1	AN	2/80								
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2								
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3								
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60								

SEGMENT DETAIL

TRN - CLAIM STATUS TRACKING NUMBER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200D — CLAIM STATUS TRACKING NUMBER **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the patient is the subscriber or a dependent with a unique identification number. If not required by this implementation guide, do not send.

- TR3 Notes:**
1. This is the trace or reference number from the originator of the transaction that was provided for this patient's 276 request.
 2. When the patient is not the subscriber or a dependent with a unique identification number, the Loop 2200E TRN and subsequent segments will be used to reflect the claim status information.

TR3 Example: TRN*2*1722634842~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1 ID 1/2
			CODE	DEFINITION
		2	Referenced Transaction Trace Numbers	
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	M 1 AN 1/50
			SEMANTIC: TRN02 provides unique identification for the transaction.	
			IMPLEMENTATION NAME: Referenced Transaction Trace Number	
NOT USED	TRN03	509	Originating Company Identifier	O 1 AN 10/10
NOT USED	TRN04	127	Reference Identification	O 1 AN 1/50

SEGMENT DETAIL

STC - CLAIM LEVEL STATUS INFORMATION

X12 Segment Name: Status Information

X12 Purpose: To report the status, required action, and paid information of a claim or service line

Loop: 2200D — CLAIM STATUS TRACKING NUMBER


Segment Repeat: >1

Usage: REQUIRED

TR3 Notes: 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.

TR3 Example: STC*A1:21*20050501**50*0~ or
STC*F1:65*20050511**50*40*20050510**20050510*50321~ or
STC*F2:79::RX*20050501**50*0~

DIAGRAM

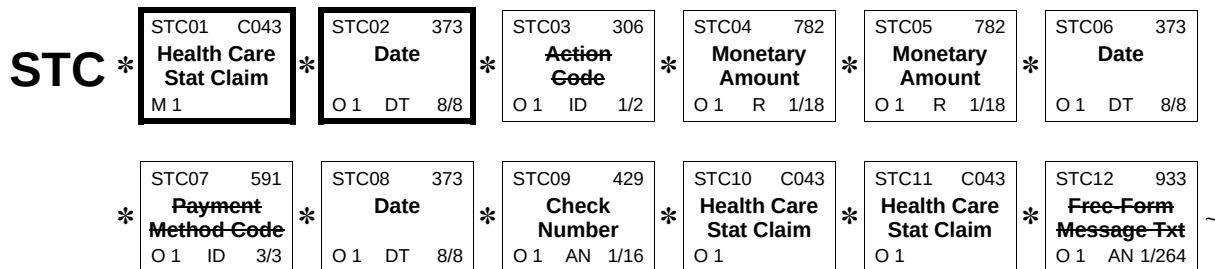

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code All Category Codes except 'Request for Additional Information' (R Category Codes) are allowable at this level.
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC01-4 must have the value 'RX'.

SITUATIONAL STC01 - 3

98 Entity Identifier Code O ID 2/3
Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:
C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

CODE	DEFINITION
03	Dependent
13	Contracted Service Provider
17	Consultant's Office
1E	Health Maintenance Organization (HMO)
1G	Oncology Center
1H	Kidney Dialysis Unit
1I	Preferred Provider Organization (PPO)
1O	Acute Care Hospital
1P	Provider
1Q	Military Facility
1R	University, College or School
1S	Outpatient Surgicenter
1T	Physician, Clinic or Group Practice
1U	Long Term Care Facility
1V	Extended Care Facility
1W	Psychiatric Health Facility
1X	Laboratory
1Y	Retail Pharmacy
1Z	Home Health Care
28	Subcontractor
2A	Federal, State, County or City Facility
2B	Third-Party Administrator
2D	Miscellaneous Health Care Facility
2E	Non-Health Care Miscellaneous Facility
2I	Church Operated Facility
2K	Partnership
2P	Public Health Service Facility
2Q	Veterans Administration Facility

2S	Public Health Service Indian Service Facility
2Z	Hospital Unit of an Institution (prison hospital, college infirmary, etc.)
30	Service Supplier
36	Employer
3A	Hospital Unit Within an Institution for the Mentally Retarded
3C	Tuberculosis and Other Respiratory Diseases Facility
3D	Obstetrics and Gynecology Facility
3E	Eye, Ear, Nose and Throat Facility
3F	Rehabilitation Facility
3G	Orthopedic Facility
3H	Chronic Disease Facility
3I	Other Specialty Facility
3J	Children's General Facility
3K	Children's Hospital Unit of an Institution
3L	Children's Psychiatric Facility
3M	Children's Tuberculosis and Other Respiratory Diseases Facility
3N	Children's Eye, Ear, Nose and Throat Facility
3O	Children's Rehabilitation Facility
3P	Children's Orthopedic Facility
3Q	Children's Chronic Disease Facility
3R	Children's Other Specialty Facility
3S	Institution for Mental Retardation
3T	Alcoholism and Other Chemical Dependency Facility
3U	General Inpatient Care for AIDS/ARC Facility
3V	AIDS/ARC Unit
3W	Specialized Outpatient Program for AIDS/ARC
3X	Alcohol/Drug Abuse or Dependency Inpatient Unit
3Y	Alcohol/Drug Abuse or Dependency Outpatient Services
3Z	Arthritis Treatment Center
40	Receiver
43	Claimant Authorized Representative
44	Data Processing Service Bureau
4A	Birthing Room/LDRP Room
4B	Burn Care Unit
4C	Cardiac Catheterization Laboratory
4D	Open-Heart Surgery Facility
4E	Cardiac Intensive Care Unit
4F	Angioplasty Facility
4G	Chronic Obstructive Pulmonary Disease Service Facility

4H	Emergency Department
4I	Trauma Center (Certified)
4J	Extracorporeal Shock-Wave Lithotripter (ESWL) Unit
4L	Genetic Counseling/Screening Services
4M	Adult Day Care Program Facility
4N	Alzheimer's Diagnostic/Assessment Services
4O	Comprehensive Geriatric Assessment Facility
4P	Emergency Response (Geriatric) Unit
4Q	Geriatric Acute Care Unit
4R	Geriatric Clinics
4S	Respite Care Facility
4U	Patient Education Unit
4V	Community Health Promotion Facility
4W	Worksite Health Promotion Facility
4X	Hemodialysis Facility
4Y	Home Health Services
4Z	Hospice
5A	Medical Surgical or Other Intensive Care Unit
5B	Hisopathology Laboratory
5C	Blood Bank
5D	Neonatal Intensive Care Unit
5E	Obstetrics Unit
5F	Occupational Health Services
5G	Organized Outpatient Services
5H	Pediatric Acute Inpatient Unit
5I	Psychiatric Child/Adolescent Services
5J	Psychiatric Consultation-Liaison Services
5K	Psychiatric Education Services
5L	Psychiatric Emergency Services
5M	Psychiatric Geriatric Services
5N	Psychiatric Inpatient Unit
5O	Psychiatric Outpatient Services
5P	Psychiatric Partial Hospitalization Program
5Q	Megavoltage Radiation Therapy Unit
5R	Radioactive Implants Unit
5S	Therapeutic Radioisotope Facility
5T	X-Ray Radiation Therapy Unit
5U	CT Scanner Unit
5V	Diagnostic Radioisotope Facility
5W	Magnetic Resonance Imaging (MRI) Facility
5X	Ultrasound Unit
5Y	Rehabilitation Inpatient Unit
5Z	Rehabilitation Outpatient Services
61	Performed At

6A	Reproductive Health Services
6B	Skilled Nursing or Other Long-Term Care Unit
6C	Single Photon Emission Computerized Tomography (SPECT) Unit
6D	Organized Social Work Service Facility
6E	Outpatient Social Work Services
6F	Emergency Department Social Work Services
6G	Sports Medicine Clinic/Services
6H	Hospital Auxiliary Unit
6I	Patient Representative Services
6J	Volunteer Services Department
6K	Outpatient Surgery Services
6L	Organ/Tissue Transplant Unit
6M	Orthopedic Surgery Facility
6N	Occupational Therapy Services
6O	Physical Therapy Services
6P	Recreational Therapy Services
6Q	Respiratory Therapy Services
6R	Speech Therapy Services
6S	Women's Health Center/Services
6U	Cardiac Rehabilitation Program Facility
6V	Non-Invasive Cardiac Assessment Services
6W	Emergency Medical Technician
6X	Disciplinary Contact
6Y	Case Manager
71	Attending Physician
72	Operating Physician
73	Other Physician
74	Corrected Insured
77	Service Location
7C	Place of Occurrence
80	Hospital
82	Rendering Provider
84	Subscriber's Employer
85	Billing Provider
87	Pay-to Provider
95	Research Institute
CK	Pharmacist
CZ	Admitting Surgeon
D2	Commercial Insurer
DD	Assistant Surgeon
DJ	Consulting Physician
DK	Ordering Physician
DN	Referring Provider

DO	Dependent Name
DQ	Supervising Physician
E1	Person or Other Entity Legally Responsible for a Child
E2	Person or Other Entity With Whom a Child Resides
E7	Previous Employer
E9	Participating Laboratory
FA	Facility
FD	Physical Address
FE	Mail Address
G0	Dependent Insured
G3	Clinic
GB	Other Insured
GD	Guardian
GI	Paramedic
GJ	Paramedical Company
GK	Previous Insured
GM	Spouse Insured
GY	Treatment Facility
HF	Healthcare Professional Shortage Area (HPSA) Facility
HH	Home Health Agency
I3	Independent Physicians Association (IPA)
IJ	Injection Point
IL	Insured or Subscriber
IN	Insurer
LI	Independent Lab
LR	Legal Representative
MR	Medical Insurance Carrier
MSC	Mammography Screening Center
OB	Ordered By
OD	Doctor of Optometry
OX	Oxygen Therapy Facility
P0	Patient Facility
P2	Primary Insured or Subscriber
P3	Primary Care Provider
P4	Prior Insurance Carrier
P6	Third Party Reviewing Preferred Provider Organization (PPO)
P7	Third Party Repricing Preferred Provider Organization (PPO)
PRP	Primary Payer
PT	Party to Receive Test Report
PV	Party performing certification
PW	Pickup Address

QA	Pharmacy
QB	Purchase Service Provider
QC	Patient
QD	Responsible Party
QE	Policyholder
QH	Physician
QK	Managed Care
QL	Chiropractor
QN	Dentist
QO	Doctor of Osteopathy
QS	Podiatrist
QV	Group Practice
QY	Medical Doctor
RC	Receiving Location
RW	Rural Health Clinic
S4	Skilled Nursing Facility
SEP	Secondary Payer
SJ	Service Provider
SU	Supplier/Manufacturer
T4	Transfer Point
	Used to identify the geographic location where a patient is transferred or diverted.
TL	Testing Laboratory
TQ	Third Party Reviewing Organization (TPO)
TT	Transfer To
TTP	Tertiary Payer
TU	Third Party Repricing Organization (TPO)
UH	Nursing Home
X3	Utilization Management Organization
X4	Spouse
X5	Durable Medical Equipment Supplier
ZZ	Mutually Defined

SITUATIONAL STC01 - 4

1270 Code List Qualifier Code O ID 1/3
Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC01-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
RX	National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes

REQUIRED	STC02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC02 is the effective date of the status information. IMPLEMENTATION NAME: Status Information Effective Date This is the date the claim was placed in this status by the Information Source's adjudication process.			
NOT USED	STC03	306	Action Code O 1 ID 1/2			
SITUATIONAL	STC04	782	Monetary Amount Monetary amount SEMANTIC: STC04 is the amount of original submitted charges. SITUATIONAL RULE: <i>Required when the response provides status on a claim found in the Information Source's system. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Total Claim Charge Amount The total claim charge may change from the submitted claim total charge based on claims processing instructions, i.e. claim splitting. Some payers may not store the original submitted charge. Some HMO encounters supply zero as the amount of original charges.			
SITUATIONAL	STC05	782	Monetary Amount Monetary amount SEMANTIC: STC05 is the amount paid. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and a remittance advice has been issued. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Claim Payment Amount Zero is an acceptable amount when no payment is being made. Some payers are able to provide the adjudicated payment amount prior to the remittance being issued.			
SITUATIONAL	STC06	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC06 is the paid date. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and a remittance advice has been issued. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Adjudication Finalized Date This is the date of denial or approval for the claim. This date may or may not be the same as the issue date of the check, EFT or non-payment remittance (STC08). Some payers are able to provide the final claim adjudicated date prior to the remittance being issued.			

NOT USED	STC07	591	Payment Method Code	O 1	ID	3/3
SITUATIONAL	STC08	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC08 is the check issue date. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and this claim is included on a check or EFT that is reported in an 835 or paper remittance to the provider. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Remittance Date This is the check issue or EFT funds available date. This could include a non-payment remittance advice date if available from the Information Source's system.	O 1	DT	8/8
SITUATIONAL	STC09	429	Check Number Check identification number SITUATIONAL RULE: <i>Required when the remittance cycle is complete and this claim is included on a check or EFT that is reported in an 835 or paper remittance to the provider. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Remittance Trace Number This is the check or EFT Trace Number. This could include a non-payment remittance advice Trace Number (835 or paper) if available from the Information Source's system.	O 1	AN	1/16
SITUATIONAL	STC10	C043	HEALTH CARE CLAIM STATUS Used to convey status of the entire claim or a specific service line SITUATIONAL RULE: <i>Required when a second claim status is needed. If not required by this implementation guide, do not send.</i>	O 1		
REQUIRED	STC10 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M	AN	1/30
REQUIRED	STC10 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).	M	AN	1/30

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC10-4 must have the value 'RX'.

SITUATIONAL STC10 - 3

98

Entity Identifier Code

O ID 2/3

Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:

C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

See STC01-3 for valid values.

SITUATIONAL STC10 - 4

1270

Code List Qualifier Code

O ID 1/3

Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC10-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
RX	National Council for Prescription Drug Programs Reject/Payment Codes
	CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes
C043	HEALTH CARE CLAIM STATUS
	O 1
	Used to convey status of the entire claim or a specific service line
	SITUATIONAL RULE: <i>Required when a third claim status is needed. If not required by this implementation guide, do not send.</i>
1271	Industry Code
	M AN 1/30
	Code indicating a code from a specific industry code list
	SEMANTIC:
	C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).
	IMPLEMENTATION NAME: Health Care Claim Status Category Code
	See STC01-1 for valid values.
1271	Industry Code
	M AN 1/30
	Code indicating a code from a specific industry code list
	SEMANTIC:
	C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.
	IMPLEMENTATION NAME: Status Code
	The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

RX

National Council for Prescription Drug Programs Reject/Payment Codes

CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes

SITUATIONAL STC11 C043

HEALTH CARE CLAIM STATUS

O 1

Used to convey status of the entire claim or a specific service line

SITUATIONAL RULE: *Required when a third claim status is needed. If not required by this implementation guide, do not send.*

REQUIRED STC11 - 1

1271

Industry Code

M AN 1/30

Code indicating a code from a specific industry code list

SEMANTIC:

C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).

IMPLEMENTATION NAME: Health Care Claim Status Category Code

See STC01-1 for valid values.

REQUIRED STC11 - 2

1271

Industry Code

M AN 1/30

Code indicating a code from a specific industry code list

SEMANTIC:

C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.

IMPLEMENTATION NAME: Status Code

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC11-4 must have the value 'RX'.

SITUATIONAL STC11 - 3

98

Entity Identifier Code

O ID 2/3

Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:

C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

See STC01-3 for valid values.

SITUATIONAL STC11 - 4

1270

Code List Qualifier Code

O ID 1/3

Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC11-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
------	------------

RX

National Council for Prescription Drug Programs
Reject/Payment Codes

CODE SOURCE 530: National Council for Prescription Drug
Programs Reject/Payment Codes

NOT USED STC12

933

Free-form Message Text

O 1 AN 1/264

SEGMENT DETAIL


REF - PAYER CLAIM CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when a claim is located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This is the payer's assigned control number, also known as, Internal Control Number (ICN), Document Control Number (DCN), or Claim Control Number (CCN).**TR3 Example:** REF*1K*9918046987~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			1K	Payor's Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Payer Claim Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - INSTITUTIONAL BILL TYPE
IDENTIFICATION**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required on institutional claims when different than the value submitted on the 276 request. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.**TR3 Example:** REF*BLT*111~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			BLT	Billing Type
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Bill Type Identifier	
			Concatenate the 837I CLM05-1 (Facility Type Code) and CLM05-3 (Claim Frequency Code) values. Code Source 236: Uniform Billing Claim Form Bill Type Code Source 235: Claim Frequency Type Code	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PATIENT CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Patient Control Number was submitted on the 276 request or when available on claims located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The maximum number of characters supported for the Patient Control Number is '20'.**TR3 Example:** REF*EJ*PT12345~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			EJ	Patient Account Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Patient Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PHARMACY PRESCRIPTION NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Pharmacy Prescription Number was submitted on the 276 request or when available on claims located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Example:** REF*XZ*1234567~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			XZ	Pharmacy Prescription Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Pharmacy Prescription Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - VOUCHER IDENTIFIER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when a voucher identifier is associated with the response claim. If not required by this implementation guide, do not send.**TR3 Notes:** 1. Some payers assign voucher identifiers to a group of claims as part of the payment process prior to payment being issued.**TR3 Example:** REF*VV*V123~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			VV	Voucher
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Voucher Identifier	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - CLAIM IDENTIFICATION NUMBER FOR
CLEARINGHOUSES AND OTHER
TRANSMISSION INTERMEDIARIES**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200D — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when received on the 276 status request. If not required by this implementation guide, do not send.**TR3 Example:** REF*D9*20041513010001~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			D9	Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Clearinghouse Trace Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

DTP - CLAIM SERVICE DATE

X12 Segment Name: Date or Time or Period

X12 Purpose: To specify any or all of a date, a time, or a time period

Loop: 2200D — CLAIM STATUS TRACKING NUMBER

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required for institutional claims or for professional and dental claims when the service line date is not used. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.

- TR3 Notes:**
1. For professional claims, this date is derived from the service level dates.
 2. When reporting a claim level date, use the date from the Information Source's system for claim matches, otherwise return the date from the 276 status request.

TR3 Example: DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
		CODE	DEFINITION	
		472	Service	
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
		CODE	DEFINITION	
		D8	Date Expressed in Format CCYYMMDD	
		RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD	

REQUIRED

DTP03

1251

Date Time Period

M 1 AN 1/35

Expression of a date, a time, or range of dates, times or dates and times

IMPLEMENTATION NAME: **Claim Service Period**

SEGMENT DETAIL

SVC - SERVICE LINE INFORMATION

X12 Segment Name: Service Information

X12 Purpose: To supply payment and control information to a provider for a particular service

Loop: 2220D — SERVICE LINE INFORMATION **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when reporting status for Service Lines. If not required by this implementation guide, do not send.

TR3 Notes: 1. For Institutional claims, when both an NUBC revenue code and a HCPCS or HIPPS code are reported, the HCPCS or HIPPS code is reported in SVC01-2 and the revenue code is reported in SVC04. When only a revenue code is used, it is reported in SVC01-2.

TR3 Example: SVC*HC:99214*75*50****1~ or
SVC*NU:0710*50*0****1~

DIAGRAM

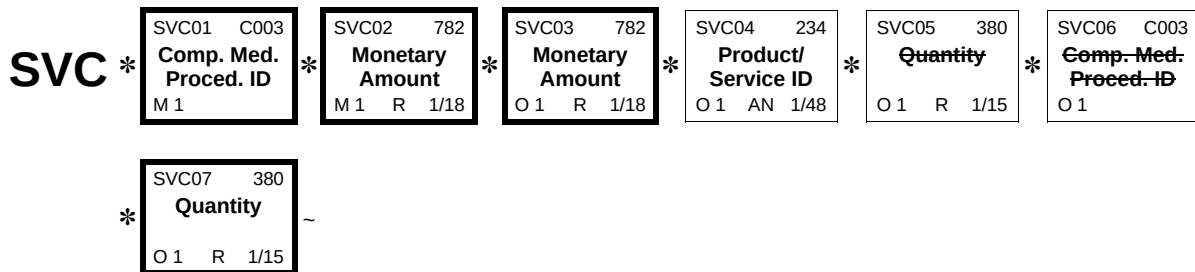

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers SVC01-2 contains the adjudicated procedure code. This code may be different than the original submitted procedure code based on the payer's claim processing.	M 1
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) SEMANTIC: C003-01 qualifies C003-02 and C003-08. IMPLEMENTATION NAME: Product or Service ID Qualifier	M ID 2/2

CODE	DEFINITION
AD	American Dental Association Codes
ER	CODE SOURCE 135: American Dental Association Jurisdiction Specific Procedure and Supply Codes
	This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Jurisdiction Specific Procedure and Supply Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
HC	CODE SOURCE 576: Workers Compensation Specific Procedure and Supply Codes Health Care Financing Administration Common Procedural Coding System (HCPCS) Codes
	Because the CPT codes of the American Medical Association are also level 1 HCPCS codes, the CPT codes are reported under the code HC.
HP	CODE SOURCE 130: Healthcare Common Procedural Coding System Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code
IV	CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities Home Infusion EDI Coalition (HIEC) Product/Service Code
	This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Home Infusion EDI Coalition Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA.
N4	CODE SOURCE 513: Home Infusion EDI Coalition (HIEC) Product/Service Code List National Drug Code in 5-4-2 Format
NU	CODE SOURCE 240: National Drug Code by Format National Uniform Billing Committee (NUBC) UB92 Codes
	This code is the NUBC Revenue Code.
	CODE SOURCE 132: National Uniform Billing Committee (NUBC) Codes

		WK	Advanced Billing Concepts (ABC) Codes		
			At the time of this writing, this code set has been approved by the Secretary of HHS as a pilot project allowed under HIPAA law. The qualifier may only be used in transactions covered under HIPAA; By parties registered in the pilot project and their trading partners, OR If a new rule names the Complementary, Alternative, or Holistic Procedure Codes as an allowable code set under HIPAA, OR For claims which are not covered under HIPAA.		
REQUIRED	SVC01 - 2	234	CODE SOURCE 843: Advanced Billing Concepts (ABC) Codes Product/Service ID M AN 1/48 Identifying number for a product or service SEMANTIC: If C003-08 is used, then C003-02 represents the beginning value in the range in which the code occurs. IMPLEMENTATION NAME: Procedure Code If the value in SVC01-1 is "NU", then this is an NUBC Revenue Code. If the revenue code is present here, then SVC04 is not used.		
SITUATIONAL	SVC01 - 3	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-03 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 4	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-04 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 5	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-05 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		


SITUATIONAL	SVC01 - 6	1339	Procedure Modifier	O	AN	2/2
			This identifies special circumstances related to the performance of the service, as defined by trading partners			
			SEMANTIC: C003-06 modifies the value in C003-02 and C003-08.			
			SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>			
NOT USED	SVC01 - 7	352	Description	O	AN	1/80
NOT USED	SVC01 - 8	234	Product/Service ID	O	AN	1/48
REQUIRED	SVC02	782	Monetary Amount	M 1	R	1/18
			Monetary amount			
			SEMANTIC: SVC02 is the submitted service charge.			
			IMPLEMENTATION NAME: Line Item Charge Amount			
			This is the line item total on the current claim service status.			
REQUIRED	SVC03	782	Monetary Amount	O 1	R	1/18
			Monetary amount			
			SEMANTIC: SVC03 is the amount paid this service.			
			IMPLEMENTATION NAME: Line Item Payment Amount			
SITUATIONAL	SVC04	234	Product/Service ID	O 1	AN	1/48
			Identifying number for a product or service			
			SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code.			
			SITUATIONAL RULE: <i>Required on institutional claims when an NUBC revenue code needs to be reported in addition to a HCPCS or HIPPS code reported in SVC01-2. If not required by this implementation guide, do not send.</i>			
			IMPLEMENTATION NAME: Revenue Code			
NOT USED	SVC05	380	Quantity	O 1	R	1/15
NOT USED	SVC06	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER	O 1		
REQUIRED	SVC07	380	Quantity	O 1	R	1/15
			Numeric value of quantity			
			SEMANTIC: SVC07 is the original submitted units of service.			
			IMPLEMENTATION NAME: Units of Service Count			

SEGMENT DETAIL

STC - SERVICE LINE STATUS INFORMATION

X12 Segment Name: Status Information**X12 Purpose:** To report the status, required action, and paid information of a claim or service line**Loop:** 2220D — SERVICE LINE INFORMATION**Segment Repeat:** >1**Usage:** REQUIRED**TR3 Notes:** 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.**TR3 Example:** STC*F1:65*20050501~ or
STC*A3:110*20050501*****A3:400~ or
STC*F2:79::RX*20050501~

DIAGRAM

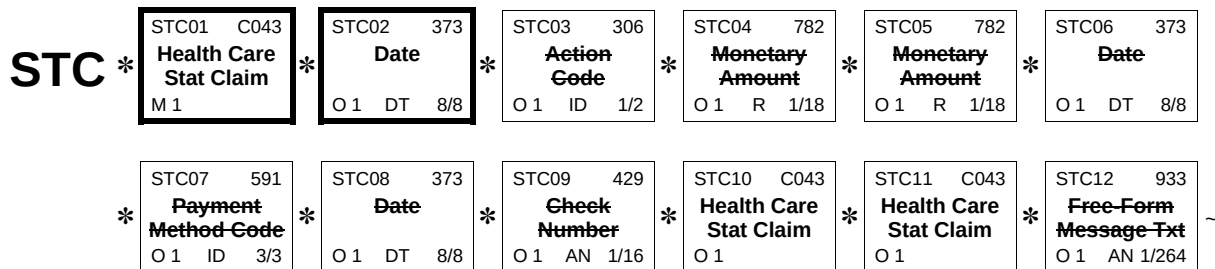

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list
SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).				
IMPLEMENTATION NAME: Health Care Claim Status Category Code				
All Category Codes except 'Request for Additional Information' (R Category Codes) are allowable at this level.				
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list
SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.				
IMPLEMENTATION NAME: Status Code				

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC01-4 must have the value 'RX'.

SITUATIONAL STC01 - 3

98 Entity Identifier Code **O ID 2/3**
Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:
C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

CODE	DEFINITION
03	Dependent
13	Contracted Service Provider
17	Consultant's Office
1E	Health Maintenance Organization (HMO)
1G	Oncology Center
1H	Kidney Dialysis Unit
1I	Preferred Provider Organization (PPO)
1O	Acute Care Hospital
1P	Provider
1Q	Military Facility
1R	University, College or School
1S	Outpatient Surgicenter
1T	Physician, Clinic or Group Practice
1U	Long Term Care Facility
1V	Extended Care Facility
1W	Psychiatric Health Facility
1X	Laboratory
1Y	Retail Pharmacy
1Z	Home Health Care
28	Subcontractor
2A	Federal, State, County or City Facility
2B	Third-Party Administrator
2D	Miscellaneous Health Care Facility
2E	Non-Health Care Miscellaneous Facility
2I	Church Operated Facility
2K	Partnership
2P	Public Health Service Facility
2Q	Veterans Administration Facility

2S	Public Health Service Indian Service Facility
2Z	Hospital Unit of an Institution (prison hospital, college infirmary, etc.)
30	Service Supplier
36	Employer
3A	Hospital Unit Within an Institution for the Mentally Retarded
3C	Tuberculosis and Other Respiratory Diseases Facility
3D	Obstetrics and Gynecology Facility
3E	Eye, Ear, Nose and Throat Facility
3F	Rehabilitation Facility
3G	Orthopedic Facility
3H	Chronic Disease Facility
3I	Other Specialty Facility
3J	Children's General Facility
3K	Children's Hospital Unit of an Institution
3L	Children's Psychiatric Facility
3M	Children's Tuberculosis and Other Respiratory Diseases Facility
3N	Children's Eye, Ear, Nose and Throat Facility
3O	Children's Rehabilitation Facility
3P	Children's Orthopedic Facility
3Q	Children's Chronic Disease Facility
3R	Children's Other Specialty Facility
3S	Institution for Mental Retardation
3T	Alcoholism and Other Chemical Dependency Facility
3U	General Inpatient Care for AIDS/ARC Facility
3V	AIDS/ARC Unit
3W	Specialized Outpatient Program for AIDS/ARC
3X	Alcohol/Drug Abuse or Dependency Inpatient Unit
3Y	Alcohol/Drug Abuse or Dependency Outpatient Services
3Z	Arthritis Treatment Center
40	Receiver
43	Claimant Authorized Representative
44	Data Processing Service Bureau
4A	Birthing Room/LDRP Room
4B	Burn Care Unit
4C	Cardiac Catheterization Laboratory
4D	Open-Heart Surgery Facility
4E	Cardiac Intensive Care Unit
4F	Angioplasty Facility
4G	Chronic Obstructive Pulmonary Disease Service Facility

4H	Emergency Department
4I	Trauma Center (Certified)
4J	Extracorporeal Shock-Wave Lithotripter (ESWL) Unit
4L	Genetic Counseling/Screening Services
4M	Adult Day Care Program Facility
4N	Alzheimer's Diagnostic/Assessment Services
4O	Comprehensive Geriatric Assessment Facility
4P	Emergency Response (Geriatric) Unit
4Q	Geriatric Acute Care Unit
4R	Geriatric Clinics
4S	Respite Care Facility
4U	Patient Education Unit
4V	Community Health Promotion Facility
4W	Worksite Health Promotion Facility
4X	Hemodialysis Facility
4Y	Home Health Services
4Z	Hospice
5A	Medical Surgical or Other Intensive Care Unit
5B	Hisopathology Laboratory
5C	Blood Bank
5D	Neonatal Intensive Care Unit
5E	Obstetrics Unit
5F	Occupational Health Services
5G	Organized Outpatient Services
5H	Pediatric Acute Inpatient Unit
5I	Psychiatric Child/Adolescent Services
5J	Psychiatric Consultation-Liaison Services
5K	Psychiatric Education Services
5L	Psychiatric Emergency Services
5M	Psychiatric Geriatric Services
5N	Psychiatric Inpatient Unit
5O	Psychiatric Outpatient Services
5P	Psychiatric Partial Hospitalization Program
5Q	Megavoltage Radiation Therapy Unit
5R	Radioactive Implants Unit
5S	Therapeutic Radioisotope Facility
5T	X-Ray Radiation Therapy Unit
5U	CT Scanner Unit
5V	Diagnostic Radioisotope Facility
5W	Magnetic Resonance Imaging (MRI) Facility
5X	Ultrasound Unit
5Y	Rehabilitation Inpatient Unit
5Z	Rehabilitation Outpatient Services
61	Performed At

6A	Reproductive Health Services
6B	Skilled Nursing or Other Long-Term Care Unit
6C	Single Photon Emission Computerized Tomography (SPECT) Unit
6D	Organized Social Work Service Facility
6E	Outpatient Social Work Services
6F	Emergency Department Social Work Services
6G	Sports Medicine Clinic/Services
6H	Hospital Auxiliary Unit
6I	Patient Representative Services
6J	Volunteer Services Department
6K	Outpatient Surgery Services
6L	Organ/Tissue Transplant Unit
6M	Orthopedic Surgery Facility
6N	Occupational Therapy Services
6O	Physical Therapy Services
6P	Recreational Therapy Services
6Q	Respiratory Therapy Services
6R	Speech Therapy Services
6S	Women's Health Center/Services
6U	Cardiac Rehabilitation Program Facility
6V	Non-Invasive Cardiac Assessment Services
6W	Emergency Medical Technician
6X	Disciplinary Contact
6Y	Case Manager
71	Attending Physician
72	Operating Physician
73	Other Physician
74	Corrected Insured
77	Service Location
7C	Place of Occurrence
80	Hospital
82	Rendering Provider
84	Subscriber's Employer
85	Billing Provider
87	Pay-to Provider
95	Research Institute
CK	Pharmacist
CZ	Admitting Surgeon
D2	Commercial Insurer
DD	Assistant Surgeon
DJ	Consulting Physician
DK	Ordering Physician
DN	Referring Provider

DO	Dependent Name
DQ	Supervising Physician
E1	Person or Other Entity Legally Responsible for a Child
E2	Person or Other Entity With Whom a Child Resides
E7	Previous Employer
E9	Participating Laboratory
FA	Facility
FD	Physical Address
FE	Mail Address
G0	Dependent Insured
G3	Clinic
GB	Other Insured
GD	Guardian
GI	Paramedic
GJ	Paramedical Company
GK	Previous Insured
GM	Spouse Insured
GY	Treatment Facility
HF	Healthcare Professional Shortage Area (HPSA) Facility
HH	Home Health Agency
I3	Independent Physicians Association (IPA)
IJ	Injection Point
IL	Insured or Subscriber
IN	Insurer
LI	Independent Lab
LR	Legal Representative
MR	Medical Insurance Carrier
MSC	Mammography Screening Center
OB	Ordered By
OD	Doctor of Optometry
OX	Oxygen Therapy Facility
P0	Patient Facility
P2	Primary Insured or Subscriber
P3	Primary Care Provider
P4	Prior Insurance Carrier
P6	Third Party Reviewing Preferred Provider Organization (PPO)
P7	Third Party Repricing Preferred Provider Organization (PPO)
PRP	Primary Payer
PT	Party to Receive Test Report
PV	Party performing certification
PW	Pickup Address

QA	Pharmacy
QB	Purchase Service Provider
QC	Patient
QD	Responsible Party
QE	Policyholder
QH	Physician
QK	Managed Care
QL	Chiropractor
QN	Dentist
QO	Doctor of Osteopathy
QS	Podiatrist
QV	Group Practice
QY	Medical Doctor
RC	Receiving Location
RW	Rural Health Clinic
S4	Skilled Nursing Facility
SEP	Secondary Payer
SJ	Service Provider
SU	Supplier/Manufacturer
T4	Transfer Point
Used to identify the geographic location where a patient is transferred or diverted.	
TL	Testing Laboratory
TQ	Third Party Reviewing Organization (TPO)
TT	Transfer To
TTP	Tertiary Payer
TU	Third Party Repricing Organization (TPO)
UH	Nursing Home
X3	Utilization Management Organization
X4	Spouse
X5	Durable Medical Equipment Supplier
ZZ	Mutually Defined

SITUATIONAL STC01 - 4

1270 Code List Qualifier Code O ID 1/3
Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC01-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
RX	National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes

REQUIRED	STC02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC02 is the effective date of the status information. IMPLEMENTATION NAME: Status Information Effective Date This is the date the service was placed in this status by the Information Source's adjudication process.	O 1	DT	8/8
NOT USED	STC03	306	Action Code	O 1	ID	1/2
NOT USED	STC04	782	Monetary Amount	O 1	R	1/18
NOT USED	STC05	782	Monetary Amount	O 1	R	1/18
NOT USED	STC06	373	Date	O 1	DT	8/8
NOT USED	STC07	591	Payment Method Code	O 1	ID	3/3
NOT USED	STC08	373	Date	O 1	DT	8/8
NOT USED	STC09	429	Check Number	O 1	AN	1/16
SITUATIONAL	STC10	C043	HEALTH CARE CLAIM STATUS Used to convey status of the entire claim or a specific service line SITUATIONAL RULE: <i>Required when a second claim status is needed. If not required by this implementation guide, do not send.</i>	O 1		
REQUIRED	STC10 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M	AN	1/30
REQUIRED	STC10 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530). The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC10-4 must have the value 'RX'.	M	AN	1/30

SITUATIONAL	STC10 - 3	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code. SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> See STC01-3 for valid values.	O ID 2/3
SITUATIONAL	STC10 - 4	1270	Code List Qualifier Code Code identifying a specific industry code list SEMANTIC: C043-04 is used to identify the Code Source referenced in C043-02. SITUATIONAL RULE: <i>Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC10-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.</i>	O ID 1/3
SITUATIONAL	STC11 C043		CODE DEFINITION RX National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes	O 1
REQUIRED	STC11 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M AN 1/30
REQUIRED	STC11 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530). The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC11-4 must have the value 'RX'.	M AN 1/30

SITUATIONAL	STC11 - 3	98	Entity Identifier Code	O	ID	2/3						
Code identifying an organizational entity, a physical location, property or an individual												
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.												
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>												
See STC01-3 for valid values.												
SITUATIONAL	STC11 - 4	1270	Code List Qualifier Code	O	ID	1/3						
Code identifying a specific industry code list												
SEMANTIC: C043-04 is used to identify the Code Source referenced in C043-02.												
SITUATIONAL RULE: <i>Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC11-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.</i>												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>RX</td><td>National Council for Prescription Drug Programs Reject/Payment Codes</td></tr><tr><td colspan="2">CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes</td></tr></table>							CODE	DEFINITION	RX	National Council for Prescription Drug Programs Reject/Payment Codes	CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes	
CODE	DEFINITION											
RX	National Council for Prescription Drug Programs Reject/Payment Codes											
CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes												
NOT USED	STC12	933	Free-form Message Text	O 1	AN	1/264						

SEGMENT DETAIL

REF - SERVICE LINE ITEM IDENTIFICATION

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2220D — SERVICE LINE INFORMATION


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the Service Line Item Identification was submitted on the 276 request and service level status is reported. If not required by this implementation guide, do not send.

TR3 Example: REF*FJ*6042201~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			FJ	Line Item Control Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203	X 1 AN 1/50
			IMPLEMENTATION NAME: Line Item Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

DTP - SERVICE LINE DATE

X12 Segment Name: Date or Time or Period**X12 Purpose:** To specify any or all of a date, a time, or a time period**Loop:** 2220D — SERVICE LINE INFORMATION**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1	ID	3/3
IMPLEMENTATION NAME: Date Time Qualifier						
			CODE	DEFINITION		
			472	Service		
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1	ID	2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.						
			CODE	DEFINITION		
			D8	Date Expressed in Format CCYYMMDD		
			RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD		
REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1	AN	1/35
IMPLEMENTATION NAME: Service Line Date						

SEGMENT DETAIL

HL - DEPENDENT LEVEL

X12 Segment Name: Hierarchical Level**X12 Purpose:** To identify dependencies among and the content of hierarchically related groups of data segments

- X12 Comments:**
1. The HL segment is used to identify levels of detail information using a hierarchical structure, such as relating line-item data to shipment data, and packaging data to line-item data.
 2. The HL segment defines a top-down/left-right ordered structure.


Loop: 2000E — DEPENDENT LEVEL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the patient is a dependent who does not have a unique identification number. If not required by this implementation guide, do not send.

TR3 Notes:

1. When the patient is a dependent, the claim status response information is reflected in the 2200E Loop under the Dependent HL, 2000E Loop (HL03 = 23). See Section 1.4.1.1 for more information on defining the patient.

TR3 Example: HL*5*4*23~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	HL01	628	Hierarchical ID Number A unique number assigned by the sender to identify a particular data segment in a hierarchical structure COMMENT: HL01 shall contain a unique alphanumeric number for each occurrence of the HL segment in the transaction set. For example, HL01 could be used to indicate the number of occurrences of the HL segment, in which case the value of HL01 would be "1" for the initial HL segment and would be incremented by one in each subsequent HL segment within the transaction. HL01 must be incremented by one each time an HL is used within each ST/SE envelope. Only numeric values are allowed in HL01.	M 1 AN 1/12
REQUIRED	HL02	734	Hierarchical Parent ID Number Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to COMMENT: HL02 identifies the hierarchical ID number of the HL segment to which the current HL segment is subordinate.	O 1 AN 1/12

REQUIRED	HL03	735	Hierarchical Level Code Code defining the characteristic of a level in a hierarchical structure COMMENT: HL03 indicates the context of the series of segments following the current HL segment up to the next occurrence of an HL segment in the transaction. For example, HL03 is used to indicate that subsequent segments in the HL loop form a logical grouping of data referring to shipment, order, or item-level information.	M 1	ID	1/2				
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>23</td><td>Dependent</td></tr></table>							CODE	DEFINITION	23	Dependent
CODE	DEFINITION									
23	Dependent									
NOT USED	HL04	736	Hierarchical Child Code	O 1	ID	1/1				

SEGMENT DETAIL

NM1 - DEPENDENT NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Syntax:** 1. **P0809**

If either NM108 or NM109 is present, then the other is required.

2. **C1110**


If NM111 is present, then NM110 is required.

3. **C1203**

If NM112 is present, then NM103 is required.

Loop: 2100E — DEPENDENT NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** NM1*QC*1*SMITH*JOSEPH~

DIAGRAM

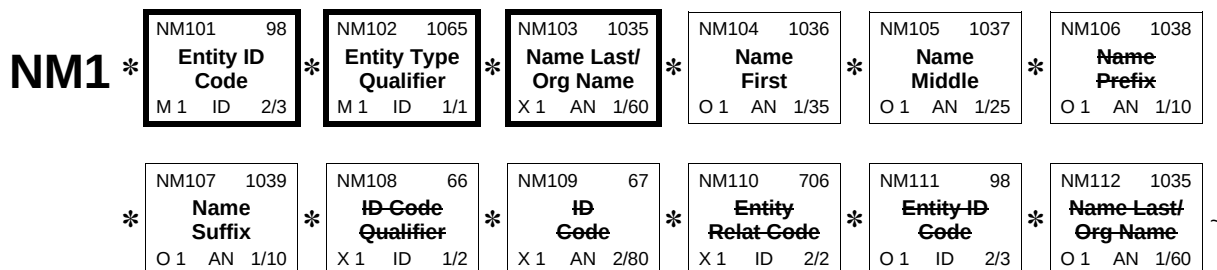

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>QC</td><td>Patient</td></tr></table>	CODE	DEFINITION	QC	Patient			
CODE	DEFINITION									
QC	Patient									
REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103.	M 1	ID	1/1				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>Person</td></tr></table>	CODE	DEFINITION	1	Person			
CODE	DEFINITION									
1	Person									
REQUIRED	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203	X 1	AN	1/60				
			IMPLEMENTATION NAME: Patient Last Name							

SITUATIONAL	NM104	1036	Name First Individual first name	O 1	AN	1/35
SITUATIONAL RULE: <i>Required when the person has a first name that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient First Name						
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial	O 1	AN	1/25
SITUATIONAL RULE: <i>Required when the person has a middle name that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient Middle Name or Initial						
NOT USED	NM106	1038	Name Prefix	O 1	AN	1/10
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name	O 1	AN	1/10
SITUATIONAL RULE: <i>Required when the person has a name suffix that is known. If not required by this implementation guide, do not send.</i>						
IMPLEMENTATION NAME: Patient Name Suffix						
NOT USED	NM108	66	Identification Code Qualifier	X 1	ID	1/2
NOT USED	NM109	67	Identification Code	X 1	AN	2/80
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60

SEGMENT DETAIL

TRN - CLAIM STATUS TRACKING NUMBER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

Loop: 2200E — CLAIM STATUS TRACKING NUMBER **Loop Repeat:** >1


Segment Repeat: 1

Usage: REQUIRED

TR3 Notes: 1. This is the trace or reference number from the originator of the transaction that was provided for this patient's 276 request.

TR3 Example: TRN*2*1722634842~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1 ID 1/2
			CODE	DEFINITION
			2	Referenced Transaction Trace Numbers
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	M 1 AN 1/50
			SEMANTIC: TRN02 provides unique identification for the transaction.	
			IMPLEMENTATION NAME: Referenced Transaction Trace Number	
NOT USED	TRN03	509	Originating Company Identifier	O 1 AN 10/10
NOT USED	TRN04	127	Reference Identification	O 1 AN 1/50

SEGMENT DETAIL

STC - CLAIM LEVEL STATUS INFORMATION

X12 Segment Name: Status Information

X12 Purpose: To report the status, required action, and paid information of a claim or service line

Loop: 2200E — CLAIM STATUS TRACKING NUMBER


Segment Repeat: >1

Usage: REQUIRED

TR3 Notes: 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.

TR3 Example: STC*A1:21*20050501**50*0~ or
STC*F1:65*20050511**50*40*20050510**20050510*50321~ or
STC*F2:79::RX*20050501**50*0~

DIAGRAM

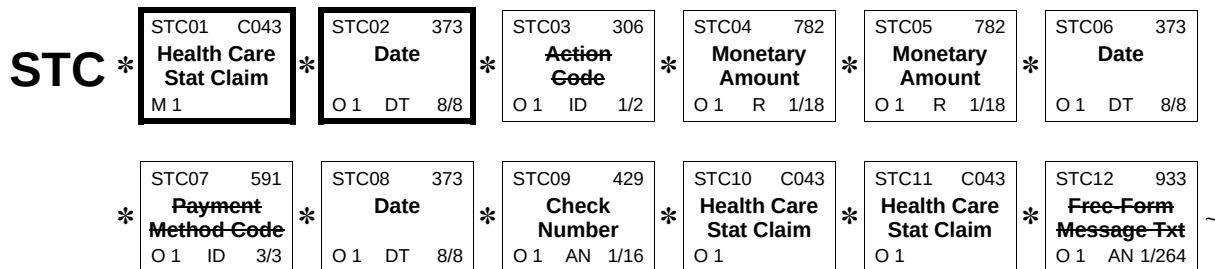

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code All Category Codes except 'Request for Additional Information' (R Category Codes) are allowable at this level.
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC01-4 must have the value 'RX'.

SITUATIONAL STC01 - 3

98 Entity Identifier Code O ID 2/3
Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:
C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

CODE	DEFINITION
03	Dependent
13	Contracted Service Provider
17	Consultant's Office
1E	Health Maintenance Organization (HMO)
1G	Oncology Center
1H	Kidney Dialysis Unit
1I	Preferred Provider Organization (PPO)
1O	Acute Care Hospital
1P	Provider
1Q	Military Facility
1R	University, College or School
1S	Outpatient Surgicenter
1T	Physician, Clinic or Group Practice
1U	Long Term Care Facility
1V	Extended Care Facility
1W	Psychiatric Health Facility
1X	Laboratory
1Y	Retail Pharmacy
1Z	Home Health Care
28	Subcontractor
2A	Federal, State, County or City Facility
2B	Third-Party Administrator
2D	Miscellaneous Health Care Facility
2E	Non-Health Care Miscellaneous Facility
2I	Church Operated Facility
2K	Partnership
2P	Public Health Service Facility
2Q	Veterans Administration Facility

2S	Public Health Service Indian Service Facility
2Z	Hospital Unit of an Institution (prison hospital, college infirmary, etc.)
30	Service Supplier
36	Employer
3A	Hospital Unit Within an Institution for the Mentally Retarded
3C	Tuberculosis and Other Respiratory Diseases Facility
3D	Obstetrics and Gynecology Facility
3E	Eye, Ear, Nose and Throat Facility
3F	Rehabilitation Facility
3G	Orthopedic Facility
3H	Chronic Disease Facility
3I	Other Specialty Facility
3J	Children's General Facility
3K	Children's Hospital Unit of an Institution
3L	Children's Psychiatric Facility
3M	Children's Tuberculosis and Other Respiratory Diseases Facility
3N	Children's Eye, Ear, Nose and Throat Facility
3O	Children's Rehabilitation Facility
3P	Children's Orthopedic Facility
3Q	Children's Chronic Disease Facility
3R	Children's Other Specialty Facility
3S	Institution for Mental Retardation
3T	Alcoholism and Other Chemical Dependency Facility
3U	General Inpatient Care for AIDS/ARC Facility
3V	AIDS/ARC Unit
3W	Specialized Outpatient Program for AIDS/ARC
3X	Alcohol/Drug Abuse or Dependency Inpatient Unit
3Y	Alcohol/Drug Abuse or Dependency Outpatient Services
3Z	Arthritis Treatment Center
40	Receiver
43	Claimant Authorized Representative
44	Data Processing Service Bureau
4A	Birthing Room/LDRP Room
4B	Burn Care Unit
4C	Cardiac Catheterization Laboratory
4D	Open-Heart Surgery Facility
4E	Cardiac Intensive Care Unit
4F	Angioplasty Facility
4G	Chronic Obstructive Pulmonary Disease Service Facility

4H	Emergency Department
4I	Trauma Center (Certified)
4J	Extracorporeal Shock-Wave Lithotripter (ESWL) Unit
4L	Genetic Counseling/Screening Services
4M	Adult Day Care Program Facility
4N	Alzheimer's Diagnostic/Assessment Services
4O	Comprehensive Geriatric Assessment Facility
4P	Emergency Response (Geriatric) Unit
4Q	Geriatric Acute Care Unit
4R	Geriatric Clinics
4S	Respite Care Facility
4U	Patient Education Unit
4V	Community Health Promotion Facility
4W	Worksite Health Promotion Facility
4X	Hemodialysis Facility
4Y	Home Health Services
4Z	Hospice
5A	Medical Surgical or Other Intensive Care Unit
5B	Hisopathology Laboratory
5C	Blood Bank
5D	Neonatal Intensive Care Unit
5E	Obstetrics Unit
5F	Occupational Health Services
5G	Organized Outpatient Services
5H	Pediatric Acute Inpatient Unit
5I	Psychiatric Child/Adolescent Services
5J	Psychiatric Consultation-Liaison Services
5K	Psychiatric Education Services
5L	Psychiatric Emergency Services
5M	Psychiatric Geriatric Services
5N	Psychiatric Inpatient Unit
5O	Psychiatric Outpatient Services
5P	Psychiatric Partial Hospitalization Program
5Q	Megavoltage Radiation Therapy Unit
5R	Radioactive Implants Unit
5S	Therapeutic Radioisotope Facility
5T	X-Ray Radiation Therapy Unit
5U	CT Scanner Unit
5V	Diagnostic Radioisotope Facility
5W	Magnetic Resonance Imaging (MRI) Facility
5X	Ultrasound Unit
5Y	Rehabilitation Inpatient Unit
5Z	Rehabilitation Outpatient Services
61	Performed At

6A	Reproductive Health Services
6B	Skilled Nursing or Other Long-Term Care Unit
6C	Single Photon Emission Computerized Tomography (SPECT) Unit
6D	Organized Social Work Service Facility
6E	Outpatient Social Work Services
6F	Emergency Department Social Work Services
6G	Sports Medicine Clinic/Services
6H	Hospital Auxiliary Unit
6I	Patient Representative Services
6J	Volunteer Services Department
6K	Outpatient Surgery Services
6L	Organ/Tissue Transplant Unit
6M	Orthopedic Surgery Facility
6N	Occupational Therapy Services
6O	Physical Therapy Services
6P	Recreational Therapy Services
6Q	Respiratory Therapy Services
6R	Speech Therapy Services
6S	Women's Health Center/Services
6U	Cardiac Rehabilitation Program Facility
6V	Non-Invasive Cardiac Assessment Services
6W	Emergency Medical Technician
6X	Disciplinary Contact
6Y	Case Manager
71	Attending Physician
72	Operating Physician
73	Other Physician
74	Corrected Insured
77	Service Location
7C	Place of Occurrence
80	Hospital
82	Rendering Provider
84	Subscriber's Employer
85	Billing Provider
87	Pay-to Provider
95	Research Institute
CK	Pharmacist
CZ	Admitting Surgeon
D2	Commercial Insurer
DD	Assistant Surgeon
DJ	Consulting Physician
DK	Ordering Physician
DN	Referring Provider

DO	Dependent Name
DQ	Supervising Physician
E1	Person or Other Entity Legally Responsible for a Child
E2	Person or Other Entity With Whom a Child Resides
E7	Previous Employer
E9	Participating Laboratory
FA	Facility
FD	Physical Address
FE	Mail Address
G0	Dependent Insured
G3	Clinic
GB	Other Insured
GD	Guardian
GI	Paramedic
GJ	Paramedical Company
GK	Previous Insured
GM	Spouse Insured
GY	Treatment Facility
HF	Healthcare Professional Shortage Area (HPSA) Facility
HH	Home Health Agency
I3	Independent Physicians Association (IPA)
IJ	Injection Point
IL	Insured or Subscriber
IN	Insurer
LI	Independent Lab
LR	Legal Representative
MR	Medical Insurance Carrier
MSC	Mammography Screening Center
OB	Ordered By
OD	Doctor of Optometry
OX	Oxygen Therapy Facility
P0	Patient Facility
P2	Primary Insured or Subscriber
P3	Primary Care Provider
P4	Prior Insurance Carrier
P6	Third Party Reviewing Preferred Provider Organization (PPO)
P7	Third Party Repricing Preferred Provider Organization (PPO)
PRP	Primary Payer
PT	Party to Receive Test Report
PV	Party performing certification
PW	Pickup Address

	QA	Pharmacy			
	QB	Purchase Service Provider			
	QC	Patient			
	QD	Responsible Party			
	QE	Policyholder			
	QH	Physician			
	QK	Managed Care			
	QL	Chiropractor			
	QN	Dentist			
	QO	Doctor of Osteopathy			
	QS	Podiatrist			
	QV	Group Practice			
	QY	Medical Doctor			
	RC	Receiving Location			
	RW	Rural Health Clinic			
	S4	Skilled Nursing Facility			
	SEP	Secondary Payer			
	SJ	Service Provider			
	SU	Supplier/Manufacturer			
	T4	Transfer Point			
		Used to identify the geographic location where a patient is transferred or diverted.			
	TL	Testing Laboratory			
	TQ	Third Party Reviewing Organization (TPO)			
	TT	Transfer To			
	TTP	Tertiary Payer			
	TU	Third Party Repricing Organization (TPO)			
	UH	Nursing Home			
	X3	Utilization Management Organization			
	X4	Spouse			
	X5	Durable Medical Equipment Supplier			
	ZZ	Mutually Defined			
SITUATIONAL	STC01 - 4	1270	Code List Qualifier Code	O	ID 1/3
			Code identifying a specific industry code list		
			SEMANTIC: C043-04 is used to identify the Code Source referenced in C043-02.		
			SITUATIONAL RULE: <i>Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC01-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.</i>		
			CODE	DEFINITION	
			RX	National Council for Prescription Drug Programs Reject/Payment Codes	
				CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes	

REQUIRED	STC02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC02 is the effective date of the status information. IMPLEMENTATION NAME: Status Information Effective Date This is the date the claim was placed in this status by the Information Source's adjudication process.			
NOT USED	STC03	306	Action Code O 1 ID 1/2			
SITUATIONAL	STC04	782	Monetary Amount Monetary amount SEMANTIC: STC04 is the amount of original submitted charges. SITUATIONAL RULE: <i>Required when the response provides status on a claim found in the Information Source's system. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Total Claim Charge Amount The total claim charge may change from the submitted claim total charge based on claims processing instructions, i.e. claim splitting. Some payers may not store the original submitted charge. Some HMO encounters supply zero as the amount of original charges.			
SITUATIONAL	STC05	782	Monetary Amount Monetary amount SEMANTIC: STC05 is the amount paid. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and a remittance advice has been issued. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Claim Payment Amount Zero is an acceptable amount when no payment is being made. Some payers are able to provide the adjudicated payment amount prior to the remittance being issued.			
SITUATIONAL	STC06	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC06 is the paid date. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and a remittance advice has been issued. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Adjudication Finalized Date This is the date of denial or approval for the claim. This date may or may not be the same as the issue date of the check, EFT or non-payment remittance (STC08). Some payers are able to provide the final claim adjudicated date prior to the remittance being issued.			

NOT USED	STC07	591	Payment Method Code	O 1	ID	3/3
SITUATIONAL	STC08	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC08 is the check issue date. SITUATIONAL RULE: <i>Required when the remittance cycle is complete and this claim is included on a check or EFT that is reported in an 835 or paper remittance to the provider. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Remittance Date This is the check issue or EFT funds available date. This could include a non-payment remittance advice date if available from the Information Source's system.	O 1	DT	8/8
SITUATIONAL	STC09	429	Check Number Check identification number SITUATIONAL RULE: <i>Required when the remittance cycle is complete and this claim is included on a check or EFT that is reported in an 835 or paper remittance to the provider. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i> IMPLEMENTATION NAME: Remittance Trace Number This is the check or EFT Trace Number. This could include a non-payment remittance advice Trace Number (835 or paper) if available from the Information Source's system.	O 1	AN	1/16
SITUATIONAL	STC10	C043	HEALTH CARE CLAIM STATUS Used to convey status of the entire claim or a specific service line SITUATIONAL RULE: <i>Required when a second claim status is needed. If not required by this implementation guide, do not send.</i>	O 1		
REQUIRED	STC10 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M	AN	1/30
REQUIRED	STC10 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).	M	AN	1/30

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC10-4 must have the value 'RX'.

SITUATIONAL STC10 - 3

98

Entity Identifier Code

O ID 2/3

Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:

C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

See STC01-3 for valid values.

SITUATIONAL STC10 - 4

1270

Code List Qualifier Code

O ID 1/3

Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC10-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
RX	National Council for Prescription Drug Programs Reject/Payment Codes
	CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes
C043	HEALTH CARE CLAIM STATUS
	O 1
	Used to convey status of the entire claim or a specific service line
	SITUATIONAL RULE: <i>Required when a third claim status is needed. If not required by this implementation guide, do not send.</i>
1271	Industry Code
	M AN 1/30
	Code indicating a code from a specific industry code list
	SEMANTIC:
	C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).
	IMPLEMENTATION NAME: Health Care Claim Status Category Code
	See STC01-1 for valid values.
1271	Industry Code
	M AN 1/30
	Code indicating a code from a specific industry code list
	SEMANTIC:
	C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.
	IMPLEMENTATION NAME: Status Code
	The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

RX

National Council for Prescription Drug Programs Reject/Payment Codes

CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes

SITUATIONAL STC11 C043

HEALTH CARE CLAIM STATUS

O 1

Used to convey status of the entire claim or a specific service line

SITUATIONAL RULE: *Required when a third claim status is needed. If not required by this implementation guide, do not send.*

REQUIRED STC11 - 1

1271

Industry Code

M AN 1/30

Code indicating a code from a specific industry code list

SEMANTIC:

C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).

IMPLEMENTATION NAME: Health Care Claim Status Category Code

See STC01-1 for valid values.

REQUIRED STC11 - 2

1271

Industry Code

M AN 1/30

Code indicating a code from a specific industry code list

SEMANTIC:

C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.

IMPLEMENTATION NAME: Status Code

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC11-4 must have the value 'RX'.

SITUATIONAL STC11 - 3

98

Entity Identifier Code

O ID 2/3

Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:

C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

See STC01-3 for valid values.

SITUATIONAL STC11 - 4

1270

Code List Qualifier Code

O ID 1/3

Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC11-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
------	------------

RX

National Council for Prescription Drug Programs
Reject/Payment Codes

CODE SOURCE 530: National Council for Prescription Drug
Programs Reject/Payment Codes

NOT USED STC12

933

Free-form Message Text

O 1 AN 1/264

SEGMENT DETAIL


REF - PAYER CLAIM CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when a claim is located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This is the payer's assigned control number, also known as, Internal Control Number (ICN), Document Control Number (DCN), or Claim Control Number (CCN).**TR3 Example:** REF*1K*9918046987~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			1K	Payor's Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Payer Claim Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - INSTITUTIONAL BILL TYPE
IDENTIFICATION**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required on institutional claims when different than the value submitted on the 276 request. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.**TR3 Example:** REF*BLT*111~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			BLT	Billing Type
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Bill Type Identifier	
			Concatenate the 837I CLM05-1 (Facility Type Code) and CLM05-3 (Claim Frequency Code) values. Code Source 236: Uniform Billing Claim Form Bill Type Code Source 235: Claim Frequency Type Code	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PATIENT CONTROL NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Patient Control Number was submitted on the 276 request or when available on claims located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The maximum number of characters supported for the Patient Control Number is '20'.**TR3 Example:** REF*EJ*PT12345~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			EJ	Patient Account Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Patient Control Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


REF - PHARMACY PRESCRIPTION NUMBER

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the Pharmacy Prescription Number was submitted on the 276 request or when available on claims located in the Information Source's system. If not required by this implementation guide, do not send.**TR3 Example:** REF*XZ*1234567~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>XZ</td><td>Pharmacy Prescription Number</td></tr></table>	CODE	DEFINITION	XZ	Pharmacy Prescription Number			
CODE	DEFINITION									
XZ	Pharmacy Prescription Number									
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Pharmacy Prescription Number	X 1	AN	1/50				
NOT USED	REF03	352	Description	X 1	AN	1/80				
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1						

SEGMENT DETAIL

REF - VOUCHER IDENTIFIER

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when a voucher identifier is associated with the response claim. If not required by this implementation guide, do not send.

TR3 Notes: 1. Some payers assign voucher identifiers to a group of claims as part of the payment process prior to payment being issued.

TR3 Example: REF*VV*V123~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			VV	Voucher
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Voucher Identifier	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1


SEGMENT DETAIL

REF - CLAIM IDENTIFICATION NUMBER FOR
CLEARINGHOUSES AND OTHER
TRANSMISSION INTERMEDIARIES**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when received on the 276 status request. If not required by this implementation guide, do not send.**TR3 Example:** REF*D9*20041513010001~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			D9	Claim Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
			SYNTAX: R0203	
			IMPLEMENTATION NAME: Clearinghouse Trace Number	
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL


DTP - CLAIM SERVICE DATE

X12 Segment Name: Date or Time or Period**X12 Purpose:** To specify any or all of a date, a time, or a time period**Loop:** 2200E — CLAIM STATUS TRACKING NUMBER**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required for institutional claims or for professional and dental claims when the service line date is not used. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.

- TR3 Notes:**
1. For professional claims, this date is derived from the service level dates.
 2. When reporting a claim level date, use the date from the Information Source's system for claim matches, otherwise return the date from the 276 status request.

TR3 Example: DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			472	Service
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1 ID 2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.				
			CODE	DEFINITION
			D8	Date Expressed in Format CCYYMMDD
			RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD

REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1 AN 1/35
IMPLEMENTATION NAME: Claim Service Period				

SEGMENT DETAIL

SVC - SERVICE LINE INFORMATION

X12 Segment Name: Service Information

X12 Purpose: To supply payment and control information to a provider for a particular service

Loop: 2220E — SERVICE LINE INFORMATION **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when reporting status for Service Lines. If not required by this implementation guide, do not send.

TR3 Notes: 1. For Institutional claims, when both an NUBC revenue code and a HCPCS or HIPPS code are reported, the HCPCS or HIPPS code is reported in SVC01-2 and the revenue code is reported in SVC04. When only a revenue code is used, it is reported in SVC01-2.

TR3 Example: SVC*HC:99214*75*50****1~ or
SVC*NU:0710*50*0****1~

DIAGRAM

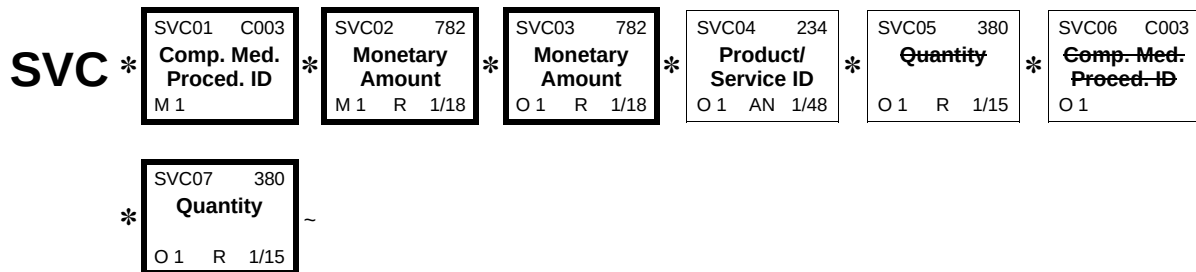

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers SVC01-2 contains the adjudicated procedure code. This code may be different than the original submitted procedure code based on the payer's claim processing.	M 1
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) SEMANTIC: C003-01 qualifies C003-02 and C003-08. IMPLEMENTATION NAME: Product or Service ID Qualifier	M ID 2/2

CODE	DEFINITION
AD	American Dental Association Codes CODE SOURCE 135: American Dental Association
ER	Jurisdiction Specific Procedure and Supply Codes This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Jurisdiction Specific Procedure and Supply Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA. CODE SOURCE 576: Workers Compensation Specific Procedure and Supply Codes
HC	Health Care Financing Administration Common Procedural Coding System (HCPCS) Codes Because the CPT codes of the American Medical Association are also level 1 HCPCS codes, the CPT codes are reported under the code HC. CODE SOURCE 130: Healthcare Common Procedural Coding System
HP	Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities
IV	Home Infusion EDI Coalition (HIEC) Product/Service Code This code set is not allowed for use under HIPAA at the time of this writing. The qualifier can only be used: If a new rule names the Home Infusion EDI Coalition Codes as an allowable code set under HIPAA, OR The Secretary grants an exception to use the code set as a pilot project as allowed under the law, OR For claims which are not covered under HIPAA. CODE SOURCE 513: Home Infusion EDI Coalition (HIEC) Product/Service Code List
N4	National Drug Code in 5-4-2 Format CODE SOURCE 240: National Drug Code by Format
NU	National Uniform Billing Committee (NUBC) UB92 Codes This code is the NUBC Revenue Code. CODE SOURCE 132: National Uniform Billing Committee (NUBC) Codes

		WK	Advanced Billing Concepts (ABC) Codes		
			At the time of this writing, this code set has been approved by the Secretary of HHS as a pilot project allowed under HIPAA law. The qualifier may only be used in transactions covered under HIPAA; By parties registered in the pilot project and their trading partners, OR If a new rule names the Complementary, Alternative, or Holistic Procedure Codes as an allowable code set under HIPAA, OR For claims which are not covered under HIPAA.		
REQUIRED	SVC01 - 2	234	CODE SOURCE 843: Advanced Billing Concepts (ABC) Codes Product/Service ID M AN 1/48 Identifying number for a product or service SEMANTIC: If C003-08 is used, then C003-02 represents the beginning value in the range in which the code occurs. IMPLEMENTATION NAME: Procedure Code If the value in SVC01-1 is "NU", then this is an NUBC Revenue Code. If the revenue code is present here, then SVC04 is not used.		
SITUATIONAL	SVC01 - 3	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-03 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 4	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-04 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		
SITUATIONAL	SVC01 - 5	1339	Procedure Modifier O AN 2/2 This identifies special circumstances related to the performance of the service, as defined by trading partners SEMANTIC: C003-05 modifies the value in C003-02 and C003-08. SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>		


SITUATIONAL	SVC01 - 6	1339	Procedure Modifier	O AN 2/2
This identifies special circumstances related to the performance of the service, as defined by trading partners				
SEMANTIC: C003-06 modifies the value in C003-02 and C003-08.				
SITUATIONAL RULE: <i>Required when modifiers have been applied to the adjudicated procedure code reported in SVC01-2. If not required by this implementation guide, do not send.</i>				
NOT USED	SVC01 - 7	352	Description	O AN 1/80
NOT USED	SVC01 - 8	234	Product/Service ID	O AN 1/48
REQUIRED	SVC02 782		Monetary Amount	M 1 R 1/18
Monetary amount				
SEMANTIC: SVC02 is the submitted service charge.				
IMPLEMENTATION NAME: Line Item Charge Amount				
This is the line item total on the current claim service status.				
REQUIRED	SVC03 782		Monetary Amount	O 1 R 1/18
Monetary amount				
SEMANTIC: SVC03 is the amount paid this service.				
IMPLEMENTATION NAME: Line Item Payment Amount				
SITUATIONAL	SVC04 234		Product/Service ID	O 1 AN 1/48
Identifying number for a product or service				
SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code.				
SITUATIONAL RULE: <i>Required on institutional claims when an NUBC revenue code needs to be reported in addition to a HCPCS or HIPPS code reported in SVC01-2. If not required by this implementation guide, do not send.</i>				
IMPLEMENTATION NAME: Revenue Code				
NOT USED	SVC05 380		Quantity	O 1 R 1/15
NOT USED	SVC06 C003		COMPOSITE MEDICAL PROCEDURE IDENTIFIER	O 1
REQUIRED	SVC07 380		Quantity	O 1 R 1/15
Numeric value of quantity				
SEMANTIC: SVC07 is the original submitted units of service.				
IMPLEMENTATION NAME: Units of Service Count				

SEGMENT DETAIL

STC - SERVICE LINE STATUS INFORMATION

X12 Segment Name: Status Information**X12 Purpose:** To report the status, required action, and paid information of a claim or service line**Loop:** 2220E — SERVICE LINE INFORMATION**Segment Repeat:** >1**Usage:** REQUIRED**TR3 Notes:** 1. See Section 1.4.3 - Status Information (STC) Segment Usage for specific STC segment information related to the hierarchical level, composites and code use.**TR3 Example:** STC*F1:65*20050501~ or
STC*A3:110*20050501*****A3:400~ or
STC*F2:79::RX*20050501~

DIAGRAM

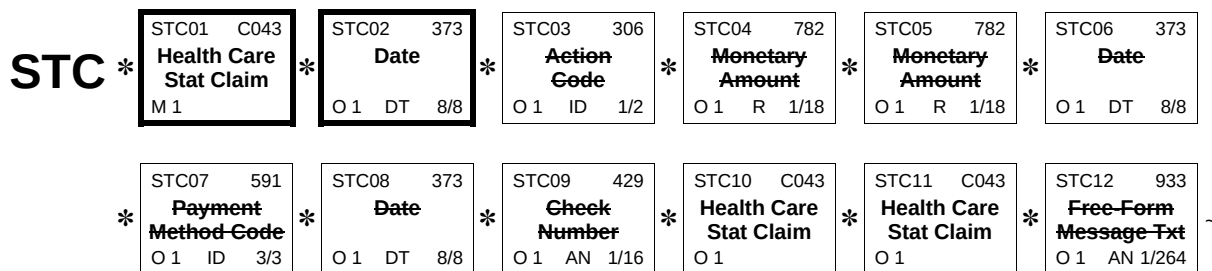

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	STC01	C043	HEALTH CARE CLAIM STATUS	M 1 Used to convey status of the entire claim or a specific service line
REQUIRED	STC01 - 1	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code All Category Codes except 'Request for Additional Information' (R Category Codes) are allowable at this level.
REQUIRED	STC01 - 2	1271	Industry Code	M AN 1/30 Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code

The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).

The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC01-4 must have the value 'RX'.

SITUATIONAL STC01 - 3

98 Entity Identifier Code **O ID 2/3**
Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:
C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC01-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

CODE	DEFINITION
03	Dependent
13	Contracted Service Provider
17	Consultant's Office
1E	Health Maintenance Organization (HMO)
1G	Oncology Center
1H	Kidney Dialysis Unit
1I	Preferred Provider Organization (PPO)
1O	Acute Care Hospital
1P	Provider
1Q	Military Facility
1R	University, College or School
1S	Outpatient Surgicenter
1T	Physician, Clinic or Group Practice
1U	Long Term Care Facility
1V	Extended Care Facility
1W	Psychiatric Health Facility
1X	Laboratory
1Y	Retail Pharmacy
1Z	Home Health Care
28	Subcontractor
2A	Federal, State, County or City Facility
2B	Third-Party Administrator
2D	Miscellaneous Health Care Facility
2E	Non-Health Care Miscellaneous Facility
2I	Church Operated Facility
2K	Partnership
2P	Public Health Service Facility
2Q	Veterans Administration Facility

2S	Public Health Service Indian Service Facility
2Z	Hospital Unit of an Institution (prison hospital, college infirmary, etc.)
30	Service Supplier
36	Employer
3A	Hospital Unit Within an Institution for the Mentally Retarded
3C	Tuberculosis and Other Respiratory Diseases Facility
3D	Obstetrics and Gynecology Facility
3E	Eye, Ear, Nose and Throat Facility
3F	Rehabilitation Facility
3G	Orthopedic Facility
3H	Chronic Disease Facility
3I	Other Specialty Facility
3J	Children's General Facility
3K	Children's Hospital Unit of an Institution
3L	Children's Psychiatric Facility
3M	Children's Tuberculosis and Other Respiratory Diseases Facility
3N	Children's Eye, Ear, Nose and Throat Facility
3O	Children's Rehabilitation Facility
3P	Children's Orthopedic Facility
3Q	Children's Chronic Disease Facility
3R	Children's Other Specialty Facility
3S	Institution for Mental Retardation
3T	Alcoholism and Other Chemical Dependency Facility
3U	General Inpatient Care for AIDS/ARC Facility
3V	AIDS/ARC Unit
3W	Specialized Outpatient Program for AIDS/ARC
3X	Alcohol/Drug Abuse or Dependency Inpatient Unit
3Y	Alcohol/Drug Abuse or Dependency Outpatient Services
3Z	Arthritis Treatment Center
40	Receiver
43	Claimant Authorized Representative
44	Data Processing Service Bureau
4A	Birthing Room/LDRP Room
4B	Burn Care Unit
4C	Cardiac Catheterization Laboratory
4D	Open-Heart Surgery Facility
4E	Cardiac Intensive Care Unit
4F	Angioplasty Facility
4G	Chronic Obstructive Pulmonary Disease Service Facility

4H	Emergency Department
4I	Trauma Center (Certified)
4J	Extracorporeal Shock-Wave Lithotripter (ESWL) Unit
4L	Genetic Counseling/Screening Services
4M	Adult Day Care Program Facility
4N	Alzheimer's Diagnostic/Assessment Services
4O	Comprehensive Geriatric Assessment Facility
4P	Emergency Response (Geriatric) Unit
4Q	Geriatric Acute Care Unit
4R	Geriatric Clinics
4S	Respite Care Facility
4U	Patient Education Unit
4V	Community Health Promotion Facility
4W	Worksite Health Promotion Facility
4X	Hemodialysis Facility
4Y	Home Health Services
4Z	Hospice
5A	Medical Surgical or Other Intensive Care Unit
5B	Hisopathology Laboratory
5C	Blood Bank
5D	Neonatal Intensive Care Unit
5E	Obstetrics Unit
5F	Occupational Health Services
5G	Organized Outpatient Services
5H	Pediatric Acute Inpatient Unit
5I	Psychiatric Child/Adolescent Services
5J	Psychiatric Consultation-Liaison Services
5K	Psychiatric Education Services
5L	Psychiatric Emergency Services
5M	Psychiatric Geriatric Services
5N	Psychiatric Inpatient Unit
5O	Psychiatric Outpatient Services
5P	Psychiatric Partial Hospitalization Program
5Q	Megavoltage Radiation Therapy Unit
5R	Radioactive Implants Unit
5S	Therapeutic Radioisotope Facility
5T	X-Ray Radiation Therapy Unit
5U	CT Scanner Unit
5V	Diagnostic Radioisotope Facility
5W	Magnetic Resonance Imaging (MRI) Facility
5X	Ultrasound Unit
5Y	Rehabilitation Inpatient Unit
5Z	Rehabilitation Outpatient Services
61	Performed At

6A	Reproductive Health Services
6B	Skilled Nursing or Other Long-Term Care Unit
6C	Single Photon Emission Computerized Tomography (SPECT) Unit
6D	Organized Social Work Service Facility
6E	Outpatient Social Work Services
6F	Emergency Department Social Work Services
6G	Sports Medicine Clinic/Services
6H	Hospital Auxiliary Unit
6I	Patient Representative Services
6J	Volunteer Services Department
6K	Outpatient Surgery Services
6L	Organ/Tissue Transplant Unit
6M	Orthopedic Surgery Facility
6N	Occupational Therapy Services
6O	Physical Therapy Services
6P	Recreational Therapy Services
6Q	Respiratory Therapy Services
6R	Speech Therapy Services
6S	Women's Health Center/Services
6U	Cardiac Rehabilitation Program Facility
6V	Non-Invasive Cardiac Assessment Services
6W	Emergency Medical Technician
6X	Disciplinary Contact
6Y	Case Manager
71	Attending Physician
72	Operating Physician
73	Other Physician
74	Corrected Insured
77	Service Location
7C	Place of Occurrence
80	Hospital
82	Rendering Provider
84	Subscriber's Employer
85	Billing Provider
87	Pay-to Provider
95	Research Institute
CK	Pharmacist
CZ	Admitting Surgeon
D2	Commercial Insurer
DD	Assistant Surgeon
DJ	Consulting Physician
DK	Ordering Physician
DN	Referring Provider

DO	Dependent Name
DQ	Supervising Physician
E1	Person or Other Entity Legally Responsible for a Child
E2	Person or Other Entity With Whom a Child Resides
E7	Previous Employer
E9	Participating Laboratory
FA	Facility
FD	Physical Address
FE	Mail Address
G0	Dependent Insured
G3	Clinic
GB	Other Insured
GD	Guardian
GI	Paramedic
GJ	Paramedical Company
GK	Previous Insured
GM	Spouse Insured
GY	Treatment Facility
HF	Healthcare Professional Shortage Area (HPSA) Facility
HH	Home Health Agency
I3	Independent Physicians Association (IPA)
IJ	Injection Point
IL	Insured or Subscriber
IN	Insurer
LI	Independent Lab
LR	Legal Representative
MR	Medical Insurance Carrier
MSC	Mammography Screening Center
OB	Ordered By
OD	Doctor of Optometry
OX	Oxygen Therapy Facility
P0	Patient Facility
P2	Primary Insured or Subscriber
P3	Primary Care Provider
P4	Prior Insurance Carrier
P6	Third Party Reviewing Preferred Provider Organization (PPO)
P7	Third Party Repricing Preferred Provider Organization (PPO)
PRP	Primary Payer
PT	Party to Receive Test Report
PV	Party performing certification
PW	Pickup Address

QA	Pharmacy
QB	Purchase Service Provider
QC	Patient
QD	Responsible Party
QE	Policyholder
QH	Physician
QK	Managed Care
QL	Chiropractor
QN	Dentist
QO	Doctor of Osteopathy
QS	Podiatrist
QV	Group Practice
QY	Medical Doctor
RC	Receiving Location
RW	Rural Health Clinic
S4	Skilled Nursing Facility
SEP	Secondary Payer
SJ	Service Provider
SU	Supplier/Manufacturer
T4	Transfer Point
Used to identify the geographic location where a patient is transferred or diverted.	
TL	Testing Laboratory
TQ	Third Party Reviewing Organization (TPO)
TT	Transfer To
TTP	Tertiary Payer
TU	Third Party Repricing Organization (TPO)
UH	Nursing Home
X3	Utilization Management Organization
X4	Spouse
X5	Durable Medical Equipment Supplier
ZZ	Mutually Defined

SITUATIONAL STC01 - 4

1270 Code List Qualifier Code O ID 1/3
Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC01-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
RX	National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes

REQUIRED	STC02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: STC02 is the effective date of the status information. IMPLEMENTATION NAME: Status Information Effective Date This is the date the service was placed in this status by the Information Source's adjudication process.	O 1	DT	8/8
NOT USED	STC03	306	Action Code	O 1	ID	1/2
NOT USED	STC04	782	Monetary Amount	O 1	R	1/18
NOT USED	STC05	782	Monetary Amount	O 1	R	1/18
NOT USED	STC06	373	Date	O 1	DT	8/8
NOT USED	STC07	591	Payment Method Code	O 1	ID	3/3
NOT USED	STC08	373	Date	O 1	DT	8/8
NOT USED	STC09	429	Check Number	O 1	AN	1/16
SITUATIONAL	STC10	C043	HEALTH CARE CLAIM STATUS Used to convey status of the entire claim or a specific service line SITUATIONAL RULE: <i>Required when a second claim status is needed. If not required by this implementation guide, do not send.</i>	O 1		
REQUIRED	STC10 - 1	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507). IMPLEMENTATION NAME: Health Care Claim Status Category Code See STC01-1 for valid values.	M	AN	1/30
REQUIRED	STC10 - 2	1271	Industry Code Code indicating a code from a specific industry code list SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04. IMPLEMENTATION NAME: Status Code The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530). The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC10-4 must have the value 'RX'.	M	AN	1/30

SITUATIONAL	STC10 - 3	98	Entity Identifier Code	O	ID	2/3				
Code identifying an organizational entity, a physical location, property or an individual										
SEMANTIC: C043-03 identifies the entity associated with the Health Care Claim Status Code.										
SITUATIONAL RULE: <i>Required when an entity must be identified to further clarify the code message in STC10-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.</i>										
See STC01-3 for valid values.										
SITUATIONAL	STC10 - 4	1270	Code List Qualifier Code	O	ID	1/3				
Code identifying a specific industry code list										
SEMANTIC: C043-04 is used to identify the Code Source referenced in C043-02.										
SITUATIONAL RULE: <i>Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC10-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.</i>										
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>RX</td><td>National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes</td></tr></table>							CODE	DEFINITION	RX	National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes
CODE	DEFINITION									
RX	National Council for Prescription Drug Programs Reject/Payment Codes CODE SOURCE 530: National Council for Prescription Drug Programs Reject/Payment Codes									
SITUATIONAL	STC11	C043	HEALTH CARE CLAIM STATUS	O	1					
Used to convey status of the entire claim or a specific service line										
SITUATIONAL RULE: <i>Required when a third claim status is needed. If not required by this implementation guide, do not send.</i>										
REQUIRED	STC11 - 1	1271	Industry Code	M	AN	1/30				
Code indicating a code from a specific industry code list										
SEMANTIC: C043-01 is used to specify the logical groupings of Health Care Claim Status Codes (See Code Source 507).										
IMPLEMENTATION NAME: Health Care Claim Status Category Code										
See STC01-1 for valid values.										
REQUIRED	STC11 - 2	1271	Industry Code	M	AN	1/30				
Code indicating a code from a specific industry code list										
SEMANTIC: C043-02 is used to identify the status of an entire claim or a serviceline. Code Source 508 is referenced unless qualified by C043-04.										
IMPLEMENTATION NAME: Status Code										
The Status Code is either a Health Care Claim Status Code (Code Source 508) or a National Council for Prescription Drug Programs Reject/Payment Code (Code Source 530).										
The National Council for Prescription Drug Programs Reject/Payment Codes may be used for status related to pharmacy claims. When these codes are used, STC11-4 must have the value 'RX'.										

SITUATIONAL STC11 - 3

98

Entity Identifier Code

O ID 2/3

Code identifying an organizational entity, a physical location, property or an individual

SEMANTIC:

C043-03 identifies the entity associated with the Health Care Claim Status Code.

SITUATIONAL RULE: *Required when an entity must be identified to further clarify the code message in STC11-2. If not required by this implementation guide, may be provided at the sender's discretion but cannot be required by the receiver.*

See STC01-3 for valid values.

SITUATIONAL STC11 - 4

1270

Code List Qualifier Code

O ID 1/3

Code identifying a specific industry code list

SEMANTIC:

C043-04 is used to identify the Code Source referenced in C043-02.

SITUATIONAL RULE: *Required when using a National Council for Prescription Drug Programs Reject/Payment Code in STC11-2 for status related to a pharmacy claim. If not required by this implementation guide, do not send.*

CODE	DEFINITION
------	------------

RX

**National Council for Prescription Drug Programs
Reject/Payment Codes**CODE SOURCE 530: National Council for Prescription Drug
Programs Reject/Payment Codes**NOT USED**

STC12

933

Free-form Message Text

O 1 AN 1/264

SEGMENT DETAIL

REF - SERVICE LINE ITEM IDENTIFICATION

X12 Segment Name: Reference Information

X12 Purpose: To specify identifying information

X12 Syntax: 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2220E — SERVICE LINE INFORMATION


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the Service Line Item Identification was submitted on the 276 request and service level status is reported. If not required by this implementation guide, do not send.

TR3 Example: REF*FJ*6042201~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
			CODE	DEFINITION
			FJ	Line Item Control Number
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Line Item Control Number	X 1 AN 1/50
NOT USED	REF03	352	Description	X 1 AN 1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

DTP - SERVICE LINE DATE**X12 Segment Name:** Date or Time or Period**X12 Purpose:** To specify any or all of a date, a time, or a time period**Loop:** 2220E — SERVICE LINE INFORMATION**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** DTP*472*RD8*20050401-20050402~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	DTP01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1	ID	3/3
IMPLEMENTATION NAME: Date Time Qualifier						
			CODE	DEFINITION		
			472	Service		
REQUIRED	DTP02	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format	M 1	ID	2/3
SEMANTIC: DTP02 is the date or time or period format that will appear in DTP03.						
			CODE	DEFINITION		
			D8	Date Expressed in Format CCYYMMDD		
			RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD		
REQUIRED	DTP03	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times	M 1	AN	1/35
IMPLEMENTATION NAME: Service Line Date						

SEGMENT DETAIL

SE - TRANSACTION SET TRAILER

X12 Segment Name: Transaction Set Trailer

X12 Purpose: To indicate the end of the transaction set and provide the count of the transmitted segments (including the beginning (ST) and ending (SE) segments)


X12 Comments: 1. SE is the last segment of each transaction set.

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: SE*34*0001~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SE01	96	Number of Included Segments Total number of segments included in a transaction set including ST and SE segments	M 1 NO 1/10
IMPLEMENTATION NAME: Transaction Segment Count				
REQUIRED	SE02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set	M 1 AN 4/9
Data value in SE02 must be identical to ST02.				

3 Examples

3.1 Business Scenario 1 -- Claim Level Status

ABC Insurance is both the Medicare Part A Fiscal Intermediary and a PPO. ABC insurance has a payer identification of 12345.

XYZ Service, which is a Clearinghouse, has an electronic transmitter identification number of X67E that it uses to conduct electronic business transactions with ABC Insurance.

Home Hospital and Home Hospital Physicians use XYZ Service to submit electronic claims and claim status requests to ABC Insurance. Home Hospital's National Provider Identifier (NPI) is 1666666661. Home Hospital Physicians' National Provider Identifier (NPI) is 1666666666.

The following details are for 3 claims that XYZ Service requested status and ABC Insurance responded:

Claim 1

Request - Fred Smith is a Medicare enrollee with a health insurance claim number of 123456789A. Mr. Smith's birth date is 12/10/1930. A claim status tracking number of ABCXYZ1 was assigned to the status inquiry for Mr. Smith's claim. Home Hospital requested the status of a claim for inpatient services (bill type 111) for services August 31, 2005 through September 6, 2005 in the amount of \$8,513.88. Home Hospital provided a patient control number of SM123456.

Response - ABC Insurance assigned a payer claim control number of 05347006051 to Mr. Smith's claim. The claim was pending waiting on additional information that had already been requested.

Claim 2

Request - Mary Jones is a Medicare enrollee with a health insurance claim number of 234567890A. Mrs. Jones' birth date is 11/15/1930. A claim status tracking number of ABCXYZ2 was assigned to the status inquiry for Mrs. Jones' claim. Home Hospital requested the status of a claim for inpatient services (bill type 111) from July 31, 2005 through August 9, 2005 in the amount of \$7,599.00. Home Hospital provided a patient control number of JO234567.

Response - ABC Insurance assigned a payer claim control number of 0529675341 to Mrs. Jones' claim. The claim completed adjudication and is awaiting the payment cycle.

Claim 3

Request - Joseph Mann is a dependent under John Mann's PPO plan. John Mann is the insured, or subscriber, and his member identification is 345678901. Joseph Mann's birth date is 11/01/1995. A claim status tracking number of ABCXYZ3 was assigned to the status inquiry for Joseph Mann's claim. Home Hospital Physicians requested the status of a service (99203) on May 1, 2005 in the amount of \$150.00. Home Hospital Physicians provided a patient control number of MA345678.

Response - ABC Insurance assigned a payer internal control number of 051681010827 to Joseph Mann's claim. The service was denied because the dependent was not eligible for benefits at the time of service.

3.1.1 276 Request Transmission

The following is the 276 transmission XYZ Services sent to ABC Insurance requesting the status of the claims described in Section 3.1 - Business Scenario 1 -- Claim Level Status.

```
ST*276*0001*005010X212~
BHT*0010*13*ABC276XXX*20050915*1425~
HL*1**20*1~
NM1*PR*2*ABC  INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ  SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME  HOSPITAL*****XX*1666666661~
HL*4*3*22*0~
DMG*D8*19301210*M~
NM1*IL*1*SMITH*FRED****MI*123456789A~
TRN*1*ABCXYZ1~
REF*BLT*111~
REF*EJ*SM123456~
AMT*T3*8513.88~
DTP*472*RD8*20050831-20050906~
HL*5*3*22*0~
DMG*D8*19301115*F~
NM1*IL*1*JONES*MARY****MI*234567890A~
```


TRN*1*ABCXYZ2~
REF*BLT*111~
REF*EJ*J0234567~
AMT*T3*7599~
DTP*472*RD8*20050731-20050809~
HL*6*2*19*1~
NM1*1P*2*HOME HOSPITAL PHYSICIANS*****XX*166666666~
HL*7*6*22*1~
NM1*IL*1*MANN*JOHN****MI*345678901~
HL*8*7*23~
DMG*D8*19951101*M~
NM1*QC*1*MANN*JOSEPH~
TRN*1*ABCXYZ3~
REF*EJ*MA345678~
SVC*HC:99203*150*****1~
DTP*472*D8*20050501~
SE*36*0001~

3.1.2 277 Response Transmission

The following is the 277 transmission ABC Insurance sent in response to the 276 transmission from XYZ Service regarding the claims described in Section 3.1 - Business Scenario 1 -- Claim Level Status.

ST*277*0001*005010X212~
BHT*0010*08*277X212*20050916*0810*DG~
HL*1**20*1~
NM1*PR*2*ABC INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME HOSPITAL*****XX*1666666661~
HL*4*3*22*0~
NM1*IL*1*SMITH*FRED****MI*123456789A~
TRN*2*ABCXYZ1~
STC*P3:317*20050913**8513.88~
REF*1K*05347006051~
REF*BLT*111~
REF*EJ*SM123456~
DTP*472*RD8*20050831-20050906~

HL*5*3*22*0~
NM1*IL*1*JONES*MARY****MI*234567890A~
TRN*2*ABCXYZ2~
STC*F0:3*20050915**7599*7599~
REF*1K*0529675341~
REF*BLT*111~
REF*EJ*J0234567~
DTP*472*RD8*20050731-20050809~
HL*6*2*19*1~
NM1*1P*2*HOME HOSPITAL PHYSICIANS*****XX*1666666666~
HL*7*6*22*1~
NM1*IL*1*MANN*JOHN****MI*345678901~
HL*8*7*23~
NM1*QC*1*MANN*JOSEPH~
TRN*2*ABCXYC3~
STC*F2:88:QC*20050612**150*0~
REF*1K*051681010827~
REF*EJ*MA345678~
SVC*HC:99203*150*0****1~
STC*F2:88:QC*20050612~
DTP*472*D8*20050501~
SE*38*0001~

3.2 Business Scenario 2 -- Provider Level Status

ABC Insurance is both the Medicare Part A Fiscal Intermediary and a PPO. ABC insurance has a payer identification of 12345.

XYZ Service, which is a Clearinghouse, has an electronic transmitter identification number of X67E that it uses to conduct electronic business transactions with ABC Insurance.

Home Hospital and Home Hospital Physicians use XYZ Service to submit electronic claims and claim status requests to ABC Insurance. Home Hospital's National Provider Identifier (NPI) is 1666666661. Home Hospital Physicians' National Provider Identifier (NPI) is 1666666666.

The following details are for 2 claims that XYZ Service requested status and ABC Insurance responded:

Claim 1

Request - Fred Smith is a Medicare enrollee with a health insurance claim number of 123456789A. Mr. Smith's birth date is 12/10/1930. A claim status tracking number of ABCXYZ1 was assigned to the status inquiry for Mr. Smith's claim. Home Hospital requested the status of a claim for inpatient services (bill type 111) for services August 31, 2005 through September 6, 2005 in the amount of \$8,513.88. Home Hospital provided a patient control number of SM123456.

Response - ABC Insurance assigned a payer claim control number of 05347006051 to Mr. Smith's claim. The claim was pending waiting on additional information that had already been requested.

Claim 2

Request - Joseph Mann is a dependent under John Mann's PPO plan. John Mann is the insured, or subscriber, and his member identification is 345678901. Joseph Mann's birth date is 11/01/1995. A claim status tracking number of ABCXYZ3 was assigned to the status inquiry for Joseph Mann's claim. Home Hospital Physicians requested the status of a service (99203) on May 1, 2005 in the amount of \$150.00. Home Hospital Physicians provided a patient control number of MA345678.

Response - ABC Insurance did not recognize the electronic business relationship between Home Hospital Physicians and XYZ Service because Home Hospital Physicians' provider number was erroneously transposed in their transmission set-up. Consequently, ABC Insurance responded at this specific Provider Level indicating the provider was not eligible for EDI status.

3.2.1 276 Request Transmission

The following is the 276 transmission XYZ Services sent to ABC Insurance requesting the status of the claims described in Section 3.2 - *Business Scenario 2 -- Provider Level Status*:

```
ST*276*0001*005010X212~
BHT*0010*13*ABC276XXX*20050915*1425~
HL*1**20*1~
NM1*PR*2*ABC  INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ  SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME  HOSPITAL*****XX*1666666661~
HL*4*3*22*0~
```

DMG*D8*19301210*M~
NM1*IL*1*SMITH*FRED****MI*123456789A~
TRN*1*ABCXYZ1~
REF*BLT*111~
REF*EJ*SM123456~
AMT*T3*8513.88~
DTP*472*RD8*20050831-20050906~
HL*5*2*19*1~
NM1*1P*2*HOME HOSPITAL PHYSICIANS*****XX*6166666666~
HL*6*5*22*1~
NM1*IL*1*MANN*JOHN****MI*345678901~
HL*7*6*23~
DMG*D8*19951101*M~
NM1*QC*1*MANN*JOSEPH~
TRN*1*ABCXYZ3~
REF*EJ*MA345678~
SVC*HC:99203*150*****1~
DTP*472*D8*20050501~
SE*28*0001~

3.2.2 277 Response Transmission

The following is the 277 transmission ABC Insurance sent in response to the 276 transmission from XYZ Service regarding the claims described in Section 3.2 - *Business Scenario 2 -- Provider Level Status*:

ST*277*0001*005010X212~
BHT*0010*08*277X212*20050916*0810*DG~
HL*1**20*1~
NM1*PR*2*ABC INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME HOSPITAL *****XX*1666666661~
HL*4*3*22*0~
NM1*IL*1*SMITH*FRED****MI*123456789A~
TRN*2*ABCXYZ1~
STC*P3:317*20050913**8513.88~
REF*1K*05347006051~
REF*BLT*111~

REF*EJ*SM123456~
DTP*472*RD8*20050831-20050906~
HL*5*2*19*0~
NM1*1P*2*HOME HOSPITAL PHYSICIANS*****XX*6166666666~
TRN*1*0~
STC*E0:24:85*20050916~
SE*21*0001~

3.3 Business Scenario 3 -- Information Receiver Level Status

ABC Insurance is a Medicare Part A Fiscal Intermediary. ABC insurance has a payer identification of 12345.

XYZ Service, which is a Clearinghouse, has an electronic transmitter identification number of X67E which it uses to conduct electronic business transactions with ABC Insurance.

Home Hospital uses XYZ Service to submit electronic claims and claim status requests to ABC Insurance. Home Hospital's National Provider Identifier (NPI) is 1666666661.

The following details are for 1 claim that XYZ Service requested status and ABC Insurance responded:

Claim 1

Request - Fred Smith is a Medicare enrollee with a health insurance claim number of 123456789A. Mr. Smith's birth date is 12/10/1930. A claim status tracking number of ABCXYZ1 was assigned to the status inquiry for Mr. Smith's claim. Home Hospital requested the status of a claim for inpatient services (bill type 111) for services August 31, 2005 through September 6, 2005 in the amount of \$8,513.88. Home Hospital provided a patient control number of SM123456.

Response - ABC Insurance's system was down and they were unable to respond to the claim status request. ABC Insurance responded at the Information Receiver level with a system unavailable status.

3.3.1 276 Request Transmission

The following is the 276 transmission XYZ Services sent to ABC Insurance requesting the status of the claims described in Section 3.3 - Business Scenario 3 -- Information Receiver Level Status:

```
ST*276*0001*005010X212~
BHT*0010*13*ABC276XXX*20050915*1425~
HL*1**20*1~
NM1*PR*2*ABC  INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ  SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME  HOSPITAL*****XX*1666666661~
HL*4*3*22*0~
DMG*D8*19301210*M~
NM1*IL*1*SMITH*FRED****MI*123456789A~
TRN*1*ABCXYZ1~
REF*BLT*111~
REF*EJ*SM123456~
AMT*T3*8513.88~
DTP*472*RD8*20050831-20050906~
SE*17*0001~
```

3.3.2 277 Response Transmission

The following is the 277 transmission ABC Insurance sent in response to the 276 transmission from XYZ Service regarding the claims described in Section 3.3 - Business Scenario 3 -- Information Receiver Level Status:

```
ST*277*0001*005010X212~
BHT*0010*08*277X212*20050916*0810*DG~
HL*1**20*1~
NM1*PR*2*ABC  INSURANCE*****PI*12345~
HL*2*1*21*0~
NM1*41*2*XYZ  SERVICE*****46*X67E~
TRN*2*ABC276XXX~
STC*E0:0*20050916~
SE*9*0001~
```

3.4 Business Scenario 4 -- Claim Level Status with NCPDP Reject/Payment Code

ABC Insurance is a Medicaid Fiscal Agent. ABC Insurance has a payer identification of 12345.

XYZ Service, which is a Clearinghouse, has an electronic transmitter identification number of X67E which it uses to conduct electronic business transactions with ABC Insurance.

Home Hospital Pharmacy uses XYZ Service to submit electronic claims and claim status requests to ABC Insurance. Home Hospital Pharmacy's National Provider Identifier (NPI) is 1666666662.

The following details are for 1 claim that XYZ Service requested status and ABC Insurance responded:

Claim 1

Request - Fred Smith is a Medicaid enrollee with a Medicaid subscriber identification of 123456789012. Mr. Smith's birth date is 12/10/1930. A claim status tracking number of ABCXYZ1 was assigned to the status inquiry for Mr. Smith's claim. Home Hospital Pharmacy requested the status of a claim for a pharmacy service on March 1, 2006 in the amount of \$85. Home Hospital Pharmacy provided a pharmacy prescription number of 7654321.

Response - ABC Insurance assigned a payer claim control number of 05347006051. ABC Insurance provided status using a Claim Status Category of F2 (Finalized/Denied) and a National Council for Prescription Drug Programs (NCPDP) Reject/Payment Code of 80 (Drug- diagnosis mismatch) to indicated the denial reason. The NCPDP Status Code Source was identified by use of the RX Code Source Qualifier in STC01-4.

3.4.1 276 Request Transmission

The following is a 276 transmission XYZ Services sent to ABC Insurance requesting the status of a pharmacy claim.

```
ST*276*0001*005010X212~
BHT*0010*13*ABC276XXX*20060415*1425~
HL*1**20*1~
NM1*PR*2*ABC INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME HOSPITAL PHARMACY*****XX*1666666662~
HL*4*3*22*0~
DMG*D8*19301210*M~
NM1*IL*1*SMITH*FRED*****MI*123456789012~
TRN*1*ABCXYZ1~
```

REF*XZ*7654321~
AMT*T3*85~
DTP*472*D8*20060301~
SE*16*0001~

3.4.2 277 Response Transmission

The following is the 277 transmission ABC Insurance sent in response to the 276 transmission from XYZ Service regarding the pharmacy claim status.

ST*277*0001*005010X212~
BHT*0010*08*277X212*20060415*0810*DG~
HL*1**20*1~
NM1*PR*2*ABC INSURANCE*****PI*12345~
HL*2*1*21*1~
NM1*41*2*XYZ SERVICE*****46*X67E~
HL*3*2*19*1~
NM1*1P*2*HOME HOSPITAL PHARMACY*****XX*1666666662~
HL*4*3*22*0~
NM1*IL*1*SMITH*FRED*****MI*123456789012~
TRN*2*ABCXYZ1~
STC*F2:80::RX*20060301**85*0~
REF*1K*05347006051~
REF*XZ*7654321~
DTP*472*D8*20060301~
SE*16*0001~

A External Code Sources

A.1 External Code Sources

130 Healthcare Common Procedural Coding System

SIMPLE DATA ELEMENT/CODE REFERENCES

235/HC, 1270/BO, 1270/BP

SOURCE

Healthcare Common Procedural Coding System

AVAILABLE FROM

Centers for Medicare & Medicaid Services
7500 Security Boulevard
Baltimore, MD 21244

ABSTRACT

HCPCS is Centers for Medicare & Medicaid Service's (CMS) coding scheme to group procedures performed for payment to providers.

132 National Uniform Billing Committee (NUBC) Codes

SIMPLE DATA ELEMENT/CODE REFERENCES

235/NU, 235/RB, 1270/BE, 1270/BG, 1270/BH, 1270/BI, 1270/NUB

SOURCE

National Uniform Billing Data Element Specifications

AVAILABLE FROM

National Uniform Billing Committee
American Hospital Association
One North Franklin
Chicago, IL 60606

ABSTRACT

Revenue codes are a classification of hospital charges in a standard grouping that is controlled by the National Uniform Billing Committee.

135 American Dental Association

SIMPLE DATA ELEMENT/CODE REFERENCES

1361, 235/AD, 1270/JO, 1270/JP, 1270/TQ, 1270/AA

SOURCE

Current Dental Terminology (CDT) Manual

AVAILABLE FROM

Salable Materials
American Dental Association
211 East Chicago Avenue
Chicago, IL 60611-2678

ABSTRACT

The CDT manual contains the American Dental Association's codes for dental procedures and nomenclature and is the accepted set of numeric codes and descriptive terms for reporting dental treatments and descriptors.

240 National Drug Code by Format

SIMPLE DATA ELEMENT/CODE REFERENCES

235/N1, 235/N2, 235/N3, 235/N4, 235/N5, 235/N6, 1270/NDC

SOURCE

Drug Establishment Registration and Listing Instruction Booklet

AVAILABLE FROM

Federal Drug Listing Branch HFN-315
5600 Fishers Lane
Rockville, MD 20857

ABSTRACT

Publication includes manufacturing and labeling information as well as drug packaging sizes.

507 Health Care Claim Status Category Code

SIMPLE DATA ELEMENT/CODE REFERENCES

1271

SOURCE

Health Care Claim Status Category Code

AVAILABLE FROM

Washington Publishing Company
<http://www.wpc-edl.com>

ABSTRACT

Code used to organize the Health Care Claim Status Codes into logical groupings.

508 Health Care Claim Status Code

SIMPLE DATA ELEMENT/CODE REFERENCES

1271, 1270/65

SOURCE

Health Care Claim Status Code

AVAILABLE FROM

Washington Publishing Company
<http://www.wpc-edl.com>

ABSTRACT

Code identifying the status of an entire claim or service line

513 Home Infusion EDI Coalition (HIEC) Product/Service Code List

SIMPLE DATA ELEMENT/CODE REFERENCES

235/IV, 1270/HO

SOURCE

Home Infusion EDI Coalition (HIEC) Coding System

AVAILABLE FROM

HIEC Chairperson
HIBCC (Health Industry Business Communications Council)
5110 North 40th Street
Suite 250
Phoenix, AZ 85018

ABSTRACT

This list contains codes identifying home infusion therapy products/services.

530 National Council for Prescription Drug Programs Reject/Payment Codes

SIMPLE DATA ELEMENT/CODE REFERENCES

1270/RX

SOURCE

National Council for Prescription Drug Programs Data Dictionary

AVAILABLE FROM

NCPDP
9240 East Raintree Drive
Scottsdale, AZ 85260

ABSTRACT

A listing of NCPDPs payment and reject reason codes, the explanation of the code, and the field number in error (if rejected).

537 Centers for Medicare and Medicaid Services National Provider Identifier

SIMPLE DATA ELEMENT/CODE REFERENCES

66/XX, 128/HPI

SOURCE

National Provider System

AVAILABLE FROM

Centers for Medicare and Medicaid Services

Office of Financial Management
Division of Provider/Supplier Enrollment
C4-10-07
7500 Security Boulevard
Baltimore, MD 21244-1850

ABSTRACT

The Centers for Medicare and Medicaid Services is developing the National Provider Identifier (NPI), which has been proposed as the standard unique identifier for each health care provider under the Health Insurance Portability and Accountability Act of 1996.

540 Centers for Medicare and Medicaid Services PlanID

SIMPLE DATA ELEMENT/CODE REFERENCES

66/XV, 128/ABY

SOURCE

PlanID Database

AVAILABLE FROM

Centers for Medicare and Medicaid Services
Center of Beneficiary Services, Membership Operations Group
Division of Benefit Coordination
S1-05-06
7500 Security Boulevard
Baltimore, MD 21244-1850

ABSTRACT

The Centers for Medicare and Medicaid Services has joined with other payers to develop a unique national payer identification number. The Centers for Medicare and Medicaid Services is the authorizing agent for enumerating payers through the services of a PlanID Registrar. It may also be used by other payers on a voluntary basis.

576 Workers Compensation Specific Procedure and Supply Codes

SIMPLE DATA ELEMENT/CODE REFERENCES

235/ER

SOURCE

IAIABC Jurisdiction Medical Bill Report Implementation Guide

AVAILABLE FROM

IAIABC EDI Implementation Manager
International Association of Industrial Accident Boards and Commissions
8643 Hauses - Suite 200
87th Parkway
Shawnee Mission, KS 66215

ABSTRACT

The IAIABC Jurisdiction Medical Bill Report Implementation Guide describes the requirements for submitting and the data contained within a jurisdiction medical report. The Implementation Guide includes: Reporting scenarios, data definitions, trading partner requirements tables, reference to industry codes, and IAIABC maintained code lists.

716 Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities

SIMPLE DATA ELEMENT/CODE REFERENCES

235/HP

SOURCE

Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities

AVAILABLE FROM

Division of Institutional Claims Processing
Centers for Medicare and Medicaid Services
C4-10-07
7500 Security Boulevard
Baltimore, MD 21244-1850

ABSTRACT

The Centers for Medicare and Medicaid services develops and publishes the HIPPS codes to establish a coding system for claims submission and claims payment under prospective payment systems. These codes represent the case mix classification groups that are used to determine payment rates under prospective payment systems. Case mix classification groups include, but may not be limited to , resource utilization groups (RUGs) for skilled nursing facilities, home health resource groups (HHRGs) for home health agencies, and case mix groups (CMGs) for inpatient rehabilitation facilities.

843 Advanced Billing Concepts (ABC) Codes

SIMPLE DATA ELEMENT/CODE REFERENCES

235/WK, 1270/CAH

SOURCE

The CAM and Nursing Coding Manual

AVAILABLE FROM

Alternative Link
6121 Indian School Road NE
Suite 131
Albuquerque, NM 87110

ABSTRACT

The manual contains the Advanced Billing Concepts (ABC) codes, descriptive terms and identifiers for reporting complementary or alternative medicine, nursing, and other integrative health care procedures.

B Nomenclature

B.1 ASC X12 Nomenclature

B.1.1 Interchange and Application Control Structures

Appendix B is provided as a reference to the X12 syntax, usage, and related information. It is not a full statement of Interchange and Control Structure rules. The full X12 Interchange and Control Structures and other rules (X12.5, X12.6, X12.59, X12 dictionaries, other X12 standards and official documents) apply unless specifically modified in the detailed instructions of this implementation guide (see Section B.1.1.3.1.2 - *Decimal* for an example of such a modification).

B.1.1.1 Interchange Control Structure

The transmission of data proceeds according to very strict format rules to ensure the integrity and maintain the efficiency of the interchange. Each business grouping of data is called a transaction set. For instance, a group of benefit enrollments sent from a sponsor to a payer is considered a transaction set.


Each transaction set contains groups of logically related data in units called segments. For instance, the N4 segment used in the transaction set conveys the city, state, ZIP Code, and other geographic information. A transaction set contains multiple segments, so the addresses of the different parties, for example, can be conveyed from one computer to the other. An analogy would be that the transaction set is like a freight train; the segments are like the train's cars; and each segment can contain several data elements the same as a train car can hold multiple crates.

The sequence of the elements within one segment is specified by the ASC X12 standard as well as the sequence of segments in the transaction set. In a more conventional computing environment, the segments would be equivalent to records, and the elements equivalent to fields.

Similar transaction sets, called "functional groups," can be sent together within a transmission. Each functional group is prefaced by a group start segment; and a functional group is terminated by a group end segment. One or more functional groups are prefaced by an interchange header and followed by an interchange trailer.

Figure B.1 - *Transmission Control Schematic*, illustrates this interchange control.

Figure B.1 - Transmission Control Schematic

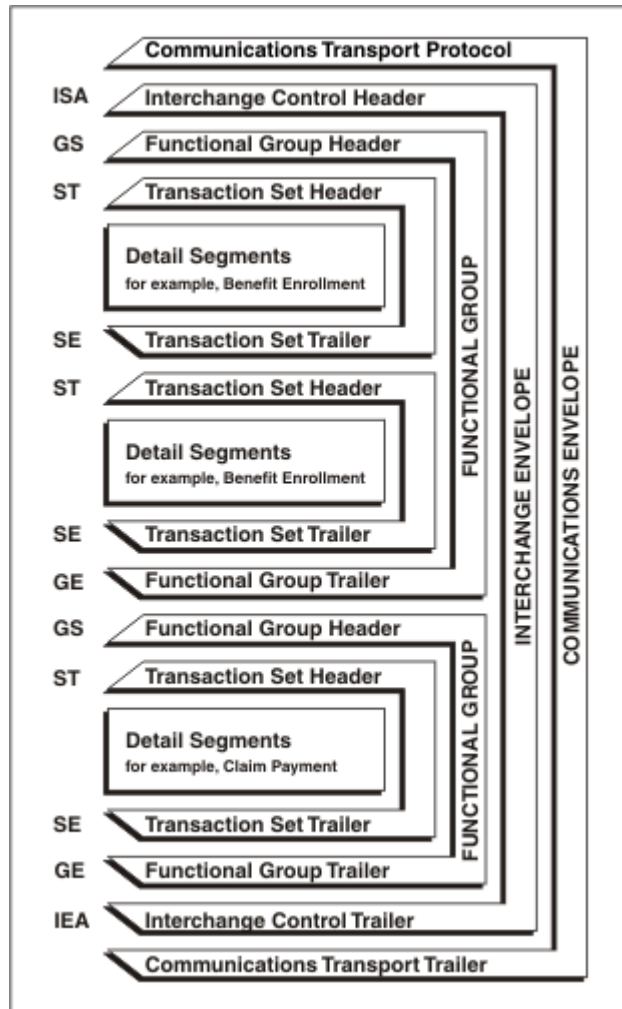

The interchange header and trailer segments envelop one or more functional groups or interchange-related control segments and perform the following functions:

1. Define the data element separators and the data segment terminator.
2. Identify the sender and receiver.
3. Provide control information for the interchange.
4. Allow for authorization and security information.

B.1.1.2 Application Control Structure Definitions and Concepts

B.1.1.2.1 Basic Structure

A data element corresponds to a data field in data processing terminology. A data segment corresponds to a record in data processing terminology. The data segment

begins with a segment ID and contains related data elements. A control segment has the same structure as a data segment; the distinction is in the use. The data segment is used primarily to convey user information, but the control segment is used primarily to convey control information and to group data segments.

B.1.1.2.2 Basic Character Set

The section that follows is designed to have representation in the common character code schemes of EBCDIC, ASCII, and CCITT International Alphabet 5. The ASC X12 standards are graphic-character-oriented; therefore, common character encoding schemes other than those specified herein may be used as long as a common mapping is available. Because the graphic characters have an implied mapping across character code schemes, those bit patterns are not provided here.

The basic character set of this standard, shown in Table B.1 - *Basic Character Set*, includes those selected from the uppercase letters, digits, space, and special characters as specified below.

Table B.1 - Basic Character Set

A...Z	0...9	!	"	&	'	(	)	+	*
,	-	.	/	:	;	?	=	" " (space)	

B.1.1.2.3 Extended Character Set

An extended character set may be used by negotiation between the two parties and includes the lowercase letters and other special characters as specified in Table B.2 - *Extended Character Set*.

Table B.2 - Extended Character Set

a...z	%	~	@	[	]	_	{	}
\		<	>	^	`	#	\$	

Note that the extended characters include several character codes that have multiple graphical representations for a specific bit pattern. The complete list appears in other standards such as CCITT S.5. Use of the USA graphics for these codes presents no problem unless data is exchanged with an international partner. Other problems, such as the translation of item descriptions from English to French, arise when exchanging data with an international partner, but minimizing the use of codes with multiple graphics eliminates one of the more obvious problems.

For implementations compliant with this guide, either the entire extended character set must be acceptable, or the entire extended character set must not be used. In the absence of a specific trading partner agreement to the contrary, trading partners will assume that the extended character set is acceptable. Use of the extended character set allows the use of the "@" character in email addresses within the PER segment. Users should note that characters in the extended character set, as well as the basic character set, may be used as delimiters only when they do not occur in the data as stated in Section B.1.1.2.4.1 - *Base Control Set*.

B.1.1.2.4 Control Characters

Two control character groups are specified; they have restricted usage. The common notation for these groups is also provided, together with the character coding in three common alphabets. In Table B.3 - *Base Control Set*, the column IA5 represents CCITT V.3 International Alphabet 5.

B.1.1.2.4.1 Base Control Set

The base control set includes those characters that will not have a disruptive effect on most communication protocols. These are represented by:

Table B.3 - Base Control Set

NOTATION	NAME	EBCDIC	ASCII	IA5
BEL	bell	2F	07	07
HT	horizontal tab	05	09	09
LF	line feed	25	0A	0A
VT	vertical tab	0B	0B	0B
FF	form feed	0C	0C	0C
CR	carriage return	0D	0D	0D
FS	file separator	1C	1C	1C
GS	group separator	1D	1D	1D
RS	record separator	1E	1E	1E
US	unit separator	1F	1F	1F
NL	new line	15		

The Group Separator (GS) may be an exception in this set because it is used in the 3780 communications protocol to indicate blank space compression.

B.1.1.2.4.2 Extended Control Set

The extended control set includes those that may have an effect on a transmission system. These are shown in Table B.4 - *Extended Control Set*.

Table B.4 - *Extended Control Set*

NOTATION	NAME	EBCDIC	ASCII	IA5
SOH	start of header	01	01	01
STX	start of text	02	02	02
ETX	end of text	03	03	03
EOT	end of transmission	37	04	04
ENQ	enquiry	2D	05	05
ACK	acknowledge	2E	06	06
DC1	device control 1	11	11	11
DC2	device control 2	12	12	12
DC3	device control 3	13	13	13
DC4	device control 4	3C	14	14
NAK	negative acknowledge	3D	15	15
SYN	synchronous idle	32	16	16
ETB	end of block	26	17	17

B.1.1.2.5 Delimiters

A delimiter is a character used to separate two data elements or component elements or to terminate a segment. The delimiters are an integral part of the data.

Delimiters are specified in the interchange header segment, ISA. The ISA segment can be considered in implementations compliant with this guide (see Appendix C, ISA Segment Note 1) to be a 105 byte fixed length record, followed by a segment terminator. The data element separator is byte number 4; the repetition separator is byte number

83; the component element separator is byte number 105; and the segment terminator is the byte that immediately follows the component element separator.

Once specified in the interchange header, the delimiters are not to be used in a data element value elsewhere in the interchange. For consistency, this implementation guide uses the delimiters shown in Table B.5 - *Delimiters*, in all examples of EDI transmissions.

Table B.5 - Delimiters

CHARACTER	NAME	DELIMITER
*	Asterisk	Data Element Separator
^	Carat	Repetition Separator
:	Colon	Component Element Separator
~	Tilde	Segment Terminator

The delimiters above are for illustration purposes only and are not specific recommendations or requirements. Users of this implementation guide should be aware that an application system may use some valid delimiter characters within the application data. Occurrences of delimiter characters in transmitted data within a data element will result in errors in translation. The existence of asterisks (*) within transmitted application data is a known issue that can affect translation software.

B.1.1.3 Business Transaction Structure Definitions and Concepts

The ASC X12 standards define commonly used business transactions (such as a health care claim) in a formal structure called "transaction sets." A transaction set is composed of a transaction set header control segment, one or more data segments, and a transaction set trailer control segment. Each segment is composed of the following:

- A unique segment ID
- One or more logically related data elements each preceded by a data element separator
- A segment terminator

B.1.1.3.1 Data Element

The data element is the smallest named unit of information in the ASC X12 standard. Data elements are identified as either simple or component. A data element that occurs as an ordinal member of a composite data structure is identified as a component data element. A data element that occurs in a segment outside the defined boundaries of a composite data structure is identified as a simple data element. The

distinction between simple and component data elements is strictly a matter of context because a data element can be used in either capacity.

Data elements are assigned a unique reference number. Each data element has a name, description, type, minimum length, and maximum length. For ID type data elements, this guide provides the applicable ASC X12 code values and their descriptions or references where the valid code list can be obtained.

A simple data element within a segment may have an attribute indicating that it may occur once or a specific number of times more than once. The number of permitted repeats are defined as an attribute in the individual segment where the repeated data element occurs.

Each data element is assigned a minimum and maximum length. The length of the data element value is the number of character positions used except as noted for numeric, decimal, and binary elements.

The data element types shown in Table B.6 - *Data Element Types*, appear in this implementation guide.

Table B.6 - Data Element Types

SYMBOL	TYPE
Nn	Numeric
R	Decimal
ID	Identifier
AN	String
DT	Date
TM	Time
B	Binary

The data element minimum and maximum lengths may be restricted in this implementation guide for a compliant implementation. Such restrictions may occur by virtue of the allowed qualifier for the data element or by specific instructions regarding length or format as stated in this implementation guide.

B.1.1.3.1.1 Numeric

A numeric data element is represented by one or more digits with an optional leading sign representing a value in the normal base of 10. The value of a numeric data element includes an implied decimal point. It is used when the position of the decimal point within the data is permanently fixed and is not to be transmitted with the data.

This set of guides denotes the number of implied decimal positions. The representation for this data element type is "Nn" where N indicates that it is numeric and n indicates the number of decimal positions to the right of the implied decimal point.

If n is 0, it need not appear in the specification; N is equivalent to N0. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) must not be transmitted.

EXAMPLE

A transmitted value of 1234, when specified as numeric type N2, represents a value of 12.34.

Leading zeros must be suppressed unless necessary to satisfy a minimum length requirement. The length of a numeric type data element does not include the optional sign.

B.1.1.3.1.2 Decimal

A decimal data element may contain an explicit decimal point and is used for numeric values that have a varying number of decimal positions. This data element type is represented as "R."

The decimal point always appears in the character stream if the decimal point is at any place other than the right end. If the value is an integer (decimal point at the right end) the decimal point must be omitted. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) must not be transmitted.

Leading zeros must be suppressed unless necessary to satisfy a minimum length requirement. Trailing zeros following the decimal point must be suppressed unless necessary to indicate precision. The use of triad separators (for example, the commas in 1,000,000) is expressly prohibited. The length of a decimal type data element does not include the optional leading sign or decimal point.

EXAMPLE

A transmitted value of 12.34 represents a decimal value of 12.34.

While the ASC X12 standard supports usage of exponential notation, this guide prohibits that usage.

For implementation of this guide under the rules promulgated under the Health Insurance Portability and Accountability Act (HIPAA), decimal data elements in Data Element 782 (Monetary Amount) will be limited to a maximum length of 10 characters including reported or implied places for cents (implied value of 00 after the decimal point). Note the statement in the preceding paragraph that the decimal point and leading sign, if sent, are not part of the character count.

EXAMPLE

For implementations mandated under HIPAA rules:

- The following transmitted value represents the largest positive dollar amount that can be sent: 99999999.99
- The following transmitted value is the longest string of characters that can be sent representing whole dollars: 99999999
- The following transmitted value is the longest string of characters that can be sent representing negative dollars and cents: -99999999.99
- The following transmitted value is the longest string of characters that can be sent representing negative whole dollars: -99999999

B.1.1.3.1.3 Identifier

An identifier data element always contains a value from a predefined list of codes that is maintained by the ASC X12 Committee or some other body recognized by the Committee. Trailing spaces must be suppressed unless they are necessary to satisfy a minimum length. An identifier is always left justified. The representation for this data element type is "ID."

B.1.1.3.1.4 String

A string data element is a sequence of any characters from the basic or extended character sets. The string data element must contain at least one non-space character. The significant characters shall be left justified. Leading spaces, when they occur, are presumed to be significant characters. Trailing spaces must be suppressed unless they are necessary to satisfy a minimum length. The representation for this data element type is "AN."

B.1.1.3.1.5 Date

A date data element is used to express the standard date in either YYMMDD or CCYYMMDD format in which CC is the first two digits of the calendar year, YY is the last two digits of the calendar year, MM is the month (01 to 12), and DD is the day in the

month (01 to 31). The representation for this data element type is "DT." Users of this guide should note that all dates within transactions are 8-character dates (millennium compliant) in the format CCYYMMDD. The only date data element that is in format YYMMDD is the Interchange Date data element in the ISA segment and the TA1 segment where the century is easily determined because of the nature of an interchange header.

B.1.1.3.1.6 Time

A time data element is used to express the ISO standard time HHMMSSd..d format in which HH is the hour for a 24 hour clock (00 to 23), MM is the minute (00 to 59), SS is the second (00 to 59) and d..d is decimal seconds. The representation for this data element type is "TM." The length of the data element determines the format of the transmitted time.

EXAMPLE

Transmitted data elements of four characters denote HHMM. Transmitted data elements of six characters denote HHMMSS.

B.1.1.3.1.7 Binary

The binary data element is any sequence of octets ranging in value from binary 00000000 to binary 11111111. This data element type has no defined maximum length. Actual length is specified by the immediately preceding data element. Within the body of a transaction set (from ST to SE) implemented according to this technical report, the binary data element type is only used in the segments Binary Data Segment BIN, and Binary Data Structure BDS. Within those segments, Data Element 785 Binary Data is a string of octets which can assume any binary pattern from hexadecimal 00 to FF, and can be used to send text as well as coded data, including data from another application in its native format. The binary data type is also used in some control and security structures.

Not all transaction sets use the Binary Data Segment BIN or Binary Data Structure BDS.

B.1.1.3.2 Repeating Data Elements

Simple or composite data elements within a segment can be designated as repeating data elements. Repeating data elements are adjacent data elements that occur up to a number of times specified in the standard as number of repeats. The implementation guide may also specify the number of repeats of a repeating data element in a specific location in the transaction that are permitted in a compliant implementation. Adjacent occurrences of the same repeating simple data element or composite data structure in a segment shall be separated by a repetition separator.

B.1.1.3.3 Composite Data Structure

The composite data structure is an intermediate unit of information in a segment. Composite data structures are composed of one or more logically related simple data elements, each, except the last, followed by a sub-element separator. The final data element is followed by the next data element separator or the segment terminator. Each simple data element within a composite is called a component.

Each composite data structure has a unique four-character identifier, a name, and a purpose. The identifier serves as a label for the composite. A composite data structure can be further defined through the use of syntax notes, semantic notes, and comments. Each component within the composite is further characterized by a reference designator and a condition designator. The reference designators and the condition designators are described in Section B.1.1.3.8 - *Reference Designator* and Section B.1.1.3.9 - *Condition Designator*.

A composite data structure within a segment may have an attribute indicating that it may occur once or a specific number of times more than once. The number of permitted repeats are defined as an attribute in the individual segment where the repeated composite data structure occurs.

B.1.1.3.4 Data Segment

The data segment is an intermediate unit of information in a transaction set. In the data stream, a data segment consists of a segment identifier, one or more composite data structures or simple data elements each preceded by a data element separator and succeeded by a segment terminator.

Each data segment has a unique two- or three-character identifier, a name, and a purpose. The identifier serves as a label for the data segment. A segment can be further defined through the use of syntax notes, semantic notes, and comments. Each simple data element or composite data structure within the segment is further characterized by a reference designator and a condition designator.

B.1.1.3.5 Syntax Notes

Syntax notes describe relational conditions among two or more data segment units within the same segment, or among two or more component data elements within the same composite data structure. For a complete description of the relational conditions, See Section B.1.1.3.9 - *Condition Designator*.

B.1.1.3.6 Semantic Notes

Simple data elements or composite data structures may be referenced by a semantic note within a particular segment. A semantic note provides important additional information regarding the intended meaning of a designated data element, particularly a generic type, in the context of its use within a specific data segment. Semantic notes may also define a relational condition among data elements in a segment based on the presence of a specific value (or one of a set of values) in one of the data elements.

B.1.1.3.7 Comments

A segment comment provides additional information regarding the intended use of the segment.

B.1.1.3.8 Reference Designator

Each simple data element or composite data structure in a segment is provided a structured code that indicates the segment in which it is used and the sequential position within the segment. The code is composed of the segment identifier followed by a two-digit number that defines the position of the simple data element or composite data structure in that segment.

For purposes of creating reference designators, the composite data structure is viewed as the hierarchical equal of the simple data element. Each component data element in a composite data structure is identified by a suffix appended to the reference designator for the composite data structure of which it is a member. This suffix is prefixed with a hyphen and defines the position of the component data element in the composite data structure.

EXAMPLE

- The first simple element of the CLP segment would be identified as CLP01.
- The first position in the SVC segment is occupied by a composite data structure that contains seven component data elements, the reference designator for the second component data element would be SVC01-02.

B.1.1.3.9 Condition Designator

This section provides information about X12 standard conditions designators. It is provided so that users will have information about the general standard. Implementation guides may impose other conditions designators. See implementation guide section 2.1 Presentation Examples for detailed information about the implementation guide Industry Usage requirements for compliant implementation.

Data element conditions are of three types: mandatory, optional, and relational. They define the circumstances under which a data element may be required to be present or not present in a particular segment.

Table B.7 - Condition Designator

DESIGNATOR	DESCRIPTION								
M- Mandatory	The designation of mandatory is absolute in the sense that there is no dependency on other data elements. This designation may apply to either simple data elements or composite data structures. If the designation applies to a composite data structure, then at least one value of a component data element in that composite data structure shall be included in the data segment.								
O- Optional	The designation of optional means that there is no requirement for a simple data element or composite data structure to be present in the segment. The presence of a value for a simple data element or the presence of value for any of the component data elements of a composite data structure is at the option of the sender.								
X- Relational	Relational conditions may exist among two or more simple data elements within the same data segment based on the presence or absence of one of those data elements (presence means a data element must not be empty). Relational conditions are specified by a condition code (see table below) and the reference designators of the affected data elements. A data element may be subject to more than one relational condition.								
	The definitions for each of the condition codes used within syntax notes are detailed below:								
	<table><tr><th>CONDITION CODE</th><th>DEFINITION</th></tr><tr><td>P- Paired or Multiple</td><td>If any element specified in the relational condition is present, then all of the elements specified must be present.</td></tr><tr><td>R- Required</td><td>At least one of the elements specified in the condition must be present.</td></tr><tr><td>E- Exclusion</td><td>Not more than one of the elements specified in the condition may be present.</td></tr></table>	CONDITION CODE	DEFINITION	P- Paired or Multiple	If any element specified in the relational condition is present, then all of the elements specified must be present.	R- Required	At least one of the elements specified in the condition must be present.	E- Exclusion	Not more than one of the elements specified in the condition may be present.
CONDITION CODE	DEFINITION								
P- Paired or Multiple	If any element specified in the relational condition is present, then all of the elements specified must be present.								
R- Required	At least one of the elements specified in the condition must be present.								
E- Exclusion	Not more than one of the elements specified in the condition may be present.								

DESIGNATOR	DESCRIPTION	
	C- Conditional	If the first element specified in the condition is present, then all other elements must be present. However, any or all of the elements not specified as the first element in the condition may appear without requiring that the first element be present. The order of the elements in the condition does not have to be the same as the order of the data elements in the data segment.
	L- List Conditional	If the first element specified in the condition is present, then at least one of the remaining elements must be present. However, any or all of the elements not specified as the first element in the condition may appear without requiring that the first element be present. The order of the elements in the condition does not have to be the same as the order of the data elements in the data segment.

B.1.1.3.10 Absence of Data

Any simple data element that is indicated as mandatory must not be empty if the segment is used. At least one component data element of a composite data structure that is indicated as mandatory must not be empty if the segment is used. Optional simple data elements and/or composite data structures and their preceding data element separators that are not needed must be omitted if they occur at the end of a segment. If they do not occur at the end of the segment, the simple data element values and/or composite data structure values may be omitted. Their absence is indicated by the occurrence of their preceding data element separators, in order to maintain the element's or structure's position as defined in the data segment.

Likewise, when additional information is not necessary within a composite, the composite may be terminated by providing the appropriate data element separator or segment terminator.

If a segment has no data in any data element within the segment (an "empty" segment), that segment must not be sent.

B.1.1.3.11 Control Segments

A control segment has the same structure as a data segment, but it is used for transferring control information rather than application information.

B.1.1.3.11.1 Loop Control Segments

Loop control segments are used only to delineate bounded loops. Delineation of the loop shall consist of the loop header (LS segment) and the loop trailer (LE segment). The loop header defines the start of a structure that must contain one or more iterations of a loop of data segments and provides the loop identifier for this loop. The loop trailer defines the end of the structure. The LS segment appears only before the first occurrence of the loop, and the LE segment appears only after the last occurrence of the loop. Unbounded looping structures do not use loop control segments.

B.1.1.3.11.2 Transaction Set Control Segments

The transaction set is delineated by the transaction set header (ST segment) and the transaction set trailer (SE segment). The transaction set header identifies the start and identifier of the transaction set. The transaction set trailer identifies the end of the transaction set and provides a count of the data segments, which includes the ST and SE segments.

B.1.1.3.11.3 Functional Group Control Segments

The functional group is delineated by the functional group header (GS segment) and the functional group trailer (GE segment). The functional group header starts and identifies one or more related transaction sets and provides a control number and application identification information. The functional group trailer defines the end of the functional group of related transaction sets and provides a count of contained transaction sets.

B.1.1.3.11.4 Relations among Control Segments

The control segment of this standard must have a nested relationship as is shown and annotated in this subsection. The letters preceding the control segment name are the segment identifier for that control segment. The indentation of segment identifiers shown below indicates the subordination among control segments.

GS Functional Group Header, starts a group of related transaction sets.

ST Transaction Set Header, starts a transaction set.

LS Loop Header, starts a bounded loop of data segments but is not part of the loop.

LS Loop Header, starts an inner, nested, bounded loop.

LE Loop Trailer, ends an inner, nested bounded loop.

LE Loop Trailer, ends a bounded loop of data segments but is not part of the loop.

SE Transaction Set Trailer, ends a transaction set.

GE Functional Group Trailer, ends a group of related transaction sets.

More than one ST/SE pair, each representing a transaction set, may be used within one functional group. Also more than one LS/LE pair, each representing a bounded loop, may be used within one transaction set.

B.1.1.3.12 Transaction Set

The transaction set is the smallest meaningful set of information exchanged between trading partners. The transaction set consists of a transaction set header segment, one or more data segments in a specified order, and a transaction set trailer segment. See Figure B.1 - *Transmission Control Schematic*.

B.1.1.3.12.1 Transaction Set Header and Trailer

A transaction set identifier uniquely identifies a transaction set. This identifier is the first data element of the Transaction Set Header Segment (ST). A user assigned transaction set control number in the header must match the control number in the Trailer Segment (SE) for any given transaction set. The value for the number of included segments in the SE segment is the total number of segments in the transaction set, including the ST and SE segments.

B.1.1.3.12.2 Data Segment Groups

The data segments in a transaction set may be repeated as individual data segments or as unbounded or bounded loops.

B.1.1.3.12.3 Repeated Occurrences of Single Data Segments

When a single data segment is allowed to be repeated, it may have a specified maximum number of occurrences defined at each specified position within a given transaction set standard. Alternatively, a segment may be allowed to repeat an unlimited number of times. The notation for an unlimited number of repetitions is ">1."

B.1.1.3.12.4 Loops of Data Segments

Loops are groups of semantically related segments. Data segment loops may be unbounded or bounded.

Unbounded Loops

To establish the iteration of a loop, the first data segment in the loop must appear once and only once in each iteration. Loops may have a specified maximum number of

repetitions. Alternatively, the loop may be specified as having an unlimited number of iterations. The notation for an unlimited number of repetitions is ">1."

A specified sequence of segments is in the loop. Loops themselves are optional or mandatory. The requirement designator of the beginning segment of a loop indicates whether at least one occurrence of the loop is required. Each appearance of the beginning segment defines an occurrence of the loop.

The requirement designator of any segment within the loop after the beginning segment applies to that segment for each occurrence of the loop. If there is a mandatory requirement designator for any data segment within the loop after the beginning segment, that data segment is mandatory for each occurrence of the loop. If the loop is optional, the mandatory segment only occurs if the loop occurs.

Bounded Loops

The characteristics of unbounded loops described previously also apply to bounded loops. In addition, bounded loops require a Loop Start Segment (LS) to appear before the first occurrence and a Loop End Segment (LE) to appear after the last consecutive occurrence of the loop. If the loop does not occur, the LS and LE segments are suppressed.

B.1.1.3.12.5 Data Segments in a Transaction Set

When data segments are combined to form a transaction set, three characteristics are applied to each data segment: a requirement designator, a position in the transaction set, and a maximum occurrence.

B.1.1.3.12.6 Data Segment Requirement Designators

A data segment, or loop, has one of the following requirement designators for health care and insurance transaction sets, indicating its appearance in the data stream of a transmission. These requirement designators are represented by a single character code.

Table B.8 - Data Segment Requirement Designators

DESIGNATOR	DESCRIPTION
M- Mandatory	This data segment must be included in the transaction set. (Note that a data segment may be mandatory in a loop of data segments, but the loop itself is optional if the beginning segment of the loop is designated as optional.)
O- Optional	The presence of this data segment is the option of the sending party.

B.1.1.3.12.7 Data Segment Position

The ordinal positions of the segments in a transaction set are explicitly specified for that transaction. Subject to the flexibility provided by the optional requirement designators of the segments, this positioning must be maintained.

B.1.1.3.12.8 Data Segment Occurrence

A data segment may have a maximum occurrence of one, a finite number greater than one, or an unlimited number indicated by ">1."

B.1.1.3.13 Functional Group

A functional group is a group of similar transaction sets that is bounded by a functional group header segment and a functional group trailer segment. The functional identifier defines the group of transactions that may be included within the functional group. The value for the functional group control number in the header and trailer control segments must be identical for any given group. The value for the number of included transaction sets is the total number of transaction sets in the group. See Figure B.1 - *Transmission Control Schematic*.

B.1.1.4 Envelopes and Control Structures

B.1.1.4.1 Interchange Control Structures

Typically, the term "interchange" connotes the ISA/IEA envelope that is transmitted between trading/business partners. Interchange control is achieved through several "control" components. The interchange control number is contained in data element ISA13 of the ISA segment. The identical control number must also occur in data element 02 of the IEA segment. Most commercial translation software products will verify that these two elements are identical. In most translation software products, if these elements are different the interchange will be "suspended" in error.

There are many other features of the ISA segment that are used for control measures. For instance, the ISA segment contains data elements such as authorization information, security information, sender identification, and receiver identification that can be used for control purposes. These data elements are agreed upon by the trading partners prior to transmission. The interchange date and time data elements as well as the interchange control number within the ISA segment are used for debugging purposes when there is a problem with the transmission or the interchange.

Data Element ISA12, Interchange Control Version Number, indicates the version of the ISA/IEA envelope. GS08 indicates the version of the transaction sets contained within the ISA/IEA envelope. The versions are not required to be the same. An Interchange

Acknowledgment can be requested through data element ISA14. The interchange acknowledgement is the TA1 segment. Data element ISA15, Test Indicator, is used between trading partners to indicate that the transmission is in a "test" or "production" mode. Data element ISA16, Subelement Separator, is used by the translator for interpretation of composite data elements.

The ending component of the interchange or ISA/IEA envelope is the IEA segment. Data element IEA01 indicates the number of functional groups that are included within the interchange. In most commercial translation software products, an aggregate count of functional groups is kept while interpreting the interchange. This count is then verified with data element IEA01. If there is a discrepancy, in most commercial products, the interchange is suspended. The other data element in the IEA segment is IEA02 which is referenced above.

See Appendix C, EDI Control Directory, for a complete detailing of the interchange control header and trailer. The authors recommend that when two transactions with different X12 versions numbers are sent in one interchange control structure (multiple functional groups within one ISA/IEA envelope), the Interchange Control version used should be that of the most recent transaction version included in the envelope. For the transmission of HIPAA transactions with mixed versions, this would be a compliant enveloping structure.

B.1.1.4.2 Functional Groups

Control structures within the functional group envelope include the functional identifier code in GS01. The Functional Identifier Code is used by the commercial translation software during interpretation of the interchange to determine the different transaction sets that may be included within the functional group. If an inappropriate transaction set is contained within the functional group, most commercial translation software will suspend the functional group within the interchange. The Application Sender's Code in GS02 can be used to identify the sending unit of the transmission. The Application Receiver's Code in GS03 can be used to identify the receiving unit of the transmission. The functional group contains a creation date (GS04) and creation time (GS05) for the functional group. The Group Control Number is contained in GS06. These data elements (GS04, GS05, and GS06) can be used for debugging purposes. GS08, Version/Release/Industry Identifier Code is the version/release/sub-release of the transaction sets being transmitted in this functional group.

The Functional Group Control Number in GS06 must be identical to data element 02 of the GE segment. Data element GE01 indicates the number of transaction sets within the functional group. In most commercial translation software products, an aggregate

count of the transaction sets is kept while interpreting the functional group. This count is then verified with data element GE01.

See Appendix C, EDI Control Directory, for a complete detailing of the functional group header and trailer.

B.1.1.4.3 HL Structures


The HL segment is used in several X12 transaction sets to identify levels of detail information using a hierarchical structure, such as relating dependents to a subscriber. Hierarchical levels may differ from guide to guide.

For example, each provider can bill for one or more subscribers, each subscriber can have one or more dependents and the subscriber and the dependents can make one or more claims.

Each guide states what levels are available, the level's usage, number of repeats, and whether that level has subordinate levels within a transaction set.

For implementations compliant with this guide, the repeats of the loops identified by the HL structure shall appear in the hierarchical order specified in BHT01, when those particular hierarchical levels exist. That is, an HL parent loop must be followed by the subordinate child loops, if any, prior to commencing a new HL parent loop at the same hierarchical level.

The following diagram, from transaction set 837, illustrates a typical hierarchy.



The two examples below illustrate this requirement:

Example 1 based on Implementation Guide 811X201:

INSURER

First STATE in transaction (child of INSURER)

First POLICY in transaction (child of first STATE)

First VEHICLE in transaction (child of first POLICY)

Second POLICY in transaction (child of first STATE)

Second VEHICLE in transaction (child of second POLICY)

Third VEHICLE in transaction (child of second POLICY)

Second STATE in transaction (child of INSURER)
Third POLICY in transaction (child of second STATE)
Fourth VEHICLE in transaction (child of third POLICY)

Example 2 based on Implementation Guide 837X141

First PROVIDER in transaction
 First SUBSCRIBER in transaction (child of first PROVIDER)
Second PROVIDER in transaction
 Second SUBSCRIBER in transaction (child of second PROVIDER)
 First DEPENDENT in transaction (child of second SUBSCRIBER)
 Second DEPENDENT in transaction (child of second SUBSCRIBER)
Third SUBSCRIBER in transaction (child of second PROVIDER)
Third PROVIDER in transaction
 Fourth SUBSCRIBER in transaction (child of third PROVIDER)
 Fifth SUBSCRIBER in transaction (child of third PROVIDER)
 Third DEPENDENT in transaction (child of fifth SUBSCRIBER)

B.1.1.5 Acknowledgments

B.1.1.5.1 Interchange Acknowledgment, TA1

The TA1 segment provides the capability for the interchange receiver to notify the sender that a valid envelope was received or that problems were encountered with the interchange control structure. The TA1 verifies the envelopes only. Transaction set-specific verification is accomplished through use of the Functional Acknowledgment Transaction Set, 997. See Section B.1.1.5.2 - *Functional Acknowledgment, 997*, for more details. The TA1 is unique in that it is a single segment transmitted without the GS/GE envelope structure. A TA1 can be included in an interchange with other functional groups and transactions.

Encompassed in the TA1 are the interchange control number, interchange date and time, interchange acknowledgment code, and the interchange note code. The interchange control number, interchange date and time are identical to those that were present in the transmitted interchange from the trading partner. This provides the capability to associate the TA1 with the transmitted interchange. TA104, Interchange Acknowledgment Code, indicates the status of the interchange control structure. This data element stipulates whether the transmitted interchange was accepted with no errors, accepted with errors, or rejected because of errors. TA105, Interchange Note Code, is a numerical code that indicates the error found while processing the interchange control structure. Values for this data element indicate whether the error occurred at the interchange or functional group envelope.

B.1.1.5.2 Functional Acknowledgment, 997

The Functional Acknowledgment Transaction Set, 997, has been designed to allow trading partners to establish a comprehensive control function as a part of their business exchange process. This acknowledgment process facilitates control of EDI. There is a one-to-one correspondence between a 997 and a functional group. Segments within the 997 can identify the acceptance or rejection of the functional group, transaction sets or segments. Data elements in error can also be identified. There are many EDI implementations that have incorporated the acknowledgment process in all of their electronic communications. The 997 is used as a functional acknowledgment to a previously transmitted functional group.

The 997 is a transaction set and thus is encapsulated within the interchange control structure (envelopes) for transmission.

B.2 Object Descriptors

Object Descriptors (OD) provide a method to uniquely identify specific locations within an implementation guide. There is an OD assigned at every level of the X12N implementation:

1. Transaction Set
2. Loop
3. Segment
4. Composite Data Element
5. Component Data Element
6. Simple Data Element

ODs at the first four levels are coded using X12 identifiers separated by underbars:

Entity	Example
1. Transaction Set Identifier plus a unique 2 character value	837Q1
2. Above plus under bar plus Loop Identifier as assigned within an implementation guide	837Q1_2330C
3. Above plus under bar plus Segment Identifier	837Q1_2330C_NM1
4. Above plus Reference Designator plus under bar plus Composite Identifier	837Q1_2400_SV101_C003

The fifth and sixth levels add a name derived from the "Industry Term" defined in the X12N Data Dictionary. The name is derived by removing the spaces.

Entity	Example
5. Number 4 above plus composite sequence plus under bar plus name	837Q1_2400_SV101_C00302_ProcedureCode
6. Number 3 above plus Reference Designator plus two under bars plus name	837Q1_2330C_NM109__OtherPayerPatientPrimaryIdentifier

Said in another way, ODs contain a coded component specifying a location in an implementation guide, a separator, and a name portion. For example:



Since ODs are unique across all X12N implementation guides, they can be used for a variety of purposes. For example, as a cross reference to older data transmission systems, like the National Standard Format for health care claims, or to form XML tags for newer data transmission systems.

C EDI Control Directory

C.1 Control Segments

- **ISA**
Interchange Control Header Segment
- **GS**
Functional Group Header Segment
- **GE**
Functional Group Trailer Segment
- **IEA**
Interchange Control Trailer Segment

SEGMENT DETAIL

ISA - INTERCHANGE CONTROL HEADER

X12 Segment Name: Interchange Control Header

X12 Purpose: To start and identify an interchange of zero or more functional groups and interchange-related control segments


Segment Repeat: 1

Usage: REQUIRED

- TR3 Notes:**
1. All positions within each of the data elements must be filled.
 2. For compliant implementations under this implementation guide, ISA13, the interchange Control Number, must be a positive unsigned number. Therefore, the ISA segment can be considered a fixed record length segment.
 3. The first element separator defines the element separator to be used through the entire interchange.
 4. The ISA segment terminator defines the segment terminator used throughout the entire interchange.
 5. Spaces in the example interchanges are represented by “.” for clarity.

TR3 Example: ISA*00*.....*01*SECRET....*ZZ*SUBMITTERS.ID..*ZZ*RECEIVERS.ID...*030101*1253*^*00501*000000905*1*T*::~~

DIAGRAM

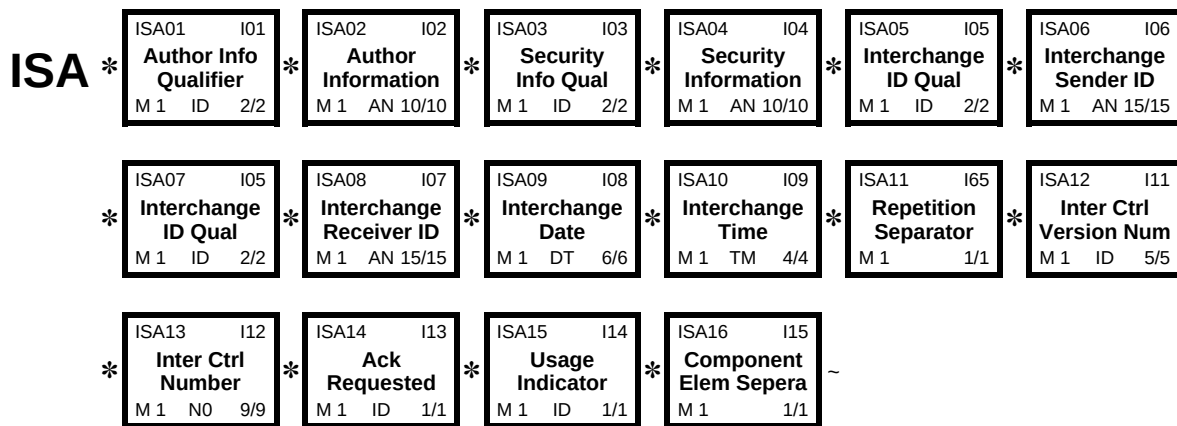

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES																						
REQUIRED	ISA01	I01	Authorization Information Qualifier Code identifying the type of information in the Authorization Information	M 1	ID	2/2																				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>00</td><td>No Authorization Information Present (No Meaningful Information in I02)</td></tr><tr><td>03</td><td>Additional Data Identification</td></tr></table>	CODE	DEFINITION	00	No Authorization Information Present (No Meaningful Information in I02)	03	Additional Data Identification																	
CODE	DEFINITION																									
00	No Authorization Information Present (No Meaningful Information in I02)																									
03	Additional Data Identification																									
REQUIRED	ISA02	I02	Authorization Information Information used for additional identification or authorization of the interchange sender or the data in the interchange; the type of information is set by the Authorization Information Qualifier (I01)	M 1	AN	10/10																				
REQUIRED	ISA03	I03	Security Information Qualifier Code identifying the type of information in the Security Information	M 1	ID	2/2																				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>00</td><td>No Security Information Present (No Meaningful Information in I04)</td></tr><tr><td>01</td><td>Password</td></tr></table>	CODE	DEFINITION	00	No Security Information Present (No Meaningful Information in I04)	01	Password																	
CODE	DEFINITION																									
00	No Security Information Present (No Meaningful Information in I04)																									
01	Password																									
REQUIRED	ISA04	I04	Security Information This is used for identifying the security information about the interchange sender or the data in the interchange; the type of information is set by the Security Information Qualifier (I03)	M 1	AN	10/10																				
REQUIRED	ISA05	I05	Interchange ID Qualifier Code indicating the system/method of code structure used to designate the sender or receiver ID element being qualified	M 1	ID	2/2																				
			This ID qualifies the Sender in ISA06.																							
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>01</td><td>Duns (Dun & Bradstreet)</td></tr><tr><td>14</td><td>Duns Plus Suffix</td></tr><tr><td>20</td><td>Health Industry Number (HIN)</td></tr><tr><td>27</td><td>CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>28</td><td>Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>29</td><td>Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>30</td><td>U.S. Federal Tax Identification Number</td></tr><tr><td>33</td><td>National Association of Insurance Commissioners Company Code (NAIC)</td></tr><tr><td>ZZ</td><td>Mutually Defined</td></tr></table>	CODE	DEFINITION	01	Duns (Dun & Bradstreet)	14	Duns Plus Suffix	20	Health Industry Number (HIN)	27	CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)	28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)	29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)	30	U.S. Federal Tax Identification Number	33	National Association of Insurance Commissioners Company Code (NAIC)	ZZ	Mutually Defined			
CODE	DEFINITION																									
01	Duns (Dun & Bradstreet)																									
14	Duns Plus Suffix																									
20	Health Industry Number (HIN)																									
27	CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)																									
28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)																									
29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)																									
30	U.S. Federal Tax Identification Number																									
33	National Association of Insurance Commissioners Company Code (NAIC)																									
ZZ	Mutually Defined																									
REQUIRED	ISA06	I06	Interchange Sender ID Identification code published by the sender for other parties to use as the receiver ID to route data to them; the sender always codes this value in the sender ID element	M 1	AN	15/15																				

REQUIRED	ISA07	I05	Interchange ID Qualifier Code indicating the system/method of code structure used to designate the sender or receiver ID element being qualified			
This ID qualifies the Receiver in ISA08.						
			CODE	DEFINITION		
			01	Duns (Dun & Bradstreet)		
			14	Duns Plus Suffix		
			20	Health Industry Number (HIN) CODE SOURCE 121: Health Industry Number		
			27	Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)		
			28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)		
			29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)		
			30	U.S. Federal Tax Identification Number		
			33	National Association of Insurance Commissioners Company Code (NAIC)		
			ZZ	Mutually Defined		
REQUIRED	ISA08	I07	Interchange Receiver ID	M 1	AN	15/15
Identification code published by the receiver of the data; When sending, it is used by the sender as their sending ID, thus other parties sending to them will use this as a receiving ID to route data to them						
REQUIRED	ISA09	I08	Interchange Date	M 1	DT	6/6
Date of the interchange						
The date format is YYMMDD.						
REQUIRED	ISA10	I09	Interchange Time	M 1	TM	4/4
Time of the interchange						
The time format is HHMM.						
REQUIRED	ISA11	I65	Repetition Separator	M 1		1/1
Type is not applicable; the repetition separator is a delimiter and not a data element; this field provides the delimiter used to separate repeated occurrences of a simple data element or a composite data structure; this value must be different than the data element separator, component element separator, and the segment terminator						
REQUIRED	ISA12	I11	Interchange Control Version Number	M 1	ID	5/5
Code specifying the version number of the interchange control segments						
			CODE	DEFINITION		
			00501	Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003		
REQUIRED	ISA13	I12	Interchange Control Number	M 1	N0	9/9
A control number assigned by the interchange sender						
The Interchange Control Number, ISA13, must be identical to the associated Interchange Trailer IEA02.						
Must be a positive unsigned number and must be identical to the value in IEA02.						

CONTROL SEGMENTS


REQUIRED	ISA14	I13	Acknowledgment Requested	M 1	ID	1/1						
Code indicating sender's request for an interchange acknowledgment												
See Section B.1.1.5.1 for interchange acknowledgment information.												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>0</td><td>No Interchange Acknowledgment Requested</td></tr><tr><td>1</td><td>Interchange Acknowledgment Requested (TA1)</td></tr></table>							CODE	DEFINITION	0	No Interchange Acknowledgment Requested	1	Interchange Acknowledgment Requested (TA1)
CODE	DEFINITION											
0	No Interchange Acknowledgment Requested											
1	Interchange Acknowledgment Requested (TA1)											
REQUIRED	ISA15	I14	Interchange Usage Indicator	M 1	ID	1/1						
Code indicating whether data enclosed by this interchange envelope is test, production or information												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>P</td><td>Production Data</td></tr><tr><td>T</td><td>Test Data</td></tr></table>							CODE	DEFINITION	P	Production Data	T	Test Data
CODE	DEFINITION											
P	Production Data											
T	Test Data											
REQUIRED	ISA16	I15	Component Element Separator	M 1		1/1						
Type is not applicable; the component element separator is a delimiter and not a data element; this field provides the delimiter used to separate component data elements within a composite data structure; this value must be different than the data element separator and the segment terminator												

SEGMENT DETAIL

GS - FUNCTIONAL GROUP HEADER

X12 Segment Name: Functional Group Header**X12 Purpose:** To indicate the beginning of a functional group and to provide control information**X12 Comments:** 1. A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** GS*XX*SENDER CODE*RECEIVER
CODE*19991231*0802*1*X*005010X212~

DIAGRAM

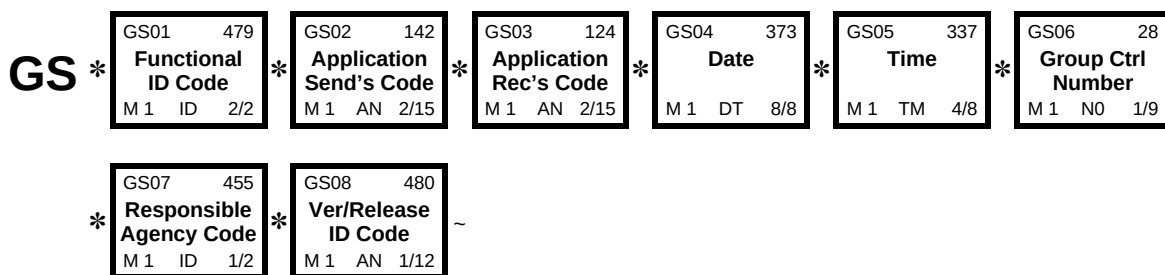

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	GS01	479	Functional Identifier Code Code identifying a group of application related transaction sets This is the 2-character Functional Identifier Code assigned to each transaction set by X12. The specific code for a transaction set defined by this implementation guide is presented in section 1.2, Version Information.	M 1 ID 2/2
REQUIRED	GS02	142	Application Sender's Code Code identifying party sending transmission; codes agreed to by trading partners Use this code to identify the unit sending the information.	M 1 AN 2/15
REQUIRED	GS03	124	Application Receiver's Code Code identifying party receiving transmission; codes agreed to by trading partners Use this code to identify the unit receiving the information.	M 1 AN 2/15
REQUIRED	GS04	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: GS04 is the group date. Use this date for the functional group creation date.	M 1 DT 8/8

CONTROL SEGMENTS

REQUIRED	GS05	337	Time Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99) SEMANTIC: GS05 is the group time. Use this time for the creation time. The recommended format is HHMM.	M 1 TM 4/8
REQUIRED	GS06	28	Group Control Number Assigned number originated and maintained by the sender SEMANTIC: The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02. For implementations compliant with this guide, GS06 must be unique within a single transmission (that is, within a single ISA to IEA enveloping structure). The authors recommend that GS06 be unique within all transmissions over a period of time to be determined by the sender.	M 1 N0 1/9
REQUIRED	GS07	455	Responsible Agency Code Code identifying the issuer of the standard; this code is used in conjunction with Data Element 480 CODE DEFINITION	M 1 ID 1/2
REQUIRED	GS08	480	X Accredited Standards Committee X12 Version / Release / Industry Identifier Code Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used, including the GS and GE segments; if code in DE455 in GS segment is X, then in DE 480 positions 1-3 are the version number; positions 4-6 are the release and subrelease, level of the version; and positions 7-12 are the industry or trade association identifiers (optionally assigned by user); if code in DE455 in GS segment is T, then other formats are allowed CODE SOURCE 881: Version / Release / Industry Identifier Code This is the unique Version/Release/Industry Identifier Code assigned to an implementation by X12N. The specific code for a transaction set defined by this implementation guide is presented in section 1.2, Version Information. CODE DEFINITION	M 1 AN 1/12
			005010X212 Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003	

SEGMENT DETAIL

GE - FUNCTIONAL GROUP TRAILER

X12 Segment Name: Functional Group Trailer

X12 Purpose: To indicate the end of a functional group and to provide control information


X12 Comments: 1. The use of identical data interchange control numbers in the associated functional group header and trailer is designed to maximize functional group integrity. The control number is the same as that used in the corresponding header.

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: GE*1*1~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	GE01	97	Number of Transaction Sets Included Total number of transaction sets included in the functional group or interchange (transmission) group terminated by the trailer containing this data element	M 1 NO 1/6
REQUIRED	GE02	28	Group Control Number Assigned number originated and maintained by the sender SEMANTIC: The data interchange control number GE02 in this trailer must be identical to the same data element in the associated functional group header, GS06.	M 1 NO 1/9

SEGMENT DETAIL

IEA - INTERCHANGE CONTROL TRAILER**X12 Segment Name:** Interchange Control Trailer**X12 Purpose:** To define the end of an interchange of zero or more functional groups and interchange-related control segments**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** IEA*1*000000905~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	IEA01	I16	Number of Included Functional Groups A count of the number of functional groups included in an interchange	M 1	N0	1/5
REQUIRED	IEA02	I12	Interchange Control Number A control number assigned by the interchange sender	M 1	N0	9/9

D Change Summary

This Implementation Guide defines X12N implementation 005010X212 of the Health Care Claim

Status Request and Response (276/277). It is based on version/release/sub-release 005010 of the ASC X12 standards.

The previous X12N implementation Guide of the Health Care Claim Status Request and Response (276/277) was 004050X139. It was based on version/release/ sub-release 004050 of the ASC X12 standards.

The 005010X212 Implementation Guide contains significant changes and clarifications. This appendix provides a high level description of changes between 004050X139 and 005010X212.

Overall Changes

1. Sections one and two were revised in accordance with version 5010 of the ASC X12N Implementation Guide Handbook.
2. All Situational loops, segments and data elements notes were **modified** in accordance with the ASC X12N Implementation Guide Handbook. See Section 2.2.1 Industry Usage and Section 2.2.1.1 Transaction Compliance Related to Industry Usage for further information about the Situational Rule format.
3. Appendix A and Appendix B have been revised in accordance with version 5010 of the X12N Implementation Guide Handbook.
4. The guide number (005010X212) is now documented in Section 1.2 Version Information. This identifier must be inserted as elements GS08 and ST03 in all Claim Status Requests and Responses created according to this implementation guide.
5. The Functional Identifier Codes, HR (276) and HN (277) are now documented in Section 1.2 Version Information. These identifiers must be inserted as the applicable element GS01 in all Claim Status Requests and Responses created according to this implementation guide.
6. All segment examples have been reviewed and brought up to date.
7. All Alias names have been deleted.

Front Matter Changes

8. The Front Matter sections pertaining to the transaction business use were rewritten and condensed into Section 1.4 Business Use for the purpose of clarity and consistency.
9. Previous Table 1 and Table 2 segment by segment details, views and matrixes were eliminated for the purpose of reducing redundancy and gaining consistency with the actual Section 2 Transaction Set Views and Segment descriptions and usages.
10. Section 1.4.3 277 Status Information (STC) Segment Usage and subsections were added to provide guidance on reporting consistency within the STC segment and the various status levels.

11. Section 1.3.2.1 - Real Time and Batch Transmissions, was added to provide guidance and limitations between real-time and batch transaction reporting.
12. Business terms were added to Section 1.5 Business Terminology.

276 Request - Loop, Segment, Element Changes

Table 1

13. ST Segment - ST03 changed from Not Used to Required.

Table 2 - Information Source Detail

14. Loop 2000A Information Source Level HL - Segment note was added.
15. Loop 2100A Payer Name NM1 - NM108 qualifiers limited to PI and XV, NM108 qualifier note added to PI and NM109 element note eliminated.

Table 2 - Information Receiver Detail

16. Loop 2000B Information Receiver Level HL - Segment note was changed.
17. Loop 2100B Information Receiver Name NM1 - NM103 changed from Required to Situational, NM107 changed from Situational to Not Used, NM108 limited to qualifier 46 and a note was added to NM109.

Table 2 - Service Provider Detail

18. Loop 2000C Service Provider Level HL - Segment note was added.
19. Loop 2100C Provider Name NM1 - Loop repeat changed to 2, segment notes were added, NM103 changed from Required to Situational and NM108 qualifier SV note deleted.

Table 2 - Subscriber Detail

20. Loop 2000D Subscriber Level HL - Segment note was changed and HL04=1 element note changed.
21. Loop 2000D Subscriber Demographic Information DMG - DMG03 usage note changed and code 'U - Unknown' removed.
22. Loop 2100D Subscriber Name NM1 - NM101 qualifier QC removed, NM102=2 note changed and NM108 qualifier ZZ replaced with II.

Table 2 - Dependent Detail

23. Loop 2000E Dependent Level HL - Segment note was changed.
24. Loop 2000E Dependent Demographic Information DMG - DMG03 usage note changed and code 'U - Unknown' removed.
25. Loop 2100E Dependent Name NM1 - Changed NM106, NM108 and NM109 from Situational to Not Used.

Table 2 - Loop 2200D and Loop 2200E

26. Loop 2200D/E Claim Status Tracking Number TRN - Loop and Segment name changed from Claim Submitter Trace Number to Claim Status Tracking Number. Segment rule, notes and data content of TRN02 value changed.
27. Loop 2200D/E Payer Claim Control Number REF - Segment name changed from Payer Claim Identification Number to Payer Claim Control Number. Segment notes changed, usage changed and REF02 element note eliminated.
28. Loop 2200D/E Institutional Bill Type Identification REF - Segment notes deleted and REF02 element note changed.
29. Loop 2200D/E Medical Record Number REF - deleted
30. Loop 2200D/E Application or Location System Identifier REF - New segment added.
31. Loop 2200D/E Group Number REF - Segment notes, data content and usage changed.
32. Loop 2200D/E Patient Control Number REF - New segment added.
33. Loop 2200D/E Pharmacy Prescription Number REF - New segment added.
34. Loop 2200D/E Claim Identification Number for Clearinghouses and Other Transmission Intermediaries REF - New segment added.
35. Loop 2200D/E Claim Submitted Charges AMT - Segment usage changed, segment note changed and AMT02 element note eliminated.
36. Loop 2200D/E Claim Service Date DTP - Segment notes changed, example changed, DTP01 qualifier changed from '232' to '472', DTP02 element note changed and qualifier D8 added.

Table 2 - Loop 2210D and Loop 2210E

37. Loop 2210D/E Service Line Information SVC - For SVC01-1: qualifiers ER and HP were added, qualifiers ID and NH were deleted and notes were added to qualifiers IV, ER and WK, usage notes changed for SVC01-3 through SVC01-6, SVC04 usage note changed and SVC07 changed from Situational to Required.
38. Loop 2210D/E Service Line Item Identification REF - Segment usage note and example changed.
39. Loop 2210D/E Service Line Date DTP - Segment note deleted, DTP02 element note changed and qualifier D8 added to DTP02.

277 Response - Loop, Segment, Element Changes

Table 1

40. ST Segment - ST03 changed from Not Used to Required.

Table 2 - Information Source Detail

41. Loop 2000A Information Source Level HL - Segment note was added.

- 42. Loop 2100A Payer Name NM1 - NM108 qualifiers limited to PI and XV, NM108 qualifier note added to PI and NM109 element note eliminated.
- 43. Loop 2100A Payer Contact Information PER - Segment usage rule changed, PER02 notes changed, qualifier ED was added to PER05 and PER07.

Table 2 - Information Receiver Detail

- 44. Loop 2000B Information Receiver Level HL - Segment note changed and the notes for HL04 values were changed.
- 45. Loop 2100B Information Receiver Name NM1 - NM103 changed from Required to Situational, NM107 changed from Situational to Not Used, NM108 limited to qualifier 46 and an element note added to NM109.
- 46. Loop 2200B Information Receiver Trace Identifier TRN - Removed 'Application' from Segment Name, segment rule and note were changed and TRN02 note changed.
- 47. Loop 2200B Information Receiver Status Information STC - Segment note changed, usage for composites STC10 and STC11 were changed, all sub-element notes for STC01, STC10 and STC11 composites changed, usage rules for STC01-3, STC10-3 and STC11-3 changed, code values 40 and 85 were eliminated from STC01-3, STC10-3 and STC11-3 and STC01-4, STC10-4 and STC11-4 were changed from Required to Not Used.

Table 2 - Service Provider Detail

- 48. Loop 2000C Service Provider Level HL - Segment rule changed, segment note changed and usage notes were added to the HL04 values.
- 49. Loop 2100C Provider Name NM1 - Loop repeat changed to 2, segment notes added, NM103 changed from Required to Situational, NM106 changed from Situational to Not Used and NM108 qualifier SV note deleted.
- 50. Loop 2200C Provider of Service Trace Identifier TRN - Removed 'Information' from Segment Name, segment rule changed and segment note on data content added for clarification.
- 51. Loop 2200C Provider Status Information STC - Removed 'Billing' from segment name, segment note added, usage for composites STC10 and STC11 were changed, all sub-element notes for STC01, STC10 and STC11 composites changed, usage rules for STC01-3, STC10-3 and STC11-3 changed, code value for STC01-3, STC10-3 and STC11-3 changed from 82 and 85 to 1P and STC01-4, STC10-4 and STC11-4 were changed from Required to Not Used.

Table 2 - Subscriber Detail

- 52. Loop 2000D Subscriber Level HL - Segment rule changed, segment note changed and the notes were changed for the HL04 values.
- 53. Loop 2000D Subscriber Demographic Information DMG - Segment deleted.
- 54. Loop 2100D Subscriber Name NM1 - NM101 qualifier QC removed, NM102=2 note changed, NM106 changed from Situational to Not Used and NM108 qualifier ZZ replaced with II.

Table 2 - Dependent Detail

- 55. Loop 2000E Dependent Level HL - Segment rule and notes changed.
- 56. Loop 2000E Dependent Demographic Information DMG - Segment deleted.
- 57. Loop 2100E Dependent Name NM1 - Element note removed from NM104 and changed NM106, NM108 and NM109 from Situational to Not Used.

Table 2 - Loop 2200D and Loop 2200E

- 58. Loop 2200D/E Claim Status Tracking Number TRN - Loop and Segment name changed from Claim Submitter Trace Number to Claim Status Tracking Number. Segment rule, notes and data content of TRN02 value changed.
- 59. Loop 2200D/E Claim Level Status Information STC - Segment repeat changed to >1, segment note added, additional TR3 example added, all sub-element notes for STC01, STC10 and STC11 composites changed, data content note added for STC01-1, STC10-1 and STC11-1, usage rule for STC01-3, STC10-3 and STC11-3 changed, code values 03, MSC, TL, PRP, SEP and TTP were added to STC01-3, STC10-3 and STC11-3, usage changed from Not Used to Situational for STC01-4, STC10-4 and STC11-4, usage rule and code value RX added for STC01-4, STC10-4 and STC11-4, STC02 note changed, STC04 usage rule changed, STC05 usage rule changed, STC06 usage and notes changed, STC07 changed from Situational to Not Used, STC08 usage and notes changed and STC09 usage and notes changed.
- 60. Loop 2200D/E Payer Claim Control Number REF - Segment name changed from Payer Claim Identification Number to Payer Claim Control Number. Segment notes and usage changed.
- 61. Loop 2200D/E Institutional Bill Type Identification REF - Segment notes deleted and REF02 element note changed.
- 62. Loop 2200D/E Medical Record Number REF - deleted
- 63. Loop 2200D/E Patient Control Number REF - New segment added.
- 64. Loop 2200D/E Pharmacy Prescription Number REF - New segment added.
- 65. Loop 2200D/E Voucher Identifier REF - New segment added.
- 66. Loop 2200D/E Claim Identification Number for Clearinghouses and Other Transmission Intermediaries REF - New segment added.
- 67. Loop 2200D/E Claim Service Date DTP - Segment usage and notes changed, example changed, DTP01 qualifier changed from '232' to '472', DTP02 element note changed and qualifier D8 was added to DTP02.

Table 2 - Loop 2220D and Loop 2220E

- 68. Loop 2220D/E Service Line Information SVC - SVC01 element note changed, for SVC01-1: qualifiers ER and HP were added, qualifiers ID and NH were deleted and notes were added to qualifiers IV, ER and WK, usage notes changed for SVC01-3 through SVC01-6, SVC02 notes changed, SVC04 usage note changed and SVC07 changed from Situational to Required.

- 69. Loop 2220D/E Service Line Status Information STC - Segment repeat changed to >1, segment note changed, additional TR3 example added, all sub-element notes for STC01, STC10 and STC11 composites changed, data content note added for STC01-1, STC10-1 and STC11-1, usage rules for STC01-3, STC10-3 and STC11-3 changed, code values 03, MSC, TL, PRP, SEP and TTP were added to STC01-3, STC10-3 and STC11-3, usage changed from Not Used to Situational for STC01-4, STC10-4 and STC11-4, usage rule and code value RX added for STC01-4, STC10-4 and STC11-4, and STC02 note changed.
- 70. Loop 2220D/E Service Line Item Identification REF - Segment usage note and example changed.
- 71. Loop 2220D/E Service Line Date DTP - Segment changed from Situational to Required, segment note deleted, DTP02 element note changed and qualifier D8 was added to DTP02.

Section 3 Examples

- 72. The existing scenario was rewritten and updated.
- 73. A new business scenario was added for a Provider Level Status Response.
- 74. A new business scenario was added for an Information Receiver Level Status Response.
- 75. A new business scenario was added for a Claim Level Status Response with NCPDP Reject/Payment Code.

Appendix A External Code Sources

- 76. The following Code Sources were added: 507 - Health Care Claim Category Codes, 508 - Health Care Claim Status Codes, 530 - National Council for Prescription Drug Programs Reject/Payment Codes, 576 - Workers Compensation Specific Procedure and Supply Codes and 716 - Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing.

Appendix D Change Summary

- 77. Updated with changes from 004050X139 to 005010X212.

E Data Element Glossary

E.1 Data Element Name Index

This section contains an alphabetic listing of data elements used in this implementation guide. Consult the X12N Data Element Dictionary for a complete list of all X12N Data Elements. Data element names in normal type are generic ASC X12 names. Italic type indicates a health care industry defined name.

Name	<i>Payment Date</i>
Definition	Date of payment.
Transaction Set ID	277
Locator Key	D 2200D SPA12 C001-2 373 156
H=Header, D=Detail, S=Summary	
Loop ID	
Segment ID/Reference Designator	
Composite ID-Sequence	
Data Element Number	
Page Number	

Adjudication Finalized Date

This is the finalized claim approval or denial date.

277 - Response to Claim Status

D		2200D		STC06		-		373		145
D		2200E		STC06		-		373		185

Amount Qualifier Code

Code to qualify amount.

276 - Health Care Claims Status Request

D		2200D		AMT01		-		522		66
D		2200E		AMT01		-		522		89

Application or Location System Identifier

A number assigned by the payer to identify the location or Application System Number believed to contain the claim.

276 - Health Care Claims Status Request

D		2200D		REF02		-		127		61
D		2200E		REF02		-		127		84

Bill Type Identifier

A code indicating the specific type of bill or claim.

276 - Health Care Claims Status Request

D		2200D		REF02		-		127		60
D		2200E		REF02		-		127		83

277 - Response to Claim Status

D		2200D		REF02		-		127		150
D		2200E		REF02		-		127		190

Claim Payment Amount

Net provider reimbursement amount for this claim (includes all payment to the provider).

277 - Response to Claim Status

D		2200D		STC05		-		782		145
D		2200E		STC05		-		782		185

Claim Service Period

The beginning and end dates for the service period covered by a claim.

276 - Health Care Claims Status Request

D		2200D		DTP03		-		1251		68
D		2200E		DTP03		-		1251		91

277 - Response to Claim Status

D		2200D		DTP03		-		1251		156
D		2200E		DTP03		-		1251		196

Claim Transaction Batch Number

This field corresponds to the BHT03 data element from the submitted claim transaction.

277 - Response to Claim Status

D		2200B		TRN02		-		127		120
---	--	-------	--	-------	--	---	--	-----	-------	------------

Clearinghouse Trace Number

Unique tracking number for the transaction assigned by a clearinghouse.

276 - Health Care Claims Status Request

D		2200D		REF02		-		127		65
D		2200E		REF02		-		127		88

277 - Response to Claim Status

D		2200D		REF02		-		127		154
---	--	-------	--	-------	--	---	--	-----	-------	------------

D | 2200E | REF02 | - | 127 194

Code List Qualifier Code

Code identifying a specific industry code list.

277 - Response to Claim Status

D 2200D STC01 C043-4 1270 144
D 2200D STC10 C043-4 1270 147
D 2200D STC11 C043-4 1270 148
D 2220D STC01 C043-4 1270 167
D 2220D STC10 C043-4 1270 169
D 2220D STC11 C043-4 1270 170
D 2200E STC01 C043-4 1270 184
D 2200E STC10 C043-4 1270 187
D 2200E STC11 C043-4 1270 188
D 2220E STC01 C043-4 1270 207
D 2220E STC10 C043-4 1270 209
D 2220E STC11 C043-4 1270 210

Communication Number Qualifier

Code identifying the type of communication number.

277 - Response to Claim Status

D 2100A PER03 - 365 114
D 2100A PER05 - 365 114
D 2100A PER07 - 365 115

Contact Function Code

Code identifying the major duty or responsibility of the person or group named.

277 - Response to Claim Status

D 2100A PER01 - 366 114

Current Transaction Trace Number

A unique identification trace number assigned by the creator of the 276 transaction to identify each 2200 loop in the transaction.

276 - Health Care Claims Status Request

D 2200D TRN02 - 127 58
D 2200E TRN02 - 127 81

Date Time Period Format Qualifier

Code indicating the date format, time format, or date and time format.

276 - Health Care Claims Status Request

D 2000D DMG01 - 1250 54
D 2200D DTP02 - 1250 67
D 2210D DTP02 - 1250 74
D 2000E DMG01 - 1250 77
D 2200E DTP02 - 1250 90
D 2210E DTP02 - 1250 97

277 - Response to Claim Status

D 2200D DTP02 - 1250 155
D 2220D DTP02 - 1250 172
D 2200E DTP02 - 1250 195
D 2220E DTP02 - 1250 212

Date Time Qualifier

Code specifying the type of date or time or both date and time.

276 - Health Care Claims Status Request

D 2200D DTP01 - 374 67
D 2210D DTP01 - 374 74
D 2200E DTP01 - 374 90
D 2210E DTP01 - 374 97

277 - Response to Claim Status

D 2200D DTP01 - 374 155
D 2220D DTP01 - 374 172
D 2200E DTP01 - 374 195
D 2220E DTP01 - 374 212

Entity Identifier Code

Code identifying an organizational entity, a physical location, property or an individual.

276 - Health Care Claims Status Request

D 2100A NM101 - 98 41
D 2100B NM101 - 98 45
D 2100C NM101 - 98 50
D 2100D NM101 - 98 56
D 2100E NM101 - 98 79

277 - Response to Claim Status

D 2100A NM101 - 98 111
D 2100B NM101 - 98 118
D 2200B STC01 C043-3 98 122
D 2200B STC10 C043-3 98 123
D 2200B STC11 C043-3 98 123
D 2100C NM101 - 98 127
D 2200C STC01 C043-3 98 131
D 2200C STC10 C043-3 98 132
D 2200C STC11 C043-3 98 132
D 2100D NM101 - 98 135
D 2200D STC01 C043-3 98 139
D 2200D STC10 C043-3 98 147
D 2200D STC11 C043-3 98 148
D 2220D STC01 C043-3 98 162
D 2220D STC10 C043-3 98 169
D 2220D STC11 C043-3 98 170
D 2100E NM101 - 98 175
D 2200E STC01 C043-3 98 179
D 2200E STC10 C043-3 98 187
D 2200E STC11 C043-3 98 188
D 2220E STC01 C043-3 98 202
D 2220E STC10 C043-3 98 209
D 2220E STC11 C043-3 98 210

Entity Type Qualifier

Code qualifying the type of entity.

276 - Health Care Claims Status Request

D 2100A NM102 - 1065 41
D 2100B NM102 - 1065 45
D 2100C NM102 - 1065 50
D 2100D NM102 - 1065 56
D 2100E NM102 - 1065 79

277 - Response to Claim Status

D 2100A NM102 - 1065 111
D 2100B NM102 - 1065 118
D 2100C NM102 - 1065 127
D 2100D NM102 - 1065 135
D 2100E NM102 - 1065 175

Group Number

The number or code assigned by the carrier or administrator to identify the group under which the individual is covered.

276 - Health Care Claims Status Request

D	2200D	REF02	-	127	62
D	2200E	REF02	-	127	85

Health Care Claim Status

Category Code

Code indicating the category of the associated claim status code.

277 - Response to Claim Status

D	2200B	STC01	C043-1	1271	121
D	2200B	STC10	C043-1	1271	122
D	2200B	STC11	C043-1	1271	123
D	2200C	STC01	C043-1	1271	130
D	2200C	STC10	C043-1	1271	131
D	2200C	STC11	C043-1	1271	132
D	2200D	STC01	C043-1	1271	138
D	2200D	STC10	C043-1	1271	146
D	2200D	STC11	C043-1	1271	147
D	2220D	STC01	C043-1	1271	161
D	2220D	STC10	C043-1	1271	168
D	2220D	STC11	C043-1	1271	169
D	2200E	STC01	C043-1	1271	178
D	2200E	STC10	C043-1	1271	186
D	2200E	STC11	C043-1	1271	187
D	2220E	STC01	C043-1	1271	201
D	2220E	STC10	C043-1	1271	208
D	2220E	STC11	C043-1	1271	209

Hierarchical Child Code

Code indicating if there are hierarchical child data segments subordinate to the level being described.

276 - Health Care Claims Status Request

D	2000A	HL04	-	736	40
D	2000B	HL04	-	736	44
D	2000C	HL04	-	736	48
D	2000D	HL04	-	736	53

277 - Response to Claim Status

D	2000A	HL04	-	736	110
D	2000B	HL04	-	736	117
D	2000C	HL04	-	736	125
D	2000D	HL04	-	736	134

Hierarchical ID Number

A unique number assigned by the sender to identify a particular data segment in a hierarchical structure.

276 - Health Care Claims Status Request

D	2000A	HL01	-	628	39
D	2000B	HL01	-	628	43
D	2000C	HL01	-	628	47
D	2000D	HL01	-	628	53
D	2000E	HL01	-	628	75

277 - Response to Claim Status

D	2000A	HL01	-	628	109
D	2000B	HL01	-	628	116
D	2000C	HL01	-	628	124
D	2000D	HL01	-	628	134
D	2000E	HL01	-	628	173

Hierarchical Level Code

Code defining the characteristic of a level in a hierarchical structure.

276 - Health Care Claims Status Request

D	2000A	HL03	-	735	40
D	2000B	HL03	-	735	44
D	2000C	HL03	-	735	48
D	2000D	HL03	-	735	53
D	2000E	HL03	-	735	76

277 - Response to Claim Status

D	2000A	HL03	-	735	110
D	2000B	HL03	-	735	117
D	2000C	HL03	-	735	125
D	2000D	HL03	-	735	134
D	2000E	HL03	-	735	174

Hierarchical Parent ID Number

Identification number of the next higher hierarchical data segment that the data segment being described is subordinate to.

276 - Health Care Claims Status Request

D	2000B	HL02	-	734	43
D	2000C	HL02	-	734	47
D	2000D	HL02	-	734	53
D	2000E	HL02	-	734	75

277 - Response to Claim Status

D	2000B	HL02	-	734	116
D	2000C	HL02	-	734	124
D	2000D	HL02	-	734	134
D	2000E	HL02	-	734	173

Hierarchical Structure Code

Code indicating the hierarchical application structure of a transaction set that utilizes the HL segment to define the structure of the transaction set

276 - Health Care Claims Status Request

H		BHT01	-	1005	37
---	--	-------	---	------	----

277 - Response to Claim Status

H		BHT01	-	1005	107
---	--	-------	---	------	-----

Identification Code Qualifier

Code designating the system/method of code structure used for Identification Code (67).

276 - Health Care Claims Status Request

D	2100A	NM108	-	66	42
D	2100B	NM108	-	66	46
D	2100C	NM108	-	66	51
D	2100D	NM108	-	66	57

277 - Response to Claim Status

D	2100A	NM108	-	66	112
D	2100B	NM108	-	66	119
D	2100C	NM108	-	66	128
D	2100D	NM108	-	66	136

Information Receiver First Name

The first name of the individual or organization who expects to receive information in response to a query.

276 - Health Care Claims Status Request	
D 2100B NM104 - 1036	46
277 - Response to Claim Status	
D 2100B NM104 - 1036	119

Information Receiver Identification Number

The identification number of the individual or organization who expects to receive information in response to a query.

276 - Health Care Claims Status Request	
D 2100B NM109 - 67	46
277 - Response to Claim Status	
D 2100B NM109 - 67	119

Information Receiver Last or Organization Name

The name of the organization or last name of the individual that expects to receive information or is receiving information.

276 - Health Care Claims Status Request	
D 2100B NM103 - 1035	46
277 - Response to Claim Status	
D 2100B NM103 - 1035	119

Information Receiver Middle Name

The middle name of the individual or organization who expects to receive information in response to a query.

276 - Health Care Claims Status Request	
D 2100B NM105 - 1037	46
277 - Response to Claim Status	
D 2100B NM105 - 1037	119

Line Item Charge Amount

Charges related to this service.

276 - Health Care Claims Status Request	
D 2210D SVC02 - 782	72
D 2210E SVC02 - 782	95
277 - Response to Claim Status	
D 2220D SVC02 - 782	160
D 2220E SVC02 - 782	200

Line Item Control Number

Identifier assigned by the submitter/provider to this line item.

276 - Health Care Claims Status Request	
D 2210D REF02 - 127	73
D 2210E REF02 - 127	96
277 - Response to Claim Status	
D 2220D REF02 - 127	171

D 2220E REF02 - 127	211
-----------------------------------	-----

Line Item Payment Amount

The amount paid for the service line item.

277 - Response to Claim Status	
D 2220D SVC03 - 782	160
D 2220E SVC03 - 782	200

Originator Application Transaction Identifier

An identification number that identifies a transaction within the originator's applications system.

277 - Response to Claim Status	
H BHT03 - 127	107

Patient Birth Date

Date of birth of the patient.

276 - Health Care Claims Status Request	
D 2000E DMG02 - 1251	77

Patient Control Number

Patient's unique alpha-numeric identification number for this claim assigned by the provider to facilitate retrieval of individual case records and posting of payment.

276 - Health Care Claims Status Request	
D 2200D REF02 - 127	63
D 2200E REF02 - 127	86
277 - Response to Claim Status	
D 2200D REF02 - 127	151
D 2200E REF02 - 127	191

Patient First Name

The first name of the individual to whom the services were provided.

276 - Health Care Claims Status Request	
D 2100E NM104 - 1036	80
277 - Response to Claim Status	
D 2100E NM104 - 1036	176

Patient Gender Code

A code indicating the sex of the patient.

276 - Health Care Claims Status Request	
D 2000E DMG03 - 1068	78

Patient Last Name

The last name of the individual to whom the services were provided.

276 - Health Care Claims Status Request	
D 2100E NM103 - 1035	79
277 - Response to Claim Status	
D 2100E NM103 - 1035	175

Patient Middle Name or Initial

The middle name or initial of the individual to whom the services were provided.

276 - Health Care Claims Status Request

D | 2100E | NM105 | - | 1037 80

277 - Response to Claim Status

D | 2100E | NM105 | - | 1037 176

Patient Name Suffix

Suffix to the name of the individual to whom the services were provided.

276 - Health Care Claims Status Request

D | 2100E | NM107 | - | 1039 80

277 - Response to Claim Status

D | 2100E | NM107 | - | 1039 176

Payer Claim Control Number

A number assigned by the payer to identify a claim. The number is usually referred to as an Internal Control Number (ICN), Claim Control Number (CCN) or a Document Control Number (DCN).

276 - Health Care Claims Status Request

D | 2200D | REF02 | - | 127 59

D | 2200E | REF02 | - | 127 82

277 - Response to Claim Status

D | 2200D | REF02 | - | 127 149

D | 2200E | REF02 | - | 127 189

Payer Contact Communication Number

Complete payer contact communications number, including country or area code when applicable.

277 - Response to Claim Status

D | 2100A | PER04 | - | 364 114

D | 2100A | PER06 | - | 364 115

D | 2100A | PER08 | - | 364 115

Payer Contact Name

Name identifying the payer organization's contact person.

277 - Response to Claim Status

D | 2100A | PER02 | - | 93 114

Payer Identifier

Number identifying the payer organization.

276 - Health Care Claims Status Request

D | 2100A | NM109 | - | 67 42

277 - Response to Claim Status

D | 2100A | NM109 | - | 67 112

Payer Name

Name identifying the payer organization.

276 - Health Care Claims Status Request

D | 2100A | NM103 | - | 1035 41

277 - Response to Claim Status

D | 2100A | NM103 | - | 1035 111

Pharmacy Prescription Number

A unique identification number assigned to the prescription claim for the purpose of identification.

276 - Health Care Claims Status Request

D | 2200D | REF02 | - | 127 64

D | 2200E | REF02 | - | 127 87

277 - Response to Claim Status

D | 2200D | REF02 | - | 127 152

D | 2200E | REF02 | - | 127 192

Procedure Code

Code identifying the procedure, product or service.

276 - Health Care Claims Status Request

D | 2210D | SVC01 | C003-2 | 234 71

D | 2210E | SVC01 | C003-2 | 234 94

277 - Response to Claim Status

D | 2220D | SVC01 | C003-2 | 234 159

D | 2220E | SVC01 | C003-2 | 234 199

Procedure Modifier

This identifies special circumstances related to the performance of the service.

276 - Health Care Claims Status Request

D | 2210D | SVC01 | C003-3 | 1339 71

D | 2210D | SVC01 | C003-4 | 1339 71

D | 2210D | SVC01 | C003-5 | 1339 71

D | 2210D | SVC01 | C003-6 | 1339 72

D | 2210E | SVC01 | C003-3 | 1339 94

D | 2210E | SVC01 | C003-4 | 1339 94

D | 2210E | SVC01 | C003-5 | 1339 94

D | 2210E | SVC01 | C003-6 | 1339 95

277 - Response to Claim Status

D | 2220D | SVC01 | C003-3 | 1339 159

D | 2220D | SVC01 | C003-4 | 1339 159

D | 2220D | SVC01 | C003-5 | 1339 159

D | 2220D | SVC01 | C003-6 | 1339 160

D | 2220E | SVC01 | C003-3 | 1339 199

D | 2220E | SVC01 | C003-4 | 1339 199

D | 2220E | SVC01 | C003-5 | 1339 199

D | 2220E | SVC01 | C003-6 | 1339 200

Product or Service ID Qualifier

Code identifying the type/source of the descriptive number used in Product/Service ID (234).

276 - Health Care Claims Status Request

D | 2210D | SVC01 | C003-1 | 235 69

D | 2210E | SVC01 | C003-1 | 235 92

277 - Response to Claim Status

D | 2220D | SVC01 | C003-1 | 235 157

D | 2220E | SVC01 | C003-1 | 235 197

Provider First Name

The first name of the provider of care submitting a transaction or related to the information provided in or request by the transaction.

276 - Health Care Claims Status Request
D | 2100C | NM104 | - | 1036 50

277 - Response to Claim Status
D | 2100C | NM104 | - | 1036 127

Provider Identifier

Number assigned by the payer, regulatory authority, or other authorized body or agency to identify the provider.

276 - Health Care Claims Status Request
D | 2100C | NM109 | - | 67 51

277 - Response to Claim Status
D | 2100C | NM109 | - | 67 128

Provider Last or Organization Name

The last name of the provider of care or name of the provider organization submitting a transaction or related to the information provided in or request by the transaction.

276 - Health Care Claims Status Request
D | 2100C | NM103 | - | 1035 50

277 - Response to Claim Status
D | 2100C | NM103 | - | 1035 127

Provider Middle Name

The middle name of the provider of care submitting a transaction or related to the information provided in or request by the transaction.

276 - Health Care Claims Status Request
D | 2100C | NM105 | - | 1037 50

277 - Response to Claim Status
D | 2100C | NM105 | - | 1037 127

Provider Name Suffix

The name suffix of the provider of care submitting a transaction or related to the information provided in or request by the transaction.

276 - Health Care Claims Status Request
D | 2100C | NM107 | - | 1039 50

277 - Response to Claim Status
D | 2100C | NM107 | - | 1039 127

Provider of Service Information Trace Identifier

A placeholder number used to complete ASC X12 Syntax Loop requirements when providing status for a specific provider's group of claims.

277 - Response to Claim Status
D | 2200C | TRN02 | - | 127 129

Reference Identification

The identification value assigned by the sender for this particular transaction.

276 - Health Care Claims Status Request
H | | BHT03 | - | 127 37

Reference Identification Qualifier

Code qualifying the reference identification.

276 - Health Care Claims Status Request
D | 2200D | REF01 | - | 128 59
D | 2200D | REF01 | - | 128 60
D | 2200D | REF01 | - | 128 61
D | 2200D | REF01 | - | 128 62
D | 2200D | REF01 | - | 128 63
D | 2200D | REF01 | - | 128 64
D | 2200D | REF01 | - | 128 65
D | 2210D | REF01 | - | 128 73
D | 2200E | REF01 | - | 128 82
D | 2200E | REF01 | - | 128 83
D | 2200E | REF01 | - | 128 84
D | 2200E | REF01 | - | 128 85
D | 2200E | REF01 | - | 128 86
D | 2200E | REF01 | - | 128 87
D | 2200E | REF01 | - | 128 88
D | 2210E | REF01 | - | 128 96

277 - Response to Claim Status
D | 2200D | REF01 | - | 128 149
D | 2200D | REF01 | - | 128 150
D | 2200D | REF01 | - | 128 151
D | 2200D | REF01 | - | 128 152
D | 2200D | REF01 | - | 128 153
D | 2200D | REF01 | - | 128 154
D | 2220D | REF01 | - | 128 171
D | 2200E | REF01 | - | 128 189
D | 2200E | REF01 | - | 128 190
D | 2200E | REF01 | - | 128 191
D | 2200E | REF01 | - | 128 192
D | 2200E | REF01 | - | 128 193
D | 2200E | REF01 | - | 128 194
D | 2220E | REF01 | - | 128 211

Referenced Transaction Trace Number

The unique identification trace number originally sent in the 276 transaction to identify each 2200 loop in the transaction.

277 - Response to Claim Status
D | 2200D | TRN02 | - | 127 137
D | 2200E | TRN02 | - | 127 177

Remittance Date

Date the check was issued, Electronic Funds Transfer (EFT) are available or the non-payment remittance advice was issued.

277 - Response to Claim Status
D | 2200D | STC08 | - | 373 146
D | 2200E | STC08 | - | 373 186

Remittance Trace Number

Check number, Electronic Funds Transfer (EFT) or non-payment remittance advice number that is unique with the sender/receiver relationship.

277 - Response to Claim Status

D		2200D		STC09		-		429		146
D		2200E		STC09		-		429		186

Revenue Code

A code that identifies a specific accommodation, ancillary service or billing calculation.

276 - Health Care Claims Status Request

D		2210D		SVC04		-		234		72
D		2210E		SVC04		-		234		95

277 - Response to Claim Status

D		2220D		SVC04		-		234		160
D		2220E		SVC04		-		234		200

Service Line Date

Date of service of the identified service line on the claim.

276 - Health Care Claims Status Request

D		2210D		DTP03		-		1251		74
D		2210E		DTP03		-		1251		97

277 - Response to Claim Status

D		2220D		DTP03		-		1251		172
D		2220E		DTP03		-		1251		212

Status Code

Code conveying the status of a health care claim.

277 - Response to Claim Status

D		2200B		STC01		C043-2		1271		121
D		2200B		STC10		C043-2		1271		122
D		2200B		STC11		C043-2		1271		123
D		2200C		STC01		C043-2		1271		130
D		2200C		STC10		C043-2		1271		131
D		2200C		STC11		C043-2		1271		132
D		2200D		STC01		C043-2		1271		138
D		2200D		STC10		C043-2		1271		146
D		2200D		STC11		C043-2		1271		147
D		2220D		STC01		C043-2		1271		161
D		2220D		STC10		C043-2		1271		168
D		2220D		STC11		C043-2		1271		169
D		2200E		STC01		C043-2		1271		178
D		2200E		STC10		C043-2		1271		186
D		2200E		STC11		C043-2		1271		187
D		2220E		STC01		C043-2		1271		201
D		2220E		STC10		C043-2		1271		208
D		2220E		STC11		C043-2		1271		209

Status Information Effective Date

The date that the status information provided is effective.

277 - Response to Claim Status

D		2200B		STC02		-		373		122
D		2200C		STC02		-		373		131
D		2200D		STC02		-		373		145
D		2220D		STC02		-		373		168
D		2200E		STC02		-		373		185
D		2220E		STC02		-		373		208

Subscriber Birth Date

The date of birth of the subscriber to the indicated coverage or policy.

276 - Health Care Claims Status Request

D		2000D		DMG02		-		1251		55
---	--	-------	--	-------	--	---	--	------	-------	----

Subscriber First Name

The first name of the insured individual or subscriber to the coverage.

276 - Health Care Claims Status Request

D		2100D		NM104		-		1036		57
---	--	-------	--	-------	--	---	--	------	-------	----

277 - Response to Claim Status

D		2100D		NM104		-		1036		136
---	--	-------	--	-------	--	---	--	------	-------	-----

Subscriber Gender Code

Code indicating the sex of the subscriber to the indicated coverage or policy.

276 - Health Care Claims Status Request

D		2000D		DMG03		-		1068		55
---	--	-------	--	-------	--	---	--	------	-------	----

Subscriber Identifier

Insured's or subscriber's unique identification number assigned by a payer.

276 - Health Care Claims Status Request

D		2100D		NM109		-		67		57
---	--	-------	--	-------	--	---	--	----	-------	----

277 - Response to Claim Status

D		2100D		NM109		-		67		136
---	--	-------	--	-------	--	---	--	----	-------	-----

Subscriber Last Name

The surname of the insured individual or subscriber to the coverage.

276 - Health Care Claims Status Request

D		2100D		NM103		-		1035		57
---	--	-------	--	-------	--	---	--	------	-------	----

277 - Response to Claim Status

D		2100D		NM103		-		1035		136
---	--	-------	--	-------	--	---	--	------	-------	-----

Subscriber Middle Name or Initial

The middle name or initial of the subscriber to the indicated coverage or policy.

276 - Health Care Claims Status Request

D		2100D		NM105		-		1037		57
---	--	-------	--	-------	--	---	--	------	-------	----

277 - Response to Claim Status

D		2100D		NM105		-		1037		136
---	--	-------	--	-------	--	---	--	------	-------	-----

Subscriber Name Suffix

Suffix of the insured individual or subscriber to the coverage.

276 - Health Care Claims Status Request

D		2100D		NM107		-		1039		57
---	--	-------	--	-------	--	---	--	------	-------	----

277 - Response to Claim Status

D		2100D		NM107		-		1039		136
---	--	-------	--	-------	--	---	--	------	-------	-----

Total Claim Charge Amount

The sum of all charges included within this claim.

276 - Health Care Claims Status Request

D		2200D		AMT02		-		782		66
D		2200E		AMT02		-		782		89

277 - Response to Claim Status

D		2200D		STC04		-		782		145
D		2200E		STC04		-		782		185

Trace Type Code

Code identifying the type of re-association which needs to be performed.

276 - Health Care Claims Status Request

D		2200D		TRN01		-		481		58
D		2200E		TRN01		-		481		81

277 - Response to Claim Status

D		2200B		TRN01		-		481		120
D		2200C		TRN01		-		481		129
D		2200D		TRN01		-		481		137
D		2200E		TRN01		-		481		177

Transaction Segment Count

A tally of all segments between the ST and the SE segments including the ST and SE segments.

276 - Health Care Claims Status Request

D				SE01		-		96		98
---	--	--	--	------	--	---	--	----	-------	----

277 - Response to Claim Status

D				SE01		-		96		213
---	--	--	--	------	--	---	--	----	-------	-----

Transaction Set Control Number

The unique identification number within a transaction set.

276 - Health Care Claims Status Request

H				ST02		-		329		36
D				SE02		-		329		98

277 - Response to Claim Status

H				ST02		-		329		106
D				SE02		-		329		213

Transaction Set Creation Date

Identifies the date the submitter created the transaction.

276 - Health Care Claims Status Request

H				BHT04		-		373		37
---	--	--	--	-------	--	---	--	-----	-------	----

277 - Response to Claim Status

H				BHT04		-		373		107
---	--	--	--	-------	--	---	--	-----	-------	-----

Transaction Set Creation Time

Time file is created for transmission.

276 - Health Care Claims Status Request

H				BHT05		-		337		38
---	--	--	--	-------	--	---	--	-----	-------	----

277 - Response to Claim Status

H				BHT05		-		337		108
---	--	--	--	-------	--	---	--	-----	-------	-----

Transaction Set Identifier Code

Code uniquely identifying a Transaction Set.

276 - Health Care Claims Status Request

H				ST01		-		143		36
---	--	--	--	------	--	---	--	-----	-------	----

277 - Response to Claim Status

H				ST01		-		143		106
---	--	--	--	------	--	---	--	-----	-------	-----

Transaction Set Purpose Code

Code identifying purpose of transaction set.

276 - Health Care Claims Status Request

H				BHT02		-		353		37
---	--	--	--	-------	--	---	--	-----	-------	----

277 - Response to Claim Status

H				BHT02		-		353		107
---	--	--	--	-------	--	---	--	-----	-------	-----

Transaction Type Code

Code specifying the type of transaction.

277 - Response to Claim Status

H				BHT06		-		640		108
---	--	--	--	-------	--	---	--	-----	-------	-----

Units of Service Count

The number of units of service associated with this service line item.

276 - Health Care Claims Status Request

D		2210D		SVC07		-		380		72
D		2210E		SVC07		-		380		95

277 - Response to Claim Status

D		2220D		SVC07		-		380		160
D		2220E		SVC07		-		380		200

Version, Release, or Industry Identifier

Code indicating the version, release, sub-release and industry identification of the EDI standard being used.

276 - Health Care Claims Status Request

H				ST03		-		1705		36
---	--	--	--	------	--	---	--	------	-------	----

277 - Response to Claim Status

H				ST03		-		1705		106
---	--	--	--	------	--	---	--	------	-------	-----

Voucher Identifier

A tracking number assigned to a group of claims.

277 - Response to Claim Status

D		2200D		REF02		-		127		153
D		2200E		REF02		-		127		193