

ASC X12N/005010X218

Based on Version 5, Release 1

**ASC X12 Standards for Electronic Data Interchange
Technical Report Type 3**

Payroll Deducted and Other Group Premium Payment for Insurance Products (820)

FEBRUARY 2007

The Type 2 Errata published in 005010X218E1, January 2009, and 005010X218E2, June 2014, has been incorporated into this document.

Copyright © 2011, Data Interchange Standards Association (DISA) on behalf of the membership of ASC X12. Format © 2011 Washington Publishing Company (WPC). Exclusively published by WPC under license from DISA. All Rights Reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission.

Table of Contents

1	Purpose and Business Information	1
1.1	Implementation Purpose and Scope	1
1.2	Version Information	1
1.3	Implementation Limitations	2
1.3.1	Batch and Real-time Usage	2
1.3.2	Other Usage Limitations	2
1.4	Business Usage	2
1.4.1	Information Flows	3
1.4.1.1	ACH Payment Dollars and Remittance	3
1.4.1.2	Separate Dollars and Remittance	4
1.5	Business Terminology	6
1.6	Transaction Acknowledgments	6
1.6.1	997 Functional Acknowledgment	6
1.6.2	999 Implementation Acknowledgment	6
1.6.3	824 Application Advice	7
1.7	Related Transactions	7
1.8	Trading Partner Agreements	7
1.9	The HIPAA Role in Implementation Guides	7
1.10	Data Overview	8
1.10.1	Overall Data Architecture	8
1.10.1.1	The Reporting Process	8
1.10.2	Data Use by Business Use	8
1.10.2.1	Header	9
1.10.2.2	Detail	10
1.10.2.3	Trailer	12
1.10.2.4	Balancing	12
1.10.2.5	Remittance Tracking	14
1.10.2.6	Reassociation of Dollars and Data	14
2	Transaction Sets	17
2.1	Presentation Examples	17
2.2	Implementation Usage	22
2.2.1	Industry Usage	22
2.2.1.1	Transaction Compliance Related to Industry Usage	23
2.2.2	Loops	23
2.3	Transaction Set Listing	25
2.3.1	Implementation	25
2.3.2	X12 Standard	28
2.4	820 Segment Detail	34
	ST 820 Header	35
	BPR Financial Information	36
	TRN Reassociation Trace Number	43

CUR	Foreign Currency Information	45
REF	Premium Receivers Identification Key	48
DTM	Process Date	50
DTM	Delivery Date	51
DTM	Coverage Period	53
DTM	Creation Date	55
N1	Premium Receiver's Name	56
N2	Premium Receiver Additional Name	58
N3	Premium Receiver's Address	59
N4	Premium Receiver's City, State, and ZIP Code	60
RDM	Premium Receiver's Remittance Delivery Method	62
N1	Premium Payer's Name	64
N2	Premium Payer Additional Name	66
N3	Premium Payer's Address	67
N4	Premium Payer's City, State, ZIP Code	68
PER	Premium Payer's Administrative Contact	70
N1	Intermediary Bank Information	73
N2	Intermediary Bank Additional Name	75
N3	Intermediary Bank's Address	76
N4	Intermediary Bank's City, State, ZIP Code	77
PER	Intermediary Bank's Administrative Contact	79
ENT	Organization Summary Remittance	82
ADX	Organization Summary Remittance Level Adjustment for Previous Payment	85
RMR	Organization Summary Remittance Detail	87
REF	Reference Information	90
DTM	Organizational Coverage Period	92
IT1	Summary Line Item	94
SAC	Service, Promotion, Allowance, or Charge Information	97
SLN	Member Count	99
ADX	Organization Summary Remittance Level Adjustment for Current Payment	103
ENT	Individual Remittance	105
NM1	Individual Name	107
ADX	Individual Premium Adjustment for Previous Payment	110
RMR	Individual Premium Remittance Detail	112
REF	Reference Information	114
DTM	Individual Coverage Period	115
ADX	Individual Premium Adjustment for Current Payment	117
SE	Transaction Set Trailer	119

3	Examples	121
3.1	Scenario One Description	121
3.1.1	Scenario One Example	121
3.2	Scenario Two Description	123
3.2.1	Scenario Two Example	123
3.3	Scenario Three Description	125
3.3.1	Scenario Three Example	125

3.4	Scenario Four Description	127
3.4.1	Scenario Four Example	127
A	External Code Sources	A.1
4	ABA Routing Number	A.1
5	Countries, Currencies and Funds	A.1
16	D-U-N-S Number	A.2
22	States and Provinces	A.3
51	ZIP Code	A.4
60	(DFI) Identification Number	A.4
91	Canadian Financial Institution Branch and Institution Number	A.5
327	Society for Worldwide Interbank Financial Telecommunication (SWIFT)	A.6
540	Centers for Medicare and Medicaid Services PlanID	A.6
932	Universal Postal Codes	A.7
B	Nomenclature	B.1
B.1	ASC X12 Nomenclature	B.1
B.1.1	Interchange and Application Control Structures	B.1
B.1.1.1	Interchange Control Structure	B.1
B.1.1.2	Application Control Structure Definitions and Concepts	B.2
B.1.1.3	Business Transaction Structure Definitions and Concepts	B.6
B.1.1.4	Envelopes and Control Structures	B.19
B.1.1.5	Acknowledgments	B.22
B.2	Object Descriptors	B.23
C	EDI Control Directory	C.1
C.1	Control Segments	C.1
ISA	Interchange Control Header	C.3
GS	Functional Group Header	C.7
GE	Functional Group Trailer	C.9
IEA	Interchange Control Trailer	C.10
D	Change Summary	D.1
E	Data Element Glossary	E.1
E.1	Data Element Name Index	E.1

1 Purpose and Business Information

1.1 Implementation Purpose and Scope

For the health care industry to achieve the potential administrative cost savings with Electronic Data Interchange (EDI), standards have been developed and need to be implemented consistently by all organizations. To facilitate a smooth transition into the EDI environment, uniform implementation is critical.

The Payroll Deducted and Other Group Premium Payment for Insurance Products Implementation Guide (IG) provides standardized data requirements and content to all users of the ANSI ASC X12 Premium Payment Order/Remittance Advice (820) Transaction Set for the purpose of reporting payroll deducted and other group premiums.

This Implementation Guide is designed to assist those sending premium payments to an insurance company, health care organization or government agency receiving premium payments using the 820 transaction set. In the dollars and data together scenario or when the RDFI (Receiving Depository Financial Institution) is reporting only payment information, the specific reporting medium and format that will be delivered to the receiver is pursuant to that receiver's reporting service with their receiving bank RDFI.

1.2 Version Information

This implementation guide is based on the October 2003 ASC X12 standards, referred to as Version 5, Release 1, Sub-release 0 (005010).

The unique Version/Release/Industry Identifier Code for transaction sets that are defined by this implementation guide is 005010**X218**.

The two-character Functional Identifier Code for the transaction set included in this implementation guide:

- ***RA Payment Order/Remittance Advice (820)***

The Version/Release/Industry Identifier Code and the applicable Functional Identifier Code must be transmitted in the Functional Group Header (GS segment) that begins a functional group of these transaction sets. For more information, see the descriptions of GS01 and GS08 in Appendix C, EDI Control Directory.

1.3 Implementation Limitations

1.3.1 Batch and Real-time Usage

There are multiple methods available for sending and receiving business transactions electronically. Two common modes for EDI transactions are batch and real-time.

Batch - In a batch mode the sender does not remain connected while the receiver processes the transactions. Processing is usually completed according to a set schedule. If there is an associated business response transaction (such as a 271 Response to a 270 Request for Eligibility), the receiver creates the response transaction and stores it for future delivery. The sender of the original transmission reconnects at a later time and picks up the response transaction. This implementation guide does not set specific response time parameters for these activities.

Real Time - In real-time mode the sender remains connected while the receiver processes the transactions and returns a response transaction to the sender. This implementation guide does not set specific response time parameters for implementers.

This implementation guide is intended to support use in batch mode. This implementation guide is not intended to support use in real-time mode. A statement that the transaction is not intended to support a specific mode does not preclude its use in that mode between willing trading partners.

1.3.2 Other Usage Limitations

There are not other usage limitations.

1.4 Business Usage

Companies and government agencies that offer employees group life, health, and disability insurance can use a subset of the 820 to provide remittance detail associated with the premium payments. The premium being remitted can be associated with health care, individual life, disability, and/or property and casualty contracts.

This transaction can be used for non-covered contributions associated with account-based health arrangements such as health savings accounts.

The 820 can be used in the following ways:

1. Initiate an electronic payment that includes the remittance detail needed by the premium receiver to properly apply the payment.
2. Initiate a payment without the remittance detail, and send the remittance detail separately to the premium receiver. The payment can be an electronic payment or a paper check.

1.4.1 Information Flows

The 820 transaction can perform multiple functions:


1. An 820 can be sent to a bank to move money only.
2. An 820 can be sent to a bank to move money as well as detailed or summary remittance information.
3. An 820 can be sent directly to a payee to move detailed or summary remittance information.

Each function changes the actual content of the transaction slightly.

1.4.1.1 ACH Payment Dollars and Remittance

Figure 1.1 - *ACH Payment Dollars and Remittance*, shows a payment with remittance being made using the Automated Clearing House (ACH) Network. Premium dollars and remittance data flow together through the ACH Network. This is the approach recommended by the financial services industry.

Figure 1.1 - ACH Payment Dollars and Remittance

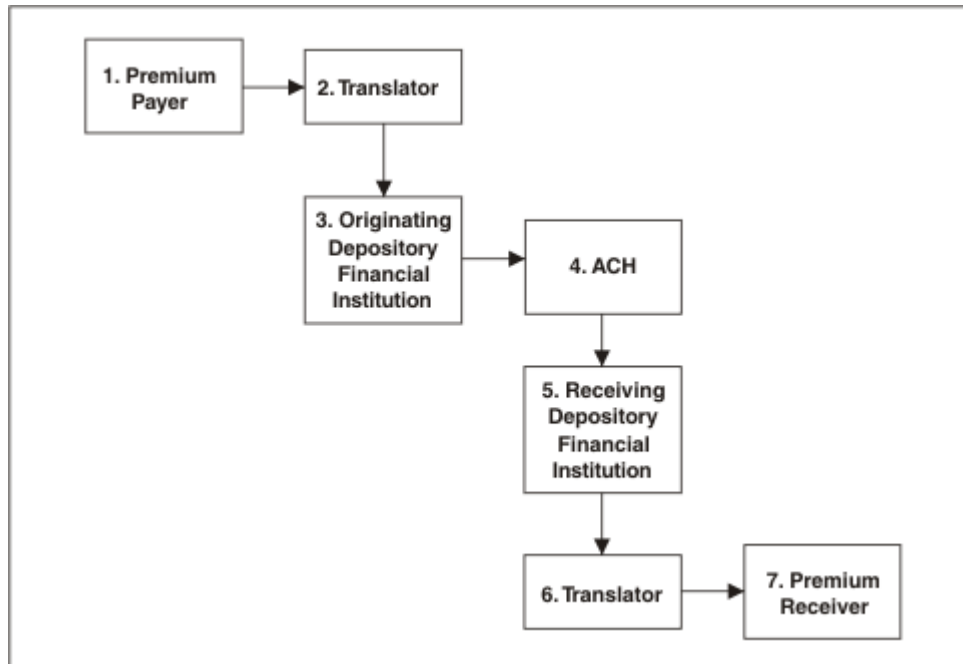


1. A premium payer creates a premium remittance extract file. The premium remittance file is processed through EDI translation software.
2. The EDI translation software creates an 820 transaction directing the Originating Depository Financial Institution (ODFI) to originate an Automated Clearing House (ACH) Corporate Trade Exchange (CTX). This 820 is transmitted to the ODFI.
3. The ODFI processes the 820 and creates an ACH payment that includes the 820 remittance. The ACH payment (including the 820) is sent by the ODFI to the ACH Network.
4. The ACH Network delivers the ACH payment, including the 820, to the Receiving Depository Financial Institution (RDFI).
5. The RDFI credits the premium receiver's bank account for the ACH amount and delivers the 820 remittance information to the premium receiver.
6. The premium receiver processes the 820 using EDI translation software. The software creates a remittance file that can be processed by the premium receiver's computer system.
7. The premium receiver's computer system processes the remittance file and credits the premium payer's account.

1.4.1.2 Separate Dollars and Remittance

Figure 1.2 - *Separate Dollars and Remittance*, shows the remittance data being sent using either a Value Added Network (VAN) or direct communications method. The

payment is sent as a paper check, ACH Cash Concentration/Disbursement plus Addenda (CCD+) or wire. Premium dollars and remittance data flow separately. This approach is not recommended due to the extra burden that reassociation creates for the premium receiver.

Figure 1.2 - Separate Dollars and Remittance

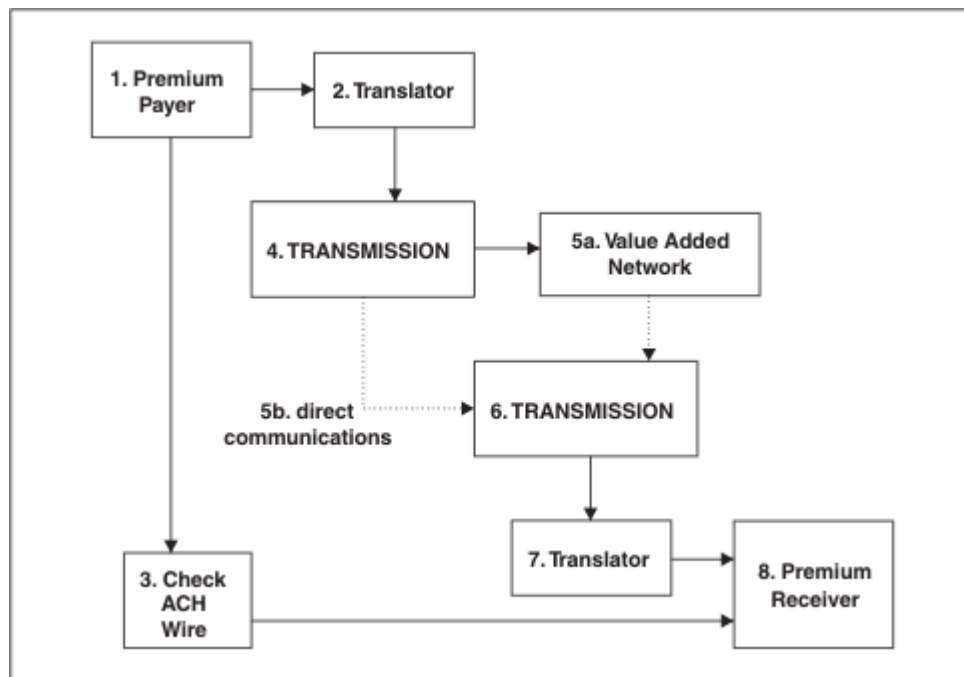

1. A premium payer creates a premium remittance extract file. The premium remittance file is processed through EDI translation software.
2. The EDI translation software creates an 820 transaction.
3. The premium payer creates a paper check or a separate ACH or Wire payment for the total premium paid and sends it to the premium receiver via the banking system.
4. If a direct communication method is used, the 820 is transmitted directly to the receiver by the premium payer and Step 5 does not apply. If a VAN is used, the 820 transaction is transmitted to the VAN for delivery.
5. The VAN delivers the 820 to premium receiver mail box.
6. If a VAN is used, the premium receiver pulls the 820 from the VAN mail box. If a direct communication method is used, the premium receiver receives the 820 directly from the premium payer.
7. The premium receiver processes the 820 using EDI translation software. The software creates a remittance file that can be processed by the premium receiver.

8. The premium receiver processes the remittance file and the payment, and performs the re-association. After re-association the premium receiver credits the premium payer's account.

1.5 Business Terminology

No special business terms are used in this implementation guide.

1.6 Transaction Acknowledgments

There are several acknowledgment implementation transactions available for use. The IG developers have noted acknowledgment requirements in this section. Other recommendations of acknowledgment transactions may be used at the discretion of the trading partners. A statement that the acknowledgment is not required does not preclude its use between willing trading partners.

1.6.1 997 Functional Acknowledgment

The 997 informs the submitter that the functional group arrived at the destination. It may include information about the syntactical quality of the functional group.

The Functional Acknowledgment (997) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Functional Acknowledgment (997) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

A 997 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.6.2 999 Implementation Acknowledgment

The 999 informs the submitter that the functional group arrived at the destination. It may include information about the syntactical quality of the functional group and the implementation guide compliance.

The Implementation Acknowledgment (999) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Implementation Acknowledgment (999) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

A 999 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.6.3 824 Application Advice

The 824 informs the submitter of the results of the receiving application system's data content edits of transaction sets.

The Application Advice (824) transaction is not required as a response to receipt of a batch transaction compliant with this implementation guide.

The Application Advice (824) transaction is not required as a response to receipt of a real-time transaction compliant with this implementation guide.

An 824 Implementation Guide is being developed for use by the insurance industry and is expected to be available for use with this version of this Implementation Guide.

1.7 Related Transactions

There are no other transaction sets necessary to achieve the business functions described in this implementation guide.

1.8 Trading Partner Agreements

Trading partner agreements are used to establish and document the relationship between trading partners. A trading partner agreement must not override the specifications in this implementation guide if a transmission is reported in GS08 to be a product of this implementation guide.

1.9 HIPAA Role in Implementation Guides

Administrative Simplification provisions of the Health Insurance Portability and Accountability Act of 1996 (PL 104-191 - known as HIPAA) direct the Secretary of Health and Human Services to adopt standards for transactions to enable health information to be exchanged electronically and to adopt specifications for implementing each standard.

This implementation guide has been developed for use as an insurance industry implementation guide. At the time of publication it has not been adopted as a HIPAA standard. Should the Secretary adopt this implementation guide as a standard, the Secretary will establish compliance dates for its use by HIPAA covered entities.

1.10 Data Overview

1.10.1 Overall Data Architecture

For clarity in this technical report, loops have been assigned identifiers that clearly distinguish the loops for reference purposes. Thus, instead of referring to the loop identifier "N1" or "ENT" and other identifiers as printed in the standard, loops are given the implementation name of "1000", "2000" or "2200" and others, followed by a letter. This convention allows the user to more easily associate a loop with a specific entity or purpose.

NOTE

See Appendix B, *Nomenclature*, to review the transaction set structure, including descriptions of segments, data elements, levels, and loops.

1.10.1.1 The Reporting Process

The 820 can be used by premium remitters to report premium payment remittance information, as well as premium payment to a premium receiver. The premium remitter can be:

- An employer-operated internal department or an outside agency which performs payroll processing on behalf of an employer.
- A government agency paying health care premiums.
- An Employer paying group premiums.

The premium receiver can be either an insurance company, a government agency, or a health care organization. The 820 can be sent from the premium remitter to the premium receiver either directly, through a VAN, or through a financial institution using an ACH Network to facilitate both the remittance and dollars movement.

1.10.2 Data Use by Business Use

The 820 is divided into three tables. See Figure 1.3 - *820 Transaction Set Listing*.

Table 1, the Header, contains information related to the total premium payment, the sender, and the receiver of the payment.

Table 2, the Detail, provides remittance information. The remittance information can be sent as a summary bill payment, or an individual/list bill payment. Section 1.10.2.2 - *Detail*, addresses the various implementations in more detail.

Table 3, the Summary, provides a control number and total count of segments represented in an 820. This Table is generated automatically by most translation software packages.

Figure 1.3 - 820 Transaction Set Listing

Table 1 - Header					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
0100	ST	Transaction Set Header	R	1	
0200	BPR	Financial Information	R	1	
...					

Table 2 - Detail, Organization Summary Remittance					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
LOOP ID - 2000A ORGANIZATION SUMMARY REMITTANCE					>1
0100	ENT	Organization Summary Remittance	S	1	
LOOP ID - 2300A ORGANIZATION SUMMARY REMITTANCE DETAIL					>1
1500	RMR	Organization Summary Remittance Detail	S	1	
...					
LOOP ID - 2320A ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT					>1
2100	ADX	Organization Summary Remittance Level Adjustment	S	1	

Table 3 - Summary					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
0100	SE	Transaction Set Trailer	R	1	

1.10.2.1 Header

Table 1 (Header) - contains information related to the total payment. See Figure 1.4 - *Transaction Set Header*. Examples are:

- The party receiving the payment (premium receiver)
- The party responsible for paying the premium (premium payer)
- The party or parties responsible for the transferring of the funds between the banks (intermediary bank).

Other information contained in Table 1 is necessary for the Originating and Receiving Depository Financial Institutions to perform the dollars transfer associated with the premium payment.

The content of the header area will vary depending upon the payment method, the receiver of the transaction, and the delivery mechanism.

Figure 1.4 - Transaction Set Header

Table 1 - Header					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
0100	ST	820 Header	R	1	
0200	BPR	Financial Information	R	1	
0350	TRN	Reassociation Trace Number	R	1	
0400	CUR	Foreign Currency Information	S	1	
0500	REF	Premium Receivers Identification Key	S	>1	
0600	DTM	Process Date	S	1	
0600	DTM	Delivery Date	S	1	
0600	DTM	Coverage Period	S	1	
0600	DTM	Creation Date	S	1	
LOOP ID - 1000A PREMIUM RECEIVER'S NAME					1
0700	N1	Premium Receiver's Name	R	1	
0800	N2	Premium Receiver Additional Name	S	1	
0900	N3	Premium Receiver's Address	S	1	
1000	N4	Premium Receiver's City, State, and ZIP Code	S	1	
1300	RDM	Premium Receiver's Remittance Delivery Method	S	1	
LOOP ID - 1000B PREMIUM PAYER'S NAME					1
0700	N1	Premium Payer's Name	R	1	
0800	N2	Premium Payer Additional Name	S	1	
0900	N3	Premium Payer's Address	S	1	
1000	N4	Premium Payer's City, State, ZIP Code	S	1	
1200	PER	Premium Payer's Administrative Contact	S	>1	
LOOP ID - 1000C INTERMEDIARY BANK INFORMATION					14
0700	N1	Intermediary Bank Information	S	1	
0800	N2	Intermediary Bank Additional Name	S	1	
0900	N3	Intermediary Bank's Address	S	1	
1000	N4	Intermediary Bank's City, State, ZIP Code	S	1	
1200	PER	Intermediary Bank's Administrative Contact	S	>1	

1.10.2.2 Detail

Table 2 can be structured in either one of two ways. The first is used to provide remittance information associated with a summary bill payment. The second provides remittance information associated with an individual or list bill payment. The structure used is dependent on your business needs.

A summary bill is submitted to a premium payer with one or more amounts representing a summary of the premiums due. See Scenario One in Section 3 *Examples*.

An individual/list bill is submitted to a premium payer with one or more amounts representing detail premiums due for each individual of an organization. See Scenario Two in Section 3 *Examples*.

There are two possible uses for the detailed remittance information.

In the first use, the premium payment is specific to the employee / subscriber. Dependent payments are made as part of the employee payment and the dependents are not included in the detailed remittance information.

In the second usage, every individual has an associated specific premium payment. In this case, each employee and dependent must be separately included in the remittance information.

Contact the premium receiver when providing detailed remittance information in order to determine which approach is necessary within that specific business situation.

In any event, the remittance information is not intended to act as an enrollment or disenrollment mechanism. The Benefit Enrollment and Maintenance (834) transaction should be used for those functions.

When the remittance information is sent outside the banking network, an 820 transaction can be sent to the bank to make the electronic payment.

1.10.2.2.1 Organization Summary Remittance

Table 2 - Organization Summary Remittance is used when the premium payment is representative of a summary bill payment. See Figure 1.5 - *Transaction Organization Summary*.

Figure 1.5 - Transaction Organization Summary

Table 2 - Organization Summary Remittance Detail					
POS. #	SEQ. ID	NAME	USAGE	REPEAT	LOOP REPEAT
		LOOP ID - 2000A ORGANIZATION SUMMARY REMITTANCE			1
0100	ENT	Organization Summary Remittance	S	1	
		LOOP ID - 2200A			>1
0800	ADX	Adjustment	S	1	
		LOOP ID - 2300A ORGANIZATION SUMMARY REMITTANCE DETAIL			>1
1500	RMR	Organization Summary Remittance Detail	R	1	
1700	REF	Reference Information	S	>1	
		LOOP ID - 2310A SUMMARY LINE ITEM			1
1900	IT1	Summary Line Item	S	1	
		LOOP ID - 2312A			>1
2020	SAC	Service, Promotion, Allowance, or Charge Information	S	1	
		LOOP ID - 2315A MEMBER COUNT			>1
2040	SLN	Member Count	S	1	
		LOOP ID - 2320A ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT			>1
2100	ADX	Organization Summary Remittance Level Adjustment	S	1	

1.10.2.2.2 Individual Remittance

Table 2 - Individual Remittance is used when the payment is representative of individual premium on behalf of employees or members of a group plan. See Figure 1.6 - *Transaction Individual Detail*.

Figure 1.6 - Transaction Individual Detail

Table 2 - Individual Remittance Detail					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
LOOP ID - 2000B INDIVIDUAL REMITTANCE					
0100	ENT	Individual Remittance	S	1	>1
LOOP ID - 2100B INDIVIDUAL NAME					
0200	NM1	Individual Name	S	1	>1
LOOP ID - 2200B					
0800	ADX	Adjustment	S	1	>1
LOOP ID - 2300B INDIVIDUAL PREMIUM REMITTANCE DETAIL					
1500	RMR	Individual Premium Remittance Detail	S	1	>1
1700	REF	Reference Information	S	>1	>1
1800	DTM	Individual Coverage Period	S	1	>1
LOOP ID - 2320B INDIVIDUAL PREMIUM ADJUSTMENT					
2100	ADX	Individual Premium Adjustment	S	1	>1

1.10.2.3 Trailer

Table 3 - Summary contains only one segment, the SE transaction set trailer, which provides a control number and total count of segments used in the current 820. See Figure 1.7 - *Transaction Set Trailer*.

Figure 1.7 - Transaction Set Trailer

Table 3 - Summary					
POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
0100	SE	Transaction Set Trailer	R	1	

1.10.2.4 Balancing

Elements Used in Balancing Defined

The amount transmitted in the Financial Information BPR02 is the total amount being paid to the premium receiver from the premium payer. The BPR can occur only once in an 820.

The amount(s) transmitted in ADX01 in loop 2200A or 2200B represent adjustments at the ENT (loop 2000A or 2000B) level.

The amount(s) transmitted in RMR04 represent summary (2300A) or individual (2300B) remittance premium payment amounts. One or more occurrences of RMR04 is required.

The amounts transmitted in RMR05 represent summary (2300A) or individual (2300B) billed invoice amounts. This element is situationally required in the case where the

remitted amount (RMR04) does not match a billed amount and the adjustments which cause this discrepancy are presented using ADX or SAC segments in the 2300A or 2300B loop.

The amount(s) transmitted in ADX01 in loop 2320A or 2320B represent adjustments to the remitted amount for a specific iteration of Loop ID 2300A or 2300B.

The amount(s) transmitted in SAC05 in loop 2312A represent dollar amounts for service, promotion, allowance or charge information to be reflected in the remitted amount for a specific iteration of Loop ID 2300A.

Two Levels of Balancing

Balancing may be performed at two levels:

- The total amount of the payment is represented by data element BPR02, which must equal the accumulated total of all RMR04 data elements, plus amounts in ADX01 at loop 2200A or loop 2200B (See "Level One," below).
- The total amount for one iteration of the Remittance Detail loop (Loop ID 2300A or 2300B) is represented by the amount in RMR04 for that iteration of the loop. If the RMR05 field is present for a given iteration of Loop ID 2300, RMR04 must equal the sum of RMR05 and any amounts in ADX01 and/or SAC05 (See "Level Two," below)

Level One

The amount reported in the BPR02 data element represents the total monetary amount presented in an 820. It is a total of all RMR04 (paid amounts) presented in loop IDs 2300A or 2300B in Table 2, plus any entity-level adjustments presented in any ADX01 elements in loop 2200A or 2200B. To quote the transaction set notes for the ADX segment at loop 2200A/B, "This ADX loop contains adjustment items which are not netted to an RMR segment in this transaction set."

BPR02 = Total of all RMR04 and 2200A or 2200B level ADX01 elements

Level Two

The amount in any given RMR04 is the total of RMR05 (if present) and any ADX01 (in the case of loop 2320A or 2320B) and/or any SAC05 elements (in the case of loop 2300A only) present in the Remittance Detail loop (Loop ID 2300).

If ADX01 is negative, the paid amount (RMR04) is less than the billed amount (RMR05) by the amount in ADX01. If ADX01 is positive or unsigned, the paid amount (RMR04) is greater than the billed amount (RMR05) by the amount in ADX01.

If SAC05 is negative, the paid amount (RMR04) is less than the billed amount (RMR05) by the amount in SAC05. If SAC05 is positive or unsigned, the paid amount (RMR04) is greater than the billed amount (RMR05) by the amount in SAC05.

For Loop 2320A:

$$\text{RMR04} = \text{RMR05} + \text{ADX01} + \text{SAC05}$$

For Loop 2320B:

$$\text{RMR04} = \text{RMR05} + \text{ADX01}$$

NOTE

In the dollars and data together scenario (Section 1.4.1.1 - *ACH Payment Dollars and Remittance*) any balancing performed by the financial institution would be as agreed between the originator and ODFI. The secondary level of balancing is not customarily performed by receiving or transmitting financial institutions. If another receiver of the transaction is expected to balance the transaction at this level, and ADX or SAC segments are passed for a given Remittance Detail loop, RMR05 must be present for that iteration of Loop ID 2300.

1.10.2.5 Remittance Tracking

The Reassociation Key Segment, TRN contains a trace number for the transaction set. Trace Number, TRN02, which is used to reassociate payments and remittances sent separately, should be a unique number.

1. For check payments, TRN02 is the check number.
2. For Electronic Funds Transfer (EFT) payments (ACH or wire), TRN02 is the unique number assigned by the payer to identify the EFT.
3. The ODFI may use TRN02 for other purposes than reassociation, e.g. duplicate checking.
4. For purposes of reassociation, the RDFI will use the TRN02 in combination with other data elements including but not limited to payment amount, settlement date, originating company ID.

In addition, TRN03 is the payer's identification number. TRN03 allows the payee to avoid matching problems in case multiple payers use the same number in TRN02.

1.10.2.6 Reassociation of Dollars and Data

The 820 is capable of sending premium payment remittance data with or without the dollars represented by the data. When the remittance data is sent separately from the

monetary amounts, reassociation requires that both remittance and monetary data contain information that allows a system to match the items received. The premium receiver should have a method to ensure that payment and remittance advice are reconciled in their accounts receivable system.

Two key pieces of information facilitate reassociation - the trace number in the Reassociation Key, TRN02, and the Originating Company Identifier, TRN03. The trace number in conjunction with the company ID number provides a unique number that identifies the transaction.

Two ways of sending premium payments include check and ACH. When the payment is received by check, the check number is the trace number in TRN02, and the company ID is in TRN03. For purposes of reassociation, the RDFI will use the TRN02 in combination with other data elements including but not limited to payment amount, settlement date, originating company ID.

There are two ways to include reassociation data when an ACH payment is sent separately from the remittance data. One method is to use an ACH CCD+ payment type. Using this method, the Reassociation Key Segment in its entirety is contained in the ACH addenda record. The second method, which is not allowed under this implementation, is the ACH CCD payment type. The company ID is then contained in the batch header record of the ACH payment, and the trace number is contained in the identification number field in the ACH payment's detail record. When an ACH CCD or CCD+ payment type is used, the remittance data must include the unique reassociation trace number in TRN02 and the company ID in TRN03.

When an ACH CTX payment type is used and contains a complete 820 Transaction Set no reassociation is required.

For complete details on reassociation and ACH file formats, contact either your local value added bank (VAB) or the National Automated Clearing House Association (NACHA) at (703) 742-9190.

2 Transaction Set

NOTE

See Appendix B, Nomenclature, to review the transaction set structure, including descriptions of segments, data elements, levels, and loops.

2.1 Presentation Examples

The ASC X12 standards are generic. For example, multiple trading communities use the same PER segment to specify administrative communication contacts. Each community decides which elements to use and which code values in those elements are applicable.

This implementation guide uses a format that depicts both the generalized standard and the insurance industry-specific implementation. In this implementation guide, **IMPLEMENTATION** specifies the requirements for this implementation. **X12 STANDARD** is included as a reference only.

The transaction set presentation is comprised of two main sections with subsections within the main sections:

2.3 Transaction Set Listing

There are two sub-sections under this general title. The first sub-section concerns this implementation of a generic X12 transaction set. The second sub-section concerns the generic X12 standard itself.

IMPLEMENTATION

This section lists the levels, loops, and segments contained in this implementation. It also serves as an index to the segment detail.

STANDARD

This section is included as a reference.

2.4 Segment Detail

There are three sub-sections under this general title. This section repeats once for each segment used in this implementation providing segment specific detail and X12 standard detail.

SEGMENT DETAIL

This section is included as a reference.

DIAGRAM

This section is included as a reference. It provides a pictorial view of the standard and shows which elements are used in this implementation.

ELEMENT DETAIL

This section specifies the implementation details of each data element.

These illustrations (Figures 2.1 through 2.5) are examples and are not extracted from the Section 2 detail in this implementation guide. Annotated illustrations, presented below in the same order they appear in this implementation guide, describe the format of the transaction set that follows.

IMPLEMENTATION						
Indicates that this section is the implementation and not the standard 8XX Insurance Transaction Set						
Table 1 - Header						
PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
53	0100	ST	Transaction Set Header	R	1	Segment repeats and loop repeats reflect actual usage
54	0200	BPR	Financial Information	R	1	
60	0400	TRN	Reassociation Key	R	1	
62	0500	CUR	Non-US Dollars Currency	S	1	
65	0600	REF	Receiver ID	S	1	
66	0600	REF	Version Number	S	1	Each loop is assigned an industry specific name
68	0700	DTM	Production Date	S	1	
PAYER NAME						1
70	0800	N1	Payer Name	R	1	R=Required S=Situational
72	1000	N3	Payer Address	S	1	
75	1100	N4	Payer City, State, Zip	S	1	
76	1200	REF	Additional Payer Reference Number	S	1	
78	1300	PER	Payer Contact	S	1	
PAYEE NAME						1
79	0800	N1	Payee Name	R	1	Individual segments and entire loops are repeated
81	1000	N3	Payee Address	S	1	
82	1100	N4	Payee City, State, Zip	S	1	
84	1200	REF	Payee Additional Reference Number	S	>1	

Position Numbers and Segment IDs retain their X12 values

Each segment is assigned an industry specific name. Not used segments do not appear

Each loop is assigned an industry specific name

Figure 2.1. Transaction Set Key — Implementation

STANDARD						
Indicates that this section is identical to the ASC X12 standard 8XX Insurance Transaction Set Functional Group ID: XX See <i>Appendix B.1, ASC X12 Nomenclature</i> for a complete description of the standard This Draft Standard for Trial Use contains the format and establishes the data contents of the Insurance Transaction Set (8XX) within the context of the Electronic Data Interchange (EDI) environment.						
Table 1 - Header						
POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT	
0100	ST	Transaction Set Header	M	1		
0200	BPR	Beginning Segment	M	1		
0300	NTE	Note/Special Instruction	O	>1		
0400	TRN	Trace	O	1		

Figure 2.2. Transaction Set Key — Standard

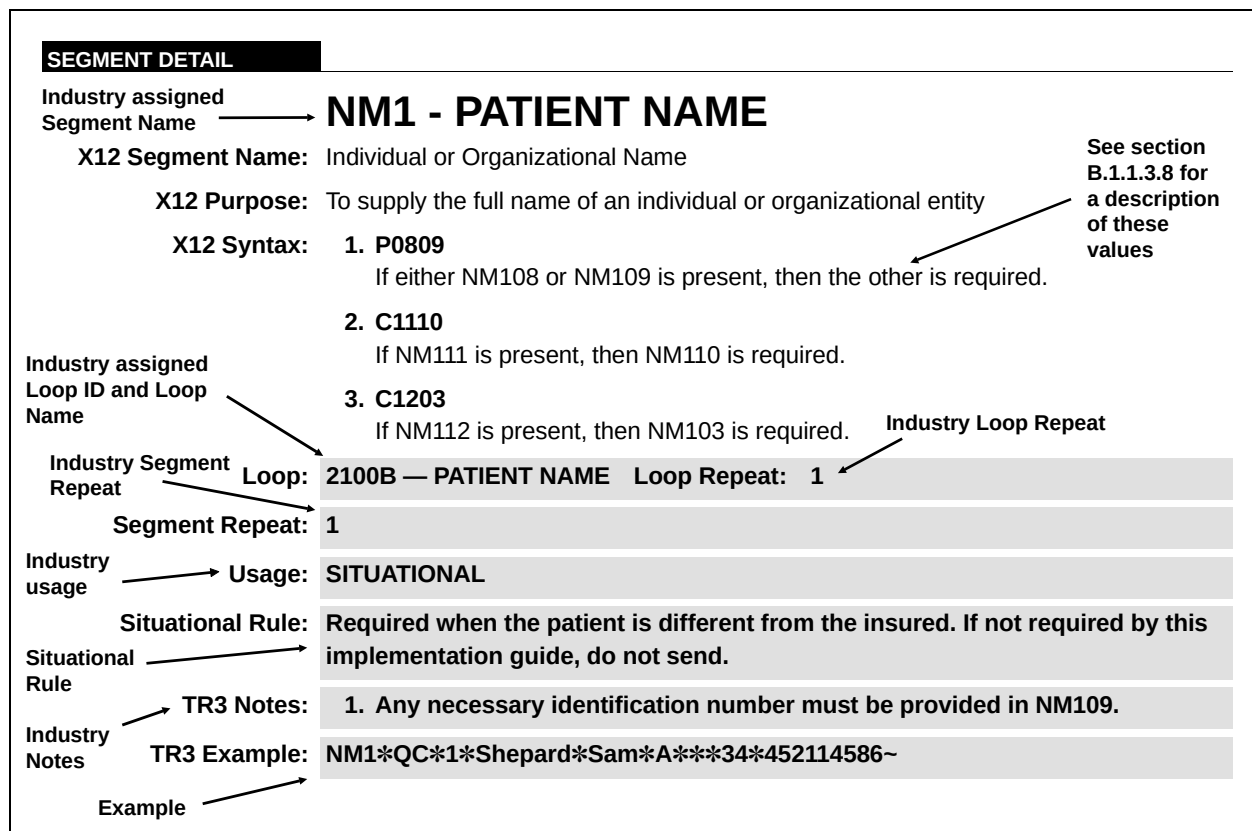


Figure 2.3. Segment Key — Implementation

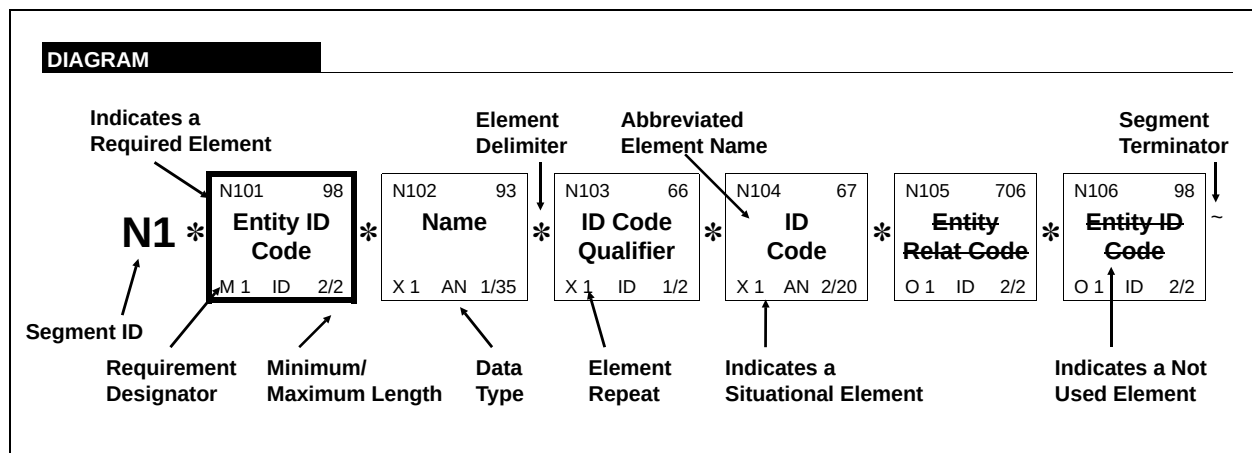


Figure 2.4. Segment Key — Diagram

ELEMENT DETAIL						
USAGE	REF. DES.	DATA ELEMENT	NAME	Element Repeat	ATTRIBUTES	
REQUIRED	SVC01	C003	COMPOSITE MEDICAL PROCEDURE IDENTIFIER To identify a medical procedure by its standardized codes and applicable modifiers Use the Primary Payer's adjudicated Medical Procedure Code.	M 1		
Reference Designator		Composite Number				
REQUIRED	SVC01 - 1	235	Product/Service ID Qualifier Code identifying the type/source of the descriptive number used in Product/Service ID (234) IMPLEMENTATION NAME: Product or Service ID Qualifier The value in SVC01-1 qualifies the values in SVC01-2, SVC01-3, SVC01-4, SVC01-5, and SVC01-6.	M ID	2/2	
Industry Usage: See the following page for complete descriptions		Industry Note				
		Selected Code Values	AD	American Dental Association Codes CODE SOURCE 135: American Dental Association		
		See Appendix A for external code source reference	HP	Health Insurance Prospective Payment System (HIPPS) Skilled Nursing Facility Rate Code CODE SOURCE 716: Health Insurance Prospective Payment System (HIPPS) Rate Code for Skilled Nursing Facilities		
REQUIRED	SVC01 - 2	234	Product/Service ID Identifying number for a product or service	M AN	1/48	
NOT USED	SVC01 - 3	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 4	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 5	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 6	1339	Procedure Modifier	O AN	2/2	
NOT USED	SVC01 - 7	352	Description	O AN	1/80	
REQUIRED	SVC02	782	Monetary Amount Monetary amount SEMANTIC: SVC02 is the submitted service charge. This value can not be negative.	M 1 R	1/18	
		Data Element Number				
NOT USED	SVC03	782	Monetary Amount	O 1 R	1/18	
SITUATIONAL	SVC04	234	Product/Service ID Identifying number for a product or service SEMANTIC: SVC04 is the National Uniform Billing Committee Revenue Code. SITUATIONAL RULE: Required when an NUBC revenue code was considered during adjudication in addition to a procedure code already identified in SVC01. If not required by this implementation guide, do not send. IMPLEMENTATION NAME: National Uniform Billing Committee Revenue Code	O 1 AN	1/48	
X12 Semantic Note						
Situational Rule						
Implementation Name See Appendix E for definition						

Figure 2.5. Segment Key — Element Summary

2.2 Implementation Usage

2.2.1 Industry Usage

Industry Usage describes when loops, segments, and elements are to be sent when complying with this implementation guide. The three choices for Usage are required, not used, and situational. To avoid confusion, these are named differently than the X12 standard Condition Designators (mandatory, optional, and relational).

Required This loop/segment/element must always be sent.

Required segments in Situational loops only occur when the loop is used.

Required elements in Situational segments only occur when the segment is used.

Required component elements in Situational composite elements only occur when the composite element is used.

Not Used This element must never be sent.

Situational Use of this loop/segment/element varies, depending on data content and business context as described in the defining rule. The defining rule is documented in a Situational Rule attached to the item.

There are two forms of Situational Rules.

The first form is "Required when <explicit condition statement>. If not required by this implementation guide, may be provided at the sender's discretion, but cannot be required by the receiver." The data qualified by such a situational rule cannot be required or requested by the receiver, transmission of this data is solely at the sender's discretion.

The alternative form is "Required when <explicit condition statement>. If not required by this implementation guide, do not send." The data qualified by such a situational rule cannot be sent except as described in the explicit condition statement.

2.2.1.1

Transaction Compliance Related to Industry Usage

A transmitted transaction complies with an implementation guide when it satisfies the requirements as defined within the implementation guide. The presence or absence of an item (loop, segment, or element) complies with the industry usage specified by this implementation guide according to the following table.

Industry Usage	Business Condition is	Item is	Transaction Complies with Implementation Guide?
Required	N/A	Sent	Yes
		Not Sent	No
Not Used	N/A	Sent	No
		Not Sent	Yes
Situational (Required when <explicit condition statement>. If not required by this implementation guide, may be provided at the sender's discretion, but cannot be required by the receiver.)	True	Sent	Yes
		Not Sent	No
	Not True	Sent	Yes
		Not Sent	Yes
Situational (Required when <explicit condition statement>. If not required by this implementation guide, do not send.)	True	Sent	Yes
		Not Sent	No
	Not True	Sent	No
		Not Sent	Yes

This table specifies how an entity is to evaluate a transmitted transaction for compliance with industry usage. It is not intended to require or imply that the receiver must reject non-compliant transactions. The receiver will handle non-compliant transactions based on its business process and any applicable regulations.

2.2.2

Loops

Loop requirements depend on the context or location of the loop within the transaction. See Appendix B for more information on loops.

- A nested loop can be used only when the associated higher level loop is used.
- The usage of a loop is the same as the usage of its beginning segment.
 - If a loop's beginning segment is Required, the loop is Required and must occur at least once unless it is nested in a loop that is not being used.
 - If a loop's beginning segment is Situational, the loop is Situational.
- Subsequent segments within a loop can be sent only when the beginning segment is used.
- Required segments in Situational loops occur only when the loop is used.

2.3 Transaction Set Listing

2.3.1 Implementation

This section lists the levels, loops, and segments contained in this implementation. It also serves as an index to the segment detail. Refer to section 2.1 Presentation Examples for detailed information on the components of the Implementation section.

IMPLEMENTATION

820 Payment Order/Remittance Advice**Table 1 - Header**

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
35	0100	ST	820 Header	R	1	
36	0200	BPR	Financial Information	R	1	
43	0350	TRN	Reassociation Trace Number	R	1	
45	0400	CUR	Foreign Currency Information	S	1	
48	0500	REF	Premium Receivers Identification Key	S	>1	
50	0600	DTM	Process Date	S	1	
51	0600	DTM	Delivery Date	S	1	
53	0600	DTM	Coverage Period	S	1	
55	0600	DTM	Creation Date	S	1	
LOOP ID - 1000A PREMIUM RECEIVER'S NAME						1
56	0700	N1	Premium Receiver's Name	R	1	
58	0800	N2	Premium Receiver Additional Name	S	1	
59	0900	N3	Premium Receiver's Address	S	1	
60	1000	N4	Premium Receiver's City, State, and ZIP Code	S	1	
62	1300	RDM	Premium Receiver's Remittance Delivery Method	S	1	
LOOP ID - 1000B PREMIUM PAYER'S NAME						1
64	0700	N1	Premium Payer's Name	R	1	
66	0800	N2	Premium Payer Additional Name	S	1	
67	0900	N3	Premium Payer's Address	S	1	
68	1000	N4	Premium Payer's City, State, ZIP Code	S	1	
70	1200	PER	Premium Payer's Administrative Contact	S	>1	
LOOP ID - 1000C INTERMEDIARY BANK INFORMATION						14
73	0700	N1	Intermediary Bank Information	S	1	
75	0800	N2	Intermediary Bank Additional Name	S	1	
76	0900	N3	Intermediary Bank's Address	S	1	
77	1000	N4	Intermediary Bank's City, State, ZIP Code	S	1	
79	1200	PER	Intermediary Bank's Administrative Contact	S	>1	

Table 2 - Organization Summary Remittance Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
LOOP ID - 2000A ORGANIZATION SUMMARY REMITTANCE						1
82	0100	ENT	Organization Summary Remittance	S	1	
LOOP ID - 2200A ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR PREVIOUS PAYMENT						>1
85	0800	ADX	Organization Summary Remittance Level Adjustment for Previous Payment	S	1	
LOOP ID - 2300A ORGANIZATION SUMMARY REMITTANCE DETAIL						>1
87	1500	RMR	Organization Summary Remittance Detail	R	1	

90	1700	REF	Reference Information	S	>1	
92	1800	DTM	Organizational Coverage Period	S	1	
LOOP ID - 2310A SUMMARY LINE ITEM						1
94	1900	IT1	Summary Line Item	S	1	
LOOP ID - 2312A SERVICE, PROMOTION, ALLOWANCE, OR CHARGE INFORMATION						4
97	2020	SAC	Service, Promotion, Allowance, or Charge Information	S	1	
LOOP ID - 2315A MEMBER COUNT						3
99	2040	SLN	Member Count	S	1	
LOOP ID - 2320A ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR CURRENT PAYMENT						>1
103	2100	ADX	Organization Summary Remittance Level Adjustment for Current Payment	S	1	

Table 2 - Individual Remittance Detail

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
LOOP ID - 2000B INDIVIDUAL REMITTANCE						>1
105	0100	ENT	Individual Remittance	S	1	
LOOP ID - 2100B INDIVIDUAL NAME						>1
107	0200	NM1	Individual Name	S	1	
LOOP ID - 2200B INDIVIDUAL PREMIUM ADJUSTMENT FOR PREVIOUS PAYMENT						>1
110	0800	ADX	Individual Premium Adjustment for Previous Payment	S	1	
LOOP ID - 2300B INDIVIDUAL PREMIUM REMITTANCE DETAIL						>1
112	1500	RMR	Individual Premium Remittance Detail	R	1	
114	1700	REF	Reference Information	S	>1	
115	1800	DTM	Individual Coverage Period	S	1	
LOOP ID - 2320B INDIVIDUAL PREMIUM ADJUSTMENT FOR CURRENT PAYMENT						>1
117	2100	ADX	Individual Premium Adjustment for Current Payment	S	1	

Table 3 - Summary

PAGE #	POS. #	SEG. ID	NAME	USAGE	REPEAT	LOOP REPEAT
119	0100	SE	Transaction Set Trailer	R	1	

2.3.2 X12 Standard

This section is included as a reference. The implementation guide reference clarifies actual usage. Refer to section 2.1 Presentation Examples for detailed information on the components of the X12 Standard section.

STANDARD

820 Payment Order/Remittance Advice

Functional Group ID: **RA**

This X12 Transaction Set contains the format and establishes the data contents of the Payment Order/Remittance Advice Transaction Set (820) for use within the context of an Electronic Data Interchange (EDI) environment. The transaction set can be used to make a payment, send a remittance advice, or make a payment and send a remittance advice.

This transaction set can be an order to a financial institution to make a payment to a payee. It can also be a remittance advice identifying the detail needed to perform cash application to the payee's accounts receivable system. The remittance advice can go directly from payer to payee, through a financial institution, or through a third party agent.

Table 1 - Header

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
0100	ST	Transaction Set Header	M	1	
0200	BPR	Beginning Segment for Payment Order/Remittance Advice	M	1	
0300	NTE	Note/Special Instruction	O	>1	
0350	TRN	Trace	O	1	
0400	CUR	Currency	O	1	
0500	REF	Reference Information	O	>1	
0600	DTM	Date/Time Reference	O	>1	
LOOP ID - N1					>1
0700	N1	Party Identification	O	1	
0800	N2	Additional Name Information	O	>1	
0900	N3	Party Location	O	>1	
1000	N4	Geographic Location	O	1	
1100	REF	Reference Information	O	>1	
1200	PER	Administrative Communications Contact	O	>1	
1300	RDM	Remittance Delivery Method	O	1	
1400	DTM	Date/Time Reference	O	1	

Table 2 - Detail

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
LOOP ID - ENT					>1
0100	ENT	Entity	O	1	
LOOP ID - ENT/FA1					>1
0150	FA1	Type of Financial Accounting Data	O	1	
0160	FA2	Accounting Data	M	>1	
LOOP ID - ENT/NM1					>1
0200	NM1	Individual or Organizational Name	O	1	
0300	N2	Additional Name Information	O	>1	
0400	N3	Party Location	O	>1	
0500	N4	Geographic Location	O	1	

0600	REF	Reference Information	O	>1
0700	PER	Administrative Communications Contact	O	>1
LOOP ID - ENT/ADX				>1
0800	ADX	Adjustment	O	1
0900	NTE	Note/Special Instruction	O	>1
1000	PER	Administrative Communications Contact	O	>1
1050	DTM	Date/Time Reference	O	1
LOOP ID - ENT/ADX/REF				>1
1100	REF	Reference Information	O	1
1200	DTM	Date/Time Reference	O	>1
LOOP ID - ENT/ADX/IT1				>1
1300	IT1	Baseline Item Data (Invoice)	O	1
1310	RPA	Rate Amounts or Percents	O	1
1320	QTY	Quantity Information	O	1
LOOP ID - ENT/ADX/IT1/REF				>1
1400	REF	Reference Information	O	1
1410	DTM	Date/Time Reference	O	1
LOOP ID - ENT/ADX/IT1/SAC				>1
1420	SAC	Service, Promotion, Allowance, or Charge Information	O	1
1430	TXI	Tax Information	O	>1
1440	DTM	Date/Time Reference	O	10
LOOP ID - ENT/ADX/IT1/SLN				>1
1450	SLN	Subline Item Detail	O	1
LOOP ID - ENT/ADX/IT1/SLN/REF				>1
1460	REF	Reference Information	O	1
1470	DTM	Date/Time Reference	O	>1
LOOP ID - ENT/ADX/IT1/SLN/SAC				>1
1480	SAC	Service, Promotion, Allowance, or Charge Information	O	1
1490	TXI	Tax Information	O	>1
LOOP ID - ENT/ADX/FA1				>1
1495	FA1	Type of Financial Accounting Data	O	1
1496	FA2	Accounting Data	M	>1
LOOP ID - ENT/RMR				>1
1500	RMR	Remittance Advice Accounts Receivable Open Item Reference	O	1
1600	NTE	Note/Special Instruction	O	>1
1700	REF	Reference Information	O	>1
1800	DTM	Date/Time Reference	O	>1
1850	VEH	Vehicle Information	O	1
LOOP ID - ENT/RMR/IT1				>1
1900	IT1	Baseline Item Data (Invoice)	O	1
1920	RPA	Rate Amounts or Percents	O	1

1940	QTY	Quantity Information	O	1	
LOOP ID - ENT/RMR/IT1/REF					>1
2000	REF	Reference Information	O	1	
2010	DTM	Date/Time Reference	O	1	
LOOP ID - ENT/RMR/IT1/SAC					>1
2020	SAC	Service, Promotion, Allowance, or Charge Information	O	1	
2030	TXI	Tax Information	O	>1	
LOOP ID - ENT/RMR/IT1/SLN					>1
2040	SLN	Subline Item Detail	O	1	
LOOP ID - ENT/RMR/IT1/SLN/REF					>1
2050	REF	Reference Information	O	1	
2060	DTM	Date/Time Reference	O	>1	
LOOP ID - ENT/RMR/IT1/SLN/SAC					>1
2070	SAC	Service, Promotion, Allowance, or Charge Information	O	1	
2080	TXI	Tax Information	O	>1	
LOOP ID - ENT/RMR/ADX					>1
2100	ADX	Adjustment	O	1	
2200	NTE	Note/Special Instruction	O	>1	
2300	PER	Administrative Communications Contact	O	>1	
LOOP ID - ENT/RMR/ADX/REF					>1
2400	REF	Reference Information	O	1	
2500	DTM	Date/Time Reference	O	>1	
LOOP ID - ENT/RMR/ADX/IT1					>1
2600	IT1	Baseline Item Data (Invoice)	O	1	
2610	RPA	Rate Amounts or Percents	O	1	
2620	QTY	Quantity Information	O	1	
LOOP ID - ENT/RMR/ADX/IT1/REF					>1
2700	REF	Reference Information	O	1	
2710	DTM	Date/Time Reference	O	1	
LOOP ID - ENT/RMR/ADX/IT1/SAC					>1
2720	SAC	Service, Promotion, Allowance, or Charge Information	O	1	
2730	TXI	Tax Information	O	>1	
2740	DTM	Date/Time Reference	O	10	
LOOP ID - ENT/RMR/ADX/IT1/SLN					>1
2750	SLN	Subline Item Detail	O	1	
LOOP ID - ENT/RMR/ADX/IT1/SLN/REF					>1
2760	REF	Reference Information	O	1	
2770	DTM	Date/Time Reference	O	>1	
LOOP ID - ENT/RMR/ADX/IT1/SLN/SAC					>1
2780	SAC	Service, Promotion, Allowance, or Charge Information	O	1	
2790	TXI	Tax Information	O	>1	
LOOP ID - ENT/RMR/FA1					>1
2795	FA1	Type of Financial Accounting Data	O	1	
2796	FA2	Accounting Data	M	>1	
LOOP ID - TXP					>1
2800	TXP	Tax Payment	O	1	
2850	TXI	Tax Information	O	>1	
2855	REF	Reference Information	O	>1	
2860	DTM	Date/Time Reference	O	>1	
LOOP ID - DED					>1
2870	DED	Deductions	O	1	
LOOP ID - LX					>1
2900	LX	Transaction Set Line Number	O	1	

2950	REF	Reference Information	O	>1	
3000	TRN	Trace	O	>1	
LOOP ID - LX/NM1					>1
3050	NM1	Individual or Organizational Name	O	1	
3100	REF	Reference Information	O	>1	
3150	G53	Maintenance Type	O	1	
LOOP ID - LX/NM1/AIN					>1
3200	AIN	Income	O	1	
3250	QTY	Quantity Information	O	>1	
3300	DTP	Date or Time or Period	O	>1	
LOOP ID - LX/NM1/PEN					>1
3350	PEN	Pension Information	O	1	
3400	AMT	Monetary Amount Information	O	>1	
3450	DTP	Date or Time or Period	O	>1	
LOOP ID - LX/NM1/PEN/INV					>1
3500	INV	Investment Vehicle Selection	O	1	
3550	DTP	Date or Time or Period	O	>1	
LOOP ID - N9					1
3600	N9	Extended Reference Information	O	1	
3650	REF	Reference Information	O	>1	
LOOP ID - N9/AMT					>1
3700	AMT	Monetary Amount Information	O	1	
3800	REF	Reference Information	O	>1	
LOOP ID - N9/N1					>1
3900	N1	Party Identification	O	1	
4000	REF	Reference Information	O	>1	
LOOP ID - N9/N1/EMS					>1
4100	EMS	Employment Position	O	1	
4200	ATN	Attendance	O	>1	
4300	AIN	Income	O	>1	
4400	PYD	Payroll Deduction	O	>1	
LOOP ID - RYL					>1
4500	RYL	Royalty Payment	O	1	
LOOP ID - RYL/NM1					>1
4600	NM1	Individual or Organizational Name	O	1	
LOOP ID - RYL/NM1/LOC					>1
4700	LOC	Location	O	1	
LOOP ID - RYL/NM1/LOC/PID					>1
4800	PID	Product/Item Description	O	1	
4900	DTM	Date/Time Reference	O	1	
LOOP ID - RYL/NM1/LOC/PID/PCT					>1
5000	PCT	Percent Amounts	O	1	
5100	QTY	Quantity Information	O	1	
LOOP ID - RYL/NM1/LOC/PID/PCT/AMT					>1
5200	AMT	Monetary Amount Information	O	1	
5300	ADX	Adjustment	O	>1	
LOOP ID - RYL/NM1/ASM					1
5400	ASM	Amount and Settlement Method	O	1	
5500	ADX	Adjustment	O	1	

Table 3 - Summary

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
0100	SE	Transaction Set Trailer	M	1	

NOTES:

- 1/0350** The TRN segment is used to uniquely identify a payment order/remittance advice.
- 1/0400** The CUR segment does not initiate a foreign exchange transaction.
- 1/0700** The N1 loop allows for name/address information for the payer and payee which would be utilized to address remittance(s) for delivery.
- 2/0100** The ENT loop is for vendor or consumer third party consolidated payments.
- 2/0100** ENT09 may contain the payee's accounts receivable customer number.
- 2/0200** Allowing the NM1 segment to repeat in this area allows the paying entity within a payer and the paid entity within a payee to be identified (not the payer and payee).
- 2/0800** This ADX loop contains adjustment items which are not netted to an RMR segment in this transaction set.
- 2/1300** Loop IT1 within the ADX loop is the adjustment line item detail loop.
- 2/1500** Loop RMR is for open items being referenced or for payment on account.
- 2/1900** Loop IT1 within the RMR loop is the remittance line item detail loop.
- 2/2100** This ADX loop can only contain adjustment information for the immediately preceding RMR segment and affects the amount (RMR04) calculation. If this adjustment amount is not netted to the immediately preceding RMR, use the outer ADX loop (position 080).
- 2/2600** Loop IT1 within the ADX loop is the adjustment line item detail loop.
- 2/2800** The TXP loop is for tax payments.
- 2/2870** The DED loop is for child support payments.
- 2/2900** The LX loop is for pension payments.
- 2/3600** The N9 loop is for payroll payments.
- 2/3700** The AMT segment can be used to provide information about allocation or distribution of net pay that is split across multiple payment orders.
- 2/4500** The RYL loop is for royalty payments.

2.4 820 - Segment Detail

This section specifies the segments, data elements, and codes for this implementation. Refer to section 2.1 Presentation Examples for detailed information on the components of the Segment Detail section.

SEGMENT DETAIL

ST - 820 HEADER

X12 Segment Name: Transaction Set Header


X12 Purpose: To indicate the start of a transaction set and to assign a control number

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: ST*820*1234*005010X218~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ST01	143	Transaction Set Identifier Code Code uniquely identifying a Transaction Set SEMANTIC: The transaction set identifier (ST01) is used by the translation routines of the interchange partners to select the appropriate transaction set definition (e.g., 810 selects the Invoice Transaction Set).	M 1 ID 3/3
			CODE	DEFINITION
			820	Payment Order/Remittance Advice
REQUIRED	ST02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set	M 1 AN 4/9
REQUIRED	ST03	1705	Implementation Convention Reference Reference assigned to identify Implementation Convention SEMANTIC: The implementation convention reference (ST03) is used by the translation routines of the interchange partners to select the appropriate implementation convention to match the transaction set definition. When used, this implementation convention reference takes precedence over the implementation reference specified in the GS08.	O 1 AN 1/35
The value in ST03 must be the same as the value in GS08.				

SEGMENT DETAIL

BPR - FINANCIAL INFORMATION**X12 Segment Name:** Beginning Segment for Payment Order/Remittance Advice**X12 Purpose:** To indicate the beginning of a Payment Order/Remittance Advice Transaction Set and total payment amount, or to enable related transfer of funds and/or information from payer to payee to occur**X12 Syntax:** 1. **P0607**

If either BPR06 or BPR07 is present, then the other is required.

2. **C0809**

If BPR08 is present, then BPR09 is required.

3. **P1213**

If either BPR12 or BPR13 is present, then the other is required.

4. **C1415**

If BPR14 is present, then BPR15 is required.

5. **P1819**


If either BPR18 or BPR19 is present, then the other is required.

6. **C2021**

If BPR20 is present, then BPR21 is required.

Segment Repeat: 1**Usage:** REQUIRED**TR3 Notes:** 1. The BPR addresses the payment total that a premium payer is remitting to the premium receiver. The BPR contains mandatory information, even when not being used to move funds electronically.**TR3 Example:** BPR*C*100000.25*C*ACH*CTX*01*999999992*DA*123456*1123456789*1999999999*01*999988880*DA*98765*20070401~

DIAGRAM

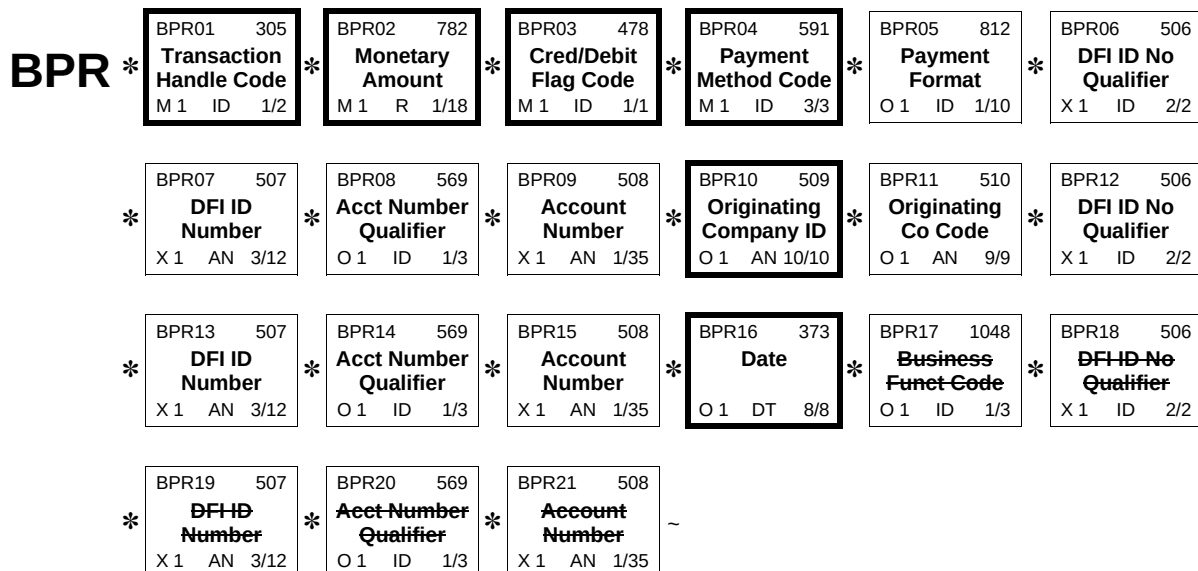

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	BPR01	305	Transaction Handling Code Code designating the action to be taken by all parties	M 1	ID	1/2
Code designating whether and how money and information are to be processed.						
			CODE	DEFINITION		
			C	Payment Accompanies Remittance Advice		
				Instructs the Originating Depository Financial Institution to move both funds and remittance detail together through the banking system.		
			D	Make Payment Only		
				Instructs the Originating Depository Financial Institution to move only funds through the banking system, and to ignore any remittance detail.		
			I	Remittance Information Only		
				Indicates to the payee that the remittance detail is moving separately from the payment. This also includes when the resulting payment would be zero.		
			P	Prenotification of Future Transfers		
				Tests the setup of the premium receiver and verifies the accuracy of the account numbers. Do not use for actual payments or remittance information.		
			U	Split Payment and Remittance		
				Instructs the third party processor to split the payment and remittance detail and send each one separately.		
			X	Handling Party's Option to Split Payment and Remittance		
				Instruct the Originating Depository Financial Institution to move the payment and remittance detail, either together or separately, based upon the payee's request or capabilities.		
REQUIRED	BPR02	782	Monetary Amount Monetary amount	M 1	R	1/18
SEMANTIC: BPR02 specifies the payment amount.						
IMPLEMENTATION NAME: Total Premium Payment Amount						
The ACH system can not support dollar amounts greater than 11 characters (including the decimal point). This provides an ACH limit of \$99,999,999.99. for the 820. Dollar limits vary by the clearing system used, e.g ACH vs. wire. Contact your ODFI for information.						

REQUIRED	BPR03	478	Credit/Debit Flag Code			M 1	ID	1/1
			Code indicating whether amount is a credit or debit					
			IMPLEMENTATION NAME: Credit or Debit Flag Code					
			This indicates a credit to the payee's account, and a debit to the Payer's account.					
			CODE	DEFINITION				
			C	Credit				
REQUIRED	BPR04	591	Payment Method Code			M 1	ID	3/3
			Code identifying the method for the movement of payment instructions					
			CODE	DEFINITION				
			ACH	Automated Clearing House (ACH)				
			Move money electronically through the ACH. Information in BPR05 through BPR09 and BPR12 through BPR15 must also be included.					
			BOP	Financial Institution Option				
			The Originating Depository Financial Institution will choose the method of payment based upon payee's request or capabilities. Assuming a customized arrangement is in place between the originator and the ODFI, the ODFI at its option may direct the payer to use code BOP when the ODFI will determine the payment method.					
			CHK	Check				
			A check has been issued for payment.					
			FWT	Federal Reserve Funds/Wire Transfer - Nonrepetitive				
			The funds were sent through the wire system.					
			NON	Non-Payment Data				
			For use when BPR01 is "I" Remittance Information Only. This code is needed when the ODFI is sending remittance information only to the Premium Payment Receiver without originating a payment transaction.					
			SWT	Society for Worldwide Interbank Financial Telecommunications (S.W.I.F.T.)				
			The funds were sent as a S.W.I.F.T. payment.					
SITUATIONAL	BPR05	812	Payment Format Code			O 1	ID	1/10
			Code identifying the payment format to be used					
			SITUATIONAL RULE: Required when payment is made using an ACH network. If not required by this implementation guide do not send.					
			CODE	DEFINITION				
			CCP	Cash Concentration/Disbursement plus Addenda (CCD+) (ACH)				
			CCD+ format moves money and up to 80 characters of data, enough to reassociate dollars and data when the dollars are sent through the ACH and the remittance data is sent on a separate path. It is suggested that the addenda contains a copy of the TRN segment.					

			Corporate Trade Exchange (CTX) (ACH)				
			CTX format is used to move dollars and data through the ACH. It can contain up to 9,999 addenda records of 80 characters each. The CTX will encapsulate the complete 820 and all the envelope segments.				
SITUATIONAL	BPR06	506	(DFI) ID Number Qualifier	X 1	ID	2/2	
			Code identifying the type of identification number of Depository Financial Institution (DFI)				
			SYNTAX: P0607				
			SEMANTIC: When using this transaction set to initiate a payment, all or some of BPR06 through BPR16 may be required, depending on the conventions of the specific financial channel being used.				
			SITUATIONAL RULE: <i>Required when payment is made using an ACH network. If not required by this implementation guide do not send.</i>				
			IMPLEMENTATION NAME: Depository Financial Institution (DFI) Identification Number Qualifier				
			BPR06 THROUGH BPR09 relate to the Originating Depository Financial Institution and the premium payer’s bank account.				
			CODE	DEFINITION			
			01	ABA Transit Routing Number Including Check Digits (9 digits)			
			ABA is a unique number identifying every bank in the United States.				
			02	CODE SOURCE 4: ABA Routing Number Swift Identification (8 or 11 characters)			
			04	Canadian Bank Branch and Institution Number CODE SOURCE 91: Canadian Financial Institution Branch and Institution Number			
SITUATIONAL	BPR07	507	(DFI) Identification Number	X 1	AN	3/12	
			Depository Financial Institution (DFI) identification number				
			SYNTAX: P0607				
			SITUATIONAL RULE: <i>Required when BPR01 is not equal to “I”. If not required by this implementation guide, do not send.</i>				
			IMPLEMENTATION NAME: Originating Depository Financial Institution (DFI) Identifier				
			CODE SOURCE 60: (DFI) Identification Number				
			This is the identifying number of the Originating Depository Financial Institution sending the transaction into the ACH network.				

SITUATIONAL	BPR08	569	Account Number Qualifier	O 1	ID	1/3
			Code indicating the type of account			
			SYNTAX: C0809			
			SEMANTIC: BPR08 is a code identifying the type of bank account or other financial asset.			
			SITUATIONAL RULE: <i>Required when BPR01 is not equal to "I". If not required by this implementation guide, do not send.</i>			
			CODE	DEFINITION		
			ALC	Agency Location Code (ALC)		
				For Federal Government use only.		
			DA	Demand Deposit		
SITUATIONAL	BPR09	508	Account Number	X 1	AN	1/35
			Account number assigned			
			SYNTAX: C0809			
			SEMANTIC: BPR09 is the account of the company originating the payment. This account may be debited or credited depending on the type of payment order.			
			SITUATIONAL RULE: <i>Required when BPR01 is not equal to "I". If not required by this implementation guide, do not send.</i>			
			IMPLEMENTATION NAME: Sender Bank Account Number			
			This is the premium payer's bank account at the Originating Depository Financial Institution.			
REQUIRED	BPR10	509	Originating Company Identifier	O 1	AN	10/10
			A unique identifier designating the company initiating the funds transfer instructions, business transaction or assigning tracking reference identification.			
			SEMANTIC: BPR10 shall be mutually established between the originating depository financial institution (ODFI) and the company originating the payment.			
			IMPLEMENTATION NAME: Payer Identifier			
SITUATIONAL	BPR11	510	Originating Company Supplemental Code	O 1	AN	9/9
			A code defined between the originating company and the originating depository financial institution (ODFI) that uniquely identifies the company initiating the transfer instructions			
			SITUATIONAL RULE: <i>Required when identification of a subdivision within a company is necessary. If not required by this implementation guide do not send.</i>			
			This data must be identical to the value sent in the TRN04 data element.			

SITUATIONAL	BPR12	506	(DFI) ID Number Qualifier	X 1	ID	2/2
			Code identifying the type of identification number of Depository Financial Institution (DFI)			
			SYNTAX: P1213			
			SEMANTIC: BPR12 and BPR13 relate to the receiving depository financial institution (RDFI).			
			SITUATIONAL RULE: <i>Required when BPR04 is ACH, BOP, FWT, or SWT. If not required by this implementation guide, do not send.</i>			
			IMPLEMENTATION NAME: Depository Financial Institution (DFI) Identification Number Qualifier			
			BPR12 THROUGH BPR15 relate to the Receiving Depository Financial Institution and the premium receiver's bank account. BPR12 - BPR15 are required if the 820 transaction set initiates a funds transfer.			
			CODE	DEFINITION		
			01	ABA Transit Routing Number Including Check Digits (9 digits)		
				ABA is a unique number identifying every bank in the United States.		
			02	CODE SOURCE 4: ABA Routing Number Swift Identification (8 or 11 characters)		
				See Code Source 327: Society for Worldwide Interbank Financial Telecommunication (SWIFT).		
			04	Canadian Bank Branch and Institution Number		
				CODE SOURCE 91: Canadian Financial Institution Branch and Institution Number		
SITUATIONAL	BPR13	507	(DFI) Identification Number	X 1	AN	3/12
			Depository Financial Institution (DFI) identification number			
			SYNTAX: P1213			
			SITUATIONAL RULE: <i>Required when BPR04 is ACH, BOP, FWT, or SWT. If not required by this implementation guide, do not send.</i>			
			IMPLEMENTATION NAME: Receiving Depository Financial Institution (DFI) Identifier			
			CODE SOURCE 60: (DFI) Identification Number			
			This is the identifying number of the Receiving Depository Financial Institution receiving the transaction into the ACH network.			
SITUATIONAL	BPR14	569	Account Number Qualifier	O 1	ID	1/3
			Code indicating the type of account			
			SYNTAX: C1415			
			SEMANTIC: BPR14 is a code identifying the type of bank account or other financial asset.			
			SITUATIONAL RULE: <i>Required when BPR04 is ACH, BOP, FWT, or SWT. If not required by this implementation guide, do not send.</i>			
			BPR14 identifies the type of account in BPR15.			
			CODE	DEFINITION		
			DA	Demand Deposit		

			SG	Savings			
SITUATIONAL	BPR15	508	Account Number		X 1	AN	1/35
			Account number assigned				
			SYNTAX: C1415				
			SEMANTIC: BPR15 is the account number of the receiving company to be debited or credited with the payment order.				
			SITUATIONAL RULE: <i>Required when BPR04 is ACH, BOP, FWT, or SWT. If not required by this implementation guide, do not send.</i>				
			IMPLEMENTATION NAME: Receiver Bank Account Number				
			This is the premium receiver's bank account at the Receiving Depository Financial Institution.				
REQUIRED	BPR16	373	Date		O 1	DT	8/8
			Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year				
			SEMANTIC: BPR16 is the date the originating company intends for the transaction to be settled (i.e., Payment Effective Date).				
			IMPLEMENTATION NAME: Check Issue or EFT Effective Date				
			For check payment, this data element specifies the check issuance date.				
			For payments other than check this data element specifies the date the originator (premium payer) intends to provide funds to the receiver (premium receiver).				
NOT USED	BPR17	1048	Business Function Code		O 1	ID	1/3
NOT USED	BPR18	506	(DFI) ID Number Qualifier		X 1	ID	2/2
NOT USED	BPR19	507	(DFI) Identification Number		X 1	AN	3/12
NOT USED	BPR20	569	Account Number Qualifier		O 1	ID	1/3
NOT USED	BPR21	508	Account Number		X 1	AN	1/35

SEGMENT DETAIL

TRN - REASSOCIATION TRACE NUMBER

X12 Segment Name: Trace

X12 Purpose: To uniquely identify a transaction to an application

X12 Set Notes: 1. The TRN segment is used to uniquely identify a payment order/remittance advice.


Segment Repeat: 1

Usage: REQUIRED

TR3 Notes: 1. The purpose of this segment is to uniquely identify this transaction set and aid in the reassociating payment and remittance data that have been separated. See section 1.10.2.5 and 1.10.2.6 for more information.

TR3 Example: TRN*1*12345*1512345678*1999999999~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES								
REQUIRED	TRN01	481	Trace Type Code Code identifying which transaction is being referenced	M 1	ID	1/2						
			<table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>1</td><td>Current Transaction Trace Numbers The payment and remittance have not been separated.</td></tr><tr><td>3</td><td>Financial Reassociation Trace Number The payment and remittance information have been separated and need to be reassociated by the receiver.</td></tr></tbody></table>	CODE	DEFINITION	1	Current Transaction Trace Numbers The payment and remittance have not been separated.	3	Financial Reassociation Trace Number The payment and remittance information have been separated and need to be reassociated by the receiver.			
CODE	DEFINITION											
1	Current Transaction Trace Numbers The payment and remittance have not been separated.											
3	Financial Reassociation Trace Number The payment and remittance information have been separated and need to be reassociated by the receiver.											
REQUIRED	TRN02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SEMANTIC: TRN02 provides unique identification for the transaction. IMPLEMENTATION NAME: Check or EFT Trace Number This field is used to re-associate the payment with the remittance information.	M 1	AN	1/50						

SITUATIONAL	TRN03	509	Originating Company Identifier A unique identifier designating the company initiating the funds transfer instructions, business transaction or assigning tracking reference identification. SEMANTIC: TRN03 identifies an organization. SITUATIONAL RULE: <i>Required when the receiver needs an originating company identification to reassociate a payment to a remittance. If not required by this implementation guide, do not send.</i>	O 1 AN 10/10
SITUATIONAL	TRN04	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SEMANTIC: TRN04 identifies a further subdivision within the organization. SITUATIONAL RULE: <i>Required when the Payer is sending multiple premium payments for multiple group plans and the receiver needs an additional identifier for re-association. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Originating Company Supplemental Code If provided, TRN04 and BPR11 must be identical.	O 1 AN 1/50

SEGMENT DETAIL

CUR - FOREIGN CURRENCY INFORMATION

X12 Segment Name: Currency

X12 Purpose: To specify the currency (dollars, pounds, francs, etc.) used in a transaction

X12 Set Notes: 1. The CUR segment does not initiate a foreign exchange transaction.

- X12 Syntax:**
1. **C0807**
If CUR08 is present, then CUR07 is required.
 2. **C0907**
If CUR09 is present, then CUR07 is required.
 3. **L101112**
If CUR10 is present, then at least one of CUR11 or CUR12 are required.
 4. **C1110**
If CUR11 is present, then CUR10 is required.
 5. **C1210**
If CUR12 is present, then CUR10 is required.
 6. **L131415**
If CUR13 is present, then at least one of CUR14 or CUR15 are required.
 7. **C1413**
If CUR14 is present, then CUR13 is required.
 8. **C1513**
If CUR15 is present, then CUR13 is required.
 9. **L161718**
If CUR16 is present, then at least one of CUR17 or CUR18 are required.
 10. **C1716**
If CUR17 is present, then CUR16 is required.
 11. **C1816**
If CUR18 is present, then CUR16 is required.
 12. **L192021**
If CUR19 is present, then at least one of CUR20 or CUR21 are required.
 13. **C2019**
If CUR20 is present, then CUR19 is required.
 14. **C2119**
If CUR21 is present, then CUR19 is required.

X12 Comments: 1. See Figures Appendix for examples detailing the use of the CUR segment.


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the payment is not being made in US Dollars. If not required by this Implementation guide, do not send.

TR3 Example: CUR*PR*CAD~

DIAGRAM

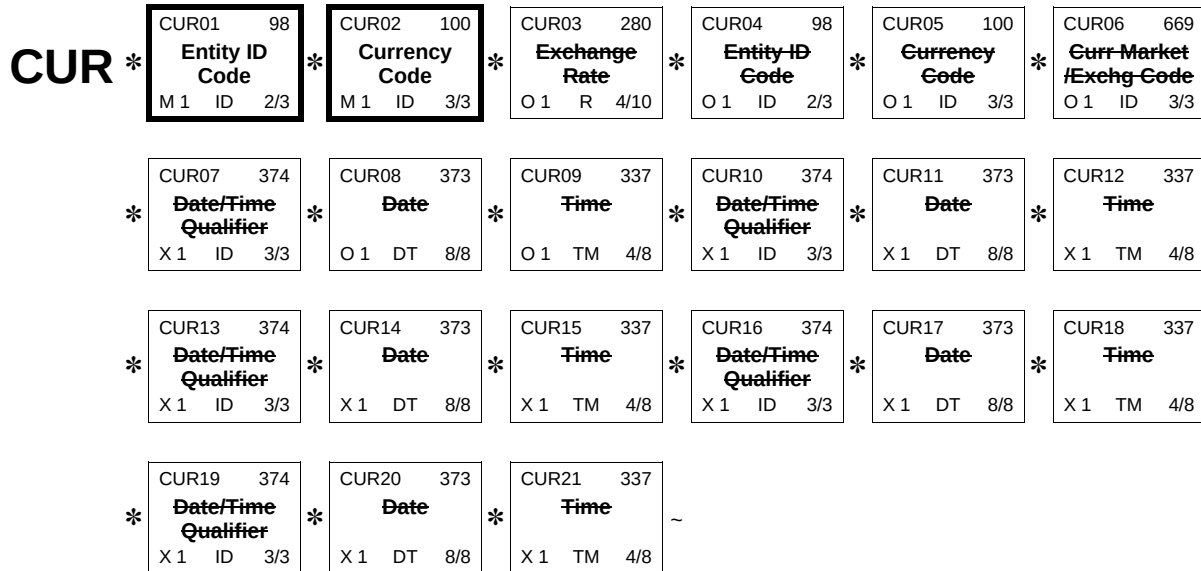

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES								
REQUIRED	CUR01	98	Entity Identifier Code	M 1	ID	2/3						
Code identifying an organizational entity, a physical location, property or an individual												
This data element identifies the party using the currency defined in Currency Code CUR02.												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>2B</td><td>Third-Party Administrator</td></tr><tr><td>PR</td><td>Payer</td></tr></table>							CODE	DEFINITION	2B	Third-Party Administrator	PR	Payer
CODE	DEFINITION											
2B	Third-Party Administrator											
PR	Payer											
REQUIRED	CUR02	100	Currency Code	M 1	ID	3/3						
Code (Standard ISO) for country in whose currency the charges are specified												
CODE SOURCE 5: Countries, Currencies and Funds												
<table><tr><td>MXP</td><td>Mexican Pesos</td></tr><tr><td>CAD</td><td>Canadian Dollars</td></tr></table>							MXP	Mexican Pesos	CAD	Canadian Dollars		
MXP	Mexican Pesos											
CAD	Canadian Dollars											
NOT USED	CUR03	280	Exchange Rate	O 1	R	4/10						
NOT USED	CUR04	98	Entity Identifier Code	O 1	ID	2/3						
NOT USED	CUR05	100	Currency Code	O 1	ID	3/3						
NOT USED	CUR06	669	Currency Market/Exchange Code	O 1	ID	3/3						
NOT USED	CUR07	374	Date/Time Qualifier	X 1	ID	3/3						
NOT USED	CUR08	373	Date	O 1	DT	8/8						
NOT USED	CUR09	337	Time	O 1	TM	4/8						
NOT USED	CUR10	374	Date/Time Qualifier	X 1	ID	3/3						
NOT USED	CUR11	373	Date	X 1	DT	8/8						

NOT USED	CUR12	337	Time	X 1	TM	4/8
NOT USED	CUR13	374	Date/Time Qualifier	X 1	ID	3/3
NOT USED	CUR14	373	Date	X 1	DT	8/8
NOT USED	CUR15	337	Time	X 1	TM	4/8
NOT USED	CUR16	374	Date/Time Qualifier	X 1	ID	3/3
NOT USED	CUR17	373	Date	X 1	DT	8/8
NOT USED	CUR18	337	Time	X 1	TM	4/8
NOT USED	CUR19	374	Date/Time Qualifier	X 1	ID	3/3
NOT USED	CUR20	373	Date	X 1	DT	8/8
NOT USED	CUR21	337	Time	X 1	TM	4/8


SEGMENT DETAIL

REF - PREMIUM RECEIVERS IDENTIFICATION
KEY**X12 Segment Name:** Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Segment Repeat: >1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This segment provides the premium receiver a key associated with this premium payment. The type of key and value is provided to the premium payer by the premium receiver. Examples of keys are Plan Number, Master Account Number, Consolidated Invoice Number, and Master Policy Number.**TR3 Example:** REF*18*123456789~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3
					</	

REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier SYNTAX: R0203 IMPLEMENTATION NAME: Premium Receiver Reference Identifier For Treasury Department Financial Management Service Disbursed payments, this data field is schedule number (11 Characters) submitted by the agency authorizing the payment.	X 1	AN	1/50
NOT USED	REF03	352	Description	X 1	AN	1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1		

SEGMENT DETAIL

DTM - PROCESS DATE

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**


If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.

Segment Repeat: 1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This segment is used to relay the date the payment was processed by the premium payer.**TR3 Example:** DTM*009*20070101~

DIAGRAM

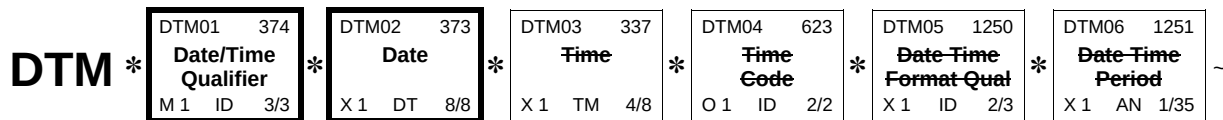

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			009	Process
REQUIRED	DTM02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year	X 1 DT 8/8
SYNTAX: R020305				
IMPLEMENTATION NAME: Payer Process Date				
NOT USED	DTM03	337	Time	X 1 TM 4/8
NOT USED	DTM04	623	Time Code	O 1 ID 2/2
NOT USED	DTM05	1250	Date Time Period Format Qualifier	X 1 ID 2/3
NOT USED	DTM06	1251	Date Time Period	X 1 AN 1/35

SEGMENT DETAIL

DTM - DELIVERY DATE

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**


If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.

Segment Repeat: 1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. Relays the date the payment was delivered to the Originating Depository Financial Institution by the premium payer or a third party processor.**TR3 Example:** DTM*035*20070101~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time IMPLEMENTATION NAME: Date Time Qualifier	M 1	ID	3/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>035</td><td>Delivered</td></tr></table>	CODE	DEFINITION	035	Delivered			
CODE	DEFINITION									
035	Delivered									
REQUIRED	DTM02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SYNTAX: R020305 IMPLEMENTATION NAME: Premium Delivery Date	X 1	DT	8/8				
NOT USED	DTM03	337	Time	X 1	TM	4/8				
NOT USED	DTM04	623	Time Code	O 1	ID	2/2				
NOT USED	DTM05	1250	Date Time Period Format Qualifier	X 1	ID	2/3				

NOT USED	DTM06	1251	Date Time Period	X 1	AN	1/35
----------	-------	------	------------------	-----	----	------

SEGMENT DETAIL

DTM - COVERAGE PERIOD

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**


If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.

Segment Repeat: 1**Usage:** SITUATIONAL**Situational Rule:** Required when the premium payer is not paying from an invoice, but paying on account for a coverage period. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This segment communicates the start and end date of the coverage period associated with this premium payment.**TR3 Example:** DTM*582****RD8*20070101-20070130~

DIAGRAM

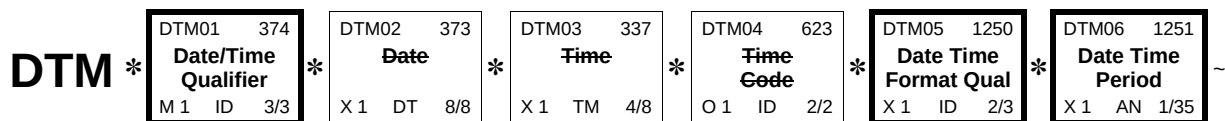

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			582	Report Period
NOT USED	DTM02	373	Date	X 1 DT 8/8
NOT USED	DTM03	337	Time	X 1 TM 4/8
NOT USED	DTM04	623	Time Code	O 1 ID 2/2

REQUIRED	DTM05	1250	Date Time Period Format Qualifier	X 1	ID	2/3
Code indicating the date format, time format, or date and time format						

SYNTAX: R020305, P0506

CODE	DEFINITION
------	------------

RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD
------------	---

REQUIRED	DTM06	1251	Date Time Period	X 1	AN	1/35
Expression of a date, a time, or range of dates, times or dates and times						

SYNTAX: P0506

IMPLEMENTATION NAME: **Coverage Period**

SEGMENT DETAIL

DTM - CREATION DATE

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**


If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.

Segment Repeat: 1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. This segment is used to relay the date that the premium payment was created.**TR3 Example:** DTM*097*20070101~

DIAGRAM



ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
			CODE	DEFINITION
			097	Transaction Creation
REQUIRED	DTM02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SYNTAX: R020305	X 1 DT 8/8
NOT USED	DTM03	337	Time	X 1 TM 4/8
NOT USED	DTM04	623	Time Code	O 1 ID 2/2
NOT USED	DTM05	1250	Date Time Period Format Qualifier	X 1 ID 2/3
NOT USED	DTM06	1251	Date Time Period	X 1 AN 1/35

SEGMENT DETAIL

N1 - PREMIUM RECEIVER'S NAME

X12 Segment Name: Party Identification**X12 Purpose:** To identify a party by type of organization, name, and code**X12 Set Notes:** 1. The N1 loop allows for name/address information for the payer and payee which would be utilized to address remittance(s) for delivery.**X12 Syntax:** 1. **R0203**
At least one of N102 or N103 is required.2. **P0304**
If either N103 or N104 is present, then the other is required.**Loop:** 1000A — PREMIUM RECEIVER'S NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** N1*PE*XYZ INSURANCE*1*123456789~

DIAGRAM

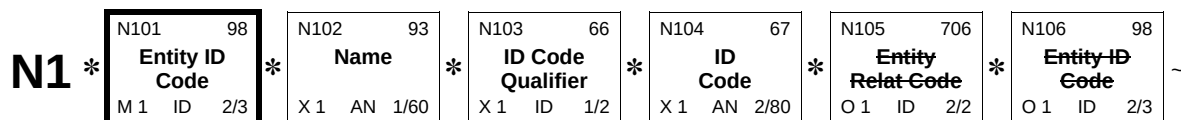

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	N101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>PE</td><td>Payee</td></tr></table>	CODE	DEFINITION	PE	Payee			
CODE	DEFINITION									
PE	Payee									
SITUATIONAL	N102	93	Name Free-form name SYNTAX: R0203 SITUATIONAL RULE: <i>Required when a value is not being sent in N103. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Receiver’s Last or Organization Name	X 1	AN	1/60				

SITUATIONAL	N103	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: R0203, P0304 SITUATIONAL RULE: <i>Required when a value is not being sent in N102 and a value is being reported in the N104 element. If not required by this implementation guide, do not send.</i>	X 1	ID	1/2												
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>1</td><td>D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>9</td><td>D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>EQ</td><td>Insurance Company Assigned Identification Number</td></tr><tr><td>FI</td><td>Federal Taxpayer’s Identification Number</td></tr><tr><td>XV</td><td>Centers for Medicare and Medicaid Services PlanID Use when reporting Health Plan ID (HPID) or Other Entity Identifier (OEID). CODE SOURCE 540: Centers for Medicare and Medicaid Services PlanID</td></tr></table>							CODE	DEFINITION	1	D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number	9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number	EQ	Insurance Company Assigned Identification Number	FI	Federal Taxpayer’s Identification Number	XV	Centers for Medicare and Medicaid Services PlanID Use when reporting Health Plan ID (HPID) or Other Entity Identifier (OEID). CODE SOURCE 540: Centers for Medicare and Medicaid Services PlanID
CODE	DEFINITION																	
1	D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number																	
9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number																	
EQ	Insurance Company Assigned Identification Number																	
FI	Federal Taxpayer’s Identification Number																	
XV	Centers for Medicare and Medicaid Services PlanID Use when reporting Health Plan ID (HPID) or Other Entity Identifier (OEID). CODE SOURCE 540: Centers for Medicare and Medicaid Services PlanID																	
SITUATIONAL	N104	67	Identification Code Code identifying a party or other code SYNTAX: P0304 COMMENT: This segment, used alone, provides the most efficient method of providing organizational identification. To obtain this efficiency the “ID Code” (N104) must provide a key to the table maintained by the transaction processing party. SITUATIONAL RULE: <i>Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Receiver’s Identification Code	X 1	AN	2/80												
NOT USED	N105	706	Entity Relationship Code	O 1	ID	2/2												
NOT USED	N106	98	Entity Identifier Code	O 1	ID	2/3												

SEGMENT DETAIL

N2 - PREMIUM RECEIVER ADDITIONAL NAME

X12 Segment Name: Additional Name Information

X12 Purpose: To specify additional names

Loop: 1000A — PREMIUM RECEIVER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the sender needs more characters than are available in the N102 or secondary line information is needed. If not required by this implementation guide, do not send.

TR3 Example: N2*Name continuation~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N201	93	Name Free-form name	M 1 AN 1/60
IMPLEMENTATION NAME: Premium Receiver's Additional Name				
NOT USED	N202	93	Name	O 1 AN 1/60

SEGMENT DETAIL

N3 - PREMIUM RECEIVER'S ADDRESS

X12 Segment Name: Party Location

X12 Purpose: To specify the location of the named party

Loop: 1000A — PREMIUM RECEIVER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N3*200 STATE STREET~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N301	166	Address Information Address information	M 1 AN 1/55
IMPLEMENTATION NAME: Premium Receiver's Address Line				
SITUATIONAL	N302	166	Address Information Address information	O 1 AN 1/55
SITUATIONAL RULE: <i>Required if a second address line exists. If not required by this implementation guide, do not send.</i>				
IMPLEMENTATION NAME: Premium Receiver's Address Line				

SEGMENT DETAIL

N4 - PREMIUM RECEIVER'S CITY, STATE, AND ZIP CODE

X12 Segment Name: Geographic Location

X12 Purpose: To specify the geographic place of the named party

- X12 Syntax:**
- E0207**
Only one of N402 or N407 may be present.
 - C0605**
If N406 is present, then N405 is required.
 - C0704**
If N407 is present, then N404 is required.

Loop: 1000A — PREMIUM RECEIVER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N4*KANSAS CITY*MO*64108~

DIAGRAM

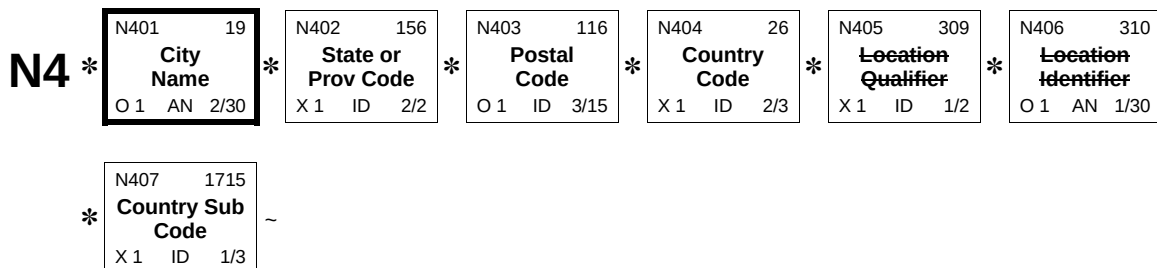

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N401	19	City Name Free-form text for city name COMMENT: A combination of either N401 through N404, or N405 and N406 may be adequate to specify a location.	O 1 AN 2/30
IMPLEMENTATION NAME: Premium Receiver's City Name				

SITUATIONAL	N402	156	State or Province Code X 1 ID 2/2 Code (Standard State/Province) as defined by appropriate government agency SYNTAX: E0207 COMMENT: N402 is required only if city name (N401) is in the U.S. or Canada. SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Receiver's State Code CODE SOURCE 22: States and Provinces
SITUATIONAL	N403	116	Postal Code O 1 ID 3/15 Code defining international postal zone code excluding punctuation and blanks (zip code for United States) SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada, or when a postal code exists for the country in N404. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Receiver's Postal Zone or Zip Code CODE SOURCE 51: ZIP Code CODE SOURCE 932: Universal Postal Codes
SITUATIONAL	N404	26	Country Code X 1 ID 2/3 Code identifying the country SYNTAX: C0704 SITUATIONAL RULE: <i>Required when the address is outside the United States of America. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the alpha-2 country codes from Part 1 of ISO 3166.
NOT USED	N405	309	Location Qualifier X 1 ID 1/2
NOT USED	N406	310	Location Identifier O 1 AN 1/30
SITUATIONAL	N407	1715	Country Subdivision Code X 1 ID 1/3 Code identifying the country subdivision SYNTAX: E0207, C0704 SITUATIONAL RULE: <i>Required when the address is not in the United States of America, including its territories, or Canada, and the country in N404 has administrative subdivisions such as but not limited to states, provinces, cantons, etc. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the country subdivision codes from Part 2 of ISO 3166.

SEGMENT DETAIL

RDM - PREMIUM RECEIVER'S REMITTANCE DELIVERY METHOD

X12 Segment Name: Remittance Delivery Method

X12 Purpose: To identify remittance delivery when remittance is separate from payment

Loop: 1000A — PREMIUM RECEIVER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the agreement between originator and financial institution or 3rd party processor. If not required by this implementation guide, do not send.

TR3 Example: RDM*BM*XYZ INSURANCE*8001234567~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	RDM01	756	Report Transmission Code Code defining timing, transmission method or format by which reports are to be sent	M 1 ID 1/2
IMPLEMENTATION NAME: Remittance Delivery Method Code				
			CODE	DEFINITION
			BM	By Mail
				If this code is used, the mailing address must be placed in the 1000A - Premium Receiver's Name Loop.
			EM	E-Mail
			FT	File Transfer
			FX	By Fax
			IA	Electronic Image
			OL	On-Line


SITUATIONAL	RDM02	93	Name Free-form name COMMENT: RDM02 is used to contain the name of a third party processor if needed, who would be the first recipient of the remittance. SITUATIONAL RULE: <i>Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.</i>	O 1 AN 1/60
IMPLEMENTATION NAME: Premium Receiver's Last or Organization Name				
SITUATIONAL	RDM03	364	Communication Number Complete communications number including country or area code when applicable COMMENT: RDM03 contains the operative communication number for the delivery method specified in RDM01 (i.e. fax phone number and mail address). SITUATIONAL RULE: <i>Required when RDM01 is not equal to "BM" and when specified by the terms of the originating financial institution, or 3rd party processor, with the payment originator. If not required by this implementation guide, do not send.</i>	O 1 AN 1/256
IMPLEMENTATION NAME: Premium Receiver's Communication Number				
NOT USED	RDM04	C040	REFERENCE IDENTIFIER	O 1
NOT USED	RDM05	C040	REFERENCE IDENTIFIER	O 1

SEGMENT DETAIL

N1 - PREMIUM PAYER'S NAME

X12 Segment Name: Party Identification**X12 Purpose:** To identify a party by type of organization, name, and code**X12 Set Notes:** 1. The N1 loop allows for name/address information for the payer and payee which would be utilized to address remittance(s) for delivery.**X12 Syntax:** 1. **R0203**
At least one of N102 or N103 is required.2. **P0304**
If either N103 or N104 is present, then the other is required.**Loop:** 1000B — PREMIUM PAYER'S NAME **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** N1*PR*ABC COMPANY*1*123456789~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES						
REQUIRED	N101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>PR</td><td>Payer</td></tr></table>	CODE	DEFINITION	PR	Payer			
CODE	DEFINITION									
PR	Payer									
SITUATIONAL	N102	93	Name Free-form name SYNTAX: R0203 SITUATIONAL RULE: <i>Required when a value is not being sent in N103. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Payer Name	X 1	AN	1/60				

SITUATIONAL	N103	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: R0203, P0304 SITUATIONAL RULE: <i>Required when a value is not being sent in N102 and a value is being reported in the N104 element. If not required by this implementation guide, do not send.</i> <table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>1</td><td>D-U-N-S Number, Dun & Bradstreet</td></tr><tr><td></td><td>CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>9</td><td>D-U-N-S+4, D-U-N-S Number with Four Character Suffix</td></tr><tr><td></td><td>CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>24</td><td>Employer's Identification Number</td></tr><tr><td>75</td><td>State or Province Assigned Number</td></tr><tr><td></td><td>Used by States when remitting Medicare premium payments (in participation with a "State Buy- In" program).</td></tr><tr><td>EQ</td><td>Insurance Company Assigned Identification Number</td></tr><tr><td>FI</td><td>Federal Taxpayer's Identification Number</td></tr><tr><td>PI</td><td>Payor Identification</td></tr><tr><td></td><td>Used by the federal government to identify a federal agency's payroll office.</td></tr></tbody></table>	CODE	DEFINITION	1	D-U-N-S Number, Dun & Bradstreet		CODE SOURCE 16: D-U-N-S Number	9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix		CODE SOURCE 16: D-U-N-S Number	24	Employer's Identification Number	75	State or Province Assigned Number		Used by States when remitting Medicare premium payments (in participation with a "State Buy- In" program).	EQ	Insurance Company Assigned Identification Number	FI	Federal Taxpayer's Identification Number	PI	Payor Identification		Used by the federal government to identify a federal agency's payroll office.	X 1	ID	1/2
CODE	DEFINITION																													
1	D-U-N-S Number, Dun & Bradstreet																													
	CODE SOURCE 16: D-U-N-S Number																													
9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix																													
	CODE SOURCE 16: D-U-N-S Number																													
24	Employer's Identification Number																													
75	State or Province Assigned Number																													
	Used by States when remitting Medicare premium payments (in participation with a "State Buy- In" program).																													
EQ	Insurance Company Assigned Identification Number																													
FI	Federal Taxpayer's Identification Number																													
PI	Payor Identification																													
	Used by the federal government to identify a federal agency's payroll office.																													
SITUATIONAL	N104	67	Identification Code Code identifying a party or other code SYNTAX: P0304 COMMENT: This segment, used alone, provides the most efficient method of providing organizational identification. To obtain this efficiency the "ID Code" (N104) must provide a key to the table maintained by the transaction processing party. SITUATIONAL RULE: <i>Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Payer Identifier	X 1	AN	2/80																								
NOT USED	N105	706	Entity Relationship Code	O 1	ID	2/2																								
NOT USED	N106	98	Entity Identifier Code	O 1	ID	2/3																								

SEGMENT DETAIL

N2 - PREMIUM PAYER ADDITIONAL NAME

X12 Segment Name: Additional Name Information

X12 Purpose: To specify additional names

Loop: 1000B — PREMIUM PAYER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the sender needs more characters than are available in the N102 or secondary line information is needed. If not required by this implementation guide, do not send.

TR3 Example: N2*Name continuation~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N201	93	Name Free-form name	M 1 AN 1/60
IMPLEMENTATION NAME: Premium Payer Additional Name				
NOT USED	N202	93	Name	O 1 AN 1/60

SEGMENT DETAIL

N3 - PREMIUM PAYER'S ADDRESS

X12 Segment Name: Party Location

X12 Purpose: To specify the location of the named party

Loop: 1000B — PREMIUM PAYER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N3*100 MAIN STREET~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N301	166	Address Information Address information	M 1 AN 1/55
IMPLEMENTATION NAME: Premium Payer Address Line				
SITUATIONAL	N302	166	Address Information Address information	O 1 AN 1/55
SITUATIONAL RULE: <i>Required when a second line of the Premium Payer's Address exists. If not required by this implementation guide, do not send.</i>				
IMPLEMENTATION NAME: Premium Payer Address Line				

SEGMENT DETAIL

N4 - PREMIUM PAYER'S CITY, STATE, ZIP CODE

X12 Segment Name: Geographic Location

X12 Purpose: To specify the geographic place of the named party

X12 Syntax: 1. **E0207**

Only one of N402 or N407 may be present.

2. **C0605**

If N406 is present, then N405 is required.

3. **C0704**

If N407 is present, then N404 is required.

Loop: 1000B — PREMIUM PAYER'S NAME


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N4*KANSAS CITY*MO*64108~

DIAGRAM

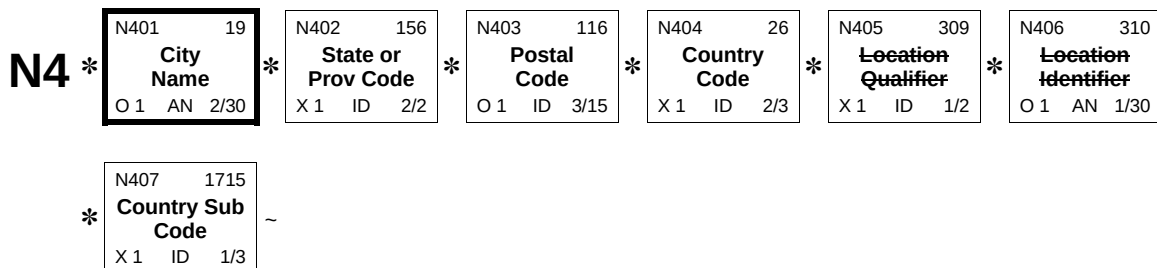

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N401	19	City Name Free-form text for city name COMMENT: A combination of either N401 through N404, or N405 and N406 may be adequate to specify a location. IMPLEMENTATION NAME: Premium Payer City Name	O 1 AN 2/30

SITUATIONAL	N402	156	State or Province Code X 1 ID 2/2 Code (Standard State/Province) as defined by appropriate government agency SYNTAX: E0207 COMMENT: N402 is required only if city name (N401) is in the U.S. or Canada. SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Payer State Code CODE SOURCE 22: States and Provinces
SITUATIONAL	N403	116	Postal Code O 1 ID 3/15 Code defining international postal zone code excluding punctuation and blanks (zip code for United States) SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada, or when a postal code exists for the country in N404. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Premium Payer Postal Zone or ZIP Code CODE SOURCE 51: ZIP Code CODE SOURCE 932: Universal Postal Codes
SITUATIONAL	N404	26	Country Code X 1 ID 2/3 Code identifying the country SYNTAX: C0704 SITUATIONAL RULE: <i>Required when the address is outside the United States of America. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the alpha-2 country codes from Part 1 of ISO 3166.
NOT USED	N405	309	Location Qualifier X 1 ID 1/2
NOT USED	N406	310	Location Identifier O 1 AN 1/30
SITUATIONAL	N407	1715	Country Subdivision Code X 1 ID 1/3 Code identifying the country subdivision SYNTAX: E0207, C0704 SITUATIONAL RULE: <i>Required when the address is not in the United States of America, including its territories, or Canada, and the country in N404 has administrative subdivisions such as but not limited to states, provinces, cantons, etc. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the country subdivision codes from Part 2 of ISO 3166.

SEGMENT DETAIL

PER - PREMIUM PAYER'S ADMINISTRATIVE CONTACT**X12 Segment Name:** Administrative Communications Contact**X12 Purpose:** To identify a person or office to whom administrative communications should be directed**X12 Syntax:** 1. **P0304**

If either PER03 or PER04 is present, then the other is required.

2. **P0506**


If either PER05 or PER06 is present, then the other is required.

3. **P0708**

If either PER07 or PER08 is present, then the other is required.

Loop: 1000B — PREMIUM PAYER'S NAME**Segment Repeat:** >1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. When the communication number represents a telephone number in the United States and other countries using the North American Dialing Plan (for voice, data, fax, etc.), the communication number must always include the area code and phone number using the format AAABBBCCCC, where AAA is the area code, BBB is the telephone number prefix, and CCCC is the telephone number. For example, (534)224-2525 would be represented as 5342242525.**TR3 Example:** PER*IC*JOHN SMITH*TE*8001234567*EX*9876*FX*8008889999~

DIAGRAM

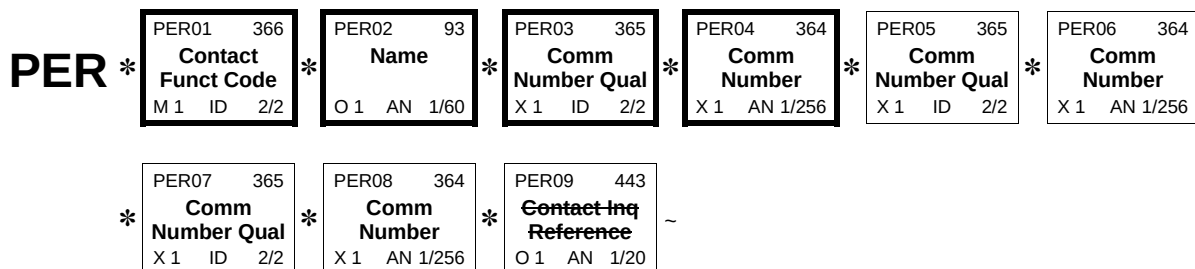

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	PER01	366	Contact Function Code Code identifying the major duty or responsibility of the person or group named	M 1 ID 2/2
			CODE	DEFINITION
			IC	Information Contact
REQUIRED	PER02	93	Name Free-form name	O 1 AN 1/60
			IMPLEMENTATION NAME: Premium Payer Contact Name	
REQUIRED	PER03	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0304	X 1 ID 2/2
			This is required when the sender needs to relay communication information.	
			CODE	DEFINITION
			EM	Electronic Mail
			FX	Facsimile
			TE	Telephone
REQUIRED	PER04	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0304	X 1 AN 1/256
SITUATIONAL	PER05	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0506	X 1 ID 2/2
			SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	
			CODE	DEFINITION
			EM	Electronic Mail
			EX	Telephone Extension
			When used, the value following this code is the extension for the preceding communications contact number.	
			FX	Facsimile
			TE	Telephone
SITUATIONAL	PER06	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0506	X 1 AN 1/256
			SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	

SITUATIONAL	PER07	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0708 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>EX</td><td>Telephone Extension</td></tr><tr><td colspan="2">When used, the value following this code is the extension for the preceding communications contact number.</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	EM	Electronic Mail	EX	Telephone Extension	When used, the value following this code is the extension for the preceding communications contact number.		FX	Facsimile	TE	Telephone			
CODE	DEFINITION																	
EM	Electronic Mail																	
EX	Telephone Extension																	
When used, the value following this code is the extension for the preceding communications contact number.																		
FX	Facsimile																	
TE	Telephone																	
SITUATIONAL	PER08	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0708 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	AN	1/256												
NOT USED	PER09	443	Contact Inquiry Reference	O 1	AN	1/20												

SEGMENT DETAIL

N1 - INTERMEDIARY BANK INFORMATION

X12 Segment Name: Party Identification

X12 Purpose: To identify a party by type of organization, name, and code

X12 Set Notes: 1. The N1 loop allows for name/address information for the payer and payee which would be utilized to address remittance(s) for delivery.

X12 Syntax: 1. **R0203**
At least one of N102 or N103 is required.

2. **P0304**
If either N103 or N104 is present, then the other is required.

Loop: 1000C — INTERMEDIARY BANK INFORMATION **Loop Repeat:** 14


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N1*C1*ABC BANK*57*123456789~

DIAGRAM

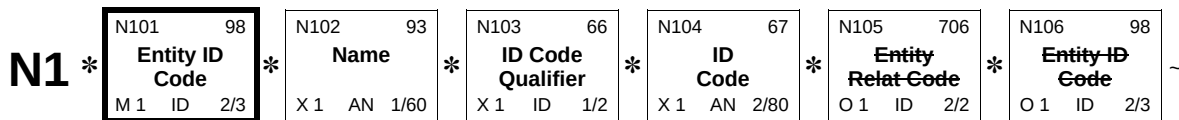

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1 ID 2/3
			CODE	DEFINITION
			04	Asset Account Holder
			0B	Interim Funding Organization
			8W	Payment Address
			AK	Party to Whom Acknowledgment Should Be Sent
			BE	Beneficiary
			BK	Bank
			C1	In Care Of Party no. 1
			C2	In Care Of Party no. 2
			IAT	Party Executing and Verifying
			MJ	Financial Institution
			RB	Receiving Bank

			Z6	Transferring Party			
			ZB	Party to Receive Credit			
			ZL	Party Passing the Transaction			
SITUATIONAL	N102	93	Name		X 1	AN	1/60
			Free-form name				
			SYNTAX: R0203				
			SITUATIONAL RULE: <i>Required when a value is not being sent in N103. If not required by this implementation guide, do not send.</i>				
			IMPLEMENTATION NAME: Intermediary Bank Name				
SITUATIONAL	N103	66	Identification Code Qualifier		X 1	ID	1/2
			Code designating the system/method of code structure used for Identification Code (67)				
			SYNTAX: R0203, P0304				
			SITUATIONAL RULE: <i>Required when a value is not being sent in N102 and a value is being reported in the N104 element. If not required by this implementation guide, do not send.</i>				
			CODE	DEFINITION			
			31	Bank Identification Code			
			57	Department			
			94	Code assigned by the organization that is the ultimate destination of the transaction set			
			A3	Assigned by Third Party			
			A4	Assigned by Clearinghouse			
			A6	Financial Identification Numbering System (FINS) Number			
			CF	Canadian Financial Institution Routing Number			
				CODE SOURCE 91: Canadian Financial Institution Branch and Institution Number			
			G	Payee Identification Number			
			PA	Secondary Agent Identification			
SITUATIONAL	N104	67	Identification Code		X 1	AN	2/80
			Code identifying a party or other code				
			SYNTAX: P0304				
			COMMENT: This segment, used alone, provides the most efficient method of providing organizational identification. To obtain this efficiency the "ID Code" (N104) must provide a key to the table maintained by the transaction processing party.				
			SITUATIONAL RULE: <i>Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.</i>				
			IMPLEMENTATION NAME: Intermediary Bank Identifier				
NOT USED	N105	706	Entity Relationship Code		O 1	ID	2/2
NOT USED	N106	98	Entity Identifier Code		O 1	ID	2/3

SEGMENT DETAIL

N2 - INTERMEDIARY BANK ADDITIONAL NAME

X12 Segment Name: Additional Name Information

X12 Purpose: To specify additional names

Loop: 1000C — INTERMEDIARY BANK INFORMATION


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when the sender needs more characters than are available in the N102 or secondary line information is needed. If not required by this implementation guide, do not send.

TR3 Example: N2*Name continuation~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N201	93	Name Free-form name	M 1 AN 1/60
IMPLEMENTATION NAME: Intermediary Bank Additional Name				
NOT USED	N202	93	Name	O 1 AN 1/60

SEGMENT DETAIL

N3 - INTERMEDIARY BANK'S ADDRESS**X12 Segment Name:** Party Location**X12 Purpose:** To specify the location of the named party**Loop:** 1000C — INTERMEDIARY BANK INFORMATION**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.**TR3 Example:** N3*100 MAIN STREET~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N301	166	Address Information Address information	M 1 AN 1/55
IMPLEMENTATION NAME: Intermediary Bank Address Line				
SITUATIONAL	N302	166	Address Information Address information	O 1 AN 1/55
SITUATIONAL RULE: <i>Required when a second line of the Premium Payer's Address exists. If not required by this implementation guide, do not send.</i>				
IMPLEMENTATION NAME: Intermediary Bank Address Line				

SEGMENT DETAIL

N4 - INTERMEDIARY BANK'S CITY, STATE, ZIP CODE

X12 Segment Name: Geographic Location

X12 Purpose: To specify the geographic place of the named party

X12 Syntax: 1. **E0207**

Only one of N402 or N407 may be present.

2. **C0605**

If N406 is present, then N405 is required.

3. **C0704**

If N407 is present, then N404 is required.

Loop: 1000C — INTERMEDIARY BANK INFORMATION


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Example: N4*KANSAS CITY*MO*64108~

DIAGRAM

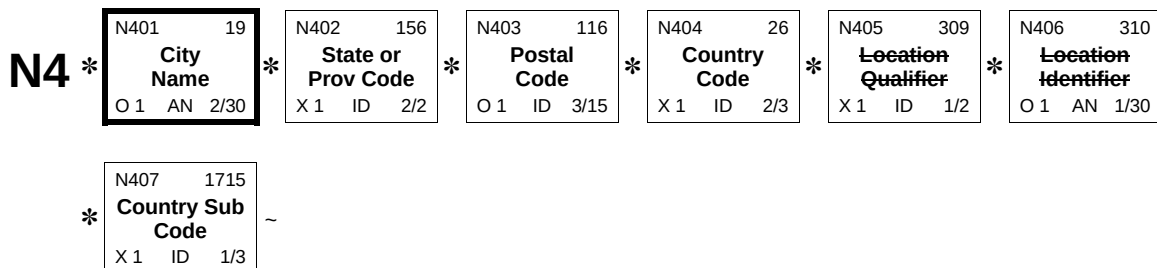

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	N401	19	City Name Free-form text for city name	O 1 AN 2/30
COMMENT: A combination of either N401 through N404, or N405 and N406 may be adequate to specify a location.				
IMPLEMENTATION NAME: Intermediary Bank City Name				

SITUATIONAL	N402	156	State or Province Code Code (Standard State/Province) as defined by appropriate government agency SYNTAX: E0207 COMMENT: N402 is required only if city name (N401) is in the U.S. or Canada. SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Intermediary Bank State Code CODE SOURCE 22: States and Provinces	X 1	ID	2/2
SITUATIONAL	N403	116	Postal Code Code defining international postal zone code excluding punctuation and blanks (zip code for United States) SITUATIONAL RULE: <i>Required when the address is in the United States of America, including its territories, or Canada, or when a postal code exists for the country in N404. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Intermediary Bank Postal Zone or ZIP Code CODE SOURCE 51: ZIP Code CODE SOURCE 932: Universal Postal Codes	O 1	ID	3/15
SITUATIONAL	N404	26	Country Code Code identifying the country SYNTAX: C0704 SITUATIONAL RULE: <i>Required when the address is outside the United States of America. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the alpha-2 country codes from Part 1 of ISO 3166.	X 1	ID	2/3
NOT USED	N405	309	Location Qualifier	X 1	ID	1/2
NOT USED	N406	310	Location Identifier	O 1	AN	1/30
SITUATIONAL	N407	1715	Country Subdivision Code Code identifying the country subdivision SYNTAX: E0207, C0704 SITUATIONAL RULE: <i>Required when the address is not in the United States of America, including its territories, or Canada, and the country in N404 has administrative subdivisions such as but not limited to states, provinces, cantons, etc. If not required by this implementation guide, do not send.</i> CODE SOURCE 5: Countries, Currencies and Funds Use the country subdivision codes from Part 2 of ISO 3166.	X 1	ID	1/3

SEGMENT DETAIL

PER - INTERMEDIARY BANK'S ADMINISTRATIVE CONTACT

X12 Segment Name: Administrative Communications Contact

X12 Purpose: To identify a person or office to whom administrative communications should be directed

- X12 Syntax:**
1. **P0304**
If either PER03 or PER04 is present, then the other is required.
 2. **P0506**
If either PER05 or PER06 is present, then the other is required.
 3. **P0708**
If either PER07 or PER08 is present, then the other is required.

Loop: 1000C — INTERMEDIARY BANK INFORMATION

Segment Repeat: >1

Usage: SITUATIONAL


Situational Rule: Required when specified by the terms of the Originating Financial Institution, or 3rd Party Processor, with the payment Originator. If not required by this implementation guide, do not send.

TR3 Notes:

1. When the communication number represents a telephone number in the United States and other countries using the North American Dialing Plan (for voice, data, fax, etc.), the communication number must always include the area code and phone number using the format AAABBBCCCC, where AAA is the area code, BBB is the telephone number prefix, and CCCC is the telephone number. For example, (534)224-2525 would be represented as 5342242525.

TR3 Example: PER*IC*JOHN SMITH*TE*8001234567*EX*9876*FX*8008889999~

DIAGRAM

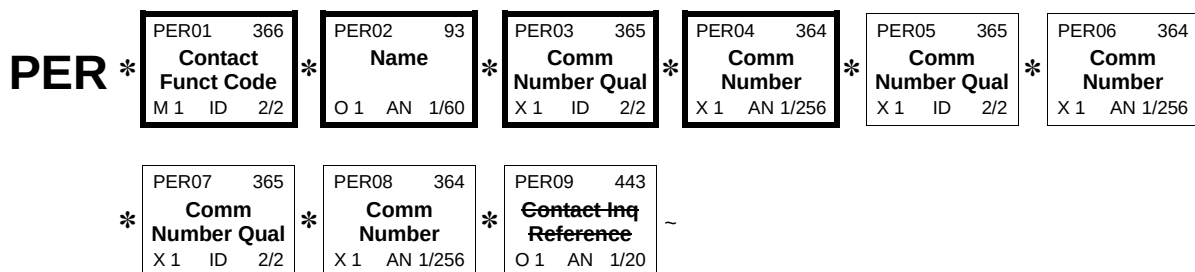

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES														
REQUIRED	PER01	366	Contact Function Code Code identifying the major duty or responsibility of the person or group named	M 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>IC</td><td>Information Contact</td></tr></table>	CODE	DEFINITION	IC	Information Contact											
CODE	DEFINITION																	
IC	Information Contact																	
REQUIRED	PER02	93	Name Free-form name	O 1	AN	1/60												
			IMPLEMENTATION NAME: Intermediary Bank Contact Name															
REQUIRED	PER03	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0304	X 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	EM	Electronic Mail	FX	Facsimile	TE	Telephone							
CODE	DEFINITION																	
EM	Electronic Mail																	
FX	Facsimile																	
TE	Telephone																	
REQUIRED	PER04	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0304	X 1	AN	1/256												
SITUATIONAL	PER05	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0506 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>EX</td><td>Telephone Extension</td></tr><tr><td></td><td>When used, the value following this code is the extension for the preceding communications contact number.</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	EM	Electronic Mail	EX	Telephone Extension		When used, the value following this code is the extension for the preceding communications contact number.	FX	Facsimile	TE	Telephone			
CODE	DEFINITION																	
EM	Electronic Mail																	
EX	Telephone Extension																	
	When used, the value following this code is the extension for the preceding communications contact number.																	
FX	Facsimile																	
TE	Telephone																	
SITUATIONAL	PER06	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0506 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	AN	1/256												

SITUATIONAL	PER07	365	Communication Number Qualifier Code identifying the type of communication number SYNTAX: P0708 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	ID	2/2												
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>EM</td><td>Electronic Mail</td></tr><tr><td>EX</td><td>Telephone Extension</td></tr><tr><td></td><td>When used, the value following this code is the extension for the preceding communications contact number.</td></tr><tr><td>FX</td><td>Facsimile</td></tr><tr><td>TE</td><td>Telephone</td></tr></table>	CODE	DEFINITION	EM	Electronic Mail	EX	Telephone Extension		When used, the value following this code is the extension for the preceding communications contact number.	FX	Facsimile	TE	Telephone			
CODE	DEFINITION																	
EM	Electronic Mail																	
EX	Telephone Extension																	
	When used, the value following this code is the extension for the preceding communications contact number.																	
FX	Facsimile																	
TE	Telephone																	
SITUATIONAL	PER08	364	Communication Number Complete communications number including country or area code when applicable SYNTAX: P0708 SITUATIONAL RULE: <i>Required when additional communication numbers are available. If not required by this implementation guide, do not send.</i>	X 1	AN	1/256												
NOT USED	PER09	443	Contact Inquiry Reference	O 1	AN	1/20												

SEGMENT DETAIL

**ENT - ORGANIZATION SUMMARY
REMITTANCE****X12 Segment Name:** Entity**X12 Purpose:** To designate the entities which are parties to a transaction and specify a reference meaningful to those entities**X12 Set Notes:**

1. The ENT loop is for vendor or consumer third party consolidated payments.
2. ENT09 may contain the payee's accounts receivable customer number.

X12 Syntax:


1. **P020304**
If either ENT02, ENT03 or ENT04 are present, then the others are required.
2. **P050607**
If either ENT05, ENT06 or ENT07 are present, then the others are required.
3. **P0809**
If either ENT08 or ENT09 is present, then the other is required.

X12 Comments:

1. This segment allows for the grouping of data by entity/entities at or within a master/masters. A master (e.g., an organization) can be comprised of numerous subgroups (e.g., entities). This master may send grouped data to another master (e.g., an organization) which is comprised of one or more entities. Groupings are as follows:
 2. (1) Single/Single: Only ENT01 is necessary, because there is a single entity (the sending master) communicating with a single entity (the receiving master).
 3. (2) Single/Multiple: ENT05, ENT06, and ENT07 would be used to identify the entities within the receiving master. The sending master is a single entity, so no other data elements need be used.
 4. (3) Multiple/Single: ENT02, ENT03, and ENT04 would be used to identify the entities within the sending master. The receiving master is a single entity, so no other data elements need be used.
 5. (4) Multiple/Multiple: ENT02, ENT03, and ENT04 would be used to identify the entities within the sending master. ENT05, ENT06, and ENT07 would be used to identify the entities within the receiving master.
6. This segment also allows for the transmission of a unique reference number that is meaningful between the entities.

Loop: 2000A — ORGANIZATION SUMMARY REMITTANCE **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when providing company remittance line items that pertain to group level premium or contribution payments. If not required by this implementation guide, do not send.**TR3 Example:** ENT*1*2L*1*932567191~

DIAGRAM

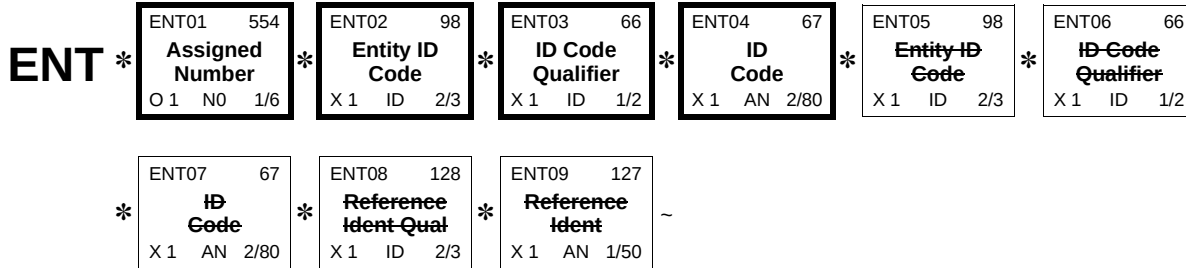

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES														
REQUIRED	ENT01	554	Assigned Number Number assigned for differentiation within a transaction set	O 1	N0	1/6												
			ENT01 must be a sequential number within the transaction set, starting with one and incrementing by one.															
REQUIRED	ENT02	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual SYNTAX: P020304	X 1	ID	2/3												
			<table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>2L</td><td>Corporation This code is used to identify an organization level (summary level bill payment only).</td></tr><tr><td>AG</td><td>Agent/Agency</td></tr><tr><td>NH</td><td>Association</td></tr><tr><td>RGA</td><td>Responsible Government Agency</td></tr><tr><td>UN</td><td>Union</td></tr></tbody></table>	CODE	DEFINITION	2L	Corporation This code is used to identify an organization level (summary level bill payment only).	AG	Agent/Agency	NH	Association	RGA	Responsible Government Agency	UN	Union			
CODE	DEFINITION																	
2L	Corporation This code is used to identify an organization level (summary level bill payment only).																	
AG	Agent/Agency																	
NH	Association																	
RGA	Responsible Government Agency																	
UN	Union																	
REQUIRED	ENT03	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P020304	X 1	ID	1/2												
			<table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>1</td><td>D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>9</td><td>D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number</td></tr><tr><td>24</td><td>Employer's Identification Number This is Required for a HIPAA compliant implementation. Code 24 is the HIPAA compliant identifier.</td></tr><tr><td>FI</td><td>Federal Taxpayer's Identification Number</td></tr></tbody></table>	CODE	DEFINITION	1	D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number	9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number	24	Employer's Identification Number This is Required for a HIPAA compliant implementation. Code 24 is the HIPAA compliant identifier.	FI	Federal Taxpayer's Identification Number					
CODE	DEFINITION																	
1	D-U-N-S Number, Dun & Bradstreet CODE SOURCE 16: D-U-N-S Number																	
9	D-U-N-S+4, D-U-N-S Number with Four Character Suffix CODE SOURCE 16: D-U-N-S Number																	
24	Employer's Identification Number This is Required for a HIPAA compliant implementation. Code 24 is the HIPAA compliant identifier.																	
FI	Federal Taxpayer's Identification Number																	

REQUIRED	ENT04	67	Identification Code Code identifying a party or other code SYNTAX: P020304	X 1	AN	2/80
IMPLEMENTATION NAME: Organization Identification Code						
NOT USED	ENT05	98	Entity Identifier Code	X 1	ID	2/3
NOT USED	ENT06	66	Identification Code Qualifier	X 1	ID	1/2
NOT USED	ENT07	67	Identification Code	X 1	AN	2/80
NOT USED	ENT08	128	Reference Identification Qualifier	X 1	ID	2/3
NOT USED	ENT09	127	Reference Identification	X 1	AN	1/50

SEGMENT DETAIL

ADX - ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR PREVIOUS PAYMENT

X12 Segment Name: Adjustment

X12 Purpose: To convey accounts-payable adjustment information for the purpose of cash application, including payer-generated debit/credit memos

X12 Set Notes: 1. This ADX loop contains adjustment items which are not netted to an RMR segment in this transaction set.

X12 Syntax: 1. **P0304**
 If either ADX03 or ADX04 is present, then the other is required.

Loop: 2200A — ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR PREVIOUS PAYMENT **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the paid amount reflects adjustments related to previous payments. If not required by this implementation guide, do not send.

TR3 Notes: 1. The ADX segment is essential to fulfilling the balancing requirements. See section 1.10.2.4 for additional information.

TR3 Example: ADX*150*52~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ADX01	782	Monetary Amount Monetary amount	M 1 R 1/18
SEMANTIC: ADX01 specifies the amount of the adjustment and must be signed if negative. If negative, it reduces the payment amount; if positive, it increases the payment amount.				
IMPLEMENTATION NAME: Premium Payment Adjustment Amount				

REQUIRED	ADX02	426	Adjustment Reason Code	M 1	ID	2/2
			Code indicating reason for debit or credit memo or adjustment to invoice, debit or credit memo, or payment			
			SEMANTIC: ADX02 specifies the reason for claiming the adjustment.			
			IMPLEMENTATION NAME: Premium Payment Adjustment Reason			
			CODE	DEFINITION		
			52	Credit for Overpayment		
			53	Remittance for Previous Underpayment		
			80	Overpayment		
			81	Credit as Agreed		
			86	Duplicate Payment		
			BJ	Insurance Charge		
			H1	Information Forthcoming		
			H6	Partial Payment Remitted		
			RU	Interest		
			WO	Overpayment Recovery		
			WW	Overpayment Credit		
NOT USED	ADX03	128	Reference Identification Qualifier	X 1	ID	2/3
NOT USED	ADX04	127	Reference Identification	X 1	AN	1/50

SEGMENT DETAIL

**RMR - ORGANIZATION SUMMARY
REMITTANCE DETAIL****X12 Segment Name:** Remittance Advice Accounts Receivable Open Item Reference**X12 Purpose:** To specify the accounts receivable open item(s) to be included in the cash application and to convey the appropriate detail**X12 Set Notes:** 1. Loop RMR is for open items being referenced or for payment on account.**X12 Syntax:** 1. **P0102**


If either RMR01 or RMR02 is present, then the other is required.

2. **P0708**

If either RMR07 or RMR08 is present, then the other is required.

Loop: 2300A — ORGANIZATION SUMMARY REMITTANCE DETAIL **Loop**
Repeat: >1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Notes:** 1. The RMR segment is essential to fulfilling the balancing requirements.
See section 1.10.2.4 for additional information.**TR3 Example:** RMR*IK*123456789*PI*250~

DIAGRAM

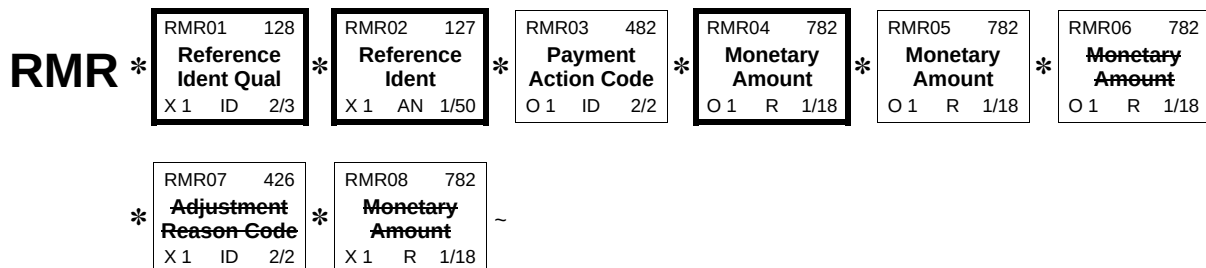

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	RMR01	128	Reference Identification Qualifier Code qualifying the Reference Identification SYNTAX: P0102 COMMENT: Parties using this segment should agree on the content of RMR01 and RMR02 prior to initiating communication.	X 1	ID	2/3
			CODE	DEFINITION		
			11	Account Number		

			1L	Group or Policy Number			
				In addition to private sector health care contract numbers, Group or Policy Number can be used to identify the Federal Employees Health Benefits Program (FEHB) "Enrollment Code" being paid. The FEHB Enrollment Code identifies an insurer's specific health benefits plan. For HIPAA Health Premium Payments this code is REQUIRED when an invoice has not been received from the Health Plan.			
			CT	Contract Number			
			IK	Invoice Number			
REQUIRED	RMR02	127		Reference Identification	X 1	AN	1/50
				Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier			
				SYNTAX: P0102			
				IMPLEMENTATION NAME: Contract, Invoice, Account, Group, or Policy Number			
SITUATIONAL	RMR03	482		Payment Action Code	O 1	ID	2/2
				Code specifying the accounts receivable open item(s), if any, to be included in the cash application.			
				SEMANTIC: If RMR03 is present, it specifies how the cash is to be applied.			
				COMMENT: If RMR03 is not present, this is a payment for an open item. If paying an open item, RMR02 must be present. If not paying a specific open item, RMR04 must be present.			
				SITUATIONAL RULE: <i>Required when specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.</i>			
				CODE	DEFINITION		
				PA	Payment in Advance		
				PI	Pay Item		
				PO	Payment on Account		
				PP	Partial Payment		
REQUIRED	RMR04	782		Monetary Amount	O 1	R	1/18
				Monetary amount			
				SEMANTIC: RMR04 is the amount paid.			
				IMPLEMENTATION NAME: Detail Premium Payment Amount			
				The amount being paid on this remittance item.			

SITUATIONAL	RMR05	782	Monetary Amount Monetary amount SEMANTIC: RMR05 is the amount of invoice (including charges, less allowance) before terms discount (if discount is applicable) or debit amount or credit amount of referenced items. COMMENT: RMR05 may be needed by some payees to distinguish between duplicate reference numbers. SITUATIONAL RULE: <i>This is required when the Insurer sent an Invoice and the paid amount is different than the amount invoiced. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Billed Premium Amount Any difference between the RMR05 and the RMR04 would be explained by the ADX at loop 2320A and/or the SAC at 2312A.	O 1	R	1/18
NOT USED	RMR06	782	Monetary Amount	O 1	R	1/18
NOT USED	RMR07	426	Adjustment Reason Code	X 1	ID	2/2
NOT USED	RMR08	782	Monetary Amount	X 1	R	1/18

SEGMENT DETAIL


REF - REFERENCE INFORMATION

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2300A — ORGANIZATION SUMMARY REMITTANCE DETAIL**Segment Repeat:** >1**Usage:** SITUATIONAL**Situational Rule:** Required when the premium receiver needs additional identifying information pertaining to the organizational remittance details. If not required by this implementation guide, do not send.**TR3 Example:** REF*18*123456789~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1 ID 2/3
IMPLEMENTATION NAME: Organizational Reference Identification Qualifier				
			CODE	DEFINITION
			14	Master Account Number
			17	Client Reporting Category
			18	Plan Number
			2F	Consolidated Invoice Number
			38	Master Policy Number
			E9	Attachment Code
			LB	Lockbox
			LU	Location Number
			ZZ	Mutually Defined
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1 AN 1/50
SYNTAX: R0203				
IMPLEMENTATION NAME: Organizational Reference Identifier				

NOT USED	REF03	352	Description	X 1	AN	1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1		

SEGMENT DETAIL

DTM - ORGANIZATIONAL COVERAGE PERIOD

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**

If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.


Loop: 2300A — ORGANIZATION SUMMARY REMITTANCE DETAIL**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the premium payer is not paying from an invoice, but paying on account for a coverage period. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The 2300A DTM overrides the DTM in the header when DTM01 = 582.

2. This segment relays the start and end date of the organizational coverage period associated with the premium payment in the current RMR segment when the date range indicator 582 is used.

3. This segment relays the due date of the organizational coverage period associated with the premium payment in the current RMR segment when the due date indicator AAG is used.

TR3 Example: DTM*582****RD8*20070101-20070130~

DIAGRAM

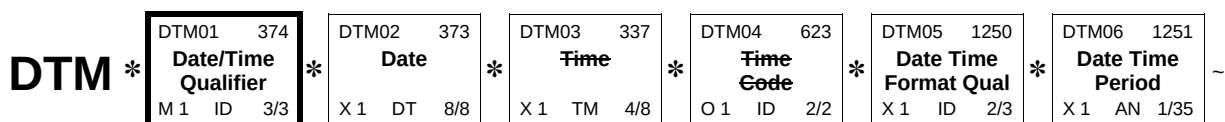

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
		CODE	DEFINITION	
		582	Report Period	
		AAG	Due Date	

SITUATIONAL	DTM02	373	Date	X 1	DT	8/8				
Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year										
SYNTAX: R020305										
SITUATIONAL RULE: <i>Required when DTM01 is AAG. If not required by this implementation guide, do not send.</i>										
NOT USED	DTM03	337	Time	X 1	TM	4/8				
NOT USED	DTM04	623	Time Code	O 1	ID	2/2				
SITUATIONAL	DTM05	1250	Date Time Period Format Qualifier	X 1	ID	2/3				
Code indicating the date format, time format, or date and time format										
SYNTAX: R020305, P0506										
SITUATIONAL RULE: <i>Required when DTM01 is 582. If not required by this implementation guide, do not send.</i>										
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>RD8</td><td>Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD</td></tr></table>							CODE	DEFINITION	RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD
CODE	DEFINITION									
RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD									
SITUATIONAL	DTM06	1251	Date Time Period	X 1	AN	1/35				
Expression of a date, a time, or range of dates, times or dates and times										
SYNTAX: P0506										
SITUATIONAL RULE: <i>Required when DTM01 is 582. If not required by this implementation guide, do not send.</i>										
IMPLEMENTATION NAME: Coverage Period										

SEGMENT DETAIL

IT1 - SUMMARY LINE ITEM**X12 Segment Name:** Baseline Item Data (Invoice)**X12 Purpose:** To specify the basic and most frequently used line item data for the invoice and related transactions**X12 Set Notes:** 1. Loop IT1 within the RMR loop is the remittance line item detail loop.**X12 Syntax:** 1. **P020304**

If either IT102, IT103 or IT104 are present, then the others are required.

2. **P0607**

If either IT106 or IT107 is present, then the other is required.

3. **P0809**

If either IT108 or IT109 is present, then the other is required.

4. **P1011**

If either IT110 or IT111 is present, then the other is required.

5. **P1213**

If either IT112 or IT113 is present, then the other is required.

6. **P1415**

If either IT114 or IT115 is present, then the other is required.

7. **P1617**

If either IT116 or IT117 is present, then the other is required.

8. **P1819**

If either IT118 or IT119 is present, then the other is required.

9. **P2021**

If either IT120 or IT121 is present, then the other is required.

10. **P2223**

If either IT122 or IT123 is present, then the other is required.

11. **P2425**


If either IT124 or IT125 is present, then the other is required.

X12 Comments: 1. Element 235/234 combinations should be interpreted to include products and/or services. See the Data Dictionary for a complete list of IDs.**Loop:** 2310A — SUMMARY LINE ITEM **Loop Repeat:** 1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when additional charges exist, or when member counts are specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Notes:** 1. Additional charges are transmitted in 2312A/SAC.

2. The member count is transmitted in 2315A/SLN.

TR3 Example: IT1*1~

DIAGRAM

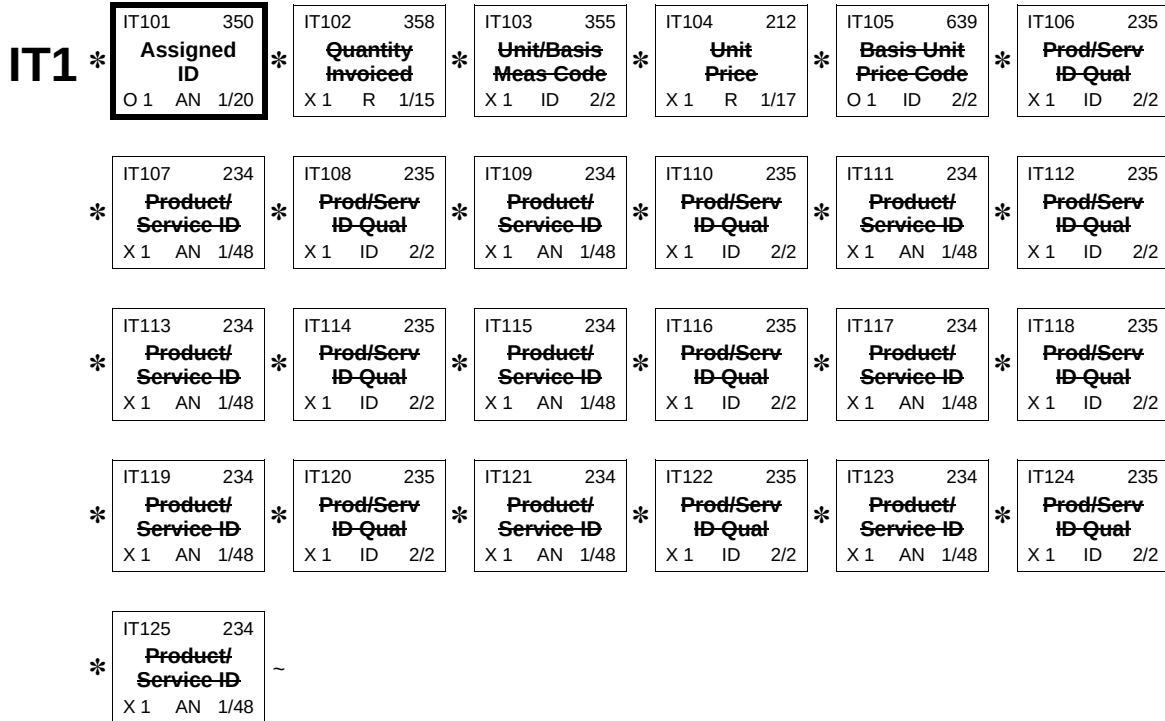

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	IT101	350	Assigned Identification Alphanumeric characters assigned for differentiation within a transaction set SEMANTIC: IT101 is the line item identification.	O 1 AN 1/20
IMPLEMENTATION NAME: Line Item Control Number				
Assigned for uniqueness. Start with "1" and increment by "1" for every occurrence of the segment within a specific transaction.				
NOT USED	IT102	358	Quantity Invoiced	X 1 R 1/15
NOT USED	IT103	355	Unit or Basis for Measurement Code	X 1 ID 2/2
NOT USED	IT104	212	Unit Price	X 1 R 1/17
NOT USED	IT105	639	Basis of Unit Price Code	O 1 ID 2/2
NOT USED	IT106	235	Product/Service ID Qualifier	X 1 ID 2/2
NOT USED	IT107	234	Product/Service ID	X 1 AN 1/48
NOT USED	IT108	235	Product/Service ID Qualifier	X 1 ID 2/2
NOT USED	IT109	234	Product/Service ID	X 1 AN 1/48
NOT USED	IT110	235	Product/Service ID Qualifier	X 1 ID 2/2
NOT USED	IT111	234	Product/Service ID	X 1 AN 1/48
NOT USED	IT112	235	Product/Service ID Qualifier	X 1 ID 2/2
NOT USED	IT113	234	Product/Service ID	X 1 AN 1/48

NOT USED	IT114	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT115	234	Product/Service ID	X 1	AN	1/48
NOT USED	IT116	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT117	234	Product/Service ID	X 1	AN	1/48
NOT USED	IT118	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT119	234	Product/Service ID	X 1	AN	1/48
NOT USED	IT120	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT121	234	Product/Service ID	X 1	AN	1/48
NOT USED	IT122	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT123	234	Product/Service ID	X 1	AN	1/48
NOT USED	IT124	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	IT125	234	Product/Service ID	X 1	AN	1/48

SEGMENT DETAIL

SAC - SERVICE, PROMOTION, ALLOWANCE, OR CHARGE INFORMATION

X12 Segment Name: Service, Promotion, Allowance, or Charge Information

X12 Purpose: To request or identify a service, promotion, allowance, or charge; to specify the amount or percentage for the service, promotion, allowance, or charge

- X12 Syntax:**
1. **R0203**
At least one of SAC02 or SAC03 is required.
 2. **P0304**
If either SAC03 or SAC04 is present, then the other is required.
 3. **P0607**
If either SAC06 or SAC07 is present, then the other is required.
 4. **P0910**
If either SAC09 or SAC10 is present, then the other is required.
 5. **C1110**
If SAC11 is present, then SAC10 is required.
 6. **C1413**
If SAC14 is present, then SAC13 is required.
 7. **C1615**
If SAC16 is present, then SAC15 is required.

Loop: 2312A — SERVICE, PROMOTION, ALLOWANCE, OR CHARGE INFORMATION Loop Repeat: 4


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when additional charges must be reported. If not required by this implementation guide, do not send.

TR3 Example: SAC*C*A172***50~

DIAGRAM

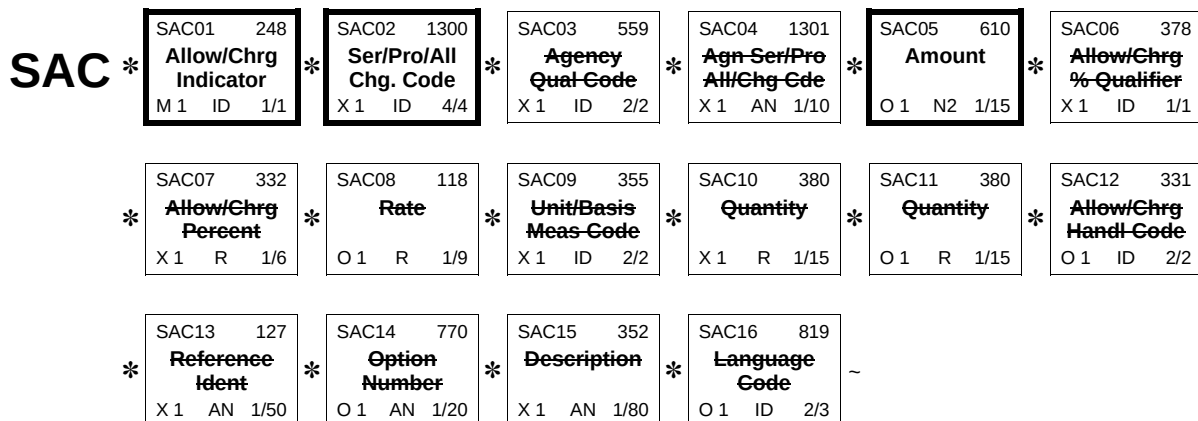

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	SAC01	248	Allowance or Charge Indicator Code which indicates an allowance or charge for the service specified SEMANTIC: If SAC01 is "A" or "C", then at least one of SAC05, SAC07, or SAC08 is required.	M 1	ID	1/1
			CODE	DEFINITION		
			C	Charge		
REQUIRED	SAC02	1300	Service, Promotion, Allowance, or Charge Code Code identifying the service, promotion, allowance, or charge SYNTAX: R0203	X 1	ID	4/4
			CODE	DEFINITION		
			A172	Administrative		
			B680	Contract Service Charge		
			D940	Insurance Premium		
			G740	Service Charge		
NOT USED	SAC03	559	Agency Qualifier Code	X 1	ID	2/2
NOT USED	SAC04	1301	Agency Service, Promotion, Allowance, or Charge Code	X 1	AN	1/10
REQUIRED	SAC05	610	Amount Monetary amount SEMANTIC: SAC05 is the total amount for the service, promotion, allowance, or charge.	O 1	N2	1/15
NOT USED	SAC06	378	Allowance/Charge Percent Qualifier	X 1	ID	1/1
NOT USED	SAC07	332	Percent, Decimal Format	X 1	R	1/6
NOT USED	SAC08	118	Rate	O 1	R	1/9
NOT USED	SAC09	355	Unit or Basis for Measurement Code	X 1	ID	2/2
NOT USED	SAC10	380	Quantity	X 1	R	1/15
NOT USED	SAC11	380	Quantity	O 1	R	1/15
NOT USED	SAC12	331	Allowance or Charge Method of Handling Code	O 1	ID	2/2
NOT USED	SAC13	127	Reference Identification	X 1	AN	1/50
NOT USED	SAC14	770	Option Number	O 1	AN	1/20
NOT USED	SAC15	352	Description	X 1	AN	1/80
NOT USED	SAC16	819	Language Code	O 1	ID	2/3

SEGMENT DETAIL

SLN - MEMBER COUNT

X12 Segment Name: Subline Item Detail

X12 Purpose: To specify product subline detail item data

X12 Syntax: 1. **P0405**

If either SLN04 or SLN05 is present, then the other is required.

2. **C0706**

If SLN07 is present, then SLN06 is required.

3. **C0806**

If SLN08 is present, then SLN06 is required.

4. **P0910**

If either SLN09 or SLN10 is present, then the other is required.

5. **P1112**

If either SLN11 or SLN12 is present, then the other is required.

6. **P1314**

If either SLN13 or SLN14 is present, then the other is required.

7. **P1516**

If either SLN15 or SLN16 is present, then the other is required.

8. **P1718**

If either SLN17 or SLN18 is present, then the other is required.

9. **P1920**

If either SLN19 or SLN20 is present, then the other is required.

10. **P2122**

If either SLN21 or SLN22 is present, then the other is required.

11. **P2324**

If either SLN23 or SLN24 is present, then the other is required.

12. **P2526**

If either SLN25 or SLN26 is present, then the other is required.

13. **P2728**

If either SLN27 or SLN28 is present, then the other is required.

X12 Comments: 1. See the Data Element Dictionary for a complete list of IDs.

Loop: 2315A — MEMBER COUNT **Loop Repeat:** 3

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when member counts are specified by the terms of the trading partner agreement. If not required by this implementation guide, do not send.

TR3 Notes: 1. The member count is the total number of members included in the summary line item payment (2300A/RMR).

TR3 Example: SLN*1**O*150*IE~

DIAGRAM

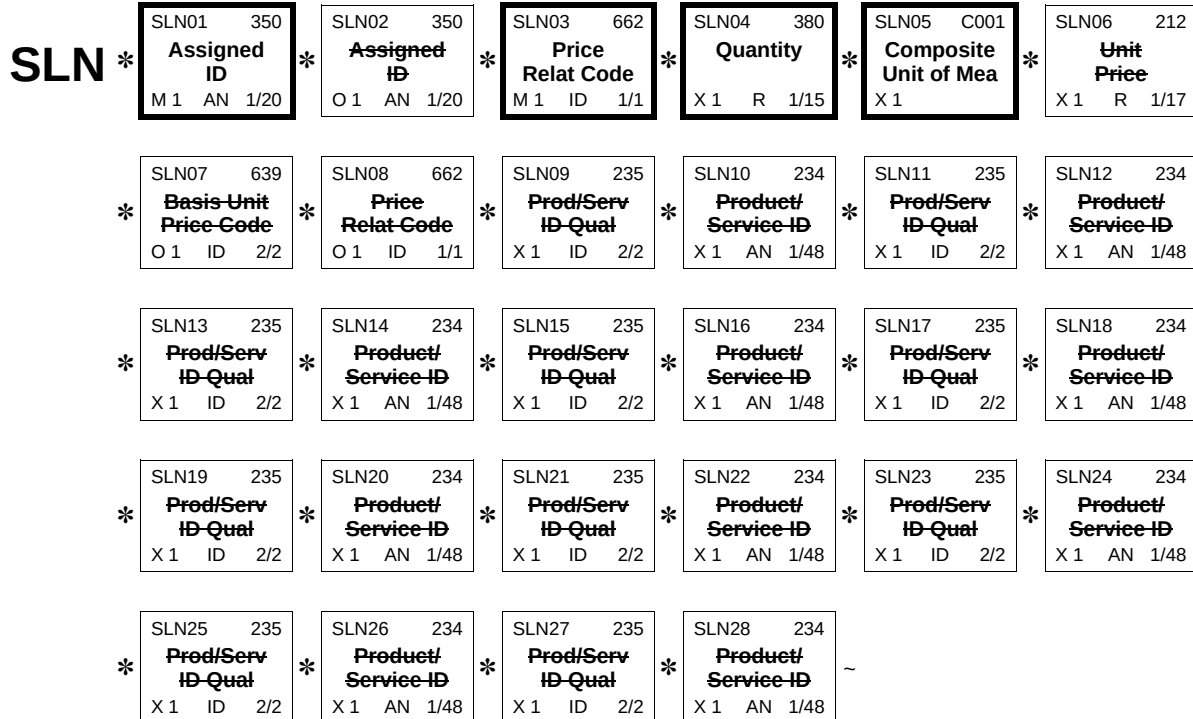

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SLN01	350	Assigned Identification Alphanumeric characters assigned for differentiation within a transaction set SEMANTIC: SLN01 is the identifying number for the subline item. COMMENT: SLN01 is related to (but not necessarily equivalent to) the baseline item number. Example: 1.1 or 1A might be used as a subline number to relate to baseline number 1. IMPLEMENTATION NAME: Line Item Control Number Assigned for uniqueness. Start with "1" and increment by "1" for every occurrence of the segment within a specific transaction.	M 1 AN 1/20
NOT USED	SLN02	350	Assigned Identification	O 1 AN 1/20
REQUIRED	SLN03	662	Relationship Code Code indicating the relationship between entities SEMANTIC: SLN03 is the configuration code indicating the relationship of the subline item to the baseline item. IMPLEMENTATION NAME: Information Only Indicator	M 1 ID 1/1
		CODE	DEFINITION	
		O	Information Only	

REQUIRED	SLN04	380	Quantity Numeric value of quantity SYNTAX: P0405 IMPLEMENTATION NAME: Head Count This is the number of contract holders with the type of coverage identified in SLN05-1.			X 1	R	1/15
REQUIRED	SLN05	C001	COMPOSITE UNIT OF MEASURE To identify a composite unit of measure			X 1		
REQUIRED	SLN05 - 1	355	Unit or Basis for Measurement Code Code specifying the units in which a value is being expressed, or manner in which a measurement has been taken COMMENTS: If C001-11 is not used, its value is to be interpreted as 1. If C001-12 is not used, its value is to be interpreted as 1. If C001-14 is not used, its value is to be interpreted as 1. If C001-15 is not used, its value is to be interpreted as 1.			M	ID	2/2
			CODE	DEFINITION				
		10		Group				
				Used to identify that the value in SLN04 represents the number of contract holders with Family coverage.				
		IE		Person				
				Used to identify that the value of SLN04 represents the number of contract holders with Individual coverage.				
		PR		Pair				
				Used to identify that the value in SLN04 represents the number of contract holders with Self and Spouse Only coverage.				
NOT USED	SLN05 - 2	1018	Exponent			O	R	1/15
NOT USED	SLN05 - 3	649	Multiplier			O	R	1/10
NOT USED	SLN05 - 4	355	Unit or Basis for Measurement Code			O	ID	2/2
NOT USED	SLN05 - 5	1018	Exponent			O	R	1/15
NOT USED	SLN05 - 6	649	Multiplier			O	R	1/10
NOT USED	SLN05 - 7	355	Unit or Basis for Measurement Code			O	ID	2/2
NOT USED	SLN05 - 8	1018	Exponent			O	R	1/15
NOT USED	SLN05 - 9	649	Multiplier			O	R	1/10
NOT USED	SLN05 - 10	355	Unit or Basis for Measurement Code			O	ID	2/2
NOT USED	SLN05 - 11	1018	Exponent			O	R	1/15
NOT USED	SLN05 - 12	649	Multiplier			O	R	1/10
NOT USED	SLN05 - 13	355	Unit or Basis for Measurement Code			O	ID	2/2
NOT USED	SLN05 - 14	1018	Exponent			O	R	1/15
NOT USED	SLN05 - 15	649	Multiplier			O	R	1/10
NOT USED	SLN06	212	Unit Price			X 1	R	1/17
NOT USED	SLN07	639	Basis of Unit Price Code			O 1	ID	2/2

NOT USED	SLN08	662	Relationship Code	O 1	ID	1/1
NOT USED	SLN09	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN10	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN11	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN12	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN13	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN14	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN15	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN16	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN17	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN18	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN19	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN20	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN21	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN22	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN23	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN24	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN25	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN26	234	Product/Service ID	X 1	AN	1/48
NOT USED	SLN27	235	Product/Service ID Qualifier	X 1	ID	2/2
NOT USED	SLN28	234	Product/Service ID	X 1	AN	1/48

SEGMENT DETAIL

ADX - ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR CURRENT PAYMENT

X12 Segment Name: Adjustment

X12 Purpose: To convey accounts-payable adjustment information for the purpose of cash application, including payer-generated debit/credit memos

X12 Set Notes: 1. This ADX loop can only contain adjustment information for the immediately preceding RMR segment and affects the amount (RMR04) calculation. If this adjustment amount is not netted to the immediately preceding RMR, use the outer ADX loop (position 080).

X12 Syntax: 1. **P0304**
 If either ADX03 or ADX04 is present, then the other is required.

Loop: 2320A — ORGANIZATION SUMMARY REMITTANCE LEVEL ADJUSTMENT FOR CURRENT PAYMENT **Loop Repeat:** >1

Segment Repeat: 1


Usage: SITUATIONAL

Situational Rule: Required when the paid amount differs from the billed amount (RMR05 is present) in the related RMR segment and the difference is not completely accounted for by amounts in related SAC segments, position 5. If not required by this implementation guide, do not send.

TR3 Notes: 1. The ADX segment is essential to fulfilling the balancing requirements. See section 1.10.2.4 for additional information.

TR3 Example: ADX*150*20~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ADX01	782	Monetary Amount Monetary amount	M 1 R 1/18
SEMANTIC: ADX01 specifies the amount of the adjustment and must be signed if negative. If negative, it reduces the payment amount; if positive, it increases the payment amount.				
IMPLEMENTATION NAME: Adjustment Amount				

REQUIRED	ADX02	426	Adjustment Reason Code	M 1	ID	2/2
			Code indicating reason for debit or credit memo or adjustment to invoice, debit or credit memo, or payment			
			SEMANTIC: ADX02 specifies the reason for claiming the adjustment.			
			CODE	DEFINITION		
			20	Balance Due Declined		
				Indicates the entire balance due is being disputed.		
			52	Credit for Overpayment		
			53	Remittance for Previous Underpayment		
			AA	Prepaid Benefit or Advances		
			AX	Person No Longer Employed		
			H1	Information Forthcoming		
				Detailed information related to the adjustment will be provided through a separate mechanism.		
			H6	Partial Payment Remitted		
			IA	Invoice Amount Does Not Match Account Analysis Statement		
				Indicates the invoice does not match the expectation for number or number/type of members and charges.		
			J3	Promised Adjustment Not Received		
				Indicates an adjustment promised by the payee for a previous invoice has not been reflected on the current invoice.		
NOT USED	ADX03	128	Reference Identification Qualifier	X 1	ID	2/3
NOT USED	ADX04	127	Reference Identification	X 1	AN	1/50

SEGMENT DETAIL

ENT - INDIVIDUAL REMITTANCE

X12 Segment Name: Entity

X12 Purpose: To designate the entities which are parties to a transaction and specify a reference meaningful to those entities

X12 Set Notes:

1. The ENT loop is for vendor or consumer third party consolidated payments.
2. ENT09 may contain the payee's accounts receivable customer number.

X12 Syntax:

1. **P020304**
If either ENT02, ENT03 or ENT04 are present, then the others are required.
2. **P050607**
If either ENT05, ENT06 or ENT07 are present, then the others are required.
3. **P0809**
If either ENT08 or ENT09 is present, then the other is required.

X12 Comments:

1. This segment allows for the grouping of data by entity/entities at or within a master/masters. A master (e.g., an organization) can be comprised of numerous subgroups (e.g., entities). This master may send grouped data to another master (e.g., an organization) which is comprised of one or more entities. Groupings are as follows:
 - (1) Single/Single: Only ENT01 is necessary, because there is a single entity (the sending master) communicating with a single entity (the receiving master).
 - (2) Single/Multiple: ENT05, ENT06, and ENT07 would be used to identify the entities within the receiving master. The sending master is a single entity, so no other data elements need be used.
 - (3) Multiple/Single: ENT02, ENT03, and ENT04 would be used to identify the entities within the sending master. The receiving master is a single entity, so no other data elements need be used.
 - (4) Multiple/Multiple: ENT02, ENT03, and ENT04 would be used to identify the entities within the sending master. ENT05, ENT06, and ENT07 would be used to identify the entities within the receiving master.
6. This segment also allows for the transmission of a unique reference number that is meaningful between the entities.

Loop: 2000B — INDIVIDUAL REMITTANCE **Loop Repeat:** >1


Segment Repeat: 1

Usage: SITUATIONAL

Situational Rule: Required when providing remittance line items that pertain to an individual enrolled in a group plan. If not required by this implementation guide, do not send.

TR3 Example: ENT*1*2J*34*030668776~

DIAGRAM

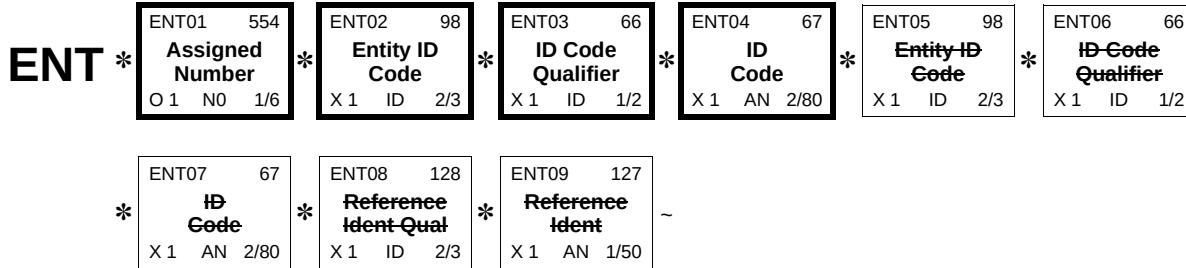

ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES												
REQUIRED	ENT01	554	Assigned Number Number assigned for differentiation within a transaction set	O 1	N0	1/6										
REQUIRED	ENT02	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual SYNTAX: P020304	X 1	ID	2/3										
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>2J</td><td>Individual</td></tr></table>							CODE	DEFINITION	2J	Individual						
CODE	DEFINITION															
2J	Individual															
REQUIRED	ENT03	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P020304	X 1	ID	1/2										
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>34</td><td>Social Security Number</td></tr><tr><td>EI</td><td>Employee Identification Number</td></tr><tr><td>II</td><td>Standard Unique Health Identifier for each Individual in the United States</td></tr><tr><td colspan="2">Required for use under HIPAA when the national individual identifier has been mandated for use.</td></tr></table>							CODE	DEFINITION	34	Social Security Number	EI	Employee Identification Number	II	Standard Unique Health Identifier for each Individual in the United States	Required for use under HIPAA when the national individual identifier has been mandated for use.	
CODE	DEFINITION															
34	Social Security Number															
EI	Employee Identification Number															
II	Standard Unique Health Identifier for each Individual in the United States															
Required for use under HIPAA when the national individual identifier has been mandated for use.																
REQUIRED	ENT04	67	Identification Code Code identifying a party or other code SYNTAX: P020304 IMPLEMENTATION NAME: Receiver’s Individual Identifier This is the identification number of the individual used by the receiver.	X 1	AN	2/80										
NOT USED	ENT05	98	Entity Identifier Code	X 1	ID	2/3										
NOT USED	ENT06	66	Identification Code Qualifier	X 1	ID	1/2										
NOT USED	ENT07	67	Identification Code	X 1	AN	2/80										
NOT USED	ENT08	128	Reference Identification Qualifier	X 1	ID	2/3										
NOT USED	ENT09	127	Reference Identification	X 1	AN	1/50										

SEGMENT DETAIL

NM1 - INDIVIDUAL NAME

X12 Segment Name: Individual or Organizational Name**X12 Purpose:** To supply the full name of an individual or organizational entity**X12 Set Notes:** 1. Allowing the NM1 segment to repeat in this area allows the paying entity within a payer and the paid entity within a payee to be identified (not the payer and payee).**X12 Syntax:** 1. **P0809**
If either NM108 or NM109 is present, then the other is required.2. **C1110**
If NM111 is present, then NM110 is required.3. **C1203**
If NM112 is present, then NM103 is required.**Loop:** 2100B — INDIVIDUAL NAME **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when individual names or ID numbers are called for by the terms of the trading partner agreement. If not required by this implementation guide, do not send.**TR3 Example:** NM1*EY*1*SHEPARD*JESSICA****EI*999887777A~

DIAGRAM

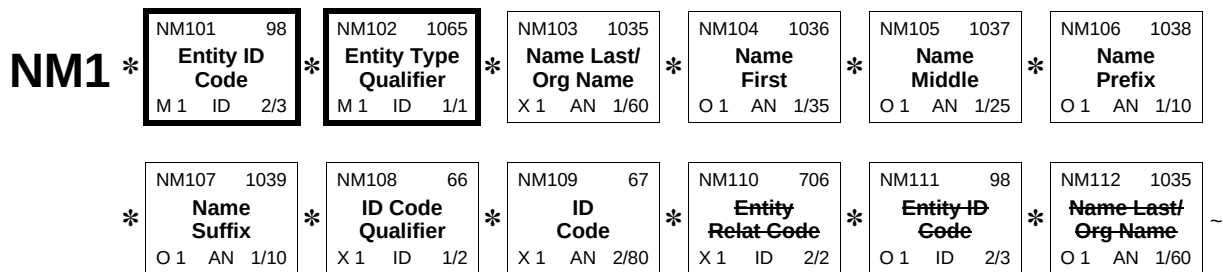

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES												
REQUIRED	NM101	98	Entity Identifier Code Code identifying an organizational entity, a physical location, property or an individual	M 1	ID	2/3										
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>DO</td><td>Dependent Name</td></tr><tr><td>EY</td><td>Employee Name</td></tr><tr><td>IL</td><td>Insured or Subscriber</td></tr><tr><td>QE</td><td>Policyholder</td></tr></table>	CODE	DEFINITION	DO	Dependent Name	EY	Employee Name	IL	Insured or Subscriber	QE	Policyholder			
CODE	DEFINITION															
DO	Dependent Name															
EY	Employee Name															
IL	Insured or Subscriber															
QE	Policyholder															


REQUIRED	NM102	1065	Entity Type Qualifier Code qualifying the type of entity SEMANTIC: NM102 qualifies NM103. <table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>1</td><td>Person</td></tr></tbody></table>	CODE	DEFINITION	1	Person	M 1	ID	1/1
CODE	DEFINITION									
1	Person									
SITUATIONAL	NM103	1035	Name Last or Organization Name Individual last name or organizational name SYNTAX: C1203 SITUATIONAL RULE: <i>This is required when the sender needs to relay the individual's last name. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Individual Last Name	X 1	AN	1/60				
SITUATIONAL	NM104	1036	Name First Individual first name SITUATIONAL RULE: <i>This is required when the sender needs to relay the individual's first name. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Individual First Name	O 1	AN	1/35				
SITUATIONAL	NM105	1037	Name Middle Individual middle name or initial SITUATIONAL RULE: <i>This is required when the sender needs to relay the individual's middle name. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Individual Middle Name	O 1	AN	1/25				
SITUATIONAL	NM106	1038	Name Prefix Prefix to individual name SITUATIONAL RULE: <i>This is required when the sender needs to relay the individual's name prefix. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Individual Name Prefix	O 1	AN	1/10				
SITUATIONAL	NM107	1039	Name Suffix Suffix to individual name SITUATIONAL RULE: <i>This is required when the sender needs to relay the individual's name suffix. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Individual Name Suffix	O 1	AN	1/10				

SITUATIONAL	NM108	66	Identification Code Qualifier Code designating the system/method of code structure used for Identification Code (67) SYNTAX: P0809 SITUATIONAL RULE: <i>This is required when the sender needs to relay a unique identifier that is associated to the individual. If not required by this implementation guide, do not send.</i>	X 1	ID	1/2								
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>34</td><td>Social Security Number</td></tr><tr><td>EI</td><td>Employee Identification Number</td></tr><tr><td>N</td><td>Insured's Unique Identification Number</td></tr></table>	CODE	DEFINITION	34	Social Security Number	EI	Employee Identification Number	N	Insured's Unique Identification Number			
CODE	DEFINITION													
34	Social Security Number													
EI	Employee Identification Number													
N	Insured's Unique Identification Number													
SITUATIONAL	NM109	67	Identification Code Code identifying a party or other code SYNTAX: P0809 SITUATIONAL RULE: <i>Required when the sender needs to relay a unique identifier that is associated to the individual. If not required by this implementation guide, do not send.</i>	X 1	AN	2/80								
			IMPLEMENTATION NAME: Individual Identifier											
NOT USED	NM110	706	Entity Relationship Code	X 1	ID	2/2								
NOT USED	NM111	98	Entity Identifier Code	O 1	ID	2/3								
NOT USED	NM112	1035	Name Last or Organization Name	O 1	AN	1/60								

SEGMENT DETAIL

**ADX - INDIVIDUAL PREMIUM ADJUSTMENT
FOR PREVIOUS PAYMENT****X12 Segment Name:** Adjustment**X12 Purpose:** To convey accounts-payable adjustment information for the purpose of cash application, including payer-generated debit/credit memos**X12 Set Notes:** 1. This ADX loop contains adjustment items which are not netted to an RMR segment in this transaction set.**X12 Syntax:** 1. **P0304**
If either ADX03 or ADX04 is present, then the other is required.**Loop:** 2200B — INDIVIDUAL PREMIUM ADJUSTMENT FOR PREVIOUS
PAYMENT Loop Repeat: >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the paid amount reflects adjustments related to previous payments. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The ADX segment is essential to fulfilling the balancing requirements.
See section 1.10.2.4 for additional information.**TR3 Example:** ADX*150*52~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ADX01	782	Monetary Amount Monetary amount SEMANTIC: ADX01 specifies the amount of the adjustment and must be signed if negative. If negative, it reduces the payment amount; if positive, it increases the payment amount. IMPLEMENTATION NAME: Premium Payment Adjustment Amount	M 1 R 1/18
REQUIRED	ADX02	426	Adjustment Reason Code Code indicating reason for debit or credit memo or adjustment to invoice, debit or credit memo, or payment SEMANTIC: ADX02 specifies the reason for claiming the adjustment. IMPLEMENTATION NAME: Premium Payment Adjustment Reason	M 1 ID 2/2
			CODE	DEFINITION
			52	Credit for Overpayment

			53	Remittance for Previous Underpayment			
			80	Overpayment			
			81	Credit as Agreed			
			86	Duplicate Payment			
			BJ	Insurance Charge			
			H1	Information Forthcoming			
			H6	Partial Payment Remitted			
			RU	Interest			
			WO	Overpayment Recovery			
NOT USED	ADX03	128	Reference Identification Qualifier		X 1	ID	2/3
NOT USED	ADX04	127	Reference Identification		X 1	AN	1/50

SEGMENT DETAIL

**RMR - INDIVIDUAL PREMIUM REMITTANCE
DETAIL****X12 Segment Name:** Remittance Advice Accounts Receivable Open Item Reference**X12 Purpose:** To specify the accounts receivable open item(s) to be included in the cash application and to convey the appropriate detail**X12 Set Notes:** 1. Loop RMR is for open items being referenced or for payment on account.**X12 Syntax:** 1. **P0102**


If either RMR01 or RMR02 is present, then the other is required.

2. **P0708**

If either RMR07 or RMR08 is present, then the other is required.

Loop: 2300B — INDIVIDUAL PREMIUM REMITTANCE DETAIL **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Notes:** 1. Relays detailed remittance information related to an employee or member of a group plan.**TR3 Example:** RMR*B7*123456789**250~

DIAGRAM

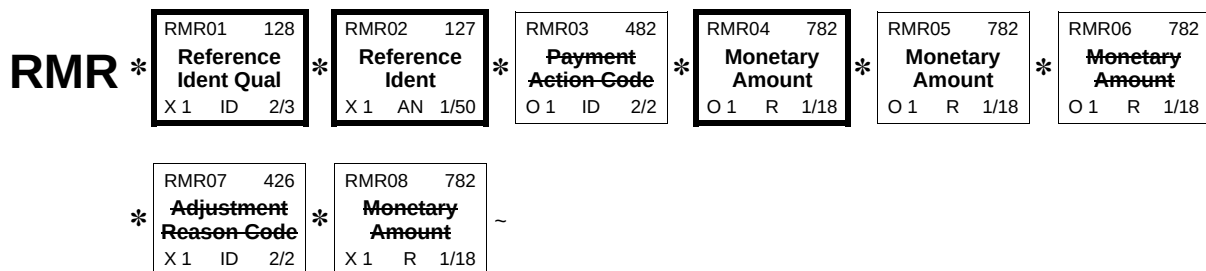

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	RMR01	128	Reference Identification Qualifier Code qualifying the Reference Identification SYNTAX: P0102 COMMENT: Parties using this segment should agree on the content of RMR01 and RMR02 prior to initiating communication.	X 1 ID 2/3
			CODE	DEFINITION
			11	Account Number
			9J	Pension Contract

			AZ	Health Insurance Policy Number			
				For HIPAA Health Premium Payments this code is REQUIRED when an invoice has not been received from the Health Plan.			
			B7	Life Insurance Policy Number			
			CT	Contract Number			
			ID	Insurance Certificate Number			
			IG	Insurance Policy Number			
			IK	Invoice Number			
				For HIPAA Health Premium Payments this code is REQUIRED when an invoice has been received from the Health Plan.			
			KW	Certification			
REQUIRED	RMR02	127	Reference Identification	X 1 AN 1/50			
			Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier				
			SYNTAX: P0102				
			IMPLEMENTATION NAME: Insurance Remittance Reference Number				
NOT USED	RMR03	482	Payment Action Code	O 1 ID 2/2			
REQUIRED	RMR04	782	Monetary Amount	O 1 R 1/18			
			Monetary amount				
			SEMANTIC: RMR04 is the amount paid.				
			IMPLEMENTATION NAME: Detail Premium Payment Amount				
			This is the amount being paid on this remittance item.				
SITUATIONAL	RMR05	782	Monetary Amount	O 1 R 1/18			
			Monetary amount				
			SEMANTIC: RMR05 is the amount of invoice (including charges, less allowance) before terms discount (if discount is applicable) or debit amount or credit amount of referenced items.				
			COMMENT: RMR05 may be needed by some payees to distinguish between duplicate reference numbers.				
			SITUATIONAL RULE: <i>Required when the Insurer sent an Invoice and the paid amount is different than the amount invoiced. If not required by this implementation guide, do not send.</i>				
			IMPLEMENTATION NAME: Billed Premium Amount				
			Any difference between the RMR05 and the RMR04 would be explained by the ADX at loop 2320B.				
NOT USED	RMR06	782	Monetary Amount	O 1 R 1/18			
NOT USED	RMR07	426	Adjustment Reason Code	X 1 ID 2/2			
NOT USED	RMR08	782	Monetary Amount	X 1 R 1/18			

SEGMENT DETAIL


REF - REFERENCE INFORMATION

X12 Segment Name: Reference Information**X12 Purpose:** To specify identifying information**X12 Syntax:** 1. R0203

At least one of REF02 or REF03 is required.

Loop: 2300B — INDIVIDUAL PREMIUM REMITTANCE DETAIL**Segment Repeat:** >1**Usage:** SITUATIONAL**Situational Rule:** Required when the premium receiver needs additional identifying information pertaining to the individual remittance details. If not required by this implementation guide, do not send.**TR3 Example:** REF*18*123456789~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES		
REQUIRED	REF01	128	Reference Identification Qualifier Code qualifying the Reference Identification	M 1	ID	2/3
IMPLEMENTATION NAME: Organizational Reference Identification Qualifier						
			CODE	DEFINITION		
			14	Master Account Number		
			18	Plan Number		
			2F	Consolidated Invoice Number		
			38	Master Policy Number		
			E9	Attachment Code		
			LU	Location Number		
			ZZ	Mutually Defined		
REQUIRED	REF02	127	Reference Identification Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	X 1	AN	1/50
SYNTAX: R0203						
IMPLEMENTATION NAME: Organizational Reference Identifier						
NOT USED	REF03	352	Description	X 1	AN	1/80
NOT USED	REF04	C040	REFERENCE IDENTIFIER	O 1		

SEGMENT DETAIL

DTM - INDIVIDUAL COVERAGE PERIOD

X12 Segment Name: Date/Time Reference**X12 Purpose:** To specify pertinent dates and times**X12 Syntax:** 1. **R020305**

At least one of DTM02, DTM03 or DTM05 is required.

2. **C0403**

If DTM04 is present, then DTM03 is required.

3. **P0506**

If either DTM05 or DTM06 is present, then the other is required.


Loop: 2300B — INDIVIDUAL PREMIUM REMITTANCE DETAIL**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the premium payer is not paying from an invoice, but paying on account for a coverage period. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The 2300B DTM overrides the DTM in the header when DTM01 = 582.

2. This segment relays the start and end date of the individual coverage period associated with the premium payment segment in the current RMR segment when the date range indicator 582 is used.

3. This segment relays the due date of the individual coverage period associated with the premium payment in the current RMR segment when the due date indicator AAG is used.

TR3 Example: DTM*582****RD8*20070101-20070130~

DIAGRAM

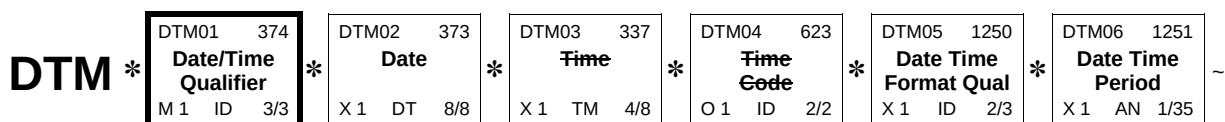

ELEMENT DETAIL


USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	DTM01	374	Date/Time Qualifier Code specifying type of date or time, or both date and time	M 1 ID 3/3
IMPLEMENTATION NAME: Date Time Qualifier				
		CODE	DEFINITION	
		582	Report Period	
		AAG	Due Date	

SITUATIONAL	DTM02	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SYNTAX: R020305 SITUATIONAL RULE: <i>Required when DTM01 is AAG. If not required by this implementation guide, do not send.</i>	X 1	DT	8/8				
NOT USED	DTM03	337	Time	X 1	TM	4/8				
NOT USED	DTM04	623	Time Code	O 1	ID	2/2				
SITUATIONAL	DTM05	1250	Date Time Period Format Qualifier Code indicating the date format, time format, or date and time format SYNTAX: R020305, P0506 SITUATIONAL RULE: <i>Required when DTM01 is 582. If not required by this implementation guide, do not send.</i>	X 1	ID	2/3				
<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>RD8</td><td>Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD</td></tr></table>							CODE	DEFINITION	RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD
CODE	DEFINITION									
RD8	Range of Dates Expressed in Format CCYYMMDD-CCYYMMDD									
SITUATIONAL	DTM06	1251	Date Time Period Expression of a date, a time, or range of dates, times or dates and times SYNTAX: P0506 SITUATIONAL RULE: <i>Required when DTM01 is 582. If not required by this implementation guide, do not send.</i> IMPLEMENTATION NAME: Coverage Period	X 1	AN	1/35				

SEGMENT DETAIL

**ADX - INDIVIDUAL PREMIUM ADJUSTMENT
FOR CURRENT PAYMENT****X12 Segment Name:** Adjustment**X12 Purpose:** To convey accounts-payable adjustment information for the purpose of cash application, including payer-generated debit/credit memos**X12 Set Notes:** 1. This ADX loop can only contain adjustment information for the immediately preceding RMR segment and affects the amount (RMR04) calculation. If this adjustment amount is not netted to the immediately preceding RMR, use the outer ADX loop (position 080).**X12 Syntax:** 1. **P0304**
If either ADX03 or ADX04 is present, then the other is required.**Loop:** 2320B — INDIVIDUAL PREMIUM ADJUSTMENT FOR CURRENT
PAYMENT **Loop Repeat:** >1**Segment Repeat:** 1**Usage:** SITUATIONAL**Situational Rule:** Required when the paid amount differs from the billed amount (RMR05 is present) in the related RMR segment. If not required by this implementation guide, do not send.**TR3 Notes:** 1. The ADX segment is essential to fulfilling the balancing requirements. See section 1.10.2.4 for additional information.**TR3 Example:** ADX*150*52~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	ADX01	782	Monetary Amount Monetary amount	M 1 R 1/18
SEMANTIC: ADX01 specifies the amount of the adjustment and must be signed if negative. If negative, it reduces the payment amount; if positive, it increases the payment amount.				
IMPLEMENTATION NAME: Adjustment Amount				

REQUIRED	ADX02	426	Adjustment Reason Code Code indicating reason for debit or credit memo or adjustment to invoice, debit or credit memo, or payment SEMANTIC: ADX02 specifies the reason for claiming the adjustment.	M 1	ID	2/2																				
			<table><thead><tr><th>CODE</th><th>DEFINITION</th></tr></thead><tbody><tr><td>20</td><td>Balance Due Declined The entire balance due is being disputed.</td></tr><tr><td>52</td><td>Credit for Overpayment</td></tr><tr><td>53</td><td>Remittance for Previous Underpayment</td></tr><tr><td>AA</td><td>Prepaid Benefit or Advances</td></tr><tr><td>AX</td><td>Person No Longer Employed This adjustment must never be used as a substitute for a termination notice using the 834 transaction.</td></tr><tr><td>H1</td><td>Information Forthcoming Detailed information related to the adjustment will be provided through a separate mechanism.</td></tr><tr><td>H6</td><td>Partial Payment Remitted</td></tr><tr><td>IA</td><td>Invoice Amount Does Not Match Account Analysis Statement The invoice does not match the expectation for number or number/type of members and charges.</td></tr><tr><td>J3</td><td>Promised Adjustment Not Received An adjustment promised by the payee for a previous invoice has not been reflected on the current invoice.</td></tr></tbody></table>	CODE	DEFINITION	20	Balance Due Declined The entire balance due is being disputed.	52	Credit for Overpayment	53	Remittance for Previous Underpayment	AA	Prepaid Benefit or Advances	AX	Person No Longer Employed This adjustment must never be used as a substitute for a termination notice using the 834 transaction.	H1	Information Forthcoming Detailed information related to the adjustment will be provided through a separate mechanism.	H6	Partial Payment Remitted	IA	Invoice Amount Does Not Match Account Analysis Statement The invoice does not match the expectation for number or number/type of members and charges.	J3	Promised Adjustment Not Received An adjustment promised by the payee for a previous invoice has not been reflected on the current invoice.			
CODE	DEFINITION																									
20	Balance Due Declined The entire balance due is being disputed.																									
52	Credit for Overpayment																									
53	Remittance for Previous Underpayment																									
AA	Prepaid Benefit or Advances																									
AX	Person No Longer Employed This adjustment must never be used as a substitute for a termination notice using the 834 transaction.																									
H1	Information Forthcoming Detailed information related to the adjustment will be provided through a separate mechanism.																									
H6	Partial Payment Remitted																									
IA	Invoice Amount Does Not Match Account Analysis Statement The invoice does not match the expectation for number or number/type of members and charges.																									
J3	Promised Adjustment Not Received An adjustment promised by the payee for a previous invoice has not been reflected on the current invoice.																									
NOT USED	ADX03	128	Reference Identification Qualifier	X 1	ID	2/3																				
NOT USED	ADX04	127	Reference Identification	X 1	AN	1/50																				

SEGMENT DETAIL

SE - TRANSACTION SET TRAILER

X12 Segment Name: Transaction Set Trailer

X12 Purpose: To indicate the end of the transaction set and provide the count of the transmitted segments (including the beginning (ST) and ending (SE) segments)


X12 Comments: 1. SE is the last segment of each transaction set.

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: SE*28*0002~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	SE01	96	Number of Included Segments Total number of segments included in a transaction set including ST and SE segments	M 1 NO 1/10
IMPLEMENTATION NAME: Transaction Segment Count				
REQUIRED	SE02	329	Transaction Set Control Number Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set	M 1 AN 4/9

3 Examples

3.1 Scenario One Description

Scenario One depicts a summary bill payment. This example shows a premium payer submitting an 820 transaction set to pay a group major medical and disability bill (Invoiced). The plan covers 80 employees. Seventy-five of the 80 employees have family coverage costing \$220 per employee. Twenty-five of the 80 employees have disability coverage costing \$100 for each employee. The total bill is \$19,000. This is a summary bill payment because the premium receiver does not require the payment detail to list each individual employee in order to properly apply the payment.

The premium receiver has provided the premium payer with a plan number (12345), a group major medical invoice number of 970501001, and a disability invoice number of 970501002. The premium payment will be delivered using the ACH network. The 820 remittance detail will accompany the funds transfer.

3.1.1 Scenario One Example

Table 1

ST*820*0001*005010X218~

Beginning of an 820 transaction set, Control number = 0001

BPR*C*19000*C*ACH*CTX*01*999999992*DA*12345678*103044999901*
199999999*DA*98765*20070516~**

Financial institution to include the remittance information with the payment of \$19000 using a credit ACH CTX formatted payment. The premium payer's bank transit routing number is 999999992 and their bank account is 12345678. The premium payer's Tax ID with a leading 1 is 1030449999. The premium receiver's bank transit routing number is 199999999 and their bank account is 98765. The payment effective date is May 16, 2007.

TRN*1*12345*1030449999~

Reassociation Key provides a sender unique trace number "12345", and the sender's Tax ID number preceded by a 1. This Key is included in case the sending trace number is duplicated by another sender.

REF*14*12345~

The master account number is 12345.

N1*PE*DEF HEALTH CARE INC.*FI*01222222~

The premium receiver's name (DEF HEALTH CARE INC) and federal Tax ID number (01222222).

N1*PR*ABC PLASTICS*FI*123456789~

The premium payer's name (ABC PLASTICS) and federal tax ID number (123456789).

Table 2

ENT*1*2L*FI*123456789~

Start of detail loop. Identifys this is a corporate entity item (summary bill payment). The premium payer's federal tax ID number (123456789).

RMR*IK*970501001*PI*16500~

The invoice being paid 970501001 (major medical). The amount being paid to this invoice (\$16500).

IT1*1~

Start of required member counts under a summary RMR item.

SLN*10*5*IE~**

Five of the 80 employees have individual coverage.

SLN*20*75*10~**

Seventy-five of the 80 employees have family coverage.

RMR*IK*970501002*PI*2500~

The invoice being paid 970501002 (disability). The amount being paid to this invoice (\$2500).

IT1*1~

Start of required member counts under a summary RMR item.

SLN*10*25*IE~**

Twenty-five employees have disability coverage.

Table 3

SE*15*0001~

Transaction Set Trailer with segment count (15) and Control Number (0001).

3.2 Scenario Two Description

Scenario Two demonstrates a List Bill payment. This example shows a premium payer submitting an 820 transaction set to pay a group employee life insurance premium bill (Invoice). The plan covers 4 employees. Two of the employees have only one policy, two of the employees have two policies each. This is a list bill payment because the premium receiver requires the payment detail to list each individual employee and each of the policy numbers and payment amounts that are being paid in this remittance.

The premium receiver has provided the premium payer with a plan number (0011001). The premium payment will be delivered using the (ACH) network. The 820 remittance detail will accompany the fund transfer. The total payment is for \$255.

3.2.1 Scenario Two Example

Table 1

ST*820*0001*005010X218~

Beginning of an 820 transaction set, Control number = 0001

BPR*C*255*C*ACH*CTX*01*999999992*DA*12345678*134567890101*
199999999*DA*98765*20071103~**

Financial institution to include the remittance information with the payment of \$255 using a credit ACH CTX formatted payment. The premium payer's bank transit routing number is 999999992 and their bank account is 12345678. The premium receiver's bank transit routing number is 199999999 and their bank account is 98765. The payment effective date is November 3, 2007.

TRN*1*78905*1345678901~

Reassociation Key provides a sender unique trace number "78905" the sender's Tax ID number preceded by a 1 is included in case the sending trace number is duplicated by another sender.

REF*14*0011001~

The master account number is 0011001.

N1*PE*BATA INSURANCE CO.*FI*01222222~

The premium receiver's name (BATA INSURANCE CO.) and Federal Tax ID number (01222222).

N1*PR*ALFA MEDAL CO*FI*123456789~

The premium payer's name (ALFA MEDAL CO) and federal tax ID number (123456789).

Table 2

ENT*1*2J*34*030440099~

Start of detail loop for first individual. Identifying this is an individual John Doe's remittance items (list bill payment). The individual's Social Security Number (030440099).

NM1*EY*1*DOE*JOHN**EI*777222~**

The individual's name (JOHN DOE) and employee's identification number (777222).

RMR*IG*55566630~**

The first policy being paid (555666) for JOHN DOE. The amount being paid to this invoice (\$30).

RMR*IG*55566735~**

The second policy being paid (555667) for JOHN DOE. The amount being paid to this invoice (\$35).

ENT*2*2J*34*029500563~

Start of detail loop second individual. Identifying this is an individual Emily Firstones's remittance items (list bill payment). The individual's Social Security Number (029500563).

NM1*EY*1*FIRSTONE*EMILY**EI*777333~**

The individual's name (EMILY FIRSTONE) and employee's identification number (777333).

RMR*IG*55577745~**

The policy being paid (555777) for EMILY FIRSTONE. The amount being paid to this invoice (\$45).

ENT*3*2J*34*029480664~

Start of detail loop third Individual. Identifying this is a individual Julie Middleone's remittance items (List bill payment). The individual's Social Security Number (029480664).

NM1*EY*1*MIDDLEONE*JULIE**EI*777444~**

The individual's name (JULIE MIDDLEONE) and employee's identification number (777444).

RMR*IG*54447750~**

The policy being paid (544477) for JULIE MIDDLEONE. The amount being paid to this invoice (\$50).

ENT*4*2J*34*030498099~

Start of detail loop fourth individual. Identifying this is a individual Kelly Newone's remittance items (list bill payment). The individual's Social Security Number (030498099).

NM1*EY*1*NEWONE*KELLY**EI*777111~**

The individual's name (KELLY NEWONE) and employee's identification number (777111).

RMR*IG*55116645~**

The first policy being paid (551166) for KELLY NEWONE. The amount being paid to this invoice (\$45).

RMR*IG*55876650~**

The second policy being paid (558766) for KELLY NEWONE. The amount being paid to this invoice (\$50).

Table 3

SE*21*0001~

Transaction Set Trailer with segment count (21) and Control Number (0001).

3.3 Scenario Three Description

Scenario Three represents a summary bill. This example illustrates a premium payer, using a third party payroll processor, sending an 820 transaction set where the remittance information and the dollars on travel on separate paths.

3.3.1 Scenario Three Example

Table 1

ST*820*0002*005010X218~

Beginning of an 820 transaction set. Control number = 0002

BPR*U*20000*C*ACH*CCP*01*934257813*DA*1234587*123155555501*
025677833*DA*99887766*20070620~**

Financial institution to send the payment of \$20,000 separate from the remittance information. The payment will use an ACH CCP format. The premium payer's bank transit routing number is 934257813 and their bank account number is 1234587. The premium receiver's bank transit routing number is 025677833 and their bank account number is 99887766. The effective date of the payment is June 20, 2007.

TRN*3*12345*123155555~

Since the remittance and dollars travel on separate paths, the financial reassociation trace number of 12345 will be used to reassociate the remittance information with the payment. The Federal Tax ID, 231555555, identifies the premium payer.

REF*14*673001~

The premium payer's master account number is 673001.

REF*2F*0004369123~

The consolidated invoice number is 0004369123.

N1*PE*DEF HEALTHCARE CO*FI*998216353~

The premium receiver's name and Federal Tax ID Number.

N1*PR*ABC PLASTICS*FI*123155555~

The premium payer's name and Federal Tax ID Number.

Table 2

ENT*1*2L*FI*000057811~

Start of the detail loop. This identifies the premium payer as a corporation and lists their Federal Tax ID Number

RMR*IK*0004369123*PI*20000~

Details the invoice and the amount being paid on that invoice.

IT1*1~

Start of required member counts under a summary RMR item.

SLN*10*100*IE~**

One hundred employees have individual coverage.

SLN*20*75*PR~**

Seventy-five employees have two party coverage.

SLN*30*125*10~**

One hundred twenty-five employees have family coverage.

Table 3

SE*14*0002~

Transaction Set Trailer.

3.4 Scenario Four Description

Scenario Four depicts a list bill. This example illustrates a premium payer, using a third party payroll processor, sending an 820 transaction set where the remittance information and the dollars on travel on separate paths. The payment detail will list each individual employee, the policy numbers, payment amounts and adjustment amounts.

3.4.1 Scenario Four Example

Table 1

ST*820*0002*005010X218~

Beginning of an 820 transaction set. Control number = 0002

BPR*U*20000*C*ACH*CCP*01*934257813*DA*1234587*123155555501*
025677833*DA*99887766*20070620~**

Financial institution to send the payment of \$20,000 separate from the remittance information. The payment will use an ACH CCP format. The premium payer's bank transit routing number is 934257813 and their bank account number is 1234587. The premium receiver's bank transit routing number is 025677833 and their bank account number is 99887766. The effective date of the payment is June 20, 2007.

TRN*3*12345*1231555555~

Since the remittance and dollars travel on separate paths, the financial reassociation trace number of 12345 will be used to reassociated the remittance information with payment. The federal tax id, 231555555, identifies the premium payer.

REF*14*673001~

The premium payer's master account number is 673001.

REF*2F*0004369123~

The consolidated invoice number is 0004369123.

N1*PE*DEF HEALTHCARE CO*FI*998216353~

The premium receiver's name and Federal Tax ID Number.

N1*PR*ABC PLASTICS*FI*000057811~

The premium payer's name and Federal Tax ID Number.

Table 2

ENT*1*2J*34*190206123~

Start of individual detail loop.

NM1*EY*1*SMITH*JOHN**EI*123456~**

Individual's name and employee identification number.

RMR*CT*1902061237000~**

Individual's policy and amount being paid.

ENT*2*2J*34*163910163~

Start of individual detail loop.

NM1*EY*1*JONES*MARY**EI*793016~**

Individual's name and employee identification number.

RMR*CT*16391016310000*11000~**

Individual's policy, amount being paid, and invoiced amount.

ADX* -1000*52~

Shows an adjustment being made to this Individual's invoice.

ENT*3*2J*34*179203456~

Start of individual detail loop.

NM1*EY*1*JOHNSON*JOE**EI*934213~**

Individual's name and employee identification number.

RMR*CT*1792034563000*3100~**

Individual's policy, amount being paid, and invoiced amount.

ADX* -100*52~

Shows an adjustment being made to this individual's invoice.

Table 3

SE*19*0002~

Transaction Set Trailer and control number.

A External Code Sources

A.1 External Code Sources

Appendix A is a listing of all external code sources referenced in this implementation guide.

4 ABA Routing Number

SIMPLE DATA ELEMENT/CODE REFERENCES

20, 66/13, 506/01, 647/806

SOURCE

Key to American Bankers Association Routing Numbers

AVAILABLE FROM

Rand McNally & Company

P. O. Box 7600

Chicago, IL 60680

ABSTRACT

Contains the Federal Reserve Routing Codes. The first four digits identify the Federal Reserve District, the next four the institution, and the last is a check digit.

5 Countries, Currencies and Funds

SIMPLE DATA ELEMENT/CODE REFERENCES

26, 100, 1715, 66/38, 235/CH, 955/SP

SOURCE

Codes for Representation of Names of Countries, ISO 3166-(Latest Release)

Codes for Representation of Currencies and Funds, ISO 4217-(Latest Release)

AVAILABLE FROM

American National Standards Institute

25 West 43rd Street, 4th Floor

New York, NY 10036

ABSTRACT

Part 1 (Country codes) of the ISO 3166 international standard establishes codes that represent the current names of countries, dependencies, and other areas of special geopolitical interest, on the basis of lists of country names obtained from the United Nations. Part 2 (Country subdivision codes) establishes a code that represents the names of the principal administrative divisions, or similar areas, of the countries, etc. included in Part 1. Part 3 (Codes for formerly used names of countries) establishes a code that represents non-current country names, i.e., the country names deleted from ISO 3166 since its first publication in 1974. Most currencies are those of the geopolitical entities that are listed in ISO 3166 Part 1, Codes for the Representation of Names of Countries. The code may be a three-character alphabetic or three-digit numeric. The two leftmost characters of the alphabetic code identify the currency authority to which the code is assigned (using the two character alphabetic code from ISO 3166 Part 1, if applicable). The rightmost character is a mnemonic derived from the name of the major currency unit or fund. For currencies not associated with a single geographic entity, a specially-allocated two-character alphabetic code, in the range XA to XZ identifies the currency authority. The rightmost character is derived from the name of the geographic area concerned, and is mnemonic to the extent possible. The numeric codes are identical to those assigned to the geographic entities listed in ISO 3166 Part 1. The range 950-998 is reserved for identification of funds and currencies not associated with a single entity listed in ISO 3166 Part 1.

16 D-U-N-S Number

SIMPLE DATA ELEMENT/CODE REFERENCES

860, 66/1, 66/9, 128/DNS, 128/DUN

SOURCE

Dun & Bradstreet

AVAILABLE FROM

U.S. D-U-N-S Number assignment and lookup services are available through EDI, on-line, several types of mainframe and personal computer media, through a 900 Number Service (900-990-3867), and in print.

Dun & Bradstreet Information Services
Information Quality Department
D-U-N-S Number Administration
899 Eaton Avenue
Bethlehem, PA 18025-0001

ABSTRACT

The D-U-N-S Number is a non-indicative nine-digit number assigned and maintained by Dun & Bradstreet to identify unique business establishments. D-U-N-S Numbers are assigned to businesses worldwide. The ninth digit of the D-U-N-S Number is a Modulus Ten Check Digit which catches 100% of single digit errors and 98% of single transposition errors. D-U-N-S Numbers provide positive identification of business locations possessing unique, separate, and distinct operations. Through the D-U-N-S Number, Dun & Bradstreet maintains linkage between units of an organization to easily identify corporate family relationships, such as those between headquarters, branches, subsidiaries, and divisions. The D-U-N-S Number is the non-indicative computer "address" of a business for which detailed marketing and credit information is maintained by Dun & Bradstreet.

22 States and Provinces

SIMPLE DATA ELEMENT/CODE REFERENCES

156, 66/SJ, 235/A5, 771/009

SOURCE

U.S. Postal Service or

Canada Post or

Bureau of Transportation Statistics

AVAILABLE FROM

The U.S. state codes may be obtained from:

U.S. Postal Service

National Information Data Center

P.O. Box 2977

Washington, DC 20013

www.usps.gov

The Canadian province codes may be obtained from:

<http://www.canadapost.ca>

The Mexican state codes may be obtained from:

www.bts.gov/ntda/tbscd/mex-states.html

ABSTRACT

Provides names, abbreviations, and two character codes for the states, provinces and sub-country divisions as defined by the appropriate government agency of the United States, Canada, and Mexico.

51 ZIP Code

SIMPLE DATA ELEMENT/CODE REFERENCES

116, 66/16, 309/PQ, 309/PR, 309/PS, 771/010

SOURCE

National ZIP Code and Post Office Directory, Publication 65

The USPS Domestic Mail Manual

AVAILABLE FROM

U.S Postal Service

Washington, DC 20260

New Orders

Superintendent of Documents

P.O. Box 371954

Pittsburgh, PA 15250-7954

ABSTRACT

The ZIP Code is a geographic identifier of areas within the United States and its territories for purposes of expediting mail distribution by the U.S. Postal Service. It is five or nine numeric digits. The ZIP Code structure divides the U.S. into ten large groups of states. The leftmost digit identifies one of these groups. The next two digits identify a smaller geographic area within the large group. The two rightmost digits identify a local delivery area. In the nine-digit ZIP Code, the four digits that follow the hyphen further subdivide the delivery area. The two leftmost digits identify a sector which may consist of several large buildings, blocks or groups of streets. The rightmost digits divide the sector into segments such as a street, a block, a floor of a building, or a cluster of mailboxes. The USPS Domestic Mail Manual includes information on the use of the new 11-digit zip code.

60 (DFI) Identification Number

SIMPLE DATA ELEMENT/CODE REFERENCES

507

SOURCE

a) Thompson Bank Directory: American Bankers Association (ABA) Routing Numbers

- b) New York Clearinghouse Association: Clearinghouse Interbank Payment System (CHIPS) Participant Numbers
- c) Canadian Payments Association Directory: Canadian Bank Transit Numbers
- d) ISO/S.W.I.F.T. Bank Identifier Code Directory: ISO Bank Identifier Codes

AVAILABLE FROM

- a) Thompson Financial Publishing
P.O. Box 65
Skokie, IL 60076-0065
- b) New York Clearinghouse Association
450 West 33rd Street
New York, New York 10001
- c) Bowne of Toronto
60 Gervais Drive
Toronto, Ontario
Canada M3C 1Z3
- d) S.W.I.F.T. SC
Avenue Adele 1
B-1310 La Hulpe
Belgium

ABSTRACT

Assigned alphanumeric codes identifying depository financial institution.

91 Canadian Financial Institution Branch and Institution Number

SIMPLE DATA ELEMENT/CODE REFERENCES

66/CF, 128/04, 506/04, 647/806

SOURCE

Canadian Payments Association (CPA) Financial Institution Directories

Volume 1 - Banks

Volume 2 - Credit Unions and Caisses Populaires
Volume 3 - Trust Companies, Loan Companies and other Deposit-taking Institutions

AVAILABLE FROM

Bowne of Canada, Ltd.
60 Gervais Drive

Toronto, Ontario M3C 1Z3
Canada

ABSTRACT

Contains the Canadian financial institutions transit and branch numbers. The first four digits represent the financial institution ID.

327 Society for Worldwide Interbank Financial Telecommunication (SWIFT)

SIMPLE DATA ELEMENT/CODE REFERENCES

1270/S

SOURCE

The SWIFT User Handbook

AVAILABLE FROM

Society for Worldwide Interbank Financial Telecommunication S.C.
Avenue Adele 1
B-1310
La Hulpe
Belgium

ABSTRACT

Contains financial transaction codes approved for use in SWIFT transactions.

540 Centers for Medicare and Medicaid Services PlanID

SIMPLE DATA ELEMENT/CODE REFERENCES

66/XV, 128/ABY

SOURCE

PlanID Database

AVAILABLE FROM

Centers for Medicare and Medicaid Services
Center of Beneficiary Services, Membership Operations Group
Division of Benefit Coordination

S1-05-06
7500 Security Boulevard
Baltimore, MD 21244-1850

ABSTRACT

The Centers for Medicare and Medicaid Services has joined with other payers to develop a unique national payer identification number. The Centers for Medicare and Medicaid Services is the authorizing agent for enumerating payers through the services of a PlanID Registrar. It may also be used by other payers on a voluntary basis.

932 Universal Postal Codes

SIMPLE DATA ELEMENT/CODE REFERENCES

116

SOURCE

Universal Postal Union website

AVAILABLE FROM

International Bureau of the Universal Postal Union

POST*CODE

Case postale 13

3000 BERNE 15 Switzerland

ABSTRACT

The postcode is the fundamental, essential element of an address. A unique, universal identifier, it unambiguously identifies the addressee's locality and assists in the transmission and sorting of mail items. At present, 105 UPU member countries use postcodes as part of their addressing systems.

B Nomenclature

B.1 ASC X12 Nomenclature

B.1.1 Interchange and Application Control Structures

Appendix B is provided as a reference to the X12 syntax, usage, and related information. It is not a full statement of Interchange and Control Structure rules. The full X12 Interchange and Control Structures and other rules (X12.5, X12.6, X12.59, X12 dictionaries, other X12 standards and official documents) apply unless specifically modified in the detailed instructions of this implementation guide (see Section B.1.1.3.1.2 - *Decimal* for an example of such a modification).

B.1.1.1 Interchange Control Structure

The transmission of data proceeds according to very strict format rules to ensure the integrity and maintain the efficiency of the interchange. Each business grouping of data is called a transaction set. For instance, a group of benefit enrollments sent from a sponsor to a payer is considered a transaction set.


Each transaction set contains groups of logically related data in units called segments. For instance, the N4 segment used in the transaction set conveys the city, state, ZIP Code, and other geographic information. A transaction set contains multiple segments, so the addresses of the different parties, for example, can be conveyed from one computer to the other. An analogy would be that the transaction set is like a freight train; the segments are like the train's cars; and each segment can contain several data elements the same as a train car can hold multiple crates.

The sequence of the elements within one segment is specified by the ASC X12 standard as well as the sequence of segments in the transaction set. In a more conventional computing environment, the segments would be equivalent to records, and the elements equivalent to fields.

Similar transaction sets, called "functional groups," can be sent together within a transmission. Each functional group is prefaced by a group start segment; and a functional group is terminated by a group end segment. One or more functional groups are prefaced by an interchange header and followed by an interchange trailer.

Figure B.1 - *Transmission Control Schematic*, illustrates this interchange control.

Figure B.1 - Transmission Control Schematic

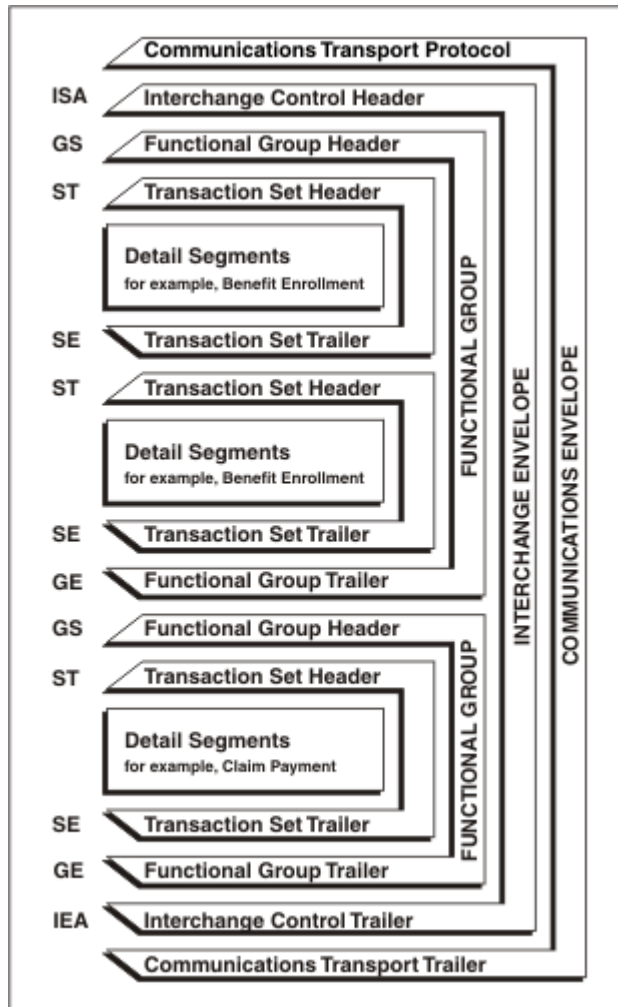

The interchange header and trailer segments envelop one or more functional groups or interchange-related control segments and perform the following functions:

1. Define the data element separators and the data segment terminator.
2. Identify the sender and receiver.
3. Provide control information for the interchange.
4. Allow for authorization and security information.

B.1.1.2 Application Control Structure Definitions and Concepts

B.1.1.2.1 Basic Structure

A data element corresponds to a data field in data processing terminology. A data segment corresponds to a record in data processing terminology. The data segment

begins with a segment ID and contains related data elements. A control segment has the same structure as a data segment; the distinction is in the use. The data segment is used primarily to convey user information, but the control segment is used primarily to convey control information and to group data segments.

B.1.1.2.2 Basic Character Set

The section that follows is designed to have representation in the common character code schemes of EBCDIC, ASCII, and CCITT International Alphabet 5. The ASC X12 standards are graphic-character-oriented; therefore, common character encoding schemes other than those specified herein may be used as long as a common mapping is available. Because the graphic characters have an implied mapping across character code schemes, those bit patterns are not provided here.

The basic character set of this standard, shown in Table B.1 - *Basic Character Set*, includes those selected from the uppercase letters, digits, space, and special characters as specified below.

Table B.1 - Basic Character Set

A...Z	0...9	!	"	&	'	(	)	+	*
,	-	.	/	:	;	?	=	" " (space)	

B.1.1.2.3 Extended Character Set

An extended character set may be used by negotiation between the two parties and includes the lowercase letters and other special characters as specified in Table B.2 - *Extended Character Set*.

Table B.2 - Extended Character Set

a...z	%	~	@	[	]	_	{	}
\		<	>	^	`	#	\$	

Note that the extended characters include several character codes that have multiple graphical representations for a specific bit pattern. The complete list appears in other standards such as CCITT S.5. Use of the USA graphics for these codes presents no problem unless data is exchanged with an international partner. Other problems, such as the translation of item descriptions from English to French, arise when exchanging data with an international partner, but minimizing the use of codes with multiple graphics eliminates one of the more obvious problems.

For implementations compliant with this guide, either the entire extended character set must be acceptable, or the entire extended character set must not be used. In the absence of a specific trading partner agreement to the contrary, trading partners will assume that the extended character set is acceptable. Use of the extended character set allows the use of the "@" character in email addresses within the PER segment. Users should note that characters in the extended character set, as well as the basic character set, may be used as delimiters only when they do not occur in the data as stated in Section B.1.1.2.4.1 - *Base Control Set*.

B.1.1.2.4 Control Characters

Two control character groups are specified; they have restricted usage. The common notation for these groups is also provided, together with the character coding in three common alphabets. In Table B.3 - *Base Control Set*, the column IA5 represents CCITT V.3 International Alphabet 5.

B.1.1.2.4.1 Base Control Set

The base control set includes those characters that will not have a disruptive effect on most communication protocols. These are represented by:

Table B.3 - Base Control Set

NOTATION	NAME	EBCDIC	ASCII	IA5
BEL	bell	2F	07	07
HT	horizontal tab	05	09	09
LF	line feed	25	0A	0A
VT	vertical tab	0B	0B	0B
FF	form feed	0C	0C	0C
CR	carriage return	0D	0D	0D
FS	file separator	1C	1C	1C
GS	group separator	1D	1D	1D
RS	record separator	1E	1E	1E
US	unit separator	1F	1F	1F
NL	new line	15		

The Group Separator (GS) may be an exception in this set because it is used in the 3780 communications protocol to indicate blank space compression.

B.1.1.2.4.2 Extended Control Set

The extended control set includes those that may have an effect on a transmission system. These are shown in Table B.4 - *Extended Control Set*.

Table B.4 - *Extended Control Set*

NOTATION	NAME	EBCDIC	ASCII	IA5
SOH	start of header	01	01	01
STX	start of text	02	02	02
ETX	end of text	03	03	03
EOT	end of transmission	37	04	04
ENQ	enquiry	2D	05	05
ACK	acknowledge	2E	06	06
DC1	device control 1	11	11	11
DC2	device control 2	12	12	12
DC3	device control 3	13	13	13
DC4	device control 4	3C	14	14
NAK	negative acknowledge	3D	15	15
SYN	synchronous idle	32	16	16
ETB	end of block	26	17	17

B.1.1.2.5 Delimiters

A delimiter is a character used to separate two data elements or component elements or to terminate a segment. The delimiters are an integral part of the data.

Delimiters are specified in the interchange header segment, ISA. The ISA segment can be considered in implementations compliant with this guide (see Appendix C, ISA Segment Note 1) to be a 105 byte fixed length record, followed by a segment terminator. The data element separator is byte number 4; the repetition separator is byte number

83; the component element separator is byte number 105; and the segment terminator is the byte that immediately follows the component element separator.

Once specified in the interchange header, the delimiters are not to be used in a data element value elsewhere in the interchange. For consistency, this implementation guide uses the delimiters shown in Table B.5 - *Delimiters*, in all examples of EDI transmissions.

Table B.5 - Delimiters

CHARACTER	NAME	DELIMITER
*	Asterisk	Data Element Separator
^	Carat	Repetition Separator
:	Colon	Component Element Separator
~	Tilde	Segment Terminator

The delimiters above are for illustration purposes only and are not specific recommendations or requirements. Users of this implementation guide should be aware that an application system may use some valid delimiter characters within the application data. Occurrences of delimiter characters in transmitted data within a data element will result in errors in translation. The existence of asterisks (*) within transmitted application data is a known issue that can affect translation software.

B.1.1.3 Business Transaction Structure Definitions and Concepts

The ASC X12 standards define commonly used business transactions (such as a health care claim) in a formal structure called "transaction sets." A transaction set is composed of a transaction set header control segment, one or more data segments, and a transaction set trailer control segment. Each segment is composed of the following:

- A unique segment ID
- One or more logically related data elements each preceded by a data element separator
- A segment terminator

B.1.1.3.1 Data Element

The data element is the smallest named unit of information in the ASC X12 standard. Data elements are identified as either simple or component. A data element that occurs as an ordinal member of a composite data structure is identified as a component data element. A data element that occurs in a segment outside the defined boundaries of a composite data structure is identified as a simple data element. The

distinction between simple and component data elements is strictly a matter of context because a data element can be used in either capacity.

Data elements are assigned a unique reference number. Each data element has a name, description, type, minimum length, and maximum length. For ID type data elements, this guide provides the applicable ASC X12 code values and their descriptions or references where the valid code list can be obtained.

A simple data element within a segment may have an attribute indicating that it may occur once or a specific number of times more than once. The number of permitted repeats are defined as an attribute in the individual segment where the repeated data element occurs.

Each data element is assigned a minimum and maximum length. The length of the data element value is the number of character positions used except as noted for numeric, decimal, and binary elements.

The data element types shown in Table B.6 - *Data Element Types*, appear in this implementation guide.

Table B.6 - Data Element Types

SYMBOL	TYPE
Nn	Numeric
R	Decimal
ID	Identifier
AN	String
DT	Date
TM	Time
B	Binary

The data element minimum and maximum lengths may be restricted in this implementation guide for a compliant implementation. Such restrictions may occur by virtue of the allowed qualifier for the data element or by specific instructions regarding length or format as stated in this implementation guide.

B.1.1.3.1.1 Numeric

A numeric data element is represented by one or more digits with an optional leading sign representing a value in the normal base of 10. The value of a numeric data element includes an implied decimal point. It is used when the position of the decimal point within the data is permanently fixed and is not to be transmitted with the data.

This set of guides denotes the number of implied decimal positions. The representation for this data element type is "Nn" where N indicates that it is numeric and n indicates the number of decimal positions to the right of the implied decimal point.

If n is 0, it need not appear in the specification; N is equivalent to N0. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) must not be transmitted.

EXAMPLE

A transmitted value of 1234, when specified as numeric type N2, represents a value of 12.34.

Leading zeros must be suppressed unless necessary to satisfy a minimum length requirement. The length of a numeric type data element does not include the optional sign.

B.1.1.3.1.2 Decimal

A decimal data element may contain an explicit decimal point and is used for numeric values that have a varying number of decimal positions. This data element type is represented as "R."

The decimal point always appears in the character stream if the decimal point is at any place other than the right end. If the value is an integer (decimal point at the right end) the decimal point must be omitted. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) must not be transmitted.

Leading zeros must be suppressed unless necessary to satisfy a minimum length requirement. Trailing zeros following the decimal point must be suppressed unless necessary to indicate precision. The use of triad separators (for example, the commas in 1,000,000) is expressly prohibited. The length of a decimal type data element does not include the optional leading sign or decimal point.

EXAMPLE

A transmitted value of 12.34 represents a decimal value of 12.34.

While the ASC X12 standard supports usage of exponential notation, this guide prohibits that usage.

For implementation of this guide under the rules promulgated under the Health Insurance Portability and Accountability Act (HIPAA), decimal data elements in Data Element 782 (Monetary Amount) will be limited to a maximum length of 10 characters including reported or implied places for cents (implied value of 00 after the decimal point). Note the statement in the preceding paragraph that the decimal point and leading sign, if sent, are not part of the character count.

EXAMPLE

For implementations mandated under HIPAA rules:

- The following transmitted value represents the largest positive dollar amount that can be sent: 99999999.99
- The following transmitted value is the longest string of characters that can be sent representing whole dollars: 99999999
- The following transmitted value is the longest string of characters that can be sent representing negative dollars and cents: -99999999.99
- The following transmitted value is the longest string of characters that can be sent representing negative whole dollars: -99999999

B.1.1.3.1.3 Identifier

An identifier data element always contains a value from a predefined list of codes that is maintained by the ASC X12 Committee or some other body recognized by the Committee. Trailing spaces must be suppressed unless they are necessary to satisfy a minimum length. An identifier is always left justified. The representation for this data element type is "ID."

B.1.1.3.1.4 String

A string data element is a sequence of any characters from the basic or extended character sets. The string data element must contain at least one non-space character. The significant characters shall be left justified. Leading spaces, when they occur, are presumed to be significant characters. Trailing spaces must be suppressed unless they are necessary to satisfy a minimum length. The representation for this data element type is "AN."

B.1.1.3.1.5 Date

A date data element is used to express the standard date in either YYMMDD or CCYYMMDD format in which CC is the first two digits of the calendar year, YY is the last two digits of the calendar year, MM is the month (01 to 12), and DD is the day in the

month (01 to 31). The representation for this data element type is "DT." Users of this guide should note that all dates within transactions are 8-character dates (millennium compliant) in the format CCYYMMDD. The only date data element that is in format YYMMDD is the Interchange Date data element in the ISA segment and the TA1 segment where the century is easily determined because of the nature of an interchange header.

B.1.1.3.1.6 Time

A time data element is used to express the ISO standard time HHMMSSd..d format in which HH is the hour for a 24 hour clock (00 to 23), MM is the minute (00 to 59), SS is the second (00 to 59) and d..d is decimal seconds. The representation for this data element type is "TM." The length of the data element determines the format of the transmitted time.

EXAMPLE

Transmitted data elements of four characters denote HHMM. Transmitted data elements of six characters denote HHMMSS.

B.1.1.3.1.7 Binary

The binary data element is any sequence of octets ranging in value from binary 00000000 to binary 11111111. This data element type has no defined maximum length. Actual length is specified by the immediately preceding data element. Within the body of a transaction set (from ST to SE) implemented according to this technical report, the binary data element type is only used in the segments Binary Data Segment BIN, and Binary Data Structure BDS. Within those segments, Data Element 785 Binary Data is a string of octets which can assume any binary pattern from hexadecimal 00 to FF, and can be used to send text as well as coded data, including data from another application in its native format. The binary data type is also used in some control and security structures.

Not all transaction sets use the Binary Data Segment BIN or Binary Data Structure BDS.

B.1.1.3.2 Repeating Data Elements

Simple or composite data elements within a segment can be designated as repeating data elements. Repeating data elements are adjacent data elements that occur up to a number of times specified in the standard as number of repeats. The implementation guide may also specify the number of repeats of a repeating data element in a specific location in the transaction that are permitted in a compliant implementation. Adjacent occurrences of the same repeating simple data element or composite data structure in a segment shall be separated by a repetition separator.

B.1.1.3.3 Composite Data Structure

The composite data structure is an intermediate unit of information in a segment. Composite data structures are composed of one or more logically related simple data elements, each, except the last, followed by a sub-element separator. The final data element is followed by the next data element separator or the segment terminator. Each simple data element within a composite is called a component.

Each composite data structure has a unique four-character identifier, a name, and a purpose. The identifier serves as a label for the composite. A composite data structure can be further defined through the use of syntax notes, semantic notes, and comments. Each component within the composite is further characterized by a reference designator and a condition designator. The reference designators and the condition designators are described in Section B.1.1.3.8 - *Reference Designator* and Section B.1.1.3.9 - *Condition Designator*.

A composite data structure within a segment may have an attribute indicating that it may occur once or a specific number of times more than once. The number of permitted repeats are defined as an attribute in the individual segment where the repeated composite data structure occurs.

B.1.1.3.4 Data Segment

The data segment is an intermediate unit of information in a transaction set. In the data stream, a data segment consists of a segment identifier, one or more composite data structures or simple data elements each preceded by a data element separator and succeeded by a segment terminator.

Each data segment has a unique two- or three-character identifier, a name, and a purpose. The identifier serves as a label for the data segment. A segment can be further defined through the use of syntax notes, semantic notes, and comments. Each simple data element or composite data structure within the segment is further characterized by a reference designator and a condition designator.

B.1.1.3.5 Syntax Notes

Syntax notes describe relational conditions among two or more data segment units within the same segment, or among two or more component data elements within the same composite data structure. For a complete description of the relational conditions, See Section B.1.1.3.9 - *Condition Designator*.

B.1.1.3.6 Semantic Notes

Simple data elements or composite data structures may be referenced by a semantic note within a particular segment. A semantic note provides important additional information regarding the intended meaning of a designated data element, particularly a generic type, in the context of its use within a specific data segment. Semantic notes may also define a relational condition among data elements in a segment based on the presence of a specific value (or one of a set of values) in one of the data elements.

B.1.1.3.7 Comments

A segment comment provides additional information regarding the intended use of the segment.

B.1.1.3.8 Reference Designator

Each simple data element or composite data structure in a segment is provided a structured code that indicates the segment in which it is used and the sequential position within the segment. The code is composed of the segment identifier followed by a two-digit number that defines the position of the simple data element or composite data structure in that segment.

For purposes of creating reference designators, the composite data structure is viewed as the hierarchical equal of the simple data element. Each component data element in a composite data structure is identified by a suffix appended to the reference designator for the composite data structure of which it is a member. This suffix is prefixed with a hyphen and defines the position of the component data element in the composite data structure.

EXAMPLE

- The first simple element of the CLP segment would be identified as CLP01.
- The first position in the SVC segment is occupied by a composite data structure that contains seven component data elements, the reference designator for the second component data element would be SVC01-02.

B.1.1.3.9 Condition Designator

This section provides information about X12 standard conditions designators. It is provided so that users will have information about the general standard. Implementation guides may impose other conditions designators. See implementation guide section 2.1 Presentation Examples for detailed information about the implementation guide Industry Usage requirements for compliant implementation.

Data element conditions are of three types: mandatory, optional, and relational. They define the circumstances under which a data element may be required to be present or not present in a particular segment.

Table B.7 - Condition Designator

DESIGNATOR	DESCRIPTION								
M- Mandatory	The designation of mandatory is absolute in the sense that there is no dependency on other data elements. This designation may apply to either simple data elements or composite data structures. If the designation applies to a composite data structure, then at least one value of a component data element in that composite data structure shall be included in the data segment.								
O- Optional	The designation of optional means that there is no requirement for a simple data element or composite data structure to be present in the segment. The presence of a value for a simple data element or the presence of value for any of the component data elements of a composite data structure is at the option of the sender.								
X- Relational	Relational conditions may exist among two or more simple data elements within the same data segment based on the presence or absence of one of those data elements (presence means a data element must not be empty). Relational conditions are specified by a condition code (see table below) and the reference designators of the affected data elements. A data element may be subject to more than one relational condition.								
	The definitions for each of the condition codes used within syntax notes are detailed below:								
	<table> <tr> <th>CONDITION CODE</th><th>DEFINITION</th></tr> <tr> <td>P- Paired or Multiple</td><td>If any element specified in the relational condition is present, then all of the elements specified must be present.</td></tr> <tr> <td>R- Required</td><td>At least one of the elements specified in the condition must be present.</td></tr> <tr> <td>E- Exclusion</td><td>Not more than one of the elements specified in the condition may be present.</td></tr> </table>	CONDITION CODE	DEFINITION	P- Paired or Multiple	If any element specified in the relational condition is present, then all of the elements specified must be present.	R- Required	At least one of the elements specified in the condition must be present.	E- Exclusion	Not more than one of the elements specified in the condition may be present.
CONDITION CODE	DEFINITION								
P- Paired or Multiple	If any element specified in the relational condition is present, then all of the elements specified must be present.								
R- Required	At least one of the elements specified in the condition must be present.								
E- Exclusion	Not more than one of the elements specified in the condition may be present.								

DESIGNATOR	DESCRIPTION	
	C- Conditional	If the first element specified in the condition is present, then all other elements must be present. However, any or all of the elements not specified as the first element in the condition may appear without requiring that the first element be present. The order of the elements in the condition does not have to be the same as the order of the data elements in the data segment.
	L- List Conditional	If the first element specified in the condition is present, then at least one of the remaining elements must be present. However, any or all of the elements not specified as the first element in the condition may appear without requiring that the first element be present. The order of the elements in the condition does not have to be the same as the order of the data elements in the data segment.

B.1.1.3.10 Absence of Data

Any simple data element that is indicated as mandatory must not be empty if the segment is used. At least one component data element of a composite data structure that is indicated as mandatory must not be empty if the segment is used. Optional simple data elements and/or composite data structures and their preceding data element separators that are not needed must be omitted if they occur at the end of a segment. If they do not occur at the end of the segment, the simple data element values and/or composite data structure values may be omitted. Their absence is indicated by the occurrence of their preceding data element separators, in order to maintain the element's or structure's position as defined in the data segment.

Likewise, when additional information is not necessary within a composite, the composite may be terminated by providing the appropriate data element separator or segment terminator.

If a segment has no data in any data element within the segment (an "empty" segment), that segment must not be sent.

B.1.1.3.11 Control Segments

A control segment has the same structure as a data segment, but it is used for transferring control information rather than application information.

B.1.1.3.11.1 Loop Control Segments

Loop control segments are used only to delineate bounded loops. Delineation of the loop shall consist of the loop header (LS segment) and the loop trailer (LE segment). The loop header defines the start of a structure that must contain one or more iterations of a loop of data segments and provides the loop identifier for this loop. The loop trailer defines the end of the structure. The LS segment appears only before the first occurrence of the loop, and the LE segment appears only after the last occurrence of the loop. Unbounded looping structures do not use loop control segments.

B.1.1.3.11.2 Transaction Set Control Segments

The transaction set is delineated by the transaction set header (ST segment) and the transaction set trailer (SE segment). The transaction set header identifies the start and identifier of the transaction set. The transaction set trailer identifies the end of the transaction set and provides a count of the data segments, which includes the ST and SE segments.

B.1.1.3.11.3 Functional Group Control Segments

The functional group is delineated by the functional group header (GS segment) and the functional group trailer (GE segment). The functional group header starts and identifies one or more related transaction sets and provides a control number and application identification information. The functional group trailer defines the end of the functional group of related transaction sets and provides a count of contained transaction sets.

B.1.1.3.11.4 Relations among Control Segments

The control segment of this standard must have a nested relationship as is shown and annotated in this subsection. The letters preceding the control segment name are the segment identifier for that control segment. The indentation of segment identifiers shown below indicates the subordination among control segments.

GS Functional Group Header, starts a group of related transaction sets.

ST Transaction Set Header, starts a transaction set.

LS Loop Header, starts a bounded loop of data segments but is not part of the loop.

LS Loop Header, starts an inner, nested, bounded loop.

LE Loop Trailer, ends an inner, nested bounded loop.

LE Loop Trailer, ends a bounded loop of data segments but is not part of the loop.

SE Transaction Set Trailer, ends a transaction set.

GE Functional Group Trailer, ends a group of related transaction sets.

More than one ST/SE pair, each representing a transaction set, may be used within one functional group. Also more than one LS/LE pair, each representing a bounded loop, may be used within one transaction set.

B.1.1.3.12 Transaction Set

The transaction set is the smallest meaningful set of information exchanged between trading partners. The transaction set consists of a transaction set header segment, one or more data segments in a specified order, and a transaction set trailer segment. See Figure B.1 - *Transmission Control Schematic*.

B.1.1.3.12.1 Transaction Set Header and Trailer

A transaction set identifier uniquely identifies a transaction set. This identifier is the first data element of the Transaction Set Header Segment (ST). A user assigned transaction set control number in the header must match the control number in the Trailer Segment (SE) for any given transaction set. The value for the number of included segments in the SE segment is the total number of segments in the transaction set, including the ST and SE segments.

B.1.1.3.12.2 Data Segment Groups

The data segments in a transaction set may be repeated as individual data segments or as unbounded or bounded loops.

B.1.1.3.12.3 Repeated Occurrences of Single Data Segments

When a single data segment is allowed to be repeated, it may have a specified maximum number of occurrences defined at each specified position within a given transaction set standard. Alternatively, a segment may be allowed to repeat an unlimited number of times. The notation for an unlimited number of repetitions is ">1."

B.1.1.3.12.4 Loops of Data Segments

Loops are groups of semantically related segments. Data segment loops may be unbounded or bounded.

Unbounded Loops

To establish the iteration of a loop, the first data segment in the loop must appear once and only once in each iteration. Loops may have a specified maximum number of

repetitions. Alternatively, the loop may be specified as having an unlimited number of iterations. The notation for an unlimited number of repetitions is ">1."

A specified sequence of segments is in the loop. Loops themselves are optional or mandatory. The requirement designator of the beginning segment of a loop indicates whether at least one occurrence of the loop is required. Each appearance of the beginning segment defines an occurrence of the loop.

The requirement designator of any segment within the loop after the beginning segment applies to that segment for each occurrence of the loop. If there is a mandatory requirement designator for any data segment within the loop after the beginning segment, that data segment is mandatory for each occurrence of the loop. If the loop is optional, the mandatory segment only occurs if the loop occurs.

Bounded Loops

The characteristics of unbounded loops described previously also apply to bounded loops. In addition, bounded loops require a Loop Start Segment (LS) to appear before the first occurrence and a Loop End Segment (LE) to appear after the last consecutive occurrence of the loop. If the loop does not occur, the LS and LE segments are suppressed.

B.1.1.3.12.5 Data Segments in a Transaction Set

When data segments are combined to form a transaction set, three characteristics are applied to each data segment: a requirement designator, a position in the transaction set, and a maximum occurrence.

B.1.1.3.12.6 Data Segment Requirement Designators

A data segment, or loop, has one of the following requirement designators for health care and insurance transaction sets, indicating its appearance in the data stream of a transmission. These requirement designators are represented by a single character code.

Table B.8 - Data Segment Requirement Designators

DESIGNATOR	DESCRIPTION
M- Mandatory	This data segment must be included in the transaction set. (Note that a data segment may be mandatory in a loop of data segments, but the loop itself is optional if the beginning segment of the loop is designated as optional.)
O- Optional	The presence of this data segment is the option of the sending party.

B.1.1.3.12.7 Data Segment Position

The ordinal positions of the segments in a transaction set are explicitly specified for that transaction. Subject to the flexibility provided by the optional requirement designators of the segments, this positioning must be maintained.

B.1.1.3.12.8 Data Segment Occurrence

A data segment may have a maximum occurrence of one, a finite number greater than one, or an unlimited number indicated by ">1."

B.1.1.3.13 Functional Group

A functional group is a group of similar transaction sets that is bounded by a functional group header segment and a functional group trailer segment. The functional identifier defines the group of transactions that may be included within the functional group. The value for the functional group control number in the header and trailer control segments must be identical for any given group. The value for the number of included transaction sets is the total number of transaction sets in the group. See Figure B.1 - *Transmission Control Schematic*.

B.1.1.4 Envelopes and Control Structures

B.1.1.4.1 Interchange Control Structures

Typically, the term "interchange" connotes the ISA/IEA envelope that is transmitted between trading/business partners. Interchange control is achieved through several "control" components. The interchange control number is contained in data element ISA13 of the ISA segment. The identical control number must also occur in data element 02 of the IEA segment. Most commercial translation software products will verify that these two elements are identical. In most translation software products, if these elements are different the interchange will be "suspended" in error.

There are many other features of the ISA segment that are used for control measures. For instance, the ISA segment contains data elements such as authorization information, security information, sender identification, and receiver identification that can be used for control purposes. These data elements are agreed upon by the trading partners prior to transmission. The interchange date and time data elements as well as the interchange control number within the ISA segment are used for debugging purposes when there is a problem with the transmission or the interchange.

Data Element ISA12, Interchange Control Version Number, indicates the version of the ISA/IEA envelope. GS08 indicates the version of the transaction sets contained within the ISA/IEA envelope. The versions are not required to be the same. An Interchange

Acknowledgment can be requested through data element ISA14. The interchange acknowledgement is the TA1 segment. Data element ISA15, Test Indicator, is used between trading partners to indicate that the transmission is in a "test" or "production" mode. Data element ISA16, Subelement Separator, is used by the translator for interpretation of composite data elements.

The ending component of the interchange or ISA/IEA envelope is the IEA segment. Data element IEA01 indicates the number of functional groups that are included within the interchange. In most commercial translation software products, an aggregate count of functional groups is kept while interpreting the interchange. This count is then verified with data element IEA01. If there is a discrepancy, in most commercial products, the interchange is suspended. The other data element in the IEA segment is IEA02 which is referenced above.

See Appendix C, EDI Control Directory, for a complete detailing of the interchange control header and trailer. The authors recommend that when two transactions with different X12 versions numbers are sent in one interchange control structure (multiple functional groups within one ISA/IEA envelope), the Interchange Control version used should be that of the most recent transaction version included in the envelope. For the transmission of HIPAA transactions with mixed versions, this would be a compliant enveloping structure.

B.1.1.4.2 Functional Groups

Control structures within the functional group envelope include the functional identifier code in GS01. The Functional Identifier Code is used by the commercial translation software during interpretation of the interchange to determine the different transaction sets that may be included within the functional group. If an inappropriate transaction set is contained within the functional group, most commercial translation software will suspend the functional group within the interchange. The Application Sender's Code in GS02 can be used to identify the sending unit of the transmission. The Application Receiver's Code in GS03 can be used to identify the receiving unit of the transmission. The functional group contains a creation date (GS04) and creation time (GS05) for the functional group. The Group Control Number is contained in GS06. These data elements (GS04, GS05, and GS06) can be used for debugging purposes. GS08, Version/Release/Industry Identifier Code is the version/release/sub-release of the transaction sets being transmitted in this functional group.

The Functional Group Control Number in GS06 must be identical to data element 02 of the GE segment. Data element GE01 indicates the number of transaction sets within the functional group. In most commercial translation software products, an aggregate

count of the transaction sets is kept while interpreting the functional group. This count is then verified with data element GE01.

See Appendix C, EDI Control Directory, for a complete detailing of the functional group header and trailer.

B.1.1.4.3 HL Structures


The HL segment is used in several X12 transaction sets to identify levels of detail information using a hierarchical structure, such as relating dependents to a subscriber. Hierarchical levels may differ from guide to guide.

For example, each provider can bill for one or more subscribers, each subscriber can have one or more dependents and the subscriber and the dependents can make one or more claims.

Each guide states what levels are available, the level's usage, number of repeats, and whether that level has subordinate levels within a transaction set.

For implementations compliant with this guide, the repeats of the loops identified by the HL structure shall appear in the hierarchical order specified in BHT01, when those particular hierarchical levels exist. That is, an HL parent loop must be followed by the subordinate child loops, if any, prior to commencing a new HL parent loop at the same hierarchical level.

The following diagram, from transaction set 837, illustrates a typical hierarchy.



The two examples below illustrate this requirement:

Example 1 based on Implementation Guide 811X201:

INSURER

- First STATE in transaction (child of INSURER)

- First POLICY in transaction (child of first STATE)

- First VEHICLE in transaction (child of first POLICY)

- Second POLICY in transaction (child of first STATE)

- Second VEHICLE in transaction (child of second POLICY)

- Third VEHICLE in transaction (child of second POLICY)

Second STATE in transaction (child of INSURER)
Third POLICY in transaction (child of second STATE)
Fourth VEHICLE in transaction (child of third POLICY)

Example 2 based on Implementation Guide 837X141

First PROVIDER in transaction
 First SUBSCRIBER in transaction (child of first PROVIDER)
Second PROVIDER in transaction
 Second SUBSCRIBER in transaction (child of second PROVIDER)
 First DEPENDENT in transaction (child of second SUBSCRIBER)
 Second DEPENDENT in transaction (child of second SUBSCRIBER)
 Third SUBSCRIBER in transaction (child of second PROVIDER)
Third PROVIDER in transaction
 Fourth SUBSCRIBER in transaction (child of third PROVIDER)
 Fifth SUBSCRIBER in transaction (child of third PROVIDER)
 Third DEPENDENT in transaction (child of fifth SUBSCRIBER)

B.1.1.5 Acknowledgments

B.1.1.5.1 Interchange Acknowledgment, TA1

The TA1 segment provides the capability for the interchange receiver to notify the sender that a valid envelope was received or that problems were encountered with the interchange control structure. The TA1 verifies the envelopes only. Transaction set-specific verification is accomplished through use of the Functional Acknowledgment Transaction Set, 997. See Section B.1.1.5.2 - *Functional Acknowledgment, 997*, for more details. The TA1 is unique in that it is a single segment transmitted without the GS/GE envelope structure. A TA1 can be included in an interchange with other functional groups and transactions.

Encompassed in the TA1 are the interchange control number, interchange date and time, interchange acknowledgment code, and the interchange note code. The interchange control number, interchange date and time are identical to those that were present in the transmitted interchange from the trading partner. This provides the capability to associate the TA1 with the transmitted interchange. TA104, Interchange Acknowledgment Code, indicates the status of the interchange control structure. This data element stipulates whether the transmitted interchange was accepted with no errors, accepted with errors, or rejected because of errors. TA105, Interchange Note Code, is a numerical code that indicates the error found while processing the interchange control structure. Values for this data element indicate whether the error occurred at the interchange or functional group envelope.

B.1.1.5.2 Functional Acknowledgment, 997

The Functional Acknowledgment Transaction Set, 997, has been designed to allow trading partners to establish a comprehensive control function as a part of their business exchange process. This acknowledgment process facilitates control of EDI. There is a one-to-one correspondence between a 997 and a functional group. Segments within the 997 can identify the acceptance or rejection of the functional group, transaction sets or segments. Data elements in error can also be identified. There are many EDI implementations that have incorporated the acknowledgment process in all of their electronic communications. The 997 is used as a functional acknowledgment to a previously transmitted functional group.

The 997 is a transaction set and thus is encapsulated within the interchange control structure (envelopes) for transmission.

B.2 Object Descriptors

Object Descriptors (OD) provide a method to uniquely identify specific locations within an implementation guide. There is an OD assigned at every level of the X12N implementation:

1. Transaction Set
2. Loop
3. Segment
4. Composite Data Element
5. Component Data Element
6. Simple Data Element

ODs at the first four levels are coded using X12 identifiers separated by underbars:

Entity	Example
1. Transaction Set Identifier plus a unique 2 character value	837Q1
2. Above plus under bar plus Loop Identifier as assigned within an implementation guide	837Q1_2330C
3. Above plus under bar plus Segment Identifier	837Q1_2330C_NM1
4. Above plus Reference Designator plus under bar plus Composite Identifier	837Q1_2400_SV101_C003

The fifth and sixth levels add a name derived from the "Industry Term" defined in the X12N Data Dictionary. The name is derived by removing the spaces.

Entity	Example
5. Number 4 above plus composite sequence plus under bar plus name	837Q1_2400_SV101_C00302_ProcedureCode
6. Number 3 above plus Reference Designator plus two under bars plus name	837Q1_2330C_NM109__OtherPayerPatientPrimaryIdentifier

Said in another way, ODs contain a coded component specifying a location in an implementation guide, a separator, and a name portion. For example:



Since ODs are unique across all X12N implementation guides, they can be used for a variety of purposes. For example, as a cross reference to older data transmission systems, like the National Standard Format for health care claims, or to form XML tags for newer data transmission systems.

C EDI Control Directory

C.1 Control Segments

- **ISA**
Interchange Control Header Segment
- **GS**
Functional Group Header Segment
- **GE**
Functional Group Trailer Segment
- **IEA**
Interchange Control Trailer Segment

SEGMENT DETAIL

ISA - INTERCHANGE CONTROL HEADER

X12 Segment Name: Interchange Control Header

X12 Purpose: To start and identify an interchange of zero or more functional groups and interchange-related control segments


Segment Repeat: 1

Usage: REQUIRED

- TR3 Notes:**
1. All positions within each of the data elements must be filled.
 2. For compliant implementations under this implementation guide, ISA13, the interchange Control Number, must be a positive unsigned number. Therefore, the ISA segment can be considered a fixed record length segment.
 3. The first element separator defines the element separator to be used through the entire interchange.
 4. The ISA segment terminator defines the segment terminator used throughout the entire interchange.
 5. Spaces in the example interchanges are represented by “.” for clarity.

TR3 Example: ISA*00*.....*01*SECRET....*ZZ*SUBMITTERS.ID..*ZZ*
RECEIVERS.ID...*030101*1253*^*00501*000000905*1*T*::~~

DIAGRAM

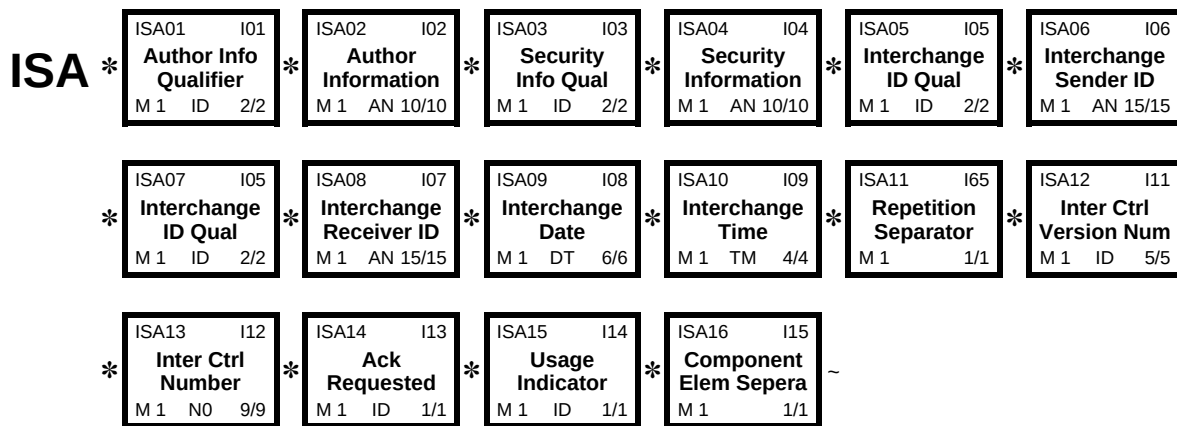

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES																						
REQUIRED	ISA01	I01	Authorization Information Qualifier Code identifying the type of information in the Authorization Information	M 1	ID	2/2																				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>00</td><td>No Authorization Information Present (No Meaningful Information in I02)</td></tr><tr><td>03</td><td>Additional Data Identification</td></tr></table>	CODE	DEFINITION	00	No Authorization Information Present (No Meaningful Information in I02)	03	Additional Data Identification																	
CODE	DEFINITION																									
00	No Authorization Information Present (No Meaningful Information in I02)																									
03	Additional Data Identification																									
REQUIRED	ISA02	I02	Authorization Information Information used for additional identification or authorization of the interchange sender or the data in the interchange; the type of information is set by the Authorization Information Qualifier (I01)	M 1	AN	10/10																				
REQUIRED	ISA03	I03	Security Information Qualifier Code identifying the type of information in the Security Information	M 1	ID	2/2																				
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>00</td><td>No Security Information Present (No Meaningful Information in I04)</td></tr><tr><td>01</td><td>Password</td></tr></table>	CODE	DEFINITION	00	No Security Information Present (No Meaningful Information in I04)	01	Password																	
CODE	DEFINITION																									
00	No Security Information Present (No Meaningful Information in I04)																									
01	Password																									
REQUIRED	ISA04	I04	Security Information This is used for identifying the security information about the interchange sender or the data in the interchange; the type of information is set by the Security Information Qualifier (I03)	M 1	AN	10/10																				
REQUIRED	ISA05	I05	Interchange ID Qualifier Code indicating the system/method of code structure used to designate the sender or receiver ID element being qualified	M 1	ID	2/2																				
			This ID qualifies the Sender in ISA06.																							
			<table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>01</td><td>Duns (Dun & Bradstreet)</td></tr><tr><td>14</td><td>Duns Plus Suffix</td></tr><tr><td>20</td><td>Health Industry Number (HIN)</td></tr><tr><td>27</td><td>CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>28</td><td>Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>29</td><td>Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)</td></tr><tr><td>30</td><td>U.S. Federal Tax Identification Number</td></tr><tr><td>33</td><td>National Association of Insurance Commissioners Company Code (NAIC)</td></tr><tr><td>ZZ</td><td>Mutually Defined</td></tr></table>	CODE	DEFINITION	01	Duns (Dun & Bradstreet)	14	Duns Plus Suffix	20	Health Industry Number (HIN)	27	CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)	28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)	29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)	30	U.S. Federal Tax Identification Number	33	National Association of Insurance Commissioners Company Code (NAIC)	ZZ	Mutually Defined			
CODE	DEFINITION																									
01	Duns (Dun & Bradstreet)																									
14	Duns Plus Suffix																									
20	Health Industry Number (HIN)																									
27	CODE SOURCE 121: Health Industry Number Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)																									
28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)																									
29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)																									
30	U.S. Federal Tax Identification Number																									
33	National Association of Insurance Commissioners Company Code (NAIC)																									
ZZ	Mutually Defined																									
REQUIRED	ISA06	I06	Interchange Sender ID Identification code published by the sender for other parties to use as the receiver ID to route data to them; the sender always codes this value in the sender ID element	M 1	AN	15/15																				

REQUIRED	ISA07	I05	Interchange ID Qualifier Code indicating the system/method of code structure used to designate the sender or receiver ID element being qualified		
This ID qualifies the Receiver in ISA08.					
			CODE	DEFINITION	
			01	Duns (Dun & Bradstreet)	
			14	Duns Plus Suffix	
			20	Health Industry Number (HIN)	
				CODE SOURCE 121: Health Industry Number	
			27	Carrier Identification Number as assigned by Health Care Financing Administration (HCFA)	
			28	Fiscal Intermediary Identification Number as assigned by Health Care Financing Administration (HCFA)	
			29	Medicare Provider and Supplier Identification Number as assigned by Health Care Financing Administration (HCFA)	
			30	U.S. Federal Tax Identification Number	
			33	National Association of Insurance Commissioners Company Code (NAIC)	
			ZZ	Mutually Defined	
REQUIRED	ISA08	I07	Interchange Receiver ID Identification code published by the receiver of the data; When sending, it is used by the sender as their sending ID, thus other parties sending to them will use this as a receiving ID to route data to them		
			M 1	AN	15/15
REQUIRED	ISA09	I08	Interchange Date Date of the interchange		
			M 1	DT	6/6
The date format is YYMMDD.					
REQUIRED	ISA10	I09	Interchange Time Time of the interchange		
			M 1	TM	4/4
The time format is HHMM.					
REQUIRED	ISA11	I65	Repetition Separator Type is not applicable; the repetition separator is a delimiter and not a data element; this field provides the delimiter used to separate repeated occurrences of a simple data element or a composite data structure; this value must be different than the data element separator, component element separator, and the segment terminator		
			M 1		1/1
REQUIRED	ISA12	I11	Interchange Control Version Number Code specifying the version number of the interchange control segments		
			M 1	ID	5/5
			CODE	DEFINITION	
			00501	Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003	
REQUIRED	ISA13	I12	Interchange Control Number A control number assigned by the interchange sender		
			M 1	N0	9/9
The Interchange Control Number, ISA13, must be identical to the associated Interchange Trailer IEA02.					
Must be a positive unsigned number and must be identical to the value in IEA02.					

CONTROL SEGMENTS


REQUIRED	ISA14	I13	Acknowledgment Requested	M 1	ID	1/1	
			Code indicating sender's request for an interchange acknowledgment				
			See Section B.1.1.5.1 for interchange acknowledgment information.				
			CODE	DEFINITION			
			0	No Interchange Acknowledgment Requested			
			1	Interchange Acknowledgment Requested (TA1)			
REQUIRED	ISA15	I14	Interchange Usage Indicator	M 1	ID	1/1	
			Code indicating whether data enclosed by this interchange envelope is test, production or information				
					CODE	DEFINITION	
					P	Production Data	
			T	Test Data			
REQUIRED	ISA16	I15	Component Element Separator	M 1		1/1	
			Type is not applicable; the component element separator is a delimiter and not a data element; this field provides the delimiter used to separate component data elements within a composite data structure; this value must be different than the data element separator and the segment terminator				

SEGMENT DETAIL

GS - FUNCTIONAL GROUP HEADER

X12 Segment Name: Functional Group Header**X12 Purpose:** To indicate the beginning of a functional group and to provide control information**X12 Comments:** 1. A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** GS*RA*SENDER CODE*RECEIVER
CODE*20071231*0802*1*X*005010X218~

DIAGRAM

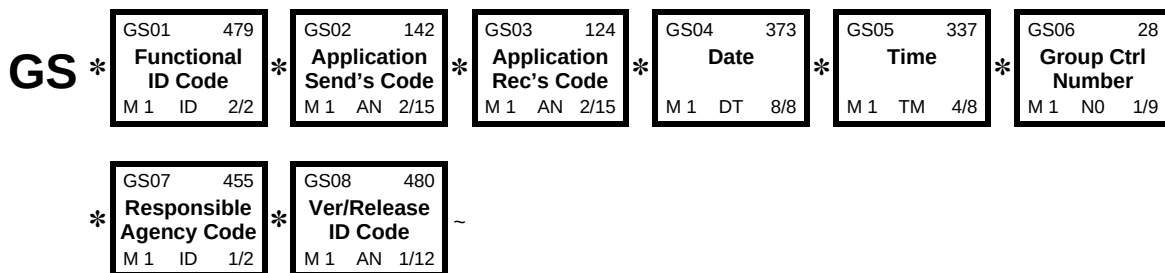

ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	GS01	479	Functional Identifier Code Code identifying a group of application related transaction sets This is the 2-character Functional Identifier Code assigned to each transaction set by X12. The specific code for a transaction set defined by this implementation guide is presented in section 1.2, Version Information.	M 1 ID 2/2
REQUIRED	GS02	142	Application Sender's Code Code identifying party sending transmission; codes agreed to by trading partners Use this code to identify the unit sending the information.	M 1 AN 2/15
REQUIRED	GS03	124	Application Receiver's Code Code identifying party receiving transmission; codes agreed to by trading partners Use this code to identify the unit receiving the information.	M 1 AN 2/15
REQUIRED	GS04	373	Date Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year SEMANTIC: GS04 is the group date. Use this date for the functional group creation date.	M 1 DT 8/8

CONTROL SEGMENTS

REQUIRED	GS05	337	Time Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99) SEMANTIC: GS05 is the group time. Use this time for the creation time. The recommended format is HHMM.	M 1 TM 4/8				
REQUIRED	GS06	28	Group Control Number Assigned number originated and maintained by the sender SEMANTIC: The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02. For implementations compliant with this guide, GS06 must be unique within a single transmission (that is, within a single ISA to IEA enveloping structure). The authors recommend that GS06 be unique within all transmissions over a period of time to be determined by the sender.	M 1 N0 1/9				
REQUIRED	GS07	455	Responsible Agency Code Code identifying the issuer of the standard; this code is used in conjunction with Data Element 480 <table><tr><th>CODE</th><th>DEFINITION</th></tr></table>	CODE	DEFINITION	M 1 ID 1/2		
CODE	DEFINITION							
REQUIRED	GS08	480	X Accredited Standards Committee X12 Version / Release / Industry Identifier Code Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used, including the GS and GE segments; if code in DE455 in GS segment is X, then in DE 480 positions 1-3 are the version number; positions 4-6 are the release and subrelease, level of the version; and positions 7-12 are the industry or trade association identifiers (optionally assigned by user); if code in DE455 in GS segment is T, then other formats are allowed CODE SOURCE 881: Version / Release / Industry Identifier Code This is the unique Version/Release/Industry Identifier Code assigned to an implementation by X12N. The specific code for a transaction set defined by this implementation guide is presented in section 1.2, Version Information. <table><tr><th>CODE</th><th>DEFINITION</th></tr><tr><td>005010X218</td><td>Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003</td></tr></table>	CODE	DEFINITION	005010X218	Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003	M 1 AN 1/12
CODE	DEFINITION							
005010X218	Standards Approved for Publication by ASC X12 Procedures Review Board through October 2003							

SEGMENT DETAIL

GE - FUNCTIONAL GROUP TRAILER

X12 Segment Name: Functional Group Trailer

X12 Purpose: To indicate the end of a functional group and to provide control information


X12 Comments: 1. The use of identical data interchange control numbers in the associated functional group header and trailer is designed to maximize functional group integrity. The control number is the same as that used in the corresponding header.

Segment Repeat: 1

Usage: REQUIRED

TR3 Example: GE*1*1~

DIAGRAM




ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	GE01	97	Number of Transaction Sets Included Total number of transaction sets included in the functional group or interchange (transmission) group terminated by the trailer containing this data element	M 1 NO 1/6
REQUIRED	GE02	28	Group Control Number Assigned number originated and maintained by the sender SEMANTIC: The data interchange control number GE02 in this trailer must be identical to the same data element in the associated functional group header, GS06.	M 1 NO 1/9

SEGMENT DETAIL

IEA - INTERCHANGE CONTROL TRAILER**X12 Segment Name:** Interchange Control Trailer**X12 Purpose:** To define the end of an interchange of zero or more functional groups and interchange-related control segments**Segment Repeat:** 1**Usage:** REQUIRED**TR3 Example:** IEA*1*000000905~

DIAGRAM



ELEMENT DETAIL

USAGE	REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES
REQUIRED	IEA01	I16	Number of Included Functional Groups A count of the number of functional groups included in an interchange	M 1 NO 1/5
REQUIRED	IEA02	I12	Interchange Control Number A control number assigned by the interchange sender	M 1 NO 9/9

D Change Summary

This Implementation Guide defines X12N implementation 005010X218 of the Payroll Deducted and Other Group Premium Payment for Insurance Products. It is based on version/release/sub release 005010 of the ASC X12 standards.

The previous X12N implementation of the Payroll Deducted and Other Group Premium Payment for Insurance Products was 004050X137. It was based on the version/release/sub release 004050 of the ASC X12 standards.

Implementation of 005010X218 contains significant changes and clarifications. It can only be used with other trading partners who have also implemented 005010X218. Below is a high-level description of the changes in the implementation of 005010X218.

Changes to Section 1

1. Section 1.3.1 reworded.
2. Section 1.2 changed version to 5010.
3. Section 1.3.2 new paragraph added.
4. Section 1.4 wording changed.
5. Section 1.5 added.
6. Section 1.6.1 added.
7. Section 1.6.2 added.
8. Section 1.6.3 added.
9. Section 1.7 wording changed.
10. Section 1.9 wording changed.

Changes to the Section 2

820 Changes

1. Header ST example corrected.
2. Header BPR situational and grey notes changed.
3. Header TRN TR3 note changed.
4. Header TRN TRN03 not changed.
5. 1000A N3 situational rule changed.
6. 1000B N3 situational rule changed.2200A TR3 note corrected.
7. 2200A TR3 example added.
8. 2000A ENT03 code '24' added.
9. 2000A ENT04 grey note removed.
10. 2200B TR3 note corrected.
11. 2200B TR3 example added.2300A TR3 example added.
12. 2300A Situational rule changed.

13. 2300A DTM segment added.
14. 2300A REF01 codes '17' and 'LB' added.
15. 2320A TR3 note corrected.
16. 2320B TR3 note corrected.
17. 2100B NM101 codes 'IL' and 'DO' added.
18. 2300A Situational rule changed.
19. 2300B DTM added additional TR3 note.
20. 2312A TR3 example added.
21. 2312A loop repeat changed to 4 from >1.
22. 2315A TR3 example added.
23. 2315A loop repeat changed to 4 from >1.

E Data Element Glossary

E.1 Data Element Name Index

This section contains an alphabetic listing of data elements used in this implementation guide. Consult the X12N Data Element Dictionary for a complete list of all X12N Data Elements. Data element names in normal type are generic ASC X12 names. Italic type indicates a health care industry defined name.

Name	<i>Payment Date</i>
Definition	Date of payment.
Transaction Set ID	277
Locator Key	D 2200D SPA12 C001-2 373 156
H=Header, D=Detail, S=Summary	
Loop ID	
Segment ID/Reference Designator	
Composite ID-Sequence	
Data Element Number	
Page Number	

Account Number Qualifier

Code indicating the type of account

H	BPR08	-	569 40
H	BPR14	-	569 41

Adjustment Amount

Adjustment amount for the associated reason code.

D	2320A	ADX01	-	782 103
D	2320B	ADX01	-	782 117

Adjustment Reason Code

Code that indicates the reason for the adjustment.

D	2320A	ADX02	-	426 104
D	2320B	ADX02	-	426 118

Allowance or Charge Indicator

Code which indicates an allowance or charge for the service specified.

D	2312A	SAC01	-	248 98
---	-------	-------	---	---------------------

Amount

Monetary amount.

D	2312A	SAC05	-	610 98
---	-------	-------	---	---------------------

Assigned Number

Number assigned for differentiation within a transaction set.

D	2000A	ENT01	-	554 83
D	2000B	ENT01	-	554 106

Billed Premium Amount

The premium amount due or billed, if different from the paid amount.

D	2300A	RMR05	-	782 89
D	2300B	RMR05	-	782 113

Check Issue or EFT Effective Date

Date the check was issued or the electronic funds transfer (EFT) effective date.

H		BPR16	-	373 42
---	--	-------	---	---------------------

Check or EFT Trace Number

Check number or Electronic Funds Transfer (EFT) number that is unique within the sender/receiver relationship.

H		TRN02	-	127 43
---	--	-------	---	---------------------

Communication Number

Complete communications number including country or area code when applicable

H	1000B	PER04	-	364 71
H	1000B	PER06	-	364 71
H	1000B	PER08	-	364 72
H	1000C	PER04	-	364 80
H	1000C	PER06	-	364 80
H	1000C	PER08	-	364 81

Communication Number Qualifier

Code identifying the type of communication number.

H		1000B		PER03		-		365		71
H		1000B		PER05		-		365		71
H		1000B		PER07		-		365		72
H		1000C		PER03		-		365		80
H		1000C		PER05		-		365		80
H		1000C		PER07		-		365		81

Contact Function Code

Code identifying the major duty or responsibility of the person or group named.

H		1000B		PER01		-		366		71
H		1000C		PER01		-		366		80

Contract, Invoice, Account, Group, or Policy Number

The reference number to which this premium payment is associated, such as an account number, contract number, invoice number, group number, or policy number.

D		2300A		RMR02		-		127		88
---	--	-------	--	-------	--	---	--	-----	-------	----

Country Code

Code indicating the geographic location.

H		1000A		N404		-		26		61
H		1000B		N404		-		26		69
H		1000C		N404		-		26		78

Country Subdivision Code

Code identifying the country subdivision.

H		1000A		N407		-		1715		61
H		1000B		N407		-		1715		69
H		1000C		N407		-		1715		78

Coverage Period

The coverage period associated with this premium payment.

H				DTM06		-		1251		54
D		2300A		DTM06		-		1251		93
D		2300B		DTM06		-		1251		116

Credit or Debit Flag Code

Code indicating whether amount is a credit or debit

H				BPR03		-		478		38
---	--	--	--	-------	--	---	--	-----	-------	----

Currency Code

Code for country in whose currency the charges are specified.

H				CUR02		-		100		46
---	--	--	--	-------	--	---	--	-----	-------	----

Date

Date expressed as CCYYMMDD where CC represents the first two digits of the calendar year.

H				DTM02		-		373		55
---	--	--	--	-------	--	---	--	-----	-------	----

D		2300A		DTM02		-		373		93
D		2300B		DTM02		-		373		116

Date Time Period Format Qualifier

Code indicating the date format, time format, or date and time format.

H				DTM05		-		1250		54
D		2300A		DTM05		-		1250		93
D		2300B		DTM05		-		1250		116

Date Time Qualifier

Code specifying the type of date or time or both date and time.

H				DTM01		-		374		50
H				DTM01		-		374		51
H				DTM01		-		374		53
H				DTM01		-		374		55
D		2300A		DTM01		-		374		92
D		2300B		DTM01		-		374		115

Depository Financial Institution (DFI) Identification Number Qualifier

Code identifying the type of identification number of Depository Financial Institution (DFI).

H				BPR06		-		506		39
H				BPR12		-		506		41

Detail Premium Payment Amount

Detailed remittance amount on the transaction.

D		2300A		RMR04		-		782		88
D		2300B		RMR04		-		782		113

Entity Identifier Code

Code identifying an organizational entity, a physical location, property or an individual.

H				CUR01		-		98		46
H		1000A		N101		-		98		56
H		1000B		N101		-		98		64
H		1000C		N101		-		98		73
D		2000A		ENT02		-		98		83
D		2000B		ENT02		-		98		106
D		2100B		NM101		-		98		107

Entity Type Qualifier

Code qualifying the type of entity.

D		2100B		NM102		-		1065		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Head Count

Number of members/insured under this summary line item remittance.

D		2315A		SLN04		-		380		101
---	--	-------	--	-------	--	---	--	-----	-------	-----

Identification Code Qualifier

Code designating the system/method of code structure used for Identification Code (67).

H		1000A		N103		-		66		57
H		1000B		N103		-		66		65

H		1000C		N103		-		66		74
D		2000A		ENT03		-		66		83
D		2000B		ENT03		-		66		106
D		2100B		NM108		-		66		109

Implementation Convention Reference

Reference assigned to identify Implementation Convention.

H				ST03		-		1705		35
---	--	--	--	------	--	---	--	------	-------	----

Individual First Name

The first name of an individual to whom specific remittance amounts apply.

D		2100B		NM104		-		1036		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Individual Identifier

Identification number for an individual to whom specific remittance amounts apply.

D		2100B		NM109		-		67		109
---	--	-------	--	-------	--	---	--	----	-------	-----

Individual Last Name

The last name of an individual to which specific remittance amount(s) apply.

D		2100B		NM103		-		1035		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Individual Middle Name

Middle name of an individual to whom specific remittance amounts apply.

D		2100B		NM105		-		1037		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Individual Name Prefix

Prefix to the name of an individual to whom specific remittance amounts apply.

D		2100B		NM106		-		1038		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Individual Name Suffix

Suffix to the name of an individual to whom specific remittance amounts apply.

D		2100B		NM107		-		1039		108
---	--	-------	--	-------	--	---	--	------	-------	-----

Information Only Indicator

An indicator that this segment is informational only

D		2315A		SLN03		-		662		100
---	--	-------	--	-------	--	---	--	-----	-------	-----

Insurance Remittance Reference Number

The reference number for this individual premium remittance, such as a policy number, account number, invoice number.

D		2300B		RMR02		-		127		113
---	--	-------	--	-------	--	---	--	-----	-------	-----

Intermediary Bank Additional Name

Additional name for the intermediary bank.

H		1000C		N201		-		93		75
---	--	-------	--	------	--	---	--	----	-------	----

Intermediary Bank Address Line

Address line for the intermediary bank's address.

H		1000C		N301		-		166		76
---	--	-------	--	------	--	---	--	-----	-------	----

H		1000C		N302		-		166		76
---	--	-------	--	------	--	---	--	-----	-------	----

Intermediary Bank City Name

The city name of the intermediary bank's address.

H		1000C		N401		-		19		77
---	--	-------	--	------	--	---	--	----	-------	----

Intermediary Bank Contact Name

Name identifying the contact person at the intermediary bank.

H		1000C		PER02		-		93		80
---	--	-------	--	-------	--	---	--	----	-------	----

Intermediary Bank Identifier

Number identifying the organization responsible for transferring funds between the banks.

H		1000C		N104		-		67		74
---	--	-------	--	------	--	---	--	----	-------	----

Intermediary Bank Name

Name identifying the organization responsible for transferring funds between the banks.

H		1000C		N102		-		93		74
---	--	-------	--	------	--	---	--	----	-------	----

Intermediary Bank Postal Zone or ZIP Code

The postal zone code of the intermediary bank's address.

H		1000C		N403		-		116		78
---	--	-------	--	------	--	---	--	-----	-------	----

Intermediary Bank State Code

State postal code of the intermediary bank's address.

H		1000C		N402		-		156		78
---	--	-------	--	------	--	---	--	-----	-------	----

Line Item Control Number

Identifier assigned by the submitter/provider to this line item.

D		2310A		IT101		-		350		95
---	--	-------	--	-------	--	---	--	-----	-------	----

D		2315A		SLN01		-		350		100
---	--	-------	--	-------	--	---	--	-----	-------	-----

Organization Identification Code

The code identifying the organization providing the summary level premium remittance.

D		2000A		ENT04		-		67		84
---	--	-------	--	-------	--	---	--	----	-------	----

Organizational Reference Identification Qualifier

Code designating the system/method of code structure used for Organizational reference Identifier.

D		2300A		REF01		-		128		90
D		2300B		REF01		-		128		114

Organizational Reference Identifier

A reference identifier used by the sending and/or receiving organizations.

D		2300A		REF02		-		127		90
D		2300B		REF02		-		127		114

Originating Company Identifier

A unique identifier designating the company originating the transaction.

H				TRN03		-		509		44
---	--	--	--	-------	--	---	--	-----	-------	----

Originating Company Supplemental Code

Number identifying a further subdivision within the entity originating the transaction.

H				BPR11		-		510		40
H				TRN04		-		127		44

Originating Depository Financial Institution (DFI) Identifier

Number identifying the financial institution originating the transaction in an ACH network.

H				BPR07		-		507		39
---	--	--	--	-------	--	---	--	-----	-------	----

Payer Identifier

Number identifying the payer organization.

H				BPR10		-		509		40
---	--	--	--	-------	--	---	--	-----	-------	----

Payer Process Date

The date the payer generated the remittance advice.

H				DTM02		-		373		50
---	--	--	--	-------	--	---	--	-----	-------	----

Payment Action Code

A code that specifies the payer's intent to pay the open amount due, make a partial payment, or pay in advance or on account.

D		2300A		RMR03		-		482		88
---	--	-------	--	-------	--	---	--	-----	-------	----

Payment Format Code

Type of format chosen to send payment

H				BPR05		-		812		38
---	--	--	--	-------	--	---	--	-----	-------	----

Payment Method Code

Code identifying the method for the movement of payment instructions.

H				BPR04		-		591		38
---	--	--	--	-------	--	---	--	-----	-------	----

Premium Delivery Date

The date the premium payment was delivered to the originating depository financial institution.

H				DTM02		-		373		51
---	--	--	--	-------	--	---	--	-----	-------	----

Premium Payer Additional Name

Additional name for the premium payer.

H		1000B		N201		-		93		66
---	--	-------	--	------	--	---	--	----	-------	----

Premium Payer Address Line

Address line for the premium payer's address.

H		1000B		N301		-		166		67
H		1000B		N302		-		166		67

Premium Payer City Name

The city name of the premium payer's address.

H		1000B		N401		-		19		68
---	--	-------	--	------	--	---	--	----	-------	----

Premium Payer Contact Name

Name identifying the contact person at the premium payer organization.

H		1000B		PER02		-		93		71
---	--	-------	--	-------	--	---	--	----	-------	----

Premium Payer Identifier

Number identifying the organization remitting the payment.

H		1000B		N104		-		67		65
---	--	-------	--	------	--	---	--	----	-------	----

Premium Payer Name

Name identifying the organization remitting the payment.

H		1000B		N102		-		93		64
---	--	-------	--	------	--	---	--	----	-------	----

Premium Payer Postal Zone or ZIP Code

The postal zone code of the premium payer's address.

H		1000B		N403		-		116		69
---	--	-------	--	------	--	---	--	-----	-------	----

Premium Payer State Code

State postal code of the premium payer's address.

H		1000B		N402		-		156		69
---	--	-------	--	------	--	---	--	-----	-------	----

Premium Payment Adjustment Amount

An amount by which a premium payment is adjusted.

D		2200A		ADX01		-		782		85
D		2200B		ADX01		-		782		110

Premium Payment Adjustment Reason

A code indicating the reason for a premium payment adjustment.

D		2200A		ADX02		-		426		86
D		2200B		ADX02		-		426		110

Premium Receiver Reference Identifier

The key or reference number used by the premium receiver to designate to which plan, invoice, or account number the premium payment is to be applied.

H				REF02		-		127		49
---	--	--	--	-------	--	---	--	-----	-------	----

Premium Receiver's Additional Name

Additional name for the premium receiver.

H		1000A		N201		-		93		58
---	--	-------	--	------	--	---	--	----	-------	----

Premium Receiver's Address Line

Address line for the premium receiver.

H		1000A		N301		-		166		59
H		1000A		N302		-		166		59

Premium Receiver's City Name

The city name of the premium receiver's address.

H		1000A		N401		-		19		60
---	--	-------	--	------	--	---	--	----	-------	----

Premium Receiver's Communication Number

The communication number of the premium receiver.

H		1000A		RDM03		-		364		63
---	--	-------	--	-------	--	---	--	-----	-------	----

Premium Receiver's Identification Code

Code identifying the premium receiver.

H		1000A		N104		-		67		57
---	--	-------	--	------	--	---	--	----	-------	----

Premium Receiver's Last or Organization Name

Name identifying the organization receiving the payment.

H		1000A		N102		-		93		56
H		1000A		RDM02		-		93		63

Premium Receiver's Postal Zone or Zip Code

The postal zone code of the premium receiver's address.

H		1000A		N403		-		116		61
---	--	-------	--	------	--	---	--	-----	-------	----

Premium Receiver's State Code

State postal code of the premium receiver's address.

H		1000A		N402		-		156		61
---	--	-------	--	------	--	---	--	-----	-------	----

Receiver Bank Account Number

The receiver's bank account number at the Receiving Depository Financial Institution.

H				BPR15		-		508		42
---	--	--	--	-------	--	---	--	-----	-------	----

Receiver's Individual Identifier

The identification number of the individual used by the receiver.

D		2000B		ENT04		-		67		106
---	--	-------	--	-------	--	---	--	----	-------	-----

Receiving Depository Financial Institution (DFI) Identifier

Number identifying the financial institution receiving the transaction from an ACH network.

H				BPR13		-		507		41
---	--	--	--	-------	--	---	--	-----	-------	----

Reference Identification Qualifier

Code qualifying the reference identification.

H				REF01		-		128		48
D		2300A		RMR01		-		128		87
D		2300B		RMR01		-		128		112

Remittance Delivery Method Code

Code qualifying the method the remittance will be delivered.

H		1000A		RDM01		-		756		62
---	--	-------	--	-------	--	---	--	-----	-------	----

Sender Bank Account Number

The sender's bank account number at the Originating Depository Financial Institution.

H				BPR09		-		508		40
---	--	--	--	-------	--	---	--	-----	-------	----

Service, Promotion, Allowance, or Charge Code

Code identifying the service, promotion, allowance, or charge.

D		2312A		SAC02		-		1300		98
---	--	-------	--	-------	--	---	--	------	-------	----

Total Premium Payment Amount

The total premium payment for this batch or transaction.

H				BPR02		-		782		37
---	--	--	--	-------	--	---	--	-----	-------	----

Trace Type Code

Code identifying the type of re-association which needs to be performed.

H				TRN01		-		481		43
---	--	--	--	-------	--	---	--	-----	-------	----

Transaction Handling Code

This code designates whether and how the money and remittance information will be processed.

H | | BPR01 | - | 305 37

Transaction Segment Count

A tally of all segments between the ST and the SE segments including the ST and SE segments.

S | | SE01 | - | 96 119

Transaction Set Control Number

The unique identification number within a transaction set.

H | | ST02 | - | 329 35

S | | SE02 | - | 329 119

Transaction Set Identifier Code

Code uniquely identifying a Transaction Set.

H | | ST01 | - | 143 35

Unit or Basis for Measurement Code

Code specifying the units in which a value is being expressed, or manner in which a measurement has been taken.

D | 2315A | SLN05 | C001-1 | 355 101