


How to configure MySQL database in Linux server using putty as following step by step:

1. First you may required to login from super user.

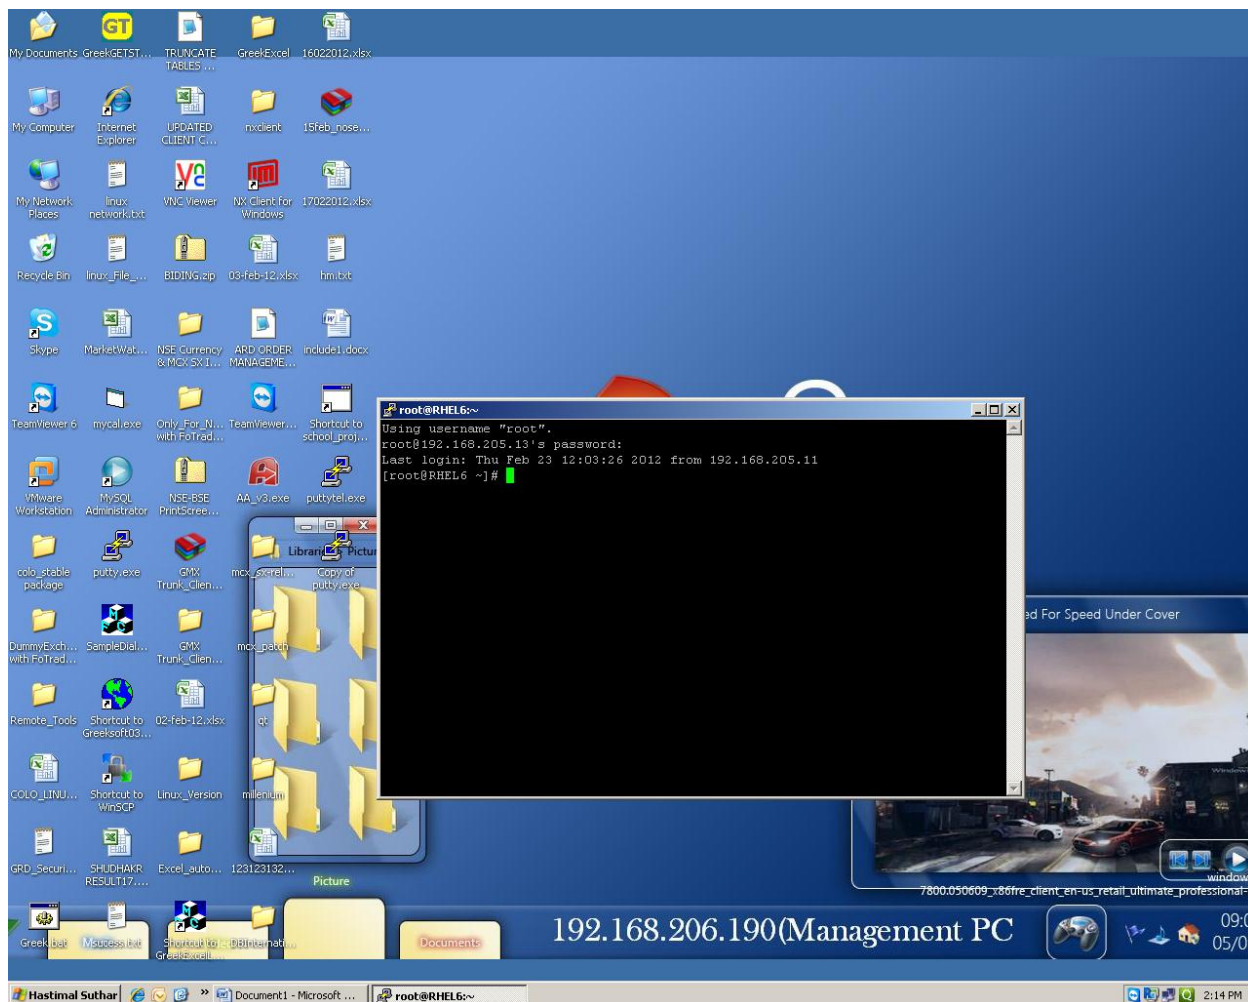


Then type the following command for editing mode Particular file .

For example: `vi /etc/my.cnf` * this is vi editor


`nano /etc/my.conf` *this is nano editor

you can also use another editor



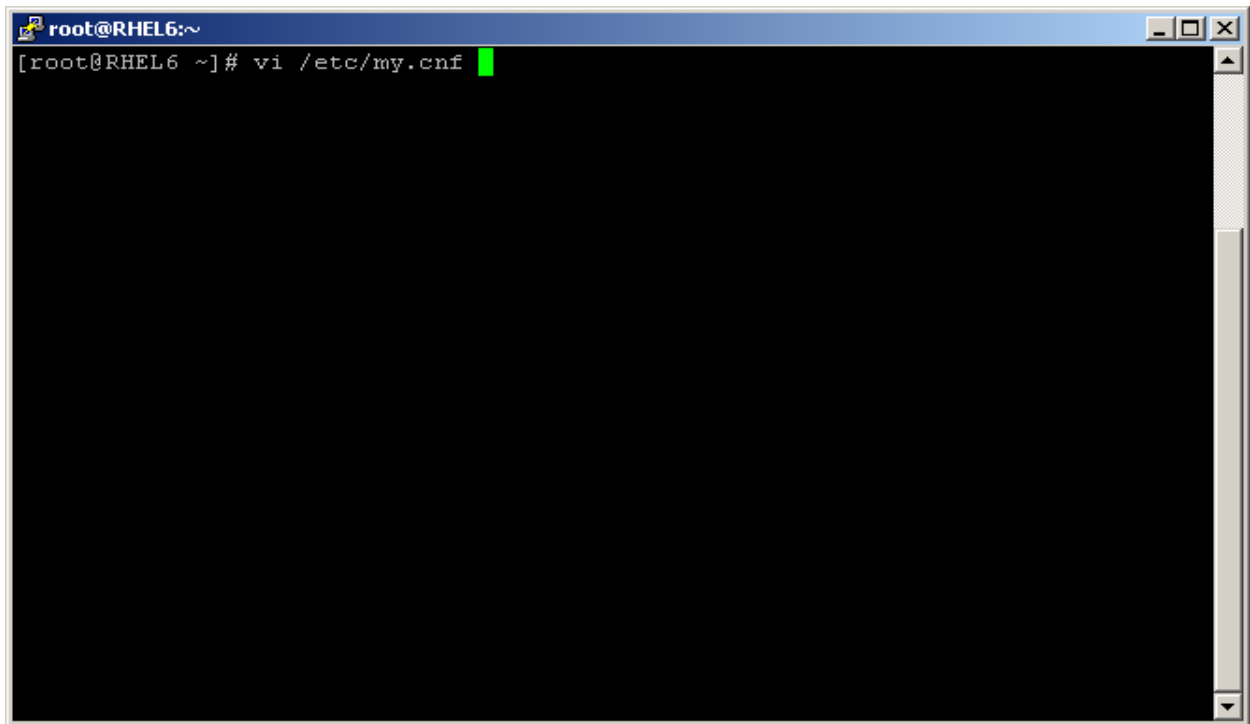


After following window will display and editing 4 line as per database connection

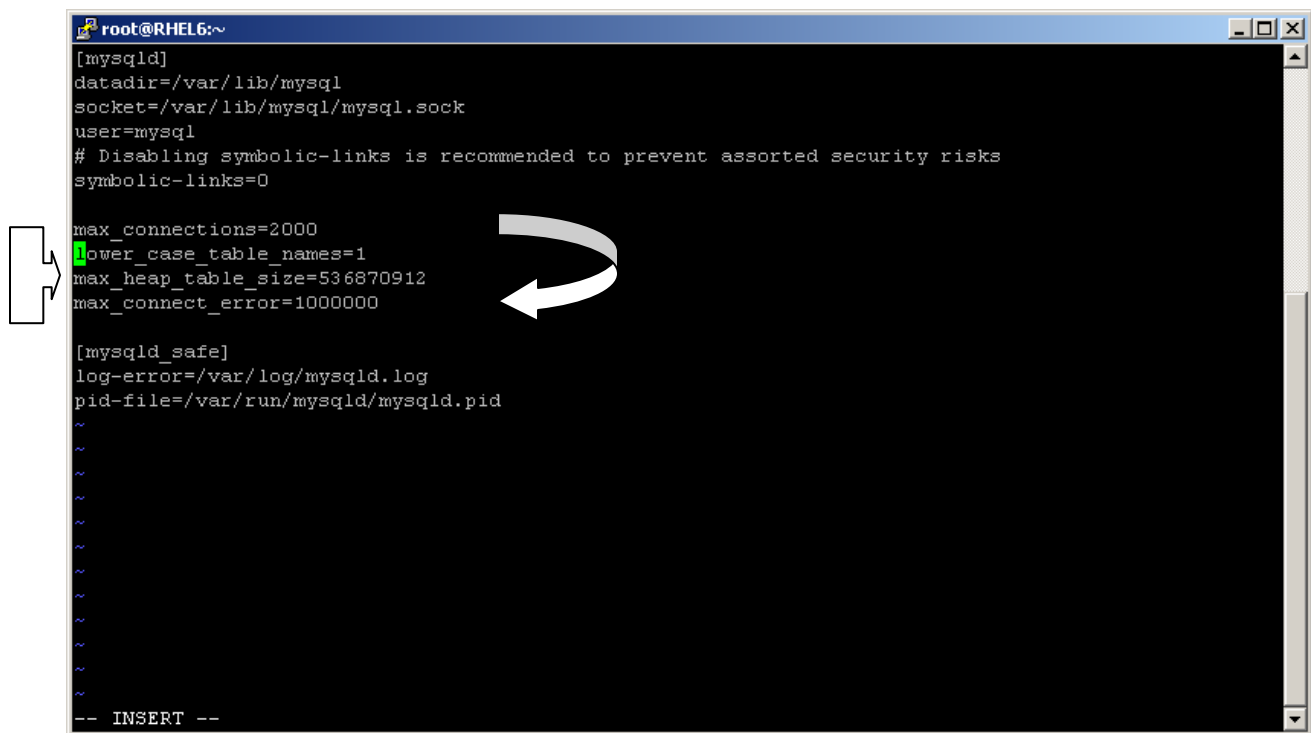

After Configure this setting you may require to save this file using ...(for eg. :wq! Then enter)



Then Type following command for mysql changes applicable .

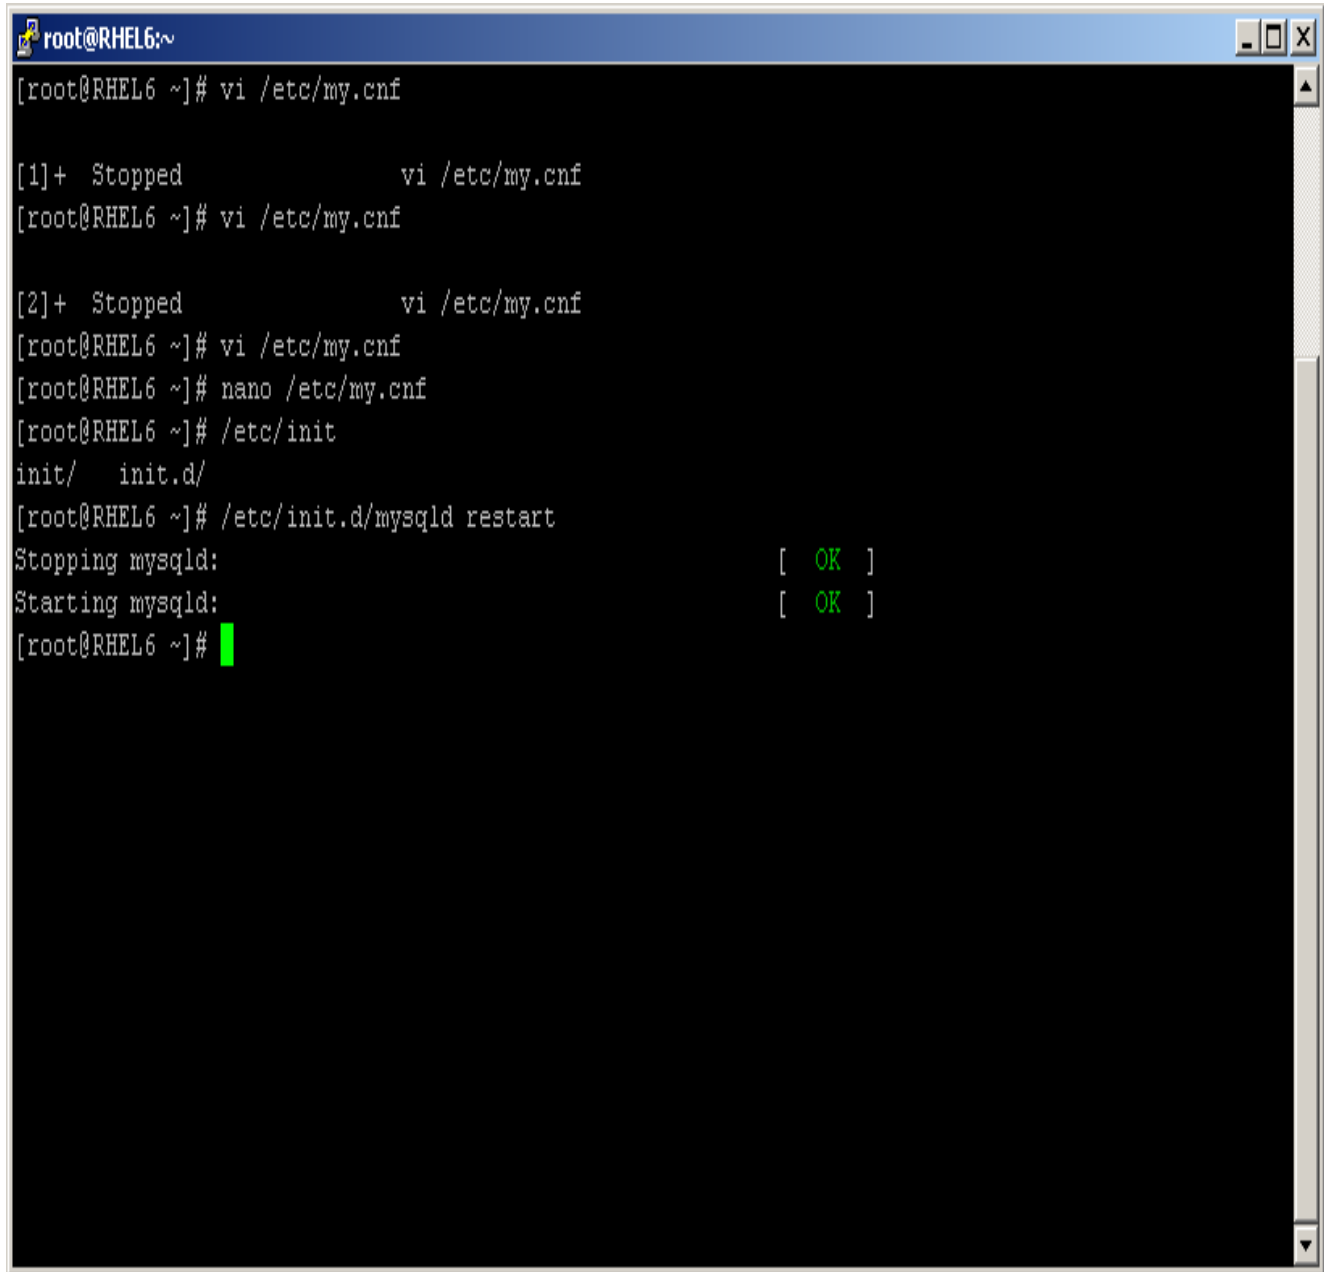A terminal window titled 'root@RHEL6:~' with standard window controls. The terminal shows a sequence of commands and their outputs. The user enters 'vi /etc/my.cnf' twice, each time followed by '[1]+ Stopped vi /etc/my.cnf' and '[root@RHEL6 ~]# vi /etc/my.cnf'. Then, the user enters 'nano /etc/my.cnf', followed by '/etc/init', then 'init/ init.d/'. Finally, the user enters '/etc/init.d/mysqld restart', which produces two lines of output: 'Stopping mysqld: [OK]' and 'Starting mysqld: [OK]'. The prompt '[root@RHEL6 ~]#' is followed by a green cursor.

```
root@RHEL6:~  
[root@RHEL6 ~]# vi /etc/my.cnf  
[1]+  Stopped          vi /etc/my.cnf  
[root@RHEL6 ~]# vi /etc/my.cnf  
[2]+  Stopped          vi /etc/my.cnf  
[root@RHEL6 ~]# vi /etc/my.cnf  
[root@RHEL6 ~]# nano /etc/my.cnf  
[root@RHEL6 ~]# /etc/init  
init/  init.d/  
[root@RHEL6 ~]# /etc/init.d/mysqld restart  
Stopping mysqld:          [ OK ]  
Starting mysqld:         [ OK ]  
[root@RHEL6 ~]#
```



After all step completed then go to following step for mysql configuration as bellow:-

Configuration step as per Greek CTCLManager

To list database type the following command

```
[greeksoft@Rhel6 ~]$ mysql -uroot -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 2489
Server version: 5.1.47 Source distribution
```

Copyright (c) 2000, 2010, Oracle and/or its affiliates. All rights reserved.
This software comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to modify and redistribute it under the GPL v2 license

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

```
mysql>
```

```
mysql> show databases;
```

```
+-----+
| Database          |
+-----+
| information_schema |
| mysql              |
| test               |
+-----+
3 rows in set (0.00 sec)
```

information schema, mysql and test are name of databases. To use these database and to list available tables type the following two commands:

```
mysql> use test;
```

```
mysql> Grant all privileges on *.* to 'root' @ '192.168.206.%' Identified by 'greek';
```

Creating a database

Now we are going to create our database.

```
mysql> CREATE DATABASE Hastimal;
Query OK, 1 row affected (0.00 sec)
```



This statement creates a new database. Throughout this tutorial, we will use the Hastimal database. To create a new database, we need to have certain privileges. Remember that we have connected to the server with the root user, which is a superuser and has all privileges.

The SHOW DATABASES statement shows all available databases on our system. Note that SQL statements are terminated with a semicolon. There are three databases present.

The information_schema, mysql and test are MySQL system databases. The test database is available as a workspace for users to try things out. It is empty; there are no tables.

Showing all databases, the mydb database is among them.

```
mysql> use Hastimal;
```

Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| Hastimal |
| mysql |
| test |
+-----+
4 rows in set (0.00 sec)
```



For Show tables in database

```
mysql> show tables;
```

Tables_in_greekmgr
algorithmordertracker
arbitragesurveillance
assignedproduct
bannedscrip
basketcombination
basketrule
bhavcopy
cashtofuttimer
clientdetails
clientmapper
clientmaster
clientscripmaster
coclimits
cocquotelimits
contractmaster
deltahedging
deltahedgingorder
exchangeloginstatus
exchangeportfolio
expensemater
explrequest
fogreektokentmaster
gatsarbitragesettings
gatsruletracker
greekbsetoken
greekbsetokendetails
greekmcxsxtoken
greekmcxtoken
greekncdextoken
greeknsecurrencyspreadtoken
greeknsecurrencytoken
greekspreadmaster
greetokenmaster
greetokenmasterhistory
indexbhavcopyinfo
indexdetailinfo
indexinfo
indexlimits
industryindexinfo
ivbasedorderentry



```
loginetails  
logininfo  
margininfo  
marketinteractivemsginfo  
marketmessageinfo  
marketpositions  
marketwatchpositions  
marketwiseinfo  
mboinfo  
mbombpinfo  
mbpinfo  
mbpmbodetailsinfo  
messageinfo  
mostactivesecurities  
onlymbpinfo  
openinterest  
openpositioninfo  
optionstrategyorderlimits  
orderinfo  
ourordernumber  
participantchangeinfo  
pendingorders  
pendingspreadleginfo  
quotealgorithmlimits  
rms_rejection  
rms_surveillance  
rolloverlimits  
rolloverquotelimits  
saudatransfer  
scripgroup  
scripmaster  
scriporderslotinfo  
securitychangeinfo  
securitymaster  
securitystatusupdatedinfo  
sequenceno  
sliceorder  
slicependingorder  
socketclientmap  
spreadivorderlimits  
spreadleginfo  
spreadmaster  
spreadmbpinfo  
start_time  
subscribedtokens  
surveillancefailorders
```



```
| surveillancemaster  
| surveillanceordervalues  
| surveillancesettings  
| systeminfomaster  
| theroticalprice  
| tickerindexinfo  
| timerinfo  
| todaysnetposition  
| topgainerloser  
| tradehistory  
| tradeinfo  
| tradelogbackup  
+-----+  
98 rows in set (0.00 sec)
```

```
mysql> quit
```

Bye



After done all step you may require to restart mysql for applicable All settings.

Start,Stop and Restart MySQL Server?

Each distribution comes with a shell script (read as service) to restart / stop / start MySQL server. First login as root user and open shell prompt (command prompt).

First login as root user. Now type the following command as per your Linux distro:

A) If you are using mysql on RedHat Linux (Fedora core) then use following command:

* To start mysql server:

```
/etc/init.d/mysqld start
```

* To stop mysql server:

```
/etc/init.d/mysqld stop
```

* To restart mysql server

```
/etc/init.d/mysqld restart
```

Tip: Redhat Linux also supports service command, which can be use to start, restart, stop any service:

```
# service mysqld start
# service mysqld stop
# service mysqld restart
```

