


Joint-fit numerical-search performance

A

Joint-fit objective landscapes

Six warm-start pairs, each with 500 numerical starts; the retained lowest objective is highlighted

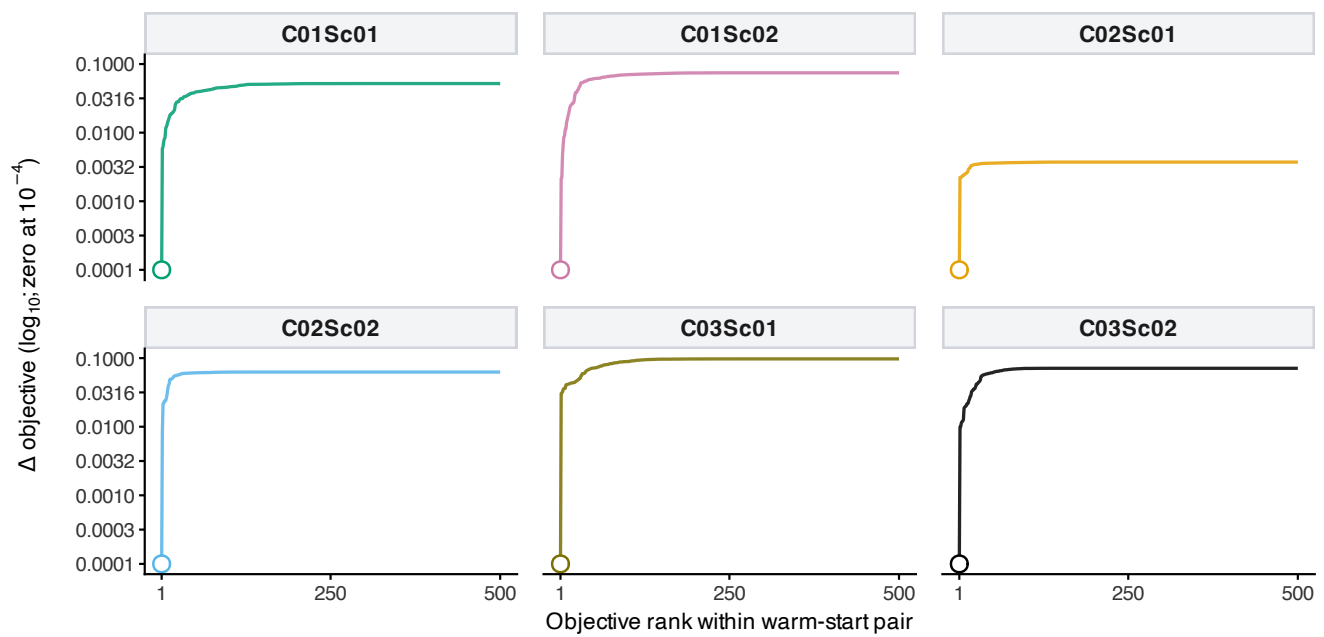

B

Joint-search diagnostics by warm-start pair

Flags, codes, numerical-start spread, and bounds describe search behavior. They are not posterior uncertainty or biological replication.

C01Sc01	500	500/500	26–82/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	2/20
C01Sc02	500	500/500	26–90/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	4/20
C02Sc01	500	500/500	26–46/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	2/20
C02Sc02	500	500/500	26–76/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	2/20
C03Sc01	500	500/500	26–116/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	3/20
C03Sc02	500	500/500	26–73/500	not accepted; code 52	500 $\leq$ 1% 500 $\leq$ 5%	2/20
	Starts	DEoptim flag	Iterations	Selected local step	Near-optimal starts	Selected at bounds