IDMON

DIGITAL ASSET INTELLIGENCE

INVESTIGATION REPORT 002

Structured Bitcoin Sweep and Consolidation

Bitcoin Mainnet

30 July 2026

TECHNICAL BLOCKCHAIN INVESTIGATION

Attribution status:

NO ENTITY OR DEVICE ATTRIBUTION ESTABLISHED

SECTION 01

Executive findings

1,195	2,350	4
first-stage transactions	source outpoints	repeated destinations

CONFIRMED - `ON_CHAIN_FACT`

The selected structural cohort contains **1,195 first-stage transactions**, spending **2,350 source outpoints** associated with **1,195 distinct source addresses**. Their outputs converge on **four repeated destination scripts**. Gross input of **1,082.65318922 BTC**, less **0.06638490 BTC** in first-stage fees, produced **1,082.58680432 BTC** in collector receipts. [E2-E4; E7]

Three subsequent transactions spend **1,036** collector outputs through exact outpoint links. They produce single outputs of **398.47573857 BTC**, **89.62327890 BTC** and **562.01962301 BTC**, with combined fees of **0.01760841 BTC**. At the recorded tip, those three outputs and **159** residual collector outputs were unspent: **162 terminal outputs**, totalling **1,082.56919591 BTC**. Gross input less all verified fees equals terminal lineage value, with an unreconciled difference of **0 satoshis**. [E5-E7]

OBSERVED - `OBSERVED_PATTERN`

The first-stage transactions share a disclosed construction pattern and a fee-rate family near 30 sat/vB. Repeated receipts accumulated into groups of **104, 100, 491 and 500 transactions**. The timing and structure are compatible with a coordinated sweep and consolidation process; common control is a `HEURISTIC_INFERENCE`, not a confirmed finding. [E2-E5]

IDMON COVERAGE - `IDMON_EXISTING_LABEL`

In the saved blind replay, **0 / 1,195** selected first-stage transactions surfaced. All were recorded `INELIGIBLE` under the saved **100 BTC** eligibility rule. **2 / 3** consolidation transactions surfaced. This is a retrospective comparison against saved system decisions, not a newly reproduced blind benchmark. [E8-E9]

UNRESOLVED

Controller identities, legal and beneficial ownership, purpose, device use, source of signing material and any change in control remain unresolved. The evidence establishes a bounded transaction lineage and a specific eligibility gap; it does not establish an attributed incident.

SECTION 02

Scope and evidential status

The primary source is the reconstruction package `investigation-002-reconstruction-20261018T104611Z`. It retains raw local Bitcoin Core responses for all **52,275 transactions** in the nine-block range, detailed first-stage records, collector statistics, exact descendant links, an anchored UTXO snapshot and checksums. This draft uses those stored artifacts. It does not extend the reconstruction, refresh UTXO status or introduce external attribution. [E1-E10]

“First stage” and “second stage” identify positions in the verified flow. They do not imply that every first-stage transaction confirmed before any consolidation. “Collector” identifies a repeated destination script within the selected cohort, not an attributed wallet, person or organization.

Evidence class	Use in this report
`ON_CHAIN_FACT`	Deterministic transaction fields, exact outpoint spends, value accounting and UTXO status at the recorded tip, derived from the retained local Core evidence.
`IDMON_EXISTING_LABEL`	Saved eligibility decisions, classifications, severity, scores or signals. Their presence establishes what the system recorded, not the substantive truth of a label.
`OBSERVED_PATTERN`	Descriptive timing, repeated destinations and transaction structures, without asserting identity, ownership or intent.
`HEURISTIC_INFERENCE`	An interpretation compatible with the evidence but not proved by it.
`UNRESOLVED`	A question the retained evidence cannot answer.

Source references E1-E12 resolve in Section 15. Exact arithmetic uses integer satoshis; BTC amounts are displayed to eight decimal places. Transaction indexes are zero-based. Report-local references T1-T3 identify the three consolidation transactions and are not production labels.

CASE IDENTITY

Prepared	19 October 2026	Source edition	Draft 1
Reconstruction acquired	18 October 2026	Observed date	30 July 2026
UTXO snapshot	Height 971983	Captured UTC	18 October 2026, 10:48:39

“Structured” refers to the disclosed transaction pattern. It does not establish a common controller, ownership or purpose.

SECTION 03

Timeline and chronology

The captured range has block header timestamps from **01:10:20 to 01:51:26 UTC on 30 July 2026**, a span of **41 minutes 6 seconds**. These timestamps describe block headers. They do not establish exact transaction creation, broadcast, first-seen or operational detection times. [E3; E10]

Block	Header time, UTC	C1 sweeps	C2 sweeps	C3 sweeps	C4 sweeps	Verified consolidation
960183	01:10:20	104	100	0	0	-
960184	01:27:58	0	0	0	0	-
960185	01:32:48	0	0	491	0	-
960186	01:33:56	0	0	0	0	-
960187	01:34:28	0	0	0	0	-
960188	01:36:08	0	0	0	63	-
960189	01:37:21	0	0	0	110	-
960190	01:43:00	0	0	0	168	T1, index 12; T2, index 470
960191	01:51:26	0	0	0	159	T3, index 4
Total		**104**	**100**	**491**	**500**	**Three**

The first selected sweep is `b04c633b881e97b1e435d89c26dbe2ea3d2130566892b5d585136c581cd90179`, at block **960183**, index **6**. The last is `69e67b8b9749caccc70cbb82c051b9d333bd454f7ba54a35ddab9c16aee008fe`, at block **960191**, index **163**. These are boundaries of the selected transactions in this window, not proof of the start or end of a wider episode. [E3]

The stages overlap in confirmation order. T3 spends previously received C4 outputs at index 4 of block 960191; the final 159 selected C4 receipts follow it in that block. Describing the entire cohort as a completed sweep batch followed by consolidation would therefore be inaccurate. [E3; E5]

SECTION 04

First-stage sweep structure

The selection was **exploratory**, rather than a pre-registered detector applied to an independent test set. The prior numerical targets were known to the analyst. The package discloses the rule and retains the broader catalogue so that another reviewer can inspect both inclusion and exclusion. [E2]

The broad candidate rule admitted non-coinbase transactions with exactly one output, complete prevout evidence and a positive fee. It produced **3,941 candidates**. A more specific structural fingerprint produced **1,475 matches** across **277 destination scripts**, including **10 repeated destination groups**. [E2]

The structural fingerprint requires:

- Transaction version **2** and locktime **0**.
- Every input sequence equal to **4294967295**.
- All inputs in an individual transaction referring to the same source script.
- Exactly one output, using a P2WPKH destination script different from that source script.

Matches were grouped by exact destination script. The selected cohort consists of repeated groups with at least two transactions, where every transaction satisfies **30 ≤ feeSats / vsize < 31**, and the fee in satoshis is divisible by **30**. The fee-family criterion was chosen after examining the catalogue. It selected the four groups reported here; no target count, BTC total or preselected address appears in that predicate. [E2]

The ledger confirms **1,195 distinct source scripts and addresses** across **2,350 distinct spent outpoints**. “Same source script” applies within each sweep, not across the whole cohort. Each selected transaction produces one collector output. The source-address count is not a count of people, devices or independently owned wallets. [E3-E4]

The observed first-stage fee rates range from **30.000000000000** to **30.319148936170 sat/vB**, with a nearest-rank median of **30.000000000000 sat/vB**. All collector outputs are P2WPKH. Source scripts include native SegWit, P2PKH and P2SH forms; the output format does not identify the signing device or software. [E3-E4; E7]

The result is complete for the disclosed predicate within the captured range. It does not establish that transactions outside the fingerprint, fee family or block window were unrelated to a broader process. Similarity in fee policy or transaction construction alone is insufficient to establish common control.

SECTION 05

Collector structure

104	100	491	500
C1 sweeps	C2 sweeps	C3 sweeps	C4 sweeps

OBSERVED_PATTERN: Four repeated destination scripts function as collector destinations within the selected structural cohort. Their identifiers C1-C4 are taken from the retained collector summary. The grouping is by exact script, not by an entity-clustering or ownership claim. [E4]

Group	Exact destination address	Sweeps / distinct source addresses	Source outpoints
C1	bc1qh0l7q0mca3ln7wsl9luwns0jc9jhgrtft025l4	104	107
C2	bc1qdaarag7729c2n4l2wnyt3hkhfpcs66n98z7uuh	100	191
C3	bc1qc779m8gec84k3t0ffvu0pps94zheht7lr7ueyn	491	728
C4	bc1qnk4zh9qcnap2mycp56qjrgza3cc8ylrh8fecp0	500	1,324
Total		**1,195**	**2,350**

Group	Gross input BTC	First-stage fees BTC	Received BTC
C1	0.77673702	0.00349320	0.77324382
C2	88.85561349	0.00515640	88.85045709
C3	398.50704687	0.02116830	398.48587857
C4	594.51379184	0.03656700	594.47722484
Total	**1,082.65318922**	**0.06638490**	**1,082.58680432**

Each row reconciles independently: gross input less fees equals the sum received at that collector. C1 and C2 later converge in one verified consolidation transaction. C3 and C4 form separate branches in the retained lineage; their inclusion in the same analytical cohort rests on the disclosed structural selection, not a verified merger of all four branches. [E4-E5]


SECTION 06

Second-stage consolidation

`ON_CHAIN_FACT`**:** Three transactions spend **1,036** selected collector outputs. Every input is linked to an exact first-stage outpoint, with matching value and script. No input outside the selected collector outputs was found in those transactions, so no proportional allocation of mixed inputs is required. [E5]

Reference	Source	Block / index	Inputs	Input BTC	Single output BTC	Fee BTC
T1	C3	960190 / 12	491	398.48587857	398.47573857	0.01014000
T2	C1 + C2	960190 / 470	204	89.62370091	89.62327890	0.00042201
T3	C4	960191 / 4	341	562.02666941	562.01962301	0.00704640
Total			**1,036**	**1,050.13624889**	**1,050.11864048**	**0.01760841**

All three outputs are at index **0**. Full transaction IDs and destination addresses are retained in Section 15. T1 consumes all C3 receipts. T2 consumes all C1 and C2 receipts. T3 consumes 341 of C4's 500 receipts. [E4-E5]

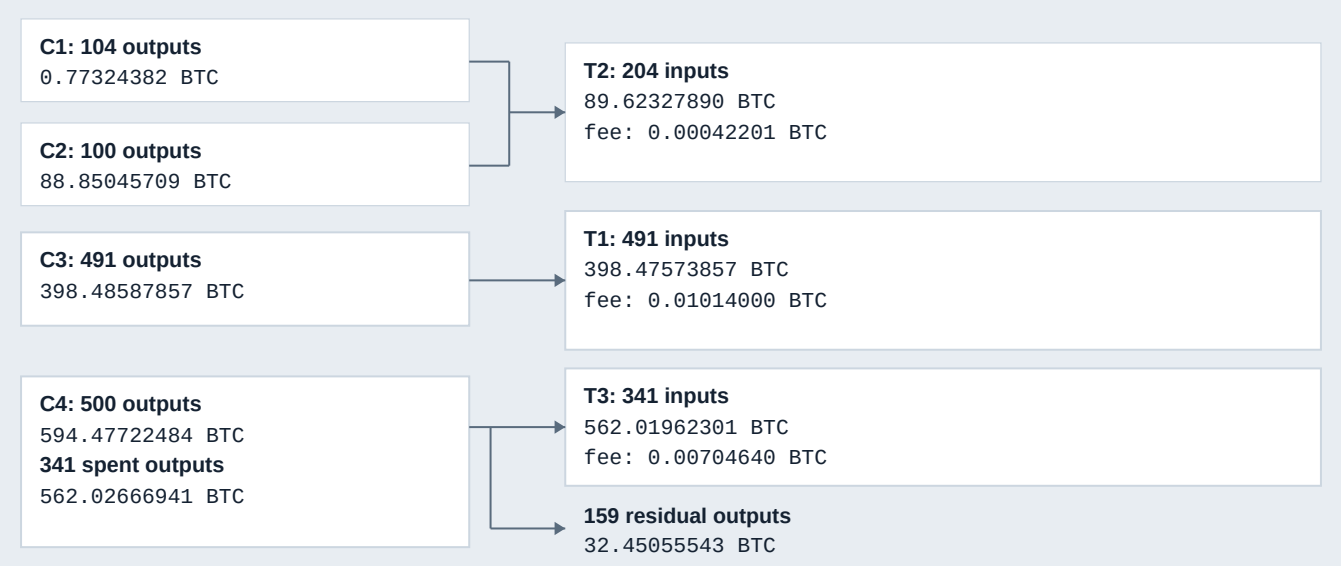

The diagram describes verified outpoint flow. It does not attribute control of the destinations. It also does not represent a strictly sequential completion of the two stages.

The three consolidation transactions use version **1**, whereas the selected sweeps use version 2. The first-stage construction rule should not be generalized to all transactions in the lineage. [E3; E5]

SECTION 07

Residual lineage and value conservation

The confirmed UTXO snapshot was captured on **18 October 2026 at 10:48:39 UTC**, anchored to height **971983** and block hash:

> `000000000000000000001dea10f6a4e17c18ef2f45441a4c24ab47d08e8afc55c`

The package queried all **1,198** first-stage and descendant outputs. It records **1,036 spent outputs** with exact verified spenders and **162 unspent outputs**. There were no spent lineage outputs for which the spender remained unlocated. [E6]

Terminal category	Outputs	Value BTC	Status at recorded tip
T1, T2 and T3 consolidation outputs	3	1,050.11864048	Unspent
Residual C4 collector outputs	159	32.45055543	Unspent
Total	**162**	**1,082.56919591**	**Unspent**

Confirmed status uses `gettxout` with `include_mempool=false`. The tip before and after those queries matched, and all non-null answers identified the anchor block. Supplementary `include_mempool=true` queries also returned all terminal outputs, but those sequential checks are not an atomic mempool snapshot. [E6]

Gross first-stage input	1,082.65318922 BTC
Less first-stage fees	0.06638490 BTC
Less consolidation fees	0.01760841 BTC
Terminal unspent lineage	1,082.56919591 BTC

UNRECONCILED DIFFERENCE: 0 SATOSHIS

In integer units:

```
108265318922 - 6638490 - 1760841 = 108256919591 satoshis
```

Total verified fees are **0.08399331 BTC**. The unreconciled difference is **0 satoshis**. Consolidation inputs and outputs are internal transfers within the traced lineage and are not added again to gross input value. [E7]

All verified collector spends occurred in the captured block range, and every resulting terminal output was unspent at the anchor. This closes the forward trace for the selected lineage at that recorded tip. It is not a current-status assertion as of the draft date or a prediction that the outputs will remain unspent.

SECTION 08

Blind replay comparison

0 / 1,195
first-stage sweeps surfaced

2 / 3
consolidations surfaced

The reconstruction was joined by exact transaction ID to the previously saved blind replay decision log. All **1,198 selected case transactions** were matched. The original decision-log hash was checked against its retained metadata, and the matching rows preserve source line references. No new replay was run for this report. [E8-E9]

Selected transaction set	Matched	Eligible	Surfaced	Recorded reason for exclusion
First-stage sweeps	1,195	0	0	`INELIGIBLE` under the saved 100 BTC rule
Second-stage consolidations	3	2	2	T2 below the saved 100 BTC rule

The maximum first-stage gross input was **51.07343852 BTC**. Thus no selected first-stage transaction reached 100 BTC in either its largest output or its complete resolved input total. T2's gross input of **89.62370091 BTC** and output of **89.62327890 BTC** were also below that threshold. [E8]

Consolidation	Saved classification	Saved intel severity	Saved event score	Surfaced
T1	`Possible Cold Storage Move`	`MODERATE`	30	Yes
T2	No classification recorded	No severity recorded	No score recorded	No - `INELIGIBLE`
T3	`Possible Cold Storage Move`	`MODERATE`	38	Yes

These fields are `IDMON_EXISTING_LABEL`. In particular, “Possible Cold Storage Move” is a stored heuristic classification, not evidence of custody, a specific device or an identified controller. [E8-E9]

The first surfaced transaction belonging to this selected cohort was T1:

> `14edd9ee8445793c320e92e3b50365a0e18b8b25f424044bce337463f007fdd2`

It appears at block **960190**, index **12**, with header timestamp **2026-07-30 01:43:00 UTC**. The benchmark's earlier global abnormality, at block **960183**, index **234**, has a different transaction ID and is outside the selected cohort. It must not be used as this cohort's first detection. [E8-E9]

The comparison measures coverage of a retrospectively selected cohort against saved decisions. It is not an independent held-out evaluation, a general precision or recall estimate, or a measurement of operational detection latency. Block header time differences are insufficient for that last purpose.

SECTION 09

IDMON detection gap

The saved eligibility rule admitted a transaction to the normal whale-intelligence path when either its largest output or its completely resolved input total met **100 BTC**. All selected first-stage records failed that test. The exclusion occurred before the normal event enrichment represented by the surfaced-event path, leaving no surfaced first-stage events from which that path could describe the four-collector accumulation. [E8]

This explains the coverage result without treating the transactions as absent from the replay. They were processed and retained in its decision log. `INELIGIBLE` is a recorded gate outcome, not a statement that the transactions were unavailable to every subsystem or could not be identified through another analysis.

The relevant mismatch is between transaction scale and episode scale. Individual first-stage inputs remained below the threshold while their selected outputs collectively delivered **1,082.58680432 BTC** to four repeated destinations. Two later consolidations became visible because they crossed the transaction-level threshold. The 204-input consolidation did not. The observed coverage therefore reflects the saved threshold architecture, not failure to retrieve the underlying block data. [E4; E8]

RESEARCH IMPLICATION ONLY

The specific research implication is **threshold-independent detection of coordinated sweep-to-collector episodes**. A future study could test whether repeated structural receipts can be recognized before a threshold-sized consolidation appears. Such research would require a pre-registered rule, independent examples and ordinary background activity to assess useful coverage and false positives. The selected fee family in this case would need evaluation rather than adoption as a general rule.

This is a research implication only. No such capability was implemented or validated by the reconstruction or this report, and no production changes form part of the investigation.

SECTION 10

Analytical interpretation

`OBSERVED_PATTERN`: The selected transactions combine repeated destination scripts, similar first-stage construction, a distinct fee family and concentrated confirmation positions. Exact later spends demonstrate consolidation of C1 with C2, complete consolidation of C3, and partial consolidation of C4. [E2-E5]

`HEURISTIC_INFERENCE`: The timing and structure are compatible with a coordinated sweep and consolidation process. Repeated construction could reflect a common transaction-building procedure. Those interpretations are not independent evidence that the four collectors shared a controller, that the same software produced every transaction, or that legal ownership changed.

The first-stage pattern is partly a consequence of the selection rule: version, locktime, sequence, source-script cardinality, destination type and fee-family similarity were used to select the cohort. Their consistency cannot then be treated as an independent test of a common origin. Later exact spend links provide stronger transaction-lineage evidence, but still do not identify the participants.

Exact value conservation establishes where the selected value remained, apart from transaction fees, at the recorded tip. It does not establish the purpose of the movement, an economic sale, an operational mandate or entitlement to the funds.

SECTION 11

Alternative explanations

The retained evidence does not distinguish or rank the following explanations. Each is a `HEURISTIC_INFERENCE`; the table presents possibilities, not findings about the participants.

Alternative	Compatibility with the observed structure	Evidence needed to distinguish it
Wallet migration or key-management change	Sweeping source outputs into a smaller set of destinations can accompany an operational transition.	Authenticated wallet records, derivation information or documented control and migration records.
Routine consolidation or collection workflow	Repeated receipts and later many-input consolidation can arise from scheduled processing.	Attributable operational records or independently verified documentation connecting the exact scripts and transactions.
Aggregation involving multiple source controllers	Distinct sources can converge on destinations used by a collection service or shared process.	Reliable counterparty, service or transaction-authorization evidence.
Transfer involving a change in control	The verified spends are compatible with outputs moving to a different controller.	Authenticated counterparty records or other evidence demonstrating changed control or beneficial ownership.
Unrelated activity included by the structural predicate	Similar construction and fee policies can occur independently.	Independent cohort validation, wider history and corroborating evidence connecting the separate branches.

None of these possibilities is established merely by convergence, matching fee policy or the absence of external attribution.

SECTION 12

Attribution status

`UNRESOLVED`**:** No entity or device attribution is established. No independently sourced public attribution was used in the reconstruction package or this draft.

A device-specific connection would require a separately retained independent source linking the relevant transactions or scripts to that claim. A general product description would not provide that connection. Any source would need to be assessed for its exact claim, provenance and evidential limits before inclusion.

The report does not establish ownership, controller identity, a compromise, theft, device use, malicious intent or legal title. It also does not identify whether the four destinations represented one operational entity or several. These questions cannot be resolved by the retained transaction structure alone.

SECTION 13

Limitations and provenance

13.1 Local blockchain evidence

The reconstruction used a **single local Bitcoin Core node**, version **310000**, on mainnet. The node was pruned at height **931129** and reported no optional indexes. It retained the required blocks **960183-960191**, whose raw verbosity-3 responses contain **52,275 transactions**. [E1; E10]

All required selected prevout values and scripts were available; no missing value was filled with an assumed zero or an external estimate. However, **2,042 selected source prevouts** were created below the prune height. Their values and scripts came from Core verbosity-3 prevout data. Original parent transaction hex for those historic prevouts was not collected. The package therefore preserves the selected spending transactions and node-supplied prevout evidence, rather than independently retained transaction bodies for the entire upstream history. [E1; E3]

The saved validation records verification of all nine block header hashes and merkle roots and the raw transaction IDs, witness transaction IDs, inputs, outputs, sizes, weights and virtual sizes of the **1,198 selected and lineage transactions**. Accounting reconciles in integer satoshis. This provides strong internal reproducibility but is not independent corroboration by another node or public source. [E11]

13.2 Cohort and temporal scope

The selection was exploratory and made with knowledge of prior numerical targets. The broader candidate catalogue and every structural destination group are retained. Numerical agreement with the prior targets does not convert the exercise into a blind test or establish completeness beyond the disclosed scope. [E2; E12]

All supplied numerical targets match, but the tip used for the earlier prior analysis was unspecified. The anchored snapshot supports the recorded state on 18 October 2026; it does not retroactively authenticate the missing earlier snapshot or establish the state on 19 October. Confirmed and supplementary mempool-sensitive checks have the distinct meanings set out in Section 7. [E6; E12]

13.3 Saved replay provenance

The saved replay decision log was hash-verified. Its metadata names revision `76993472dafce9e609b8f51644f65704ed1bec2d`, which predates the replay runner; the retained runner worktree revision is `eb2646cc93cca6d400354450be5cf4b9bb6807c6`. The original run's configuration hash, runtime details and isolation execution log are missing. The metadata's revision may identify a baseline, but that interpretation is not established. [E1; E8-E9]

The coverage findings are therefore a **bounded retrospective comparison against saved decisions**, not a newly reproduced blind benchmark. The reconstruction's environment and validation evidence must not be substituted for missing provenance of the older replay run.

13.4 Preservation and attribution

The reconstruction package contains raw responses, acquisition records, scripts, source hashes and a checksum list. Its saved preservation checks compare tracked repository content, Git state and the pre-existing dirty patch. Running production collectors were not stopped or frozen; ignored live runtime data was not asserted to be immutable. [E1; E11]

No external attribution source was used. No actor, legal title, device, motive, economic sale or common ownership conclusion follows from the verified accounting. The source-address count does not establish a count of people or devices.

SECTION 14

Conclusions

The retained evidence supports a reproducible reconstruction of **1,195 selected sweep transactions** into **four repeated destination scripts**, followed by three exact consolidation paths. At the recorded tip, **1,082.56919591 BTC** remained in **162 terminal outputs** after **0.08399331 BTC** in verified fees. The lineage reconciles without an unexplained satoshi difference.

The saved IDMON replay surfaced none of the first-stage sweeps and two of the three consolidations. The recorded 100 BTC eligibility rule accounts for the excluded transactions in this cohort. The case consequently supports research into threshold-independent recognition of sweep-to-collector episodes, with independent validation still required.

The evidence supports transaction and system-coverage conclusions within its stated scope. The interpretation of coordination remains qualified, and participant identity, ownership, purpose and device involvement remain unresolved.

SECTION 15

Evidence appendix and reproducibility notes

15.1 Primary evidence package

Evidence package: `investigation-002-reconstruction-20261018T104611Z`.

Reference	Stored artifact	Principal use
E1	`reconstruction_manifest.json`	Acquisition date, node, revisions, input hashes, methods and limitations.
E2	`candidate_selection.json`; `structural_candidate_catalogue.ndjson`	Disclosed predicate, group inventory and broader candidates.
E3	`first_stage_sweeps.ndjson`	Complete selected sweep evidence, input outpoints, values, scripts, fees and block positions.
E4	`collector_summary.json`	Exact destination groups, counts, amounts, fee and script distributions.
E5	`second_stage_lineage.ndjson`	Exact consolidation inputs, outputs and unmixed lineage.
E6	`unspent_snapshot.json`; `rpc_utxo_audit.json` and referenced raw responses	Tip bracket, confirmed status and supplementary mempool-sensitive checks.
E7	`accounting_summary.json`; `offline_reconstruction_totals.json`	Satoshi conservation and cohort totals.
E8	`blind_replay_comparison.json`; `blind_replay_matched_rows.ndjson`	Exact-txid comparison and retained decision rows.
E9	`saved_benchmark-metadata.json`; `saved_replay-summary.json`	Saved replay identity, timestamp, hashes and global first abnormality.
E10	`block_index.json`; `rpc_acquisition_audit.json` and `block-<height>-v3.json`	Block hashes, header times, raw transactions and complete retained prevouts.
E11	`validation_results.json`; `reproducibility_check.json`; repository-state snapshots	Validation, fresh offline reproduction and preservation checks.
E12	`prior_target_comparison.json`; `prior_analysis_targets.json`	Prior targets separated from the reconstructed results.

15.2 Exact consolidation references

Reference	Full transaction ID	Output index	Destination address
T1	`14edd9ee8445793c320e92e3b50365a0e18b8b25f424044bce337463f007fdd2`	0	`bc1qx76cae2706qd5q576feh7xq8rfcsjpf2htfhe3`
T2	`4b50d61a3d6e54c62ee0be13d7e9a8b69bffe7fc2b2cab4e14da56e4e20440d2`	0	`bc1q8jy96fe5lf8vfugydnte3cguk92gpev7kwtp3q`
T3	`0c6bf853a645b699a3b2cd6d8e3c44cf1a02a16f538df08212a44753f75d9d01`	0	`bc1qq85v2c926eg6pgxhwp6q7lf6cnsz80qs3fcu9r`

The complete input and terminal-output inventories remain in E3, E5 and E6. This appendix does not substitute a short address list for the full outpoint evidence.

15.3 Integrity and reproduction

The package's `SHA256SUMS.txt` covers **72 artifacts**, excluding the checksum file itself. The retained validation also records a fresh offline reconstruction whose **eight derived artifacts** were byte-identical. The package checks passed again during draft preparation. No new blockchain acquisition or reconstruction was performed for this draft.

The original replay decision log, `replay-events.ndjson`, is identified by its recorded hash in the comparison provenance (E8-E9), rather than duplicated in full. The **1,198 matching decision rows** are included in the package. Its full-log SHA-256 is:

> `156ad8e68603dca2daa2390c8c936ec06455652d84bf89daa12d346d1ce931ad`

The retained `README_reproduction.md` explains the offline validation procedure. Running `validate_idmon002.py` against the package with `--hashes` verifies the saved evidence without RPC access or filesystem writes. Reproducing the extraction from the older full replay log additionally requires that original log. Current chain state cannot reproduce the historical UTXO snapshot merely by issuing new live queries; the retained responses establish the recorded observation.