PageSpeed Insights

Copy link Docs

Report from 3 Oct 2026, 14:36:21

https://voxula-ai.web.app/

Analyse

Mobile Desktop

Discover what your real users are experiencing

No data

Diagnose performance issues

Performance	Accessibility	Best Practices	SEO	Agentic browsing
71	96	100	100	3/4



Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

▲ 0–49 ■ 50–89 ● 90–100

PageSpeed Insights

Copy link Docs



METRICS

Expand view

▲ First Contentful Paint
3.7 s


▲ Largest Contentful Paint
4.8 s

● Total Blocking Time
70 ms

● Cumulative Layout Shift
0

■ Speed Index
5.2 s

Captured at 3 Oct 2026, 14:36 GMT+5:30
Initial page load
Emulated Moto G Power with Lighthouse 13.5.0
Slow 4G throttling
Single-page session
Using HeadlessChromium 153.0.8010.36 with lr

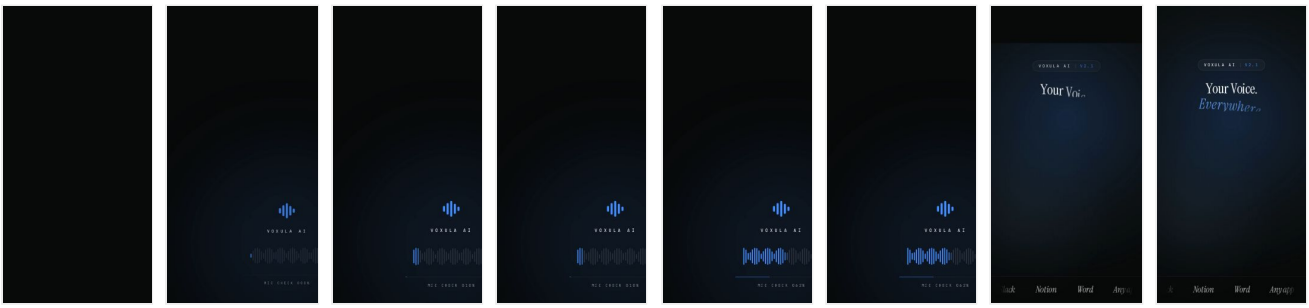

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

▲ Render-blocking requests — Est savings of 2,250 ms

Requests are blocking the page's initial render, which may delay LCP. Deferring or inlining can move these network requests out of the critical path. LCP FCP Unscored

PageSpeed Insights Copy link Docs

/css2?family=... (fonts.googleapis.com)	1.8 KiB	750 ms

Forced reflow

A forced reflow occurs when JavaScript queries geometric properties (such as offsetWidth) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations. Unscored

Top function call	Total reflow time
https://voxula-ai.web.app:149:46369	168 ms

Source	Total reflow time
[unattributed]	0 ms
https://voxula-ai.web.app:156:34339	111 ms
https://voxula-ai.web.app:156:35418	3 ms
https://voxula-ai.web.app:148:116566	51 ms
https://voxula-ai.web.app:156:55679	2 ms
https://voxula-ai.web.app:205:47865	0 ms
https://voxula-ai.web.app:148:62948	1 ms
https://voxula-ai.web.app:148:137274	3 ms

Network dependency tree

Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **725 ms**

Initial Navigation

- https://voxula-ai.web.app - **352 ms,** 145.68 KiB
  - /css2?family=... (fonts.googleapis.com) - **354 ms,** 1.80 KiB
    - ...v20/UcC73FwrK....woff2 (fonts.gstatic.com) - **725 ms,** 48.09 KiB
    - ...v24/tDbv2o-fl....woff2 (fonts.gstatic.com) - **724 ms,** 31.40 KiB
    - ...v5/jizHRFtNs....woff2 (fonts.gstatic.com) - **723 ms,** 16.11 KiB
    - ...v5/jizBRFtNs....woff2 (fonts.gstatic.com) - **723 ms,** 15.48 KiB

Preconnected origins

Origin	Source
https://fonts.googleapis.com/	head > link <link rel="preconnect" href="https://fonts.googleapis.com">
https://fonts.gstatic.com/	head > link <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin="">

Preconnect candidates

Add preconnect hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

Use efficient cache lifetimes — Est savings of 0 KiB

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts, such as elements being added, removed or their fonts changing as the page loads. CLS Unscored

Element	Layout shift score
Total	0.000
	0.000
	0.000

Element	Layout shift score
Total	0.000
	0.000

Optimise DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size. Unscored

Statistic	Element	Value
Total elements		1,293
DOM depth	div.rounded-xl > div.mt-3 > svg.lucide > path <path d="M20 6 9 17l-5-5">	16
Most children	div.group > div.relative > div.mt-8 > div.flex	54

PageSpeed Insights Copy link Docs

LCP breakdown

Each sub-part has specific improvement strategies. Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Sub-part	Duration
Time to First Byte	60 ms
Element render delay	1,610 ms

Third parties

Third-party code can significantly impact load performance. Reduce and defer loading of third-party code to prioritise your page's content. Unscored

Third party	Transfer size	Main thread time
Google Tag Manager Tag-Manager	**154 KiB**	**142 ms**
/gtag/js?id=G-R01FSKETV4 (www.googletagmanager.com)	154 KiB	142 ms
/a?v=... (www.googletagmanager.com)	0 KiB	0 ms
Google Fonts Cdn	**113 KiB**	**0 ms**
...v20/UcC73FwrK....woff2 (fonts.gstatic.com)	48 KiB	0 ms
...v24/tDbv2o-fl....woff2 (fonts.gstatic.com)	31 KiB	0 ms
...v5/jizHRFtNs....woff2 (fonts.gstatic.com)	16 KiB	0 ms
...v5/jizBRFtNs....woff2 (fonts.gstatic.com)	15 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	2 KiB	0 ms
Google Analytics Analytics	**1 KiB**	**0 ms**
/g/collect?v=... (www.google-analytics.com)	1 KiB	0 ms

These insights are also available in the Chrome DevTools performance panel – record a trace to view more detailed information.

DIAGNOSTICS

Reduce unused JavaScript — Est savings of 110 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. Learn how to reduce unused JavaScript. LCP FCP Unscored

Show 3rd-party resources (1)

Google Tag Manager Tag-Manager	**153.2 KiB**	**66.2 KiB**
/gtag/js?id=G-R01FSKETV4 (www.googletagmanager.com)	153.2 KiB	66.2 KiB
web.app First Party	**123.1 KiB**	**43.8 KiB**
https://voxula-ai.web.app	123.1 KiB	43.8 KiB

Reduce JavaScript execution time — 1.7 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. TBT Unscored

Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
web.app First Party	**4,308 ms**	**1,503 ms**	**34 ms**
https://voxula-ai.web.app	4,308 ms	1,503 ms	34 ms
Google Tag Manager Tag-Manager	**175 ms**	**119 ms**	**53 ms**
/gtag/js?id=G-R01FSKETV4 (www.googletagmanager.com)	175 ms	119 ms	53 ms
Unattributable	**157 ms**	**4 ms**	**0 ms**
`Unattributable`	157 ms	4 ms	0 ms

Minimise main-thread work — 4.6 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimise main-thread work TBT Unscored

Category	Time Spent
Script Evaluation	1,627 ms
Other	1,419 ms
Style & Layout	1,020 ms
Rendering	399 ms
Script Parsing & Compilation	87 ms
Garbage Collection	68 ms

Avoid long main-thread tasks — 5 long tasks found

Lists the longest tasks on the main thread – useful for identifying worst contributors to input delay. Learn how to avoid long main-thread tasks TBT Unscored

Show 3rd-party resources (2)

URL	Start Time	Duration
web.app First Party		**298 ms**
https://voxula-ai.web.app	1,685 ms	167 ms
https://voxula-ai.web.app	2,712 ms	77 ms
https://voxula-ai.web.app	1,585 ms	54 ms
Google Tag Manager Tag-Manager		**165 ms**
/gtag/js?id=G-R01FSKETV4 (www.googletagmanager.com)	3,837 ms	94 ms
/gtag/js?id=G-R01FSKETV4 (www.googletagmanager.com)	3,931 ms	71 ms

User Timing marks and measures — 101 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. Learn more about User Timing marks. Unscored

Name	Type	Start Time	Duration
GTM-G-R01FSKETV4:15:17	Measure	0.00 ms	355.00 ms
GTM-G-R01FSKETV4:4:17:14	Measure	355.00 ms	748.54 ms
GTM-G-R01FSKETV4:4:3	Measure	1,013.71 ms	22.12 ms
GTM-G-R01FSKETV4:8:7	Measure	1,034.10 ms	11.62 ms
GTM-G-R01FSKETV4:2:5	Measure	1,045.68 ms	58.14 ms
GTM-G-R01FSKETV4:2:6	Measure	1,045.68 ms	80.25 ms
GTM-G-R01FSKETV4:1:13:12	Measure	1,047.01 ms	6.84 ms
GTM-G-R01FSKETV4:1:13:9	Measure	1,047.01 ms	69.46 ms
GTM-G-R01FSKETV4:1:11:10	Measure	1,048.40 ms	5.29 ms

GTM-G-R01FSKETV4:2:13:9	Measure	1,054.41 ms	70.99 ms
GTM-G-R01FSKETV4:2:11:10	Measure	1,054.51 ms	0.92 ms
GTM-G-R01FSKETV4:2:6:22:21	Measure	1,056.40 ms	0.82 ms
GTM-G-R01FSKETV4:2:6:22:20	Measure	1,056.40 ms	60.32 ms
GTM-G-R01FSKETV4:2:8:22:21	Measure	1,057.39 ms	2.00 ms
GTM-G-R01FSKETV4:2:8:22:20	Measure	1,057.39 ms	59.43 ms
GTM-G-R01FSKETV4:2:14:22:21	Measure	1,059.54 ms	0.46 ms
GTM-G-R01FSKETV4:2:14:22:20	Measure	1,059.54 ms	57.35 ms
GTM-G-R01FSKETV4:2:13:22:21	Measure	1,060.15 ms	0.39 ms
GTM-G-R01FSKETV4:2:13:22:20	Measure	1,060.15 ms	56.80 ms
GTM-G-R01FSKETV4:2:12:22:21	Measure	1,060.63 ms	1.46 ms
GTM-G-R01FSKETV4:2:12:22:20	Measure	1,060.63 ms	56.41 ms
GTM-G-R01FSKETV4:2:11:22:21	Measure	1,062.19 ms	0.30 ms
GTM-G-R01FSKETV4:2:11:22:20	Measure	1,062.19 ms	54.91 ms
GTM-G-R01FSKETV4:2:10:22:21	Measure	1,062.58 ms	0.60 ms
GTM-G-R01FSKETV4:2:10:22:20	Measure	1,062.58 ms	54.59 ms
GTM-G-R01FSKETV4:2:9:22:21	Measure	1,063.28 ms	0.23 ms
GTM-G-R01FSKETV4:2:9:22:20	Measure	1,063.28 ms	53.96 ms
GTM-G-R01FSKETV4:3:13:12	Measure	1,064.12 ms	0.97 ms
GTM-G-R01FSKETV4:3:13:9	Measure	1,064.12 ms	61.42 ms
GTM-G-R01FSKETV4:3:11:10	Measure	1,064.22 ms	0.64 ms
GTM-G-R01FSKETV4:3:4:22:21	Measure	1,065.30 ms	2.09 ms
GTM-G-R01FSKETV4:3:4:22:20	Measure	1,065.30 ms	52.16 ms
GTM-G-R01FSKETV4:5:13:12	Measure	1,104.43 ms	0.68 ms
GTM-G-R01FSKETV4:5:13:9	Measure	1,104.43 ms	15.06 ms
GTM-G-R01FSKETV4:5:11:10	Measure	1,104.51 ms	0.52 ms
GTM-G-R01FSKETV4:6:13:12	Measure	1,119.77 ms	0.69 ms


GTM-G-R01FSKETV4:6:11:10	Measure	1,119.85 ms	0.56 ms
GTM-G-R01FSKETV4:15	Mark	0.00 ms	
GTM-G-R01FSKETV4:17	Mark	355.00 ms	
GTM-G-R01FSKETV4:4	Mark	1,013.71 ms	
GTM-G-R01FSKETV4:8	Mark	1,034.10 ms	
GTM-G-R01FSKETV4:3	Mark	1,035.83 ms	
GTM-G-R01FSKETV4:2	Mark	1,045.68 ms	
GTM-G-R01FSKETV4:7	Mark	1,045.72 ms	
GTM-G-R01FSKETV4:1:13	Mark	1,047.01 ms	
GTM-G-R01FSKETV4:1:11	Mark	1,048.40 ms	
GTM-G-R01FSKETV4:1:10	Mark	1,053.69 ms	
GTM-G-R01FSKETV4:1:12	Mark	1,053.85 ms	
GTM-G-R01FSKETV4:2:13	Mark	1,054.41 ms	
GTM-G-R01FSKETV4:2:11	Mark	1,054.51 ms	
GTM-G-R01FSKETV4:2:10	Mark	1,055.43 ms	
GTM-G-R01FSKETV4:2:12	Mark	1,055.50 ms	
GTM-G-R01FSKETV4:2:6:22	Mark	1,056.40 ms	
GTM-G-R01FSKETV4:2:6:21	Mark	1,057.22 ms	
GTM-G-R01FSKETV4:2:8:22	Mark	1,057.39 ms	
GTM-G-R01FSKETV4:2:8:21	Mark	1,059.39 ms	
GTM-G-R01FSKETV4:2:14:22	Mark	1,059.54 ms	
GTM-G-R01FSKETV4:2:14:21	Mark	1,060.00 ms	
GTM-G-R01FSKETV4:2:13:22	Mark	1,060.15 ms	
GTM-G-R01FSKETV4:2:13:21	Mark	1,060.54 ms	
GTM-G-R01FSKETV4:2:12:22	Mark	1,060.63 ms	
GTM-G-R01FSKETV4:2:12:21	Mark	1,062.09 ms	
GTM-G-R01FSKETV4:2:11:22	Mark	1,062.19 ms	

GTM-G-R01FSKETV4:2:10:22	Mark	1,062.58 ms
GTM-G-R01FSKETV4:2:10:21	Mark	1,063.19 ms
GTM-G-R01FSKETV4:2:9:22	Mark	1,063.28 ms
GTM-G-R01FSKETV4:2:9:21	Mark	1,063.50 ms
GTM-G-R01FSKETV4:3:13	Mark	1,064.12 ms
GTM-G-R01FSKETV4:3:11	Mark	1,064.22 ms
GTM-G-R01FSKETV4:3:10	Mark	1,064.86 ms
GTM-G-R01FSKETV4:3:12	Mark	1,065.09 ms
GTM-G-R01FSKETV4:3:4:22	Mark	1,065.30 ms
GTM-G-R01FSKETV4:3:4:21	Mark	1,067.39 ms
GTM-G-R01FSKETV4:4:14	Mark	1,103.54 ms
GTM-G-R01FSKETV4:5	Mark	1,103.82 ms
GTM-G-R01FSKETV4:5:13	Mark	1,104.43 ms
GTM-G-R01FSKETV4:5:11	Mark	1,104.51 ms
GTM-G-R01FSKETV4:5:10	Mark	1,105.03 ms
GTM-G-R01FSKETV4:5:12	Mark	1,105.11 ms
GTM-G-R01FSKETV4:1:9	Mark	1,116.47 ms
GTM-G-R01FSKETV4:2:6:20	Mark	1,116.72 ms
GTM-G-R01FSKETV4:2:8:20	Mark	1,116.82 ms
GTM-G-R01FSKETV4:2:14:20	Mark	1,116.89 ms
GTM-G-R01FSKETV4:2:13:20	Mark	1,116.96 ms
GTM-G-R01FSKETV4:2:12:20	Mark	1,117.03 ms
GTM-G-R01FSKETV4:2:11:20	Mark	1,117.10 ms
GTM-G-R01FSKETV4:2:10:20	Mark	1,117.17 ms
GTM-G-R01FSKETV4:2:9:20	Mark	1,117.23 ms
GTM-G-R01FSKETV4:3:4:20	Mark	1,117.46 ms
GTM-G-R01FSKETV4:5:9	Mark	1,119.49 ms

GTM-G-R01FSKETV4:6:11	Mark	1,119.85 ms
GTM-G-R01FSKETV4:6:10	Mark	1,120.41 ms
GTM-G-R01FSKETV4:6:12	Mark	1,120.46 ms
GTM-G-R01FSKETV4:2:9	Mark	1,125.40 ms
GTM-G-R01FSKETV4:3:9	Mark	1,125.54 ms
GTM-G-R01FSKETV4:6:9	Mark	1,125.87 ms
GTM-G-R01FSKETV4:6	Mark	1,125.93 ms

Avoid non-composited animations — 16 animated elements found

Animations that are not composited can be poor, slow and increase CLS. Learn how to avoid non-composited animations CLS Unscored

Element	Name
 Voxula Get `<header class="fixed inset-x-0 top-0 z-[60] transition-all duration-500 border-b border-t…" style="opacity: 1; transform: none;">`	
Unsupported CSS property: color	transform
VOXULA LIVE Your next thought, one shortcut away. LIVE TRANSCRIPT Remind me to… `<div class="w-full max-w-[min(460px,calc(100vw-3rem))]" style="opacity: 0; filter: blur(14px); transform: translateY(160px) scale(0.84);">`	
Filter-related property may move pixels	
div > div.h-full > div.flex > span.h-2 `<span class="h-2 w-2 rounded-full bg-sage" style="animation: 1.6s ease 0s infinite normal none running pulse-dot;">`	
Unsupported CSS property: box-shadow	pulse-dot
 Y `<span class="inline-block " style="opacity: 1; transform: none;">`	
Unsupported CSS property: border-left-color	
 o	



transform: none;">


Unsupported CSS property: border-right-color



u

<span class="inline-block " style="opacity: 1;
transform: none;">

Unsupported CSS property: border-top-color



V

<span class="inline-block " style="opacity: 1;
transform: none;">

Unsupported CSS property: color



i

<span class="inline-block " style="opacity: 1;
transform: none;">

Unsupported CSS property: color

div.mt-6 > div.flex > span.flex > span.h-2

<span class="h-2 w-2 rounded-full bg-sage" style="animation: 1.6s ease 0s
infinite normal none running pulse-dot;">

Unsupported CSS property: box-shadow pulse-dot

footer.mt-24 > div.mt-12 > span.flex > span.h-2

<span class="h-2 w-2 rounded-full bg-sage" style="animation: 1.6s ease 0s
infinite normal none running pulse-dot;">

Unsupported CSS property: box-shadow pulse-dot

div.relative > div.flex > div.flex > span.h-2

<span class="h-2 w-2 rounded-full bg-sage" style="animation: 1.6s ease 0s
infinite normal none running pulse-dot;">

Unsupported CSS property: box-shadow pulse-dot


div.relative > div.flex > div.flex > span.h-1.5

<span class="h-1.5 w-1.5 rounded-full bg-clay" style="opacity: 1;
animation: 0.86s ease-in-out 0.16s infinite normal none running runnin…;">

Unsupported CSS property: width bar

div.relative > div.flex > div.flex > span.h-1.5

<span class="h-1.5 w-1.5 rounded-full bg-clay" style="opacity: 0.35;
animation: auto ease 0s 1 normal none running none;">



Press Ctrl + Space to type into any app. Sub-second, private, free.

```
<p class="mt-8 max-w-xl text-base leading-relaxed text-mute md:text-xl" style="opacity: 1; filter: blur(0px); transform: none;">
```

Filter-related property may move pixels

refine Clean rewrite

```
<div class="flex items-center justify-between rounded-2xl border px-4 py-3 transition-…">
```

Unsupported CSS property: border-bottom-color	border-bottom-color
Unsupported CSS property: border-left-color	border-left-color
Unsupported CSS property: border-right-color	border-right-color
Unsupported CSS property: border-top-color	border-top-color

could you set meeting at 9pm actually 5pm

```
<p class="font-display text-[clamp(1.4rem,3.2vw,2.5rem)] leading-[1.2] transition-co…">
```

Unsupported CSS property: color	color

More information about the performance of your application. These numbers don't directly affect the performance score.

PASSED AUDITS (13) Show



Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does

PageSpeed Insights Copy link Docs

CONTRAST


▲ Background and foreground colours do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient colour contrast.

Failing elements



It's free
`<span class="opacity-70">`



Download for Windows It's free
`<button class="group relative inline-flex items-center gap-3 overflow-hidden rounded-full…">`

Typical averages. Illustrative.
`<p class="pt-2 text-xs text-mute/70">`

I THE WEIGHT OF TYPING Thoughts move at the speed of speech. Fingers don't. Vo…
`<div class="relative bg-ink">`

Encrypted with DPAPI · stays on this device
`<div class="flex items-center gap-3 rounded-xl bg-sage/10 p-3 text-sage transition-opa…" style="opacity: 0.25;">`

voxula — vault scanning environment… $ GEMINI_API_KEY detected AIza••••••••••••…
`<div class="overflow-hidden rounded-2xl border border-white/10 bg-panel shadow-[0_50px…">`

// Your next great idea starts with your voice.
`<span class="text-mute/60">`

1 // Your next great idea starts with your voice. 2 3 4 5 6 7 8 9 10 11
`<div class="flex-1 bg-panel px-0 py-4 font-mono text-[13px] leading-[1.7]">`

10
`<span class="w-12 shrink-0 select-none pr-4 text-right text-mute/50">`

1 // Your next great idea starts with your voice. 2 3 4 5 6 7 8 9 10 11
`<div class="flex-1 bg-panel px-0 py-4 font-mono text-[13px] leading-[1.7]">`

11
`<span class="w-12 shrink-0 select-none pr-4 text-right text-mute/50">`

1 // Your next great idea starts with your voice. 2 3 4 5 6 7 8 9 10 11
`<div class="flex-1 bg-panel px-0 py-4 font-mono text-[13px] leading-[1.7]">`

```
<p class="mt-4 text-center font-mono text-[11px] text-mute/70">

  100% FREE. ENTIRELY YOURS. Find your voice. Get into flow. Less between you an...
  <section id="download" class="relative overflow-hidden bg-ink px-6 pb-10 pt-24 md:px-
  16">
```

These are opportunities to improve the legibility of your content.

ADDITIONAL ITEMS TO MANUALLY CHECK (10) Hide

- Interactive controls are keyboard focusable

  Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable. Unscored

- Interactive elements indicate their purpose and state

  Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints. Unscored

- The page has a logical tab order

  Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering. Unscored

- Visual order on the page follows DOM order

  DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering. Unscored

- User focus is not accidentally trapped in a region

  A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps. Unscored

- The user's focus is directed to new content added to the page

  If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content. Unscored

- HTML5 landmark elements are used to improve navigation

- Offscreen content is hidden from assistive technology

  Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Unscored

- Custom controls have associated labels

  Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Unscored

- Custom controls have ARIA roles

  Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.

PASSED AUDITS (22) Show

NOT APPLICABLE (40) Hide

- `[accesskey]` values are unique

  Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. Unscored

- `button`, `link` and `menuitem` elements have accessible names

  When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. Unscored

- Elements with `role="dialog"` or `role="alertdialog"` have accessible names.

  ARIA dialogue elements without accessible names may prevent screen reader users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible. Unscored

name, making it unusable for users who rely on screen readers. Learn more about input field labels. Unscored

- ARIA `meter` elements have accessible names

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `meter` elements. Unscored

- ARIA `progressbar` elements have accessible names

When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label `progressbar` elements. Unscored

- Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children.

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. Unscored

- `[role]`s are contained by their required parent element

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. Unscored

- ARIA toggle fields have accessible names

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. Unscored

- ARIA `tooltip` elements have accessible names

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `tooltip` elements. Unscored

- ARIA `treeitem` elements have accessible names

`treeitem` elements. Unscored

- The page contains a heading, skip link or landmark region

  Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks. Unscored

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements.

  When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly. Unscored

- Definition list items are wrapped in `<dl>` elements

  Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly. Unscored

- ARIA IDs are unique

  The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs. Unscored

- No form fields have multiple labels

  Form fields with multiple labels can be confusingly announced by assistive technologies, like screen readers, which use either the first, the last or all of the labels. Learn how to use form labels. Unscored

- `<frame>` or `<iframe>` elements have a title

  Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles. Unscored

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

  If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the `lang` attribute. Unscored

- Image elements have `[alt]` attributes

- Input buttons have discernible text.

  Adding discernable and accessible text to input buttons may help screen reader users to understand the purpose of the input button. Learn more about input buttons. Unscored

- `<input type="image">` elements have `[alt]` text

  When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. Unscored

- Form elements have associated labels

  Labels ensure that form controls are announced properly by assistive technologies, such as screen readers. Learn more about form element labels. Unscored

- Links are distinguishable without relying on colour.

  Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable. Unscored

- The document does not use `<meta http-equiv="refresh">`

  Users do not expect a page to refresh automatically and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag. Unscored

- `<object>` elements have alternative text

  Screen readers cannot translate non-text content. Adding alternative text to `<object>` elements helps screen readers convey meaning to users. Learn more about alt text for `object` elements. Unscored

- Select elements have associated label elements.

  Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the `select` element. Unscored

- Skip links are focusable.

- No element has a `[tabindex]` value greater than 0

  A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the `tabindex` attribute. Unscored

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

  Screen readers have features to make navigating tables easier. Ensuring that`<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the `headers` attribute. Unscored

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

  Screen readers have features to make navigating tables easier. Ensuring that table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers. Unscored

- `[lang]` attributes have a valid value

  Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the `lang` attribute. Unscored

- `<video>` elements contain a `<track>` element with `[kind="captions"]`

  When a video provides a caption it is easier for deaf and hearing-impaired users to access its information. Learn more about video captions. Unscored

- `autocomplete` attributes are used correctly

  The `autocomplete` attribute values must be valid and correctly applied for screen readers to function correctly. Learn more about valid autocomplete values. Unscored

- Elements with `role="none"` or `role="presentation"` do not have conflicts

  There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure that the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. Learn more about presentation role conflict. Unscored

Ensures that SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. Learn more about SVG alt text. Unscored

- Tables have different content in the summary attribute and `<caption>`.

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption. Unscored

- All heading elements contain content.

A heading with no content or inaccessible text prevents screen reader users from accessing information on the page's structure. Learn more about headings. Unscored

- Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles. Unscored

- Image elements do not have `[alt]` attributes that are redundant text.

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the `alt` attribute. Unscored

- Identical links have the same purpose.

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. Learn more about identical links. Unscored



PageSpeed Insights Copy link Docs

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. Learn how to use a CSP to prevent XSS Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High

Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. Learn more about deploying the COOP header. Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate DOM-based XSS with trusted types

The `require-trusted-types-for` directive in the `Content-Security-Policy` (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. Learn more about mitigating DOM-based XSS with trusted types. Unscored

Description	Severity
No `Content-Security-Policy` header with trusted types directive found	High

BROWSER COMPATIBILITY

Baseline features

Lists web features used on the page and their Baseline status as of 2026-09-17. Learn more about Baseline. Unscored

Show 3rd-party resources (1)

background-clip-text	Limited Availability	https://voxula-ai.web.app:-1:-2
scroll-driven-animations	Limited Availability	https://voxula-ai.web.app:156:34339
scrollend	Newly Available (2025-12-12)	https://voxula-ai.web.app:147:128262
text-wrap	Newly Available (2024-10-17)	https://voxula-ai.web.app:-1:-2
relative-color	Newly Available (2024-09-16)	https://voxula-ai.web.app:-1:-2
backdrop-filter	Newly Available (2024-09-16)	https://voxula-ai.web.app:-1:-2
registered-custom-properties	Newly Available (2024-07-09)	https://voxula-ai.web.app:-1:-2
gradient-interpolation	Newly Available (2024-06-11)	https://voxula-ai.web.app:156:34339
masks	Widely Available (2023-12-07)	https://voxula-ai.web.app:-1:-2
contain-intrinsic-size	Widely Available (2023-09-18)	https://voxula-ai.web.app:-1:-2
color-mix	Widely Available (2023-05-09)	https://voxula-ai.web.app:-1:-2
oklab	Widely Available (2023-05-09)	https://voxula-ai.web.app:156:34339
overflow-clip	Widely Available (2022-09-12)	https://voxula-ai.web.app:-1:-2
individual-transforms	Widely Available (2022-08-05)	https://voxula-ai.web.app:-1:-2
cascade-layers	Widely Available (2022-03-14)	https://voxula-ai.web.app:-1:-2
appearance	Widely Available (2022-03-14)	https://voxula-ai.web.app:-1:-2
logical-properties	Widely Available (2021-09-20)	https://voxula-ai.web.app:-1:-2
aspect-ratio	Widely Available (2021-09-20)	https://voxula-ai.web.app:-1:-2

file-selector-button	(2021-04-26)	https://voxula-ai.web.app:-1:-2
where	Widely Available (2021-01-21)	https://voxula-ai.web.app:-1:-2
is	Widely Available (2021-01-21)	https://voxula-ai.web.app:-1:-2
not	Widely Available (2021-01-21)	https://voxula-ai.web.app:-1:-2
clip-path	Widely Available (2021-01-21)	https://voxula-ai.web.app:-1:-2
text-underline-offset	Widely Available (2020-11-19)	https://voxula-ai.web.app:-1:-2
nullish-coalescing	Widely Available (2020-09-16)	https://voxula-ai.web.app:1:0
web-animations	Widely Available (2020-09-16)	https://voxula-ai.web.app:148:65526
aborting	Widely Available (2019-03-25)	https://voxula-ai.web.app:147:35523
intersection-observer	Widely Available (2019-03-25)	https://voxula-ai.web.app:156:29052
js-modules	Widely Available (2018-05-09)	https://voxula-ai.web.app:-1:-2
grid	Widely Available (2017-10-17)	https://voxula-ai.web.app:156:34339
flexbox	Widely Available (2015-09-30)	https://voxula-ai.web.app:156:34339
text-indent	Widely Available (2015-07-29)	https://voxula-ai.web.app:-1:-2
request-animation-frame	Widely Available (2015-07-29)	https://voxula-ai.web.app:148:46706
Google Tag Manager Tag-Manager		
ua-client-hints	Limited Availability	/gtag/js?id=G-R01FSKETV4:726:121 (www.googletagmanager.com)
Unattributable		

PageSpeed Insights Copy link Docs

referrer-policy (2021-09-20)

GENERAL

▲ Missing source maps for large first-party JavaScript

Source maps translate minified code to the original source code. This helps developers to debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps. Unscored

URL	Map URL
web.app First Party	
https://voxula-ai.web.app	
Large JavaScript file is missing a source map	

PASSED AUDITS (12) Hide

- Uses HTTPS
- Avoids deprecated APIs
- Avoids third-party cookies
- Allows users to paste into input fields
- Avoids requesting the geolocation permission on page load
- Avoids requesting the notification permission on page load
- Displays images with correct aspect ratio
- Serves images with appropriate resolution
- Page has the HTML doctype
- Properly defines charset
- No browser errors logged to the console

PageSpeed Insights Copy link Docs

NOT APPLICABLE (4) Hide

- Redirects HTTP traffic to HTTPS
- Use a strong HSTS policy
- Mitigate clickjacking with XFO or CSP
- Detected JavaScript libraries



SEO

These checks ensure that your page is following basic search engine optimisation advice. There are many additional factors that Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1) Hide

- Structured data is valid

  Run the Structured Data Testing Tool to validate structured data. Learn more about structured data.

  Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (9) Hide

- Page isn't blocked from indexing

- Page has successful HTTP status code
- Links have descriptive text
- Links are crawlable
- robots.txt is valid
- Document has a valid `hreflang`
- Document has a valid `rel=canonical`

NOT APPLICABLE (1) Hide

- Image elements have `[alt]` attributes

3/4

Agentic browsing

These checks ensure high-quality, browsable websites for AI agents and validate the correctness of WebMCP integrations. This category is still under development and subject to change.

AGENT DISCOVERABILITY

- `ai-catalog.json` schema is invalid

  Valid `ai-catalog.json` manifests are required for autonomous AI agents and registries to discover and verify your resources. Learn more about the ARD specification.

Root	not valid JSON	Error

These audits validate that websites expose discoverable resources, documentation and catalogues for AI agents.

PASSED AUDITS (3) Hide

- Accessibility tree is well-formed — All audits passed

  A well-formed accessibility tree helps AI agents to navigate and interact with the page.

- Cumulative Layout Shift — 0

  Cumulative layout shift measures the movement of visible elements within the viewport. Learn more about the cumulative layout shift metric.

- llms.txt follows recommendations

  If your llms.txt file does not follow recommendations, large language models may not be able to understand how you want your website to be crawled or used for training. The llms.txt file should be a Markdown file containing at least one H1 header. Learn more about the llms.txt audit.

NOT APPLICABLE (3) Hide

- WebMCP form coverage

  Consider adding WebMCP annotations to the forms listed below. This helps AI agents identify and interact with these forms more reliably. Unscored

- WebMCP tools registered

  Lists the WebMCP tools registered at the time of analysis. Unscored

- WebMCP schemas are valid

  Valid WebMCP schemas are required for AI agents to understand and interact with tools correctly. Please fix any errors or warnings reported by the browser. Unscored

More on PageSpeed Insights

- What's new
- Documentation
- Learn about web performance
- Ask questions on Stack Overflow
- Mailing list

Related content

- Updates
- Web Fundamentals
- Case studies
- Podcasts

Connect

- Twitter
- YouTube

Google for Developers Chrome Firebase All products

Terms and Privacy Policy

For details, see the Google Developers site policies.