

f00

Org platform / hub / edge operations (f00-sh)

STANDARD OPERATING PROCEDURE

Document: SOP-F00-ORG-001

Date: 2026-07-29

Version: v1.1.0 platform

Standard: NASA NAII 1450.3 memorandum layout

Reply to Attn of: OPS/F00

TO: Maintainers and Release Operators

FROM: Project Engineering

SUBJECT: Standard operating procedure - f00 platform as a whole (GitHub + Cloudflare only)

REF: AGENTS.md, site/catalog.json, .github/workflows/pages.yml, sister product pages.yml

f00 is not one app. It is the brand hub (<https://f00.sh>), a product catalog, a shared theme, and the edge/DNS map for every f00-sh product. The default brand theme is Heartbox (palette from f00-sh/heartbox; CSS at <https://f00.sh/theme/f00-theme-13.css>). Public hosting is Cloudflare only. Source control is GitHub only. GitHub Actions may build and push to Cloudflare; GitHub does not host the sites. This SOP defines the whole platform so operators stop confusing "Pages" (Cloudflare Pages) with "GitHub Pages."

1. Purpose and scope

This procedure covers the f00 platform end-to-end: org inventory, hub laws, catalog SSOT, shared theme, Cloudflare DNS/Pages/R2, GitHub Actions deploy paths, product enrollment, release-to-card rules, and known failure modes.

In scope: hub repo f00-sh/f00; product repos under org f00-sh; Cloudflare account that owns zone f00.sh and Pages/R2 projects.

Out of scope: deep product-internal build SOPs (f00tils ASM gates, clun SBCL matrix). Those remain in each product's own docs. This document only states how products attach to the platform.

- Hosting target: Cloudflare (Pages + R2 + DNS). Never GitHub Pages / *.github.io.


- Code host: GitHub org f00-sh only.
- Hub is a static brand landing (splash + product cards). Install UX lives on product sites.
- Catalog file site/catalog.json is the single source of truth for product list + theme pointer.

2. One-sentence mental model

GitHub holds git history and runs CI. Cloudflare serves every public URL users open. When a workflow is named "Deploy site (Cloudflare Pages)," the word Pages means Cloudflare Pages, not GitHub Pages.

If CI/CD is healthy, a git push of site assets triggers GitHub Actions, which calls wrangler pages deploy with CLOUDFLARE_API_TOKEN and uploads the static tree into a named Cloudflare Pages project. Custom domains on that project are the live product URLs.

Figure 1. Platform map - GitHub to Cloudflare

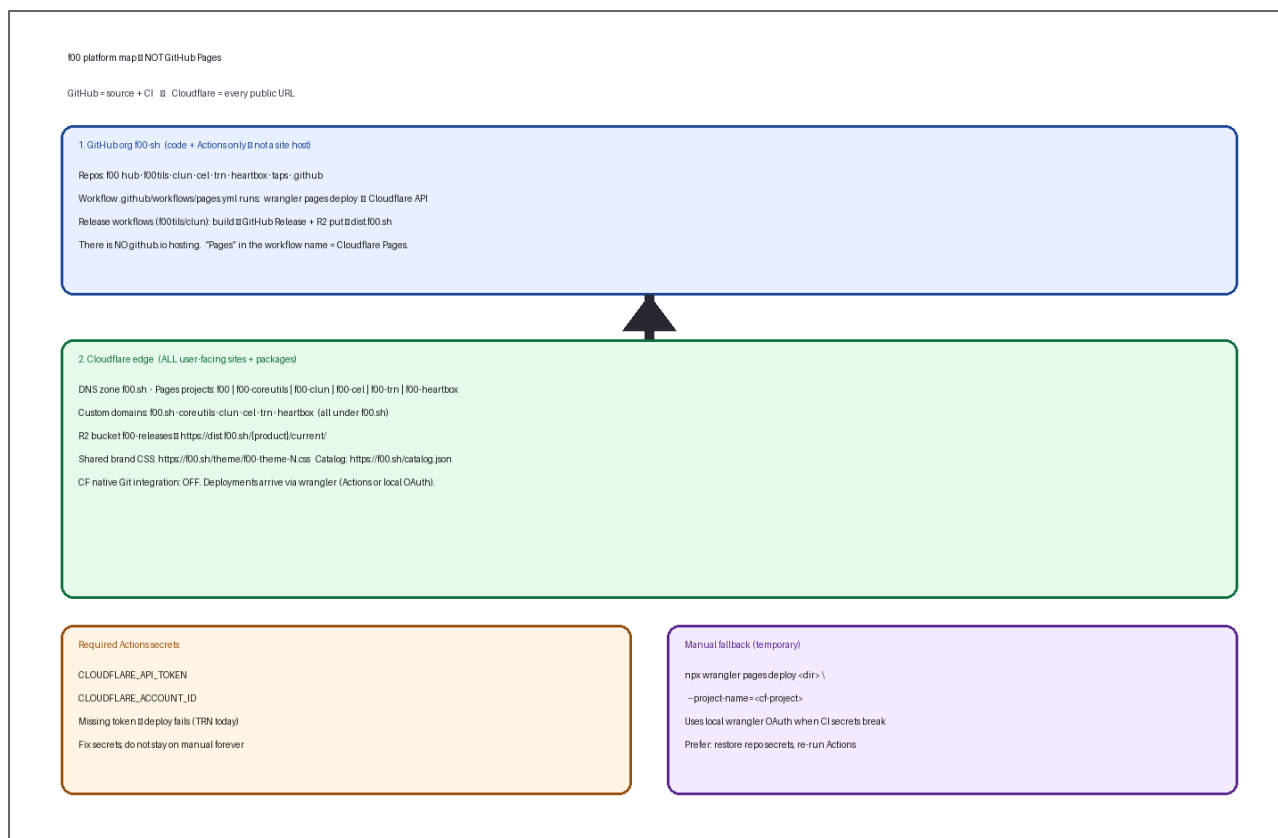

Operator view of the f00 platform. Public traffic terminates on Cloudflare. GitHub Actions is the normal push path into Cloudflare Pages and R2.

Layer	What it is	What it is not
GitHub	Source + Actions runners + Releases	Public site host

Cloudflare Pages	Static/site + optional Functions edge	GitHub Pages
Cloudflare R2	Binary package objects at dist.f00.sh	npm registry
Cloudflare DNS	f00.sh zone + subdomains	Porkbun nameservers (registrar only OK)
catalog.json	Product inventory + theme URL SSOT	Marketing copy only

3. Inventory - domains, Pages projects, packages

Account ID (ops reference): 2e192c2d18f485155ba294ae5c9e1177. Zone: f00.sh. Cloudflare Pages Git Provider is Off for all f00 projects; deployments are wrangler-driven (Actions or local OAuth), not Cloudflare's native Git hook.

- Also: www.f00.sh -> same hub project.
- Infra repos (not product cards): homebrew-tap, scoop-bucket, .github org profile.
- Released products get a hub card. status=wip products appear in catalog/AGENTS only.

Surface	Public URL	CF Pages project	Repo	Deploy input dir
Hub	https://f00.sh	f00	f00-sh/f00	site/
f00tils	https://coreutils.f00.sh	f00-coreutils	f00-sh/f00tils	site/
clun	https://clun.f00.sh	f00-clun	f00-sh/clun	site/
Cel Index	https://cel.f00.sh	f00-cel	f00-sh/cel	dist/ (build first)
TRN	https://trn.f00.sh	f00-trn	f00-sh/trn	site/ (+ functions)
Heartbox	https://heartbox.f00.sh	f00-heartbox	f00-sh/heartbox	site/
Packages	https://dist.f00.sh/{product}/current/	R2 f00-releases	product release workflows	wrangler r2 object put

4. Hub product laws

The hub is intentionally thin. Do not grow it into a product app.

- Hub only: splash + product cards. No hero shortcut buttons, fake terminal/boot log, or install blocks on f00.sh.
- Release -> card: only catalog status=released products appear on the landing grid. Update the catalog entry when a product ships again if copy or links change.
- One set of links: cards are the only product navigation (site, repo, optional docs).

- Public copy is product-only: never put agent process, org plans, DNS wiring, or internal preferences on the public site or public README.
- Aesthetic (standard theme = Heartbox): every product site loads the catalog theme CSS first (f00-theme-13.css). Colors from Heartbox palette (hospital-night bg, poppy red accent, cream fg, silver metal). Three fonts only - Onyx = branding/logo only; zine mono = body; chip mono = headers/footers/nav/domain chips. No handwriting fonts. Do not invent brand hex in product CSS.
- No secrets in git. API tokens and DNS keys stay in GitHub secrets / Cloudflare / local wrangler OAuth only.

5. Catalog SSOT procedure

Edit only site/catalog.json in the hub repo. Derived surfaces: hub product cards in site/index.html, README product table, AGENTS.md sister table, live <https://f00.sh/catalog.json> after hub deploy.

5.1 Edit site/catalog.json (product fields, theme.css pointer, status, docs URL, pages_project).

5.2 Regenerate derived files.

```
python3 scripts/sync-from-catalog.py
```


5.3 Or verify without write (CI does this on hub deploy).

```
python3 scripts/sync-from-catalog.py --check
```

5.4 Commit catalog + regenerated files together. Push main to deploy hub.

5.5 If theme path version changed (for example f00-theme-12.css), update product index.html theme <link>s (enroll-product.py or manual) and redeploy each product site so live HTML points at the new path.

Figure 2. Catalog change flow

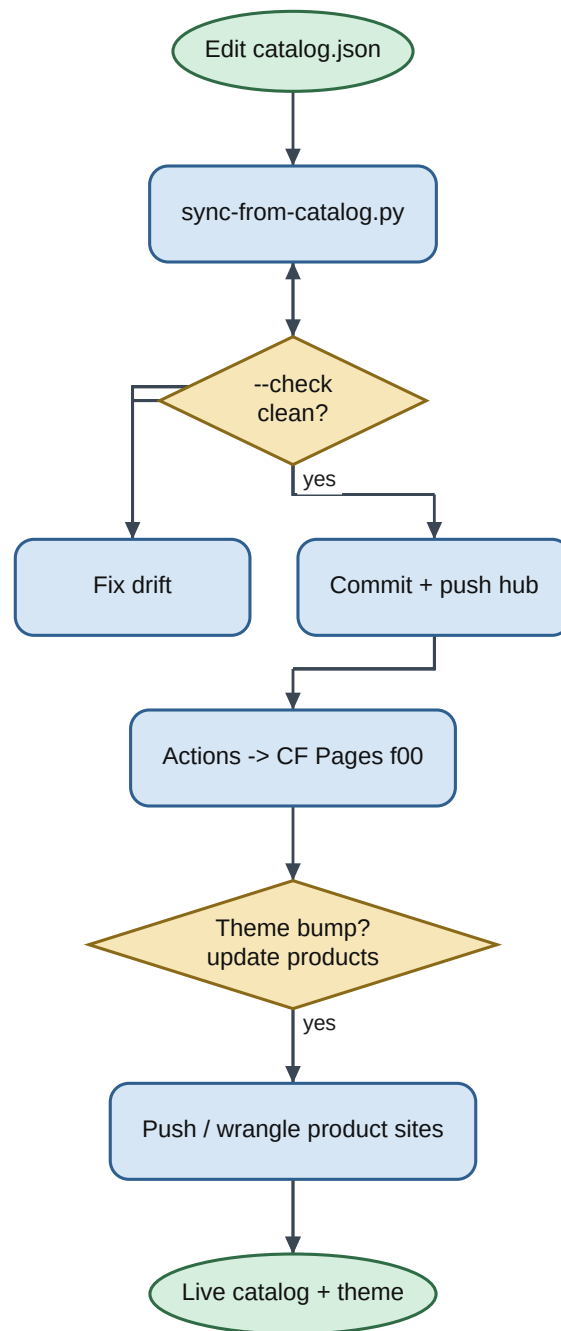

6. Shared theme procedure

Default theme is Heartbox. Color SSOT: [github.com/f00-sh/heartbox palette/heartbox.json](https://github.com/f00-sh/heartbox-palette/heartbox.json). Theme CSS and Onyx live under hub site/theme/ and site/assets/fonts/. Product sites load the versioned URL from the catalog (path version, not query string). Cloudflare edge often ignores

query-string cache busts and can SPA-fallback missing paths to HTML; always ship a new filename (f00-theme-N.css) when rules change.

Type roles (do not redefine in product CSS):

- Onyx: .splash, .brand-mark, .f00-brand only. Header brand-mark uses open tracking and larger size; splash logo may stay tight.
- Zine mono: body, paragraphs, forms, tables of prose.
- Chip mono: h1-h3, nav, footer, domain chips, meta accents.
- Mirror unversioned site/theme/f00-theme.css to the current versioned file when bumping.
- Update site/_headers for CORS/cache on new theme/styles paths.
- After first request of a not-yet-deployed path, custom-domain cache can poison HTML for minutes-hours. Prefer new path versions; purge zone cache if bare path stuck on text/html.
- Brand assets under site/assets/ (favicon, BIMi, org-avatar, icons) must use Heartbox colors. GitHub org avatar / profile avatar should match site/assets/org-avatar.png.

6.1 Copy current theme to a new path version and edit rules.

```
cp site/theme/f00-theme-13.css site/theme/f00-theme-14.css
```

6.2 Mirror to f00-theme.css; set catalog theme.css + css_path; run sync-from-catalog.py.

6.3 Point hub index.html + product index HTML at the new URL. enroll-product.py
THEME_HREF must match.

6.4 Push hub first (theme must exist as text/css on f00.sh before products depend on it).

6.5 Verify Content-Type is text/css.

```
curl -sI https://f00.sh/theme/f00-theme-13.css | grep -i content-type
```

6.6 Push or wrangle each product site.

7. Site deploy - GitHub Actions to Cloudflare Pages

Yes: CI/CD on GitHub push deploys sites to Cloudflare when secrets are present. No: that is not GitHub Pages hosting.

Each product (and the hub) has .github/workflows/pages.yml (name: Deploy site (Cloudflare Pages)). Trigger is push to main/master on site paths (and related files), or workflow_dispatch. Job uses cloudflare/wrangler-action@v3 with secrets CLOUDFLARE_API_TOKEN and CLOUDFLARE_ACCOUNT_ID, command pages deploy <dir> --project-name=<Pages project> --branch=<default branch>.

Hub additionally runs `python3 scripts/sync-from-catalog.py --check` before deploy so drifted cards/README/AGENTS fail the deploy.

7.1 Confirm change is under the workflow path filters (usually `site/**`).

7.2 Push to the default branch (hub/f00tils/cel/trn: main; clun: master).

7.3 Watch Actions for "Deploy site (Cloudflare Pages)".

```
gh run list --repo f00-sh/<repo> --limit 5
```


7.4 If deploy fails with missing `CLOUDFLARE_API_TOKEN`, either add the secret to the repo or deploy manually:

```
npx wrangler pages deploy site --project-name=f00-trn --branch=main  
--commit-dirty=true
```

7.5 Verify custom domain HTML references expected theme and Content-Type of theme CSS is `text/css`.

7.6 Do not enable GitHub Pages settings on any f00-sh repo. Do not publish to `username.github.io`.

Figure 3. Happy-path site deploy

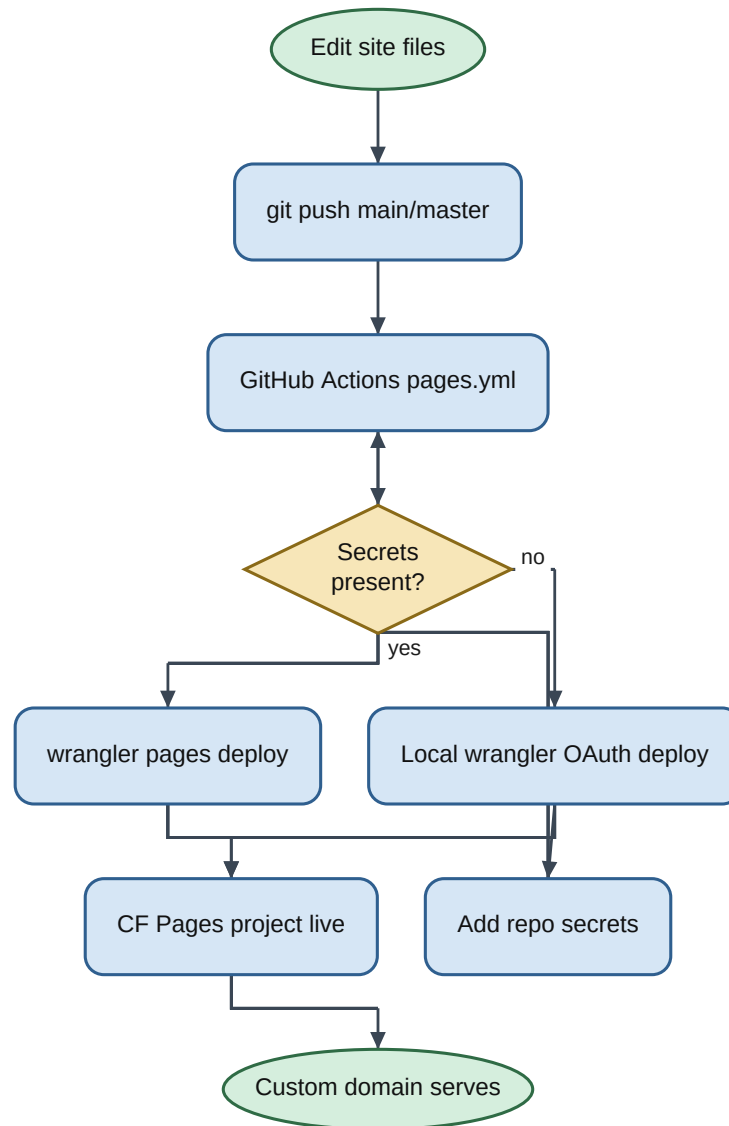

Repo	Workflow	Secrets required	CI deploy status (as of 2026-07-29)
f00-sh/f00	pages.yml -> project f00	TOKEN + ACCOUNT_ID	Working
f00-sh/f00tils	pages.yml -> f00-coreutils	TOKEN + ACCOUNT_ID	Working (site path)
f00-sh/clun	pages.yml -> f00-clun	TOKEN + ACCOUNT_ID	Working (site path)
f00-sh/cel	pages.yml -> f00-cel (dist)	TOKEN + ACCOUNT_ID	Working

f00-sh/trn	pages.yml -> f00-trn	TOKEN + ACCOUNT_ID	FAILING - token not injected; use local wrangler until fixed
f00-sh/heartbox	pages.yml -> f00-heartbox	TOKEN + ACCOUNT_ID	Working (site path)

8. Package publish path (R2 / dist.f00.sh)

Binary products (f00tils, clun) publish installable artifacts to Cloudflare R2 bucket f00-releases. Release workflows build on tag, create a GitHub Release for humans/checksums, then wrangler r2 object put into f00-releases/{product}/current/ and versioned prefixes. Public base: <https://dist.f00.sh/{product}/current/>.

Web-only products (cel, trn, hub) do not use R2 packages. Their "ship" is the Pages deploy.

8.1 Follow the product release workflow (tag + release.yml).

8.2 Confirm R2 objects exist under dist.f00.sh after the release job.

8.3 If the product is newly released for the first time, set catalog status=released, sync hub, push hub so the card appears.

9. Enroll a new f00 product

New products under the brand must enroll in the catalog and load the shared theme. Prefer house new-project workflow with f00:true.

9.1 Create repo under org f00-sh (not a personal account).

9.2 Create Cloudflare Pages project; attach custom subdomain under f00.sh.

9.3 Add repo secrets CLOUDFLARE_API_TOKEN and CLOUDFLARE_ACCOUNT_ID (same account as hub).

9.4 Add pages.yml that wrangler-deploys the site directory to the Pages project name.

9.5 Inject theme link and catalog entry.

```
python3 scripts/enroll-product.py --help
```

9.6 Keep status=wip until a real release; then set released and sync hub cards.

9.7 Product CSS is layout-only. Load catalog theme CSS first. Do not recolor or reassign type roles.

10. Operator troubleshooting

Common confusion and fixes.

10.1 List live Pages projects.

```
npx wrangler pages project list
```

10.2 Confirm who serves a host (CF headers, not github.io).

10.3 For stuck custom-domain assets, compare *.pages.dev URL vs custom domain; if only custom is wrong, purge cache or wait out max-age.

Symptom	Likely cause	Action
Thought sites were on GitHub Pages	Workflow name contains "Pages"	Read wrangler command: Cloudflare Pages project
Push did not update site	Path filters skipped OR Actions failed	gh run list; check secrets; manual wrangler
TRN Actions always red	CLOUDFLARE_API_TOKEN missing/empty in f00-sh/trn	Add secret or local wrangler pages deploy
Theme URL returns HTML	SPA fallback / poison cache of missing path	Ship new versioned CSS path; purge CF cache; curl -sI Content-Type
Header f00 illegible	Onyx with splash-tight tracking at small size	Use brand-mark size/tracking vars in current theme
Hub card missing after ship	catalog status not released / sync not run	Edit catalog, sync-from-catalog.py, push hub
Product body wrong font	Product CSS sets body to Onyx/display	Theme !important body mono; remove product override

11. Required GitHub secrets (platform)

Place these on every repo that deploys to Cloudflare (hub + each product + release publishers). Prefer org-level secrets with repo allowlists if available.

- CLOUDFLARE_API_TOKEN - Account permissions: Cloudflare Pages Edit; R2 Edit if the repo publishes packages; Zone read as needed.
- CLOUDFLARE_ACCOUNT_ID - 2e192c2d18f485155ba294ae5c9e1177 for this org account.
- Never commit tokens. Rotate if exposed.
- Local operator fallback: wrangler OAuth login (pages write) when Actions secrets are broken
 - treat as temporary.

12. Explicit non-goals and forbidden configurations

Do not reintroduce the following.

- GitHub Pages source branch or gh-pages branch hosting for f00-sh products.
- Cloudflare Pages Git integration as a second deploy path without removing Actions (double deploy chaos) - current standard is wrangler-from-Actions only.
- Forked per-product brand colors or green phosphor as the org standard (standard is Heartbox palette + three-font theme from hub).
- Hub install instructions or product binaries hosted on the hub site.
- Secrets in site/ or docs/ committed to git.

13. Records and document control

This SOP lives in the hub repo so platform ops stay next to catalog and theme.

- Source JSON: docs/sop-f00-org-ops.json
- Rendered PDF: docs/sop-f00-org-ops.pdf
- Figure: docs/figures/f00-platform-map.png
- Bump version field when platform topology or deploy contract changes.
- Product-specific release SOPs remain in product repos; link here only for attachment points.

Project Engineering
f00 / OPS
f00-sh

Enclosure: Figure 1 platform map; live catalog <https://f00.sh/catalog.json>
cc: Maintainers, Release Operators