


Treasure Hunt

Create a program that can function as a game of treasure hunt. This game should generate a specific amount of radiobuttons (minimum of 20), from which one should be set as winning button at random. The user has to select one of the radiobuttons and click on a button to check whether he found the winning button or not. If the user picked the wrong button print out a statement telling him so and deactivate the corresponding Radiobutton (use config and the attribute state). The game should count and display at the end how many tries the user needed for finding the right button. Once he found the right button, the window should be closed (use root.destroy). Please place the Radiobuttons in a rectangular form, e.g. 4 Buttons side by side in 5 rows (see image below).

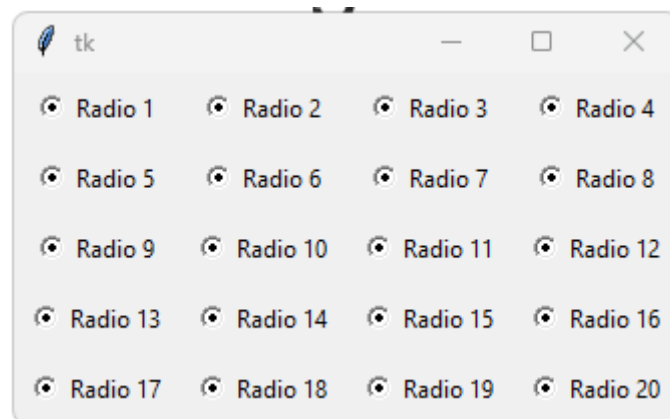

As additional feature you could allow the user to define how many buttons the game should have at the start. In this case you could use a nested loop construct to place your Radiobuttons and use the loop variables *i* and *j* to determine the value of the different buttons.

Hint:

To avoid an unnecessary long function you could save your radiobuttons inside a dictionary and use the value of your Radiobutton as key.

```
Radios = {}
```

```
Radios[1] = tk.Radiobutton(...)
```